
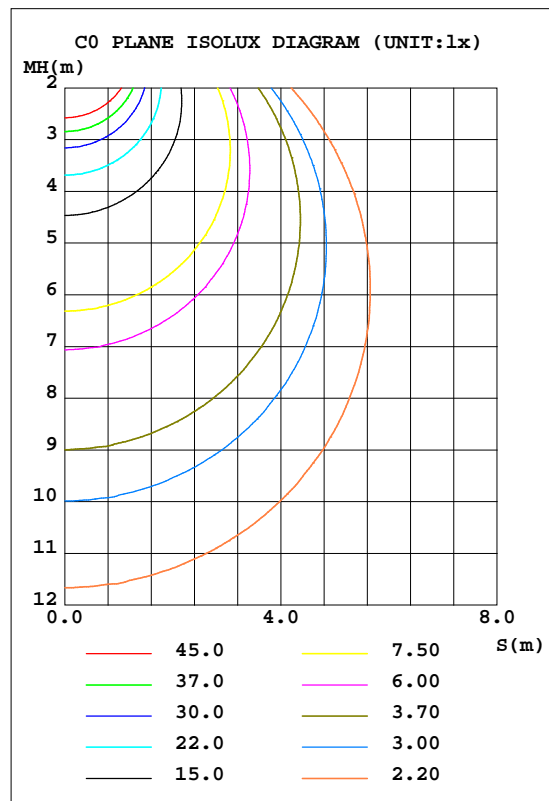


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 75.16 lm/W			
MODELASD-JBR-4D12AC(4000K)		I _{max} (cd)	297.4	S/MH(C0/180)	1.27
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	861.28	h UP, DN(C0-180)	0.2,49.4
NOMINAL FLUX(lm)	861.279	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.2
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

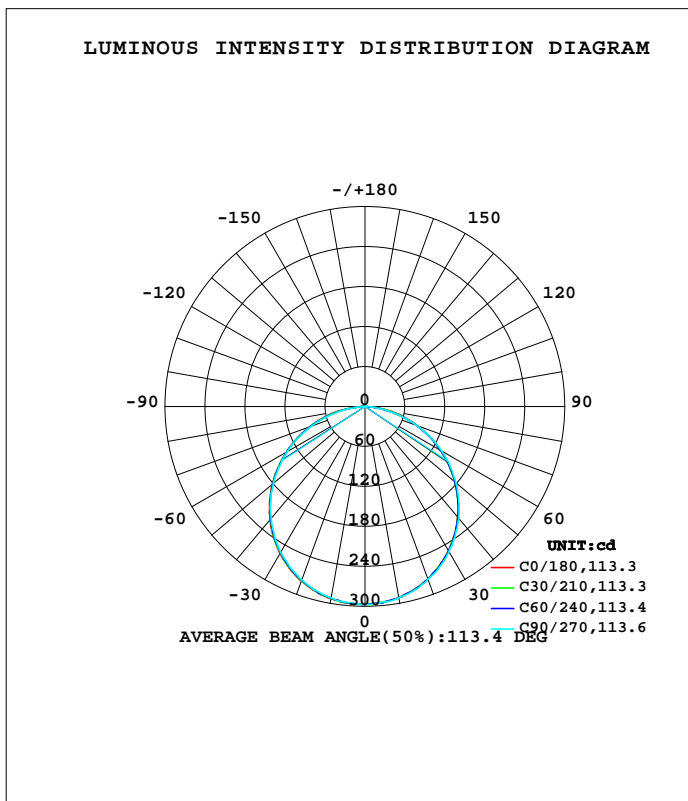

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	291.2	291.3	291.9	292.5	292.6	292.4	291.7	292.0	0- 10	28.11	28.11	3.26,3.26
20	275.5	275.8	276.3	277.5	279.0	278.0	277.1	276.8	10- 20	80.66	108.8	12.6,12.6
30	250.4	250.6	251.9	253.1	255.1	253.8	252.8	251.7	20- 30	122.5	231.3	26.9,26.9
40	216.5	217.0	218.9	220.1	221.9	220.7	219.5	218.8	30- 40	148.1	379.4	44.1,44.1
50	175.9	176.2	178.3	179.8	181.7	180.4	179.3	178.2	40- 50	154.0	533.4	61.9,61.9
60	130.4	130.6	132.8	134.3	135.7	135.3	134.7	133.6	50- 60	139.9	673.3	78.2,78.2
70	83.06	81.63	81.51	85.00	87.71	86.64	84.45	85.55	60- 70	108.1	781.4	90.7,90.7
80	37.05	32.35	29.85	34.38	41.21	36.33	32.37	35.60	70- 80	62.90	844.3	98,98
90	0.1283	0.7144	0.0997	0.1218	0.1249	0.1694	0.1400	0.1264	80- 90	13.33	857.6	99.6,99.6
100	0.2100	0.2085	0.2258	0.1992	0.2759	0.2681	0.1923	0.2291	90-100	0.1899	857.8	99.6,99.6
110	0.3938	0.3809	0.4117	0.3884	0.4795	0.5365	0.3848	0.4151	100-110	0.3505	858.1	99.6,99.6
120	0.5842	0.5628	0.5975	0.5678	0.6636	0.7118	0.5641	0.6010	110-120	0.5130	858.7	99.7,99.7
130	0.7371	0.6952	0.7369	0.7171	0.8210	0.7781	0.6968	0.7274	120-130	0.6046	859.3	99.8,99.8
140	0.8078	0.7978	0.8563	0.8268	0.9457	0.8598	0.8229	0.8467	130-140	0.6115	859.9	99.8,99.8
150	0.8932	0.8906	0.9624	0.8966	0.9788	0.9435	0.9199	0.9198	140-150	0.5522	860.4	99.9,99.9
160	0.9757	1.034	1.036	0.9862	1.058	1.059	1.009	1.003	150-160	0.4458	860.9	100,100
170	1.018	1.068	1.078	1.089	1.117	1.110	1.067	1.069	160-170	0.2974	861.2	100,100
180	1.123	1.152	1.082	1.099	1.143	1.122	1.135	1.109	170-180	0.1045	861.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1279]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:

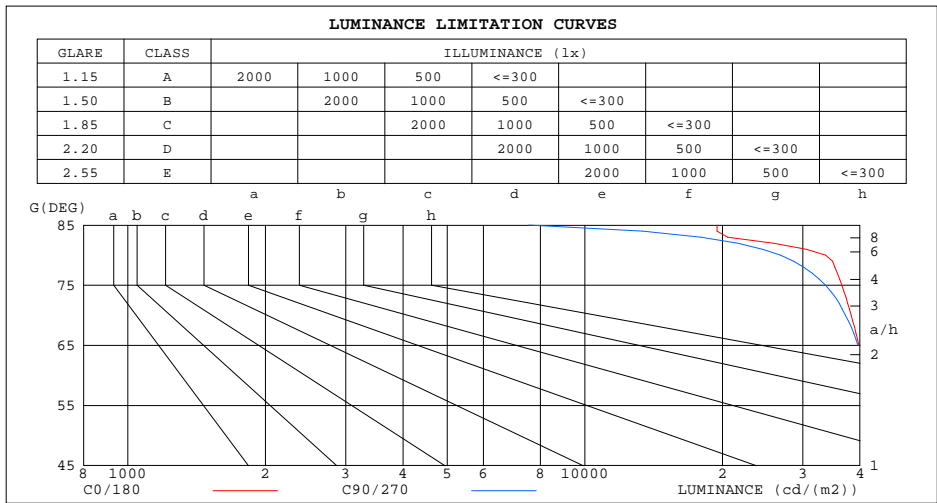

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	19480	7547
80	33612	26796
75	36498	33640
70	38257	37149
65	39801	39599
60	41086	41404
55	42173	42462
50	43107	43241
45	43863	43909


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.78	.70	.64	.74	.68	.63	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.52	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.28	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

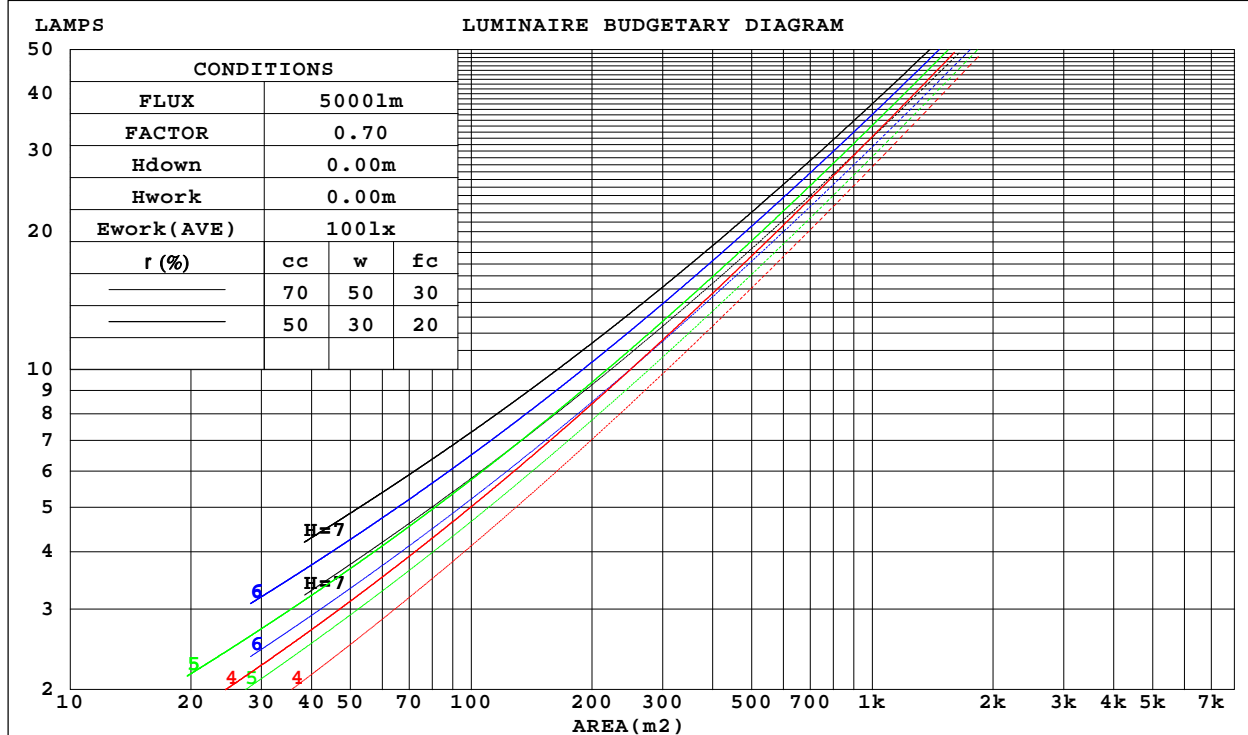

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

WEC AND CCEC

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.09	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.176	.056	.302	.172	.055	.288	.165	.053	.276	.159	.051	.264	.153	.049	
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.147	.046	.253	.143	.045	
3.0	.271	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.130	.040	
4.0	.250	.130	.038	.245	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.118	.034	.226	.116	.034	.218	.114	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.138	.157	.137	.119	.107	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.150	.116	.088	.103	.081	.061	.059	.047	.036	.019	.015	.012	
3.0	.168	.118	.078	.144	.101	.067	.099	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.160	.104	.062	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.131	.081	.044	.090	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.125	.074	.037	.086	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.037	.120	.068	.032	.083	.048	.023	.048	.028	.013	.015	.009	.004	
8.0	.132	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.029	.109	.059	.025	.075	.041	.018	.044	.024	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.022	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: ASD LIGHTNG CORP			SUR.: φ0.09			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.7	25.5	27.1	27.4	25.2	26.8	25.6	27.2	27.5
3H	27.0	28.4	27.4	28.8	29.2	27.0	28.5	27.4	28.8	29.2
4H	27.7	29.1	28.1	29.4	29.8	27.6	29.0	28.0	29.4	29.8
6H	28.2	29.5	28.7	29.9	30.3	28.1	29.3	28.5	29.7	30.1
8H	28.4	29.6	28.8	30.0	30.4	28.1	29.4	28.6	29.8	30.2
12H	28.4	29.6	28.9	30.0	30.4	28.1	29.3	28.6	29.7	30.2
4H 2H	25.7	27.1	26.1	27.5	27.9	25.9	27.3	26.3	27.6	28.0
3H	27.8	29.0	28.2	29.4	29.8	27.9	29.1	28.3	29.5	29.9
4H	28.7	29.7	29.1	30.2	30.6	28.6	29.7	29.1	30.1	30.6
6H	29.4	30.3	29.8	30.7	31.2	29.2	30.1	29.6	30.5	31.0
8H	29.5	30.4	30.0	30.8	31.3	29.3	30.1	29.7	30.6	31.1
12H	29.6	30.4	30.1	30.9	31.3	29.3	30.1	29.8	30.6	31.0
8H 4H	29.0	29.8	29.4	30.3	30.8	29.0	29.9	29.5	30.3	30.8
6H	29.8	30.5	30.3	31.0	31.5	29.6	30.3	30.1	30.8	31.3
8H	30.0	30.6	30.5	31.2	31.7	29.8	30.4	30.3	30.9	31.4
12H	30.1	30.7	30.6	31.2	31.8	29.8	30.4	30.3	30.9	31.4
12H 4H	29.0	29.8	29.5	30.3	30.7	29.0	29.8	29.5	30.3	30.8
6H	29.8	30.5	30.3	30.9	31.5	29.7	30.3	30.2	30.8	31.3
8H	30.1	30.7	30.6	31.2	31.7	29.9	30.4	30.4	30.9	31.5
CIE190: 2010										

CIE190: 2010
Area: 0.0064 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1279]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	38	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1279]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:

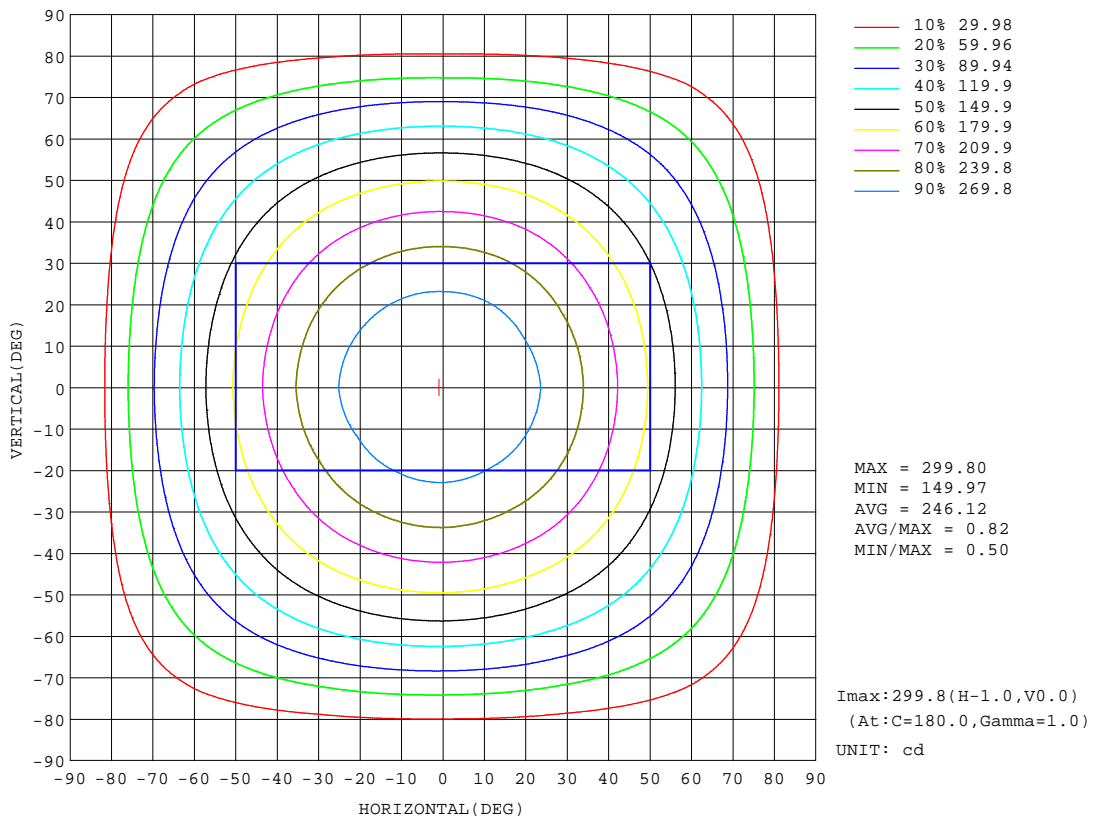


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

AAI Figure

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.09	Shielding Angle:

Flux out:633.9 lm

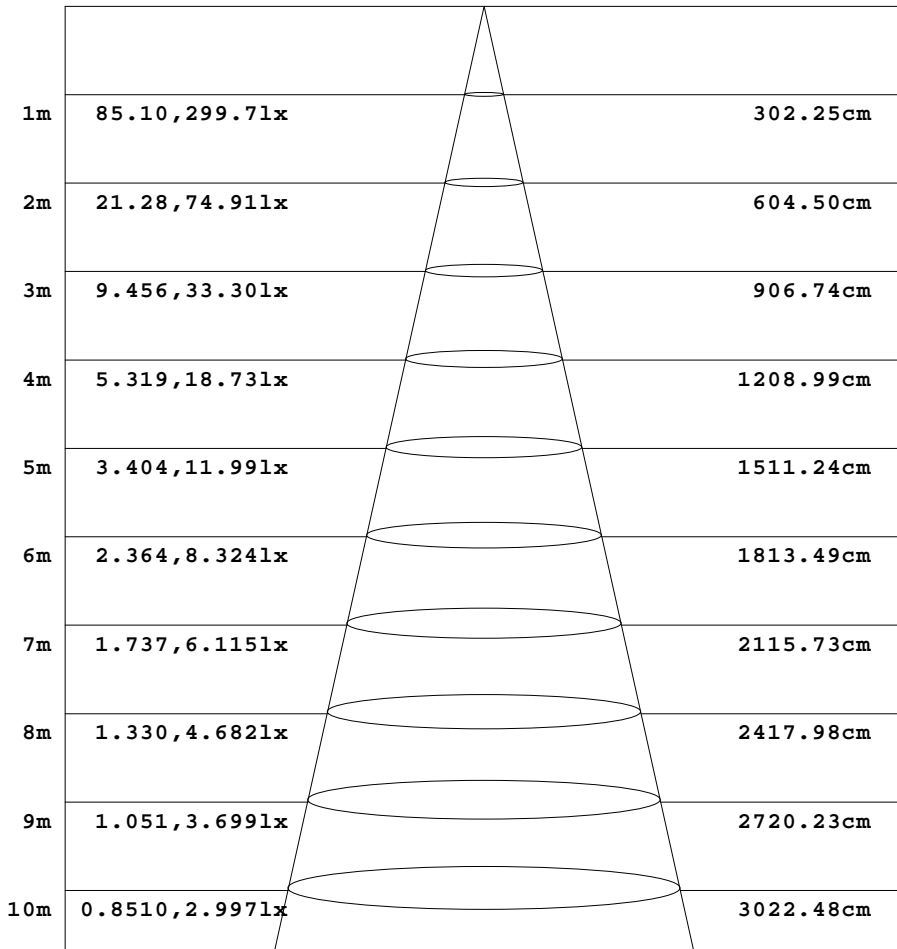

Height Eavg, Emax Angle:113.01deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:

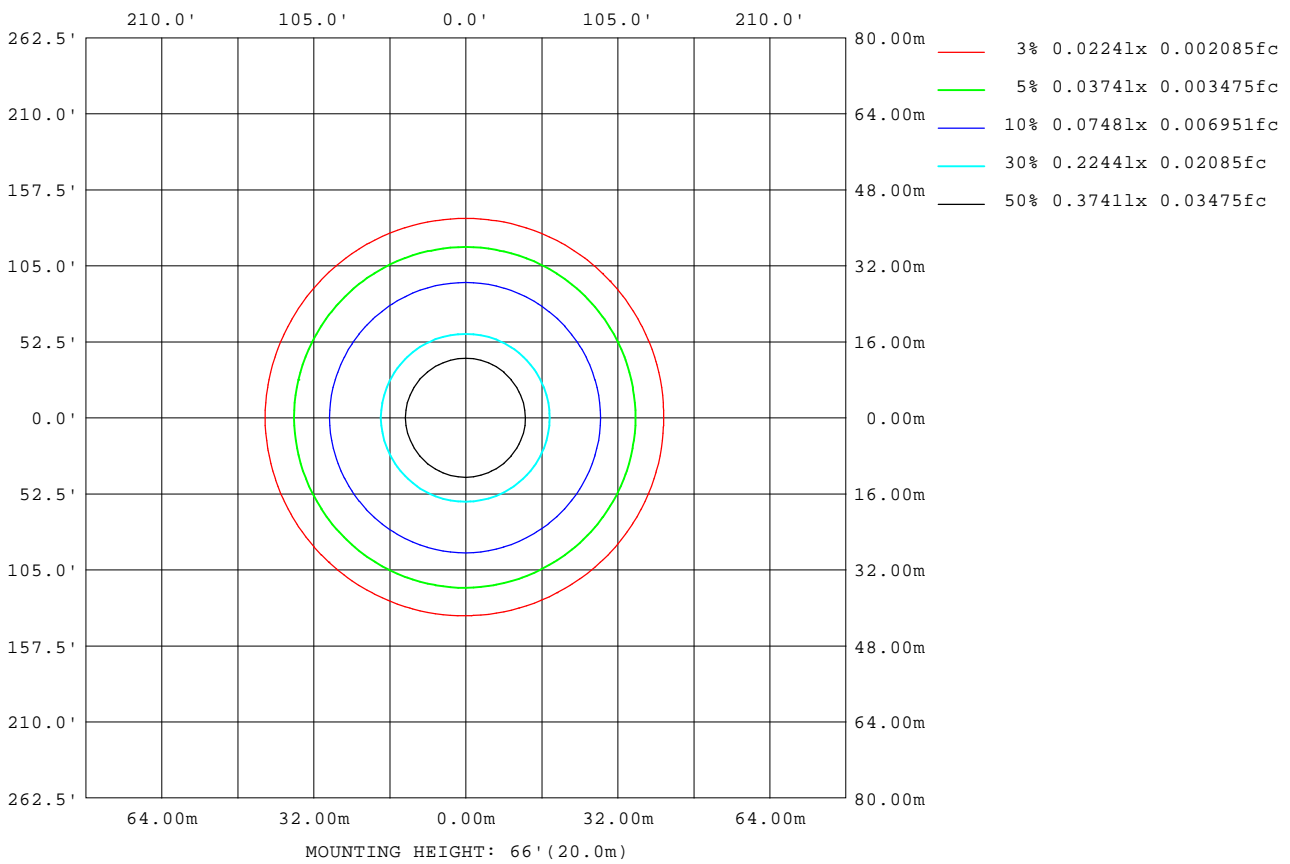

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

LED Avg.L Report

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	40404
L_0~180(75)av	37428
L_0~180(85)av	19086
L_90~270(65)av	40275
L_90~270(75)av	34534
L_90~270(85)av	10136
L_45(65)av	40504
L_45(75)av	36007
L_45(85)av	18493

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1279]
Remarks:

Planar Illuminance Curve

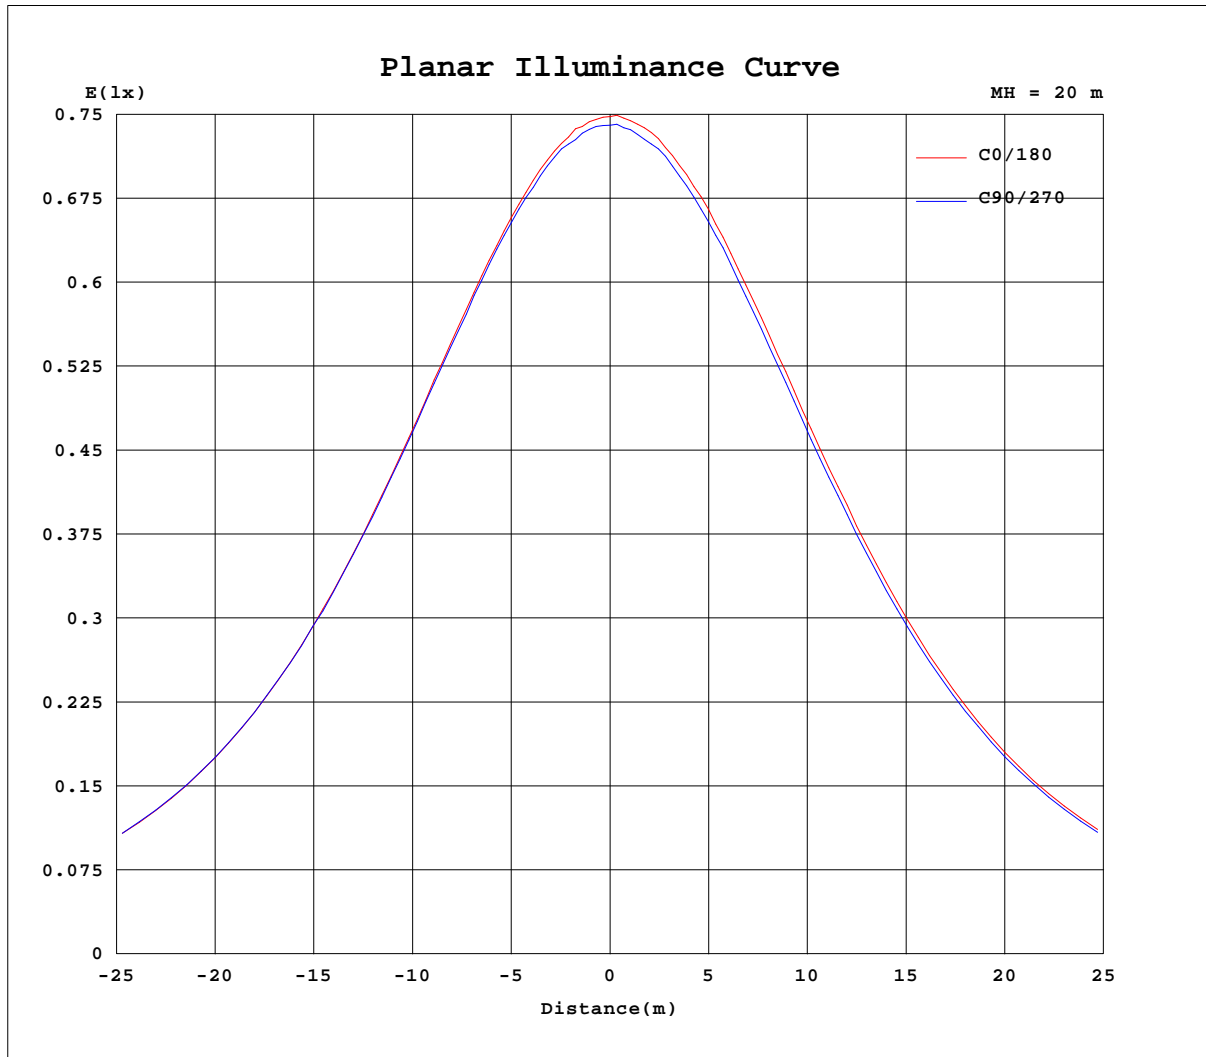

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.20V I:0.0973A P:11.460W PF:0.9795 Freq:59.98Hz Lamp Flux:861.279x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.09	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	297	297	297	297	297	297	297	297	297	297	297	297						
5	296	295	296	295	295	296	296	296	296	295	296	296						
10	291	291	291	292	293	292	293	293	292	292	292	292						
15	284	285	285	286	286	287	287	287	286	286	285	286						
20	275	276	276	276	277	278	279	278	278	277	277	276						
25	264	264	265	266	266	268	268	268	267	266	265	265						
30	250	251	251	252	252	254	255	254	254	253	252	251						
35	234	235	235	236	237	238	240	239	238	237	237	236						
40	216	217	217	219	220	221	222	221	220	219	219	218						
45	197	197	197	199	200	201	202	202	201	200	200	199						
50	176	176	176	178	179	181	182	181	180	179	179	177						
55	154	154	154	156	157	158	159	158	158	158	157	156						
60	130	131	131	133	134	135	136	135	135	135	134	133						
65	107	107	106	107	109	111	112	111	111	111	111	109						
70	83.1	82.3	81.0	81.5	83.5	86.5	87.7	87.1	86.2	84.5	85.5	85.6						
75	60.0	57.9	55.7	55.9	57.7	61.8	64.0	62.4	60.5	58.6	60.0	61.2						
80	37.1	34.2	30.5	29.9	31.7	37.1	41.2	38.0	34.7	32.4	34.4	36.8						
85	10.8	11.5	5.78	4.22	5.63	12.7	10.5	14.1	9.47	7.09	8.67	12.7						
90	0.13	1.30	0.13	0.10	0.14	0.10	0.12	0.19	0.15	0.14	0.11	0.15						
95	0.13	0.18	0.13	0.16	0.14	0.15	0.22	0.16	0.19	0.13	0.17	0.14						
100	0.21	0.24	0.17	0.23	0.18	0.22	0.28	0.26	0.28	0.19	0.25	0.21						
105	0.31	0.34	0.26	0.33	0.27	0.31	0.35	0.55	0.37	0.31	0.34	0.31						
110	0.39	0.44	0.33	0.41	0.37	0.41	0.48	0.59	0.48	0.38	0.43	0.40						
115	0.49	0.52	0.43	0.51	0.45	0.51	0.56	0.68	0.58	0.46	0.52	0.49						
120	0.58	0.62	0.50	0.60	0.54	0.59	0.66	0.77	0.66	0.56	0.62	0.58						
125	0.66	0.68	0.58	0.68	0.61	0.67	0.76	0.77	0.72	0.64	0.69	0.66						
130	0.74	0.75	0.64	0.74	0.68	0.75	0.82	0.79	0.77	0.70	0.74	0.71						
135	0.78	0.79	0.70	0.80	0.74	0.80	0.88	0.83	0.86	0.76	0.82	0.76						
140	0.81	0.83	0.77	0.86	0.80	0.85	0.95	0.86	0.86	0.82	0.87	0.82						
145	0.86	0.88	0.83	0.89	0.84	0.88	0.94	0.87	0.94	0.88	0.92	0.84						
150	0.89	0.91	0.87	0.96	0.89	0.90	0.98	0.91	0.98	0.92	0.96	0.88						
155	0.95	0.97	0.89	1.00	0.93	0.95	1.01	0.99	1.01	0.96	1.01	0.92						
160	0.98	0.99	1.07	1.04	0.97	1.00	1.06	1.06	1.06	1.01	1.04	0.96						
165	0.99	1.03	1.08	1.08	1.00	1.05	1.08	1.10	1.08	1.05	1.09	0.99						
170	1.02	1.07	1.06	1.08	1.07	1.11	1.12	1.11	1.11	1.07	1.11	1.03						
175	1.10	1.14	1.07	1.08	1.06	1.14	1.12	1.12	1.13	1.09	1.14	1.05						
180	1.12	1.17	1.13	1.08	1.08	1.12	1.14	1.12	1.13	1.14	1.14	1.08						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks: