

Report No.: GFB18042559

Test Time: 2018-04-23 14:09

Luminaire Property

Luminaire Manufacturer: ASD Lighting Corp.

Luminaire Description: ASD-WLP01L-48N50B-PC-PRM

Current: 0.188 A

Power Factor: 0.937

Voltage: 277.1 V

Power: 48.79 W

Photometric Results

CIE Class: Direct

Measurement Flux: 6977.3 lm

Downward Ratio: 94%

Horizontal Diffuse Angle(50%): H105.3

Vertical Diffuse Angle(50%): V117.5

Luminaire Efficacy Rating (LER): 143.06

Max. Intensity: 2796.34 cd

S/MH(C0/C180): 1.26

Total Rated Lamp Lumens: 6977.3 lm

Efficiency: 100%

Upward Ratio: 6%

Central Intensity: 2008.71 cd


Pos of Max. Intensity: H90 V46

S/MH(C90/C270): 1.49

Picture Of Luminaire



Luminous Intensity Distribution Curve

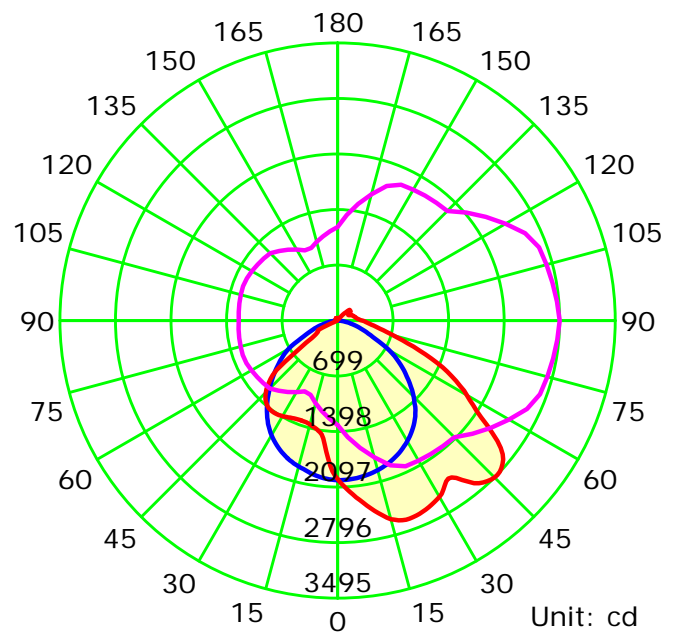

— C0-C180 — C90-C270 — G46

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

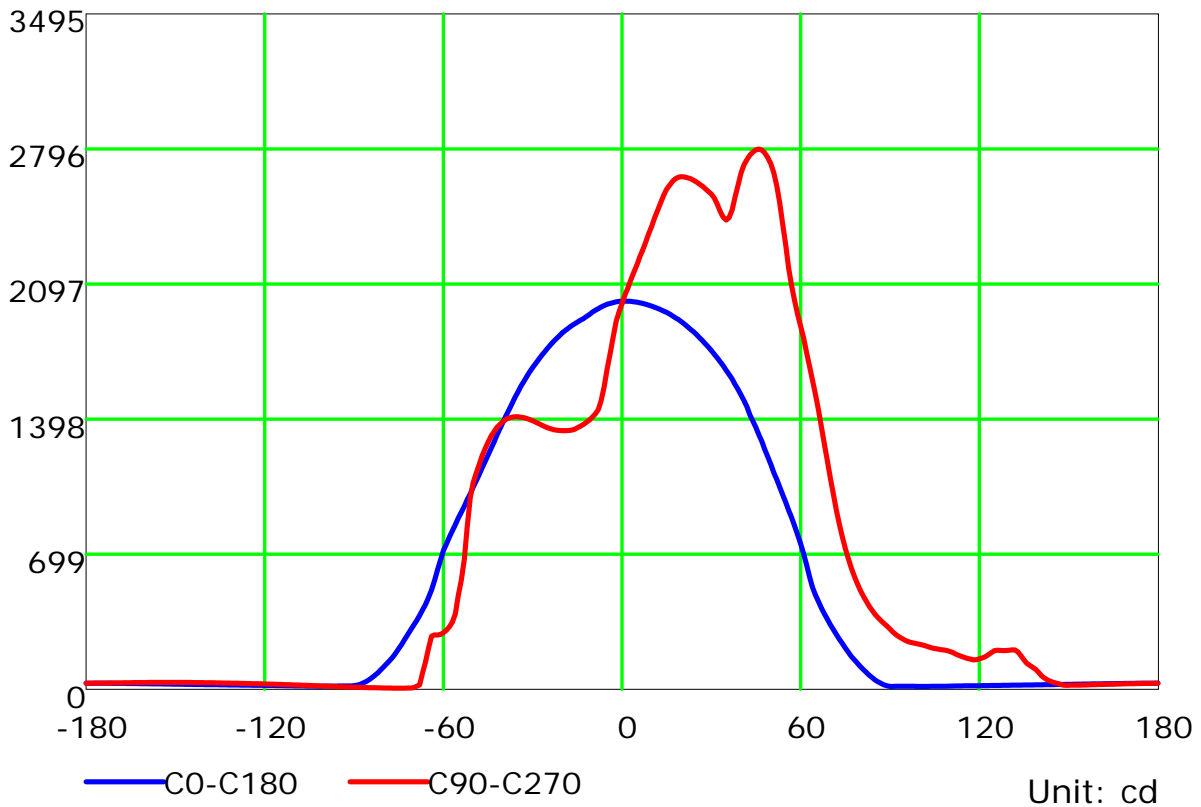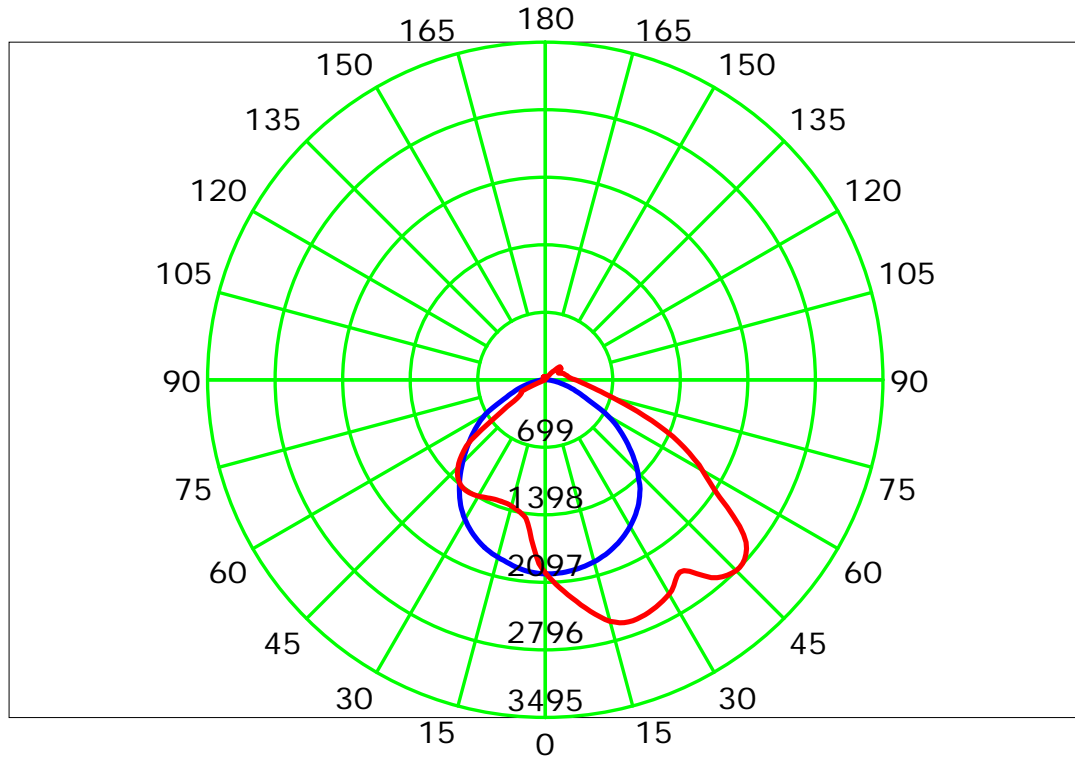

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.154 m
 Humidity:
 Inspector:

Isocandela (rectangle)

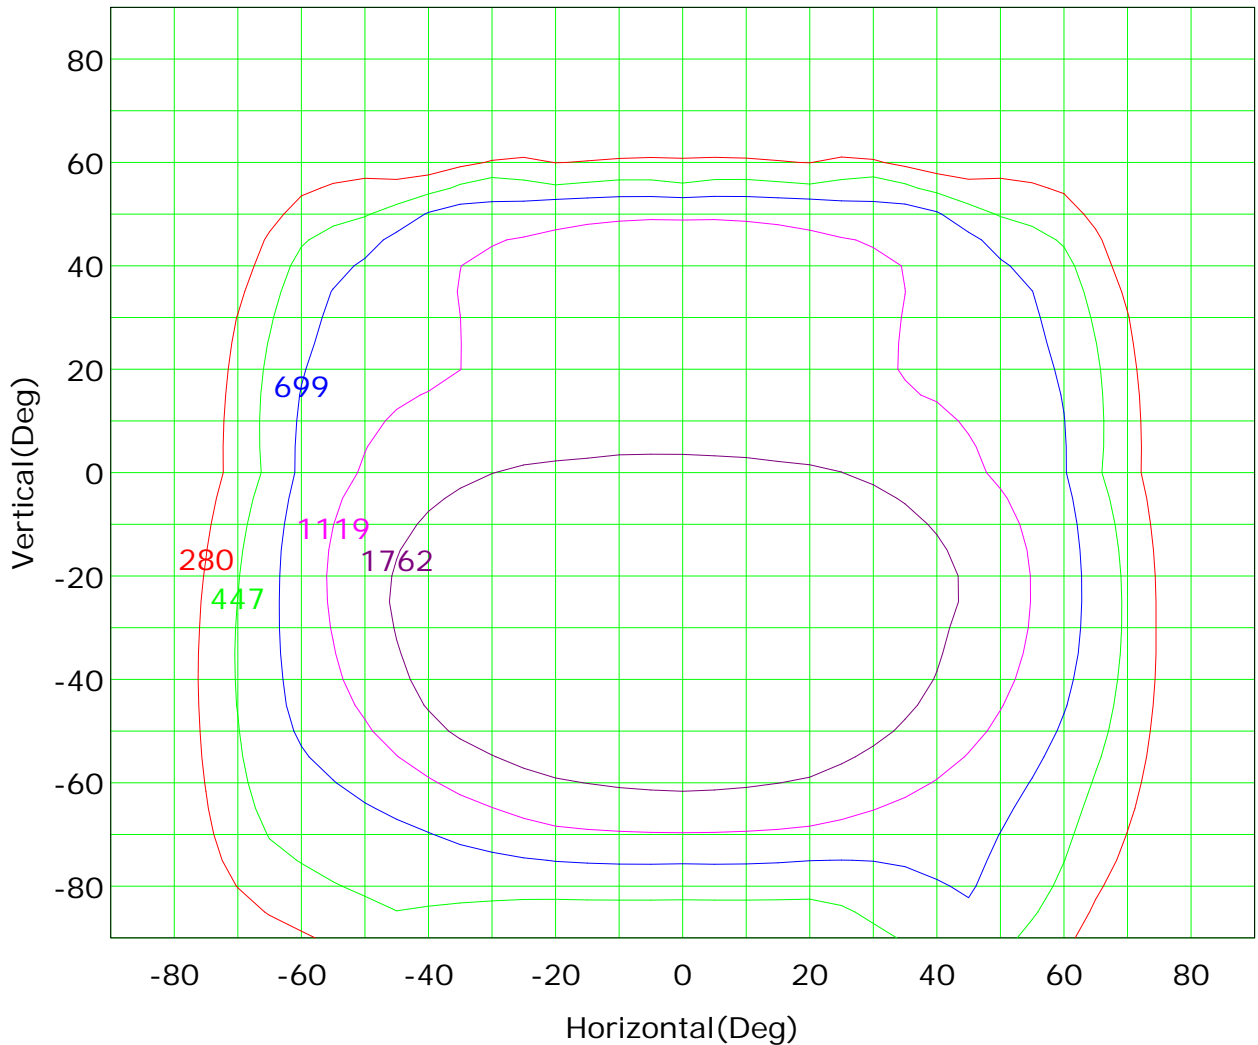


Imax (100%): 2796 cd

- | | |
|--|--|
| <ul style="list-style-type: none"> — (10%): 280 cd — (25%): 699 cd — (63%): 1762 cd | <ul style="list-style-type: none"> — (16%): 447 cd — (40%): 1119 cd — (100%): 2796 cd |
|--|--|

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.154 m
 Humidity:
 Inspector:

IsoLux Plot

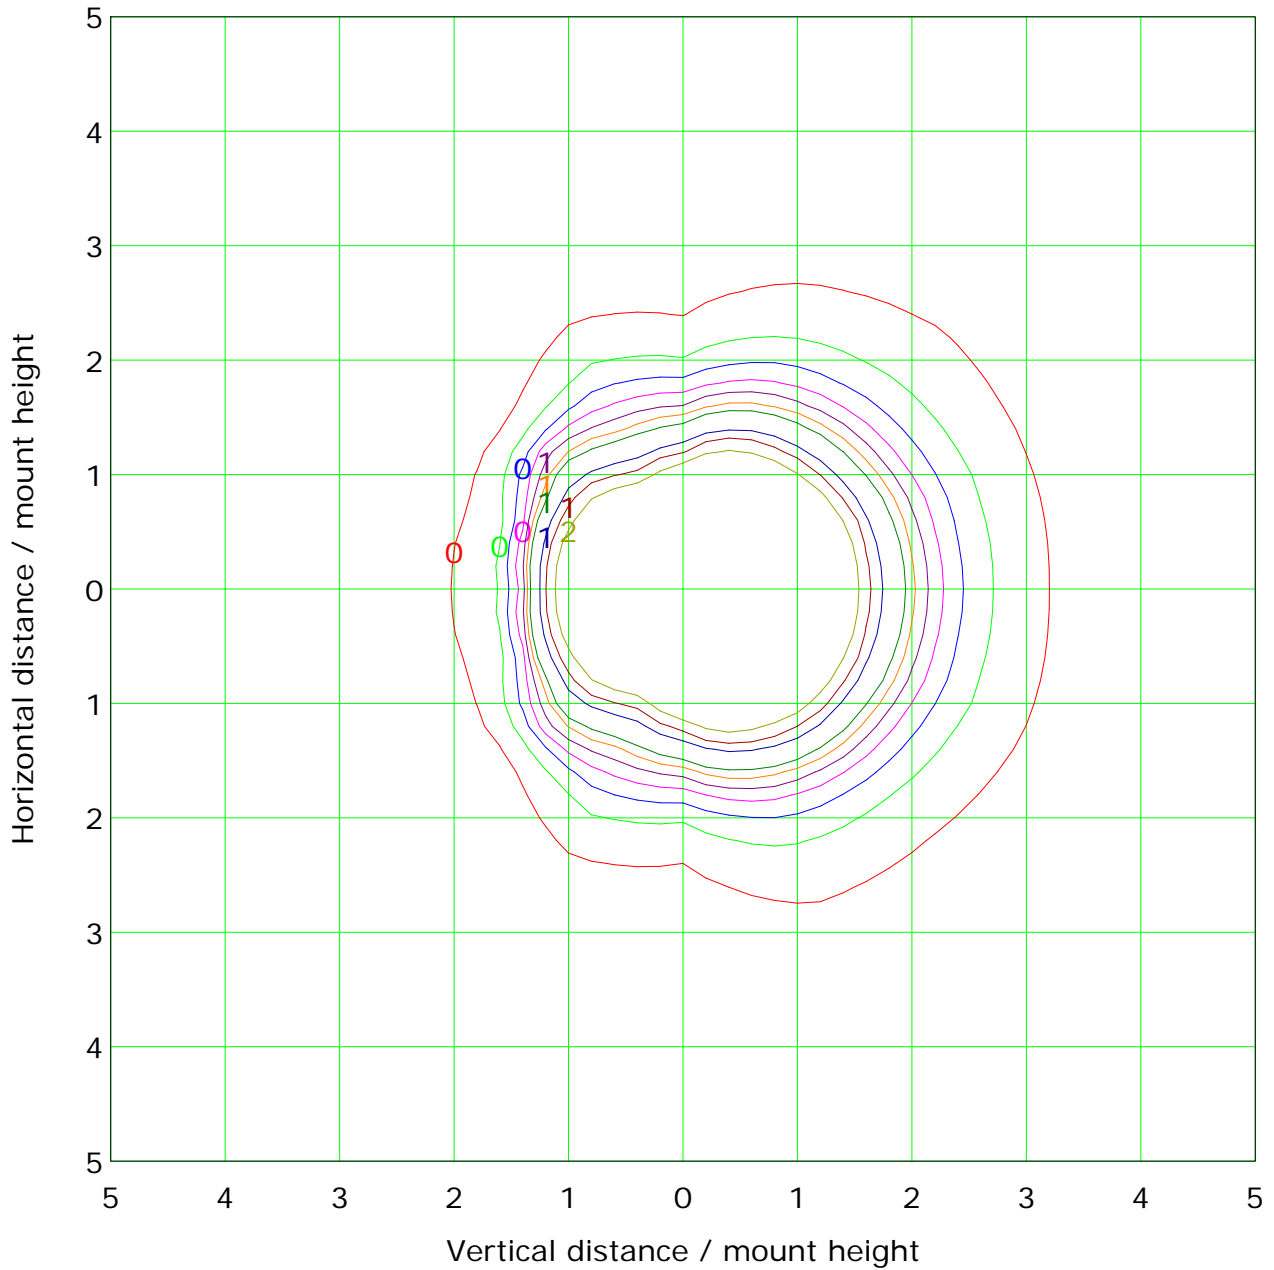


Mounting Height: 15.0m		Max Lux(100%): 10.4 lx	
— (1%):	0.1 lx	— (2%):	0.2 lx
— (3%):	0.3 lx	— (4%):	0.4 lx
— (5%):	0.5 lx	— (6%):	0.6 lx
— (7%):	0.7 lx	— (10%):	1.0 lx
— (12%):	1.2 lx	— (15%):	1.6 lx

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.154 m
 Humidity:
 Inspector:

Illuminance at a Distance

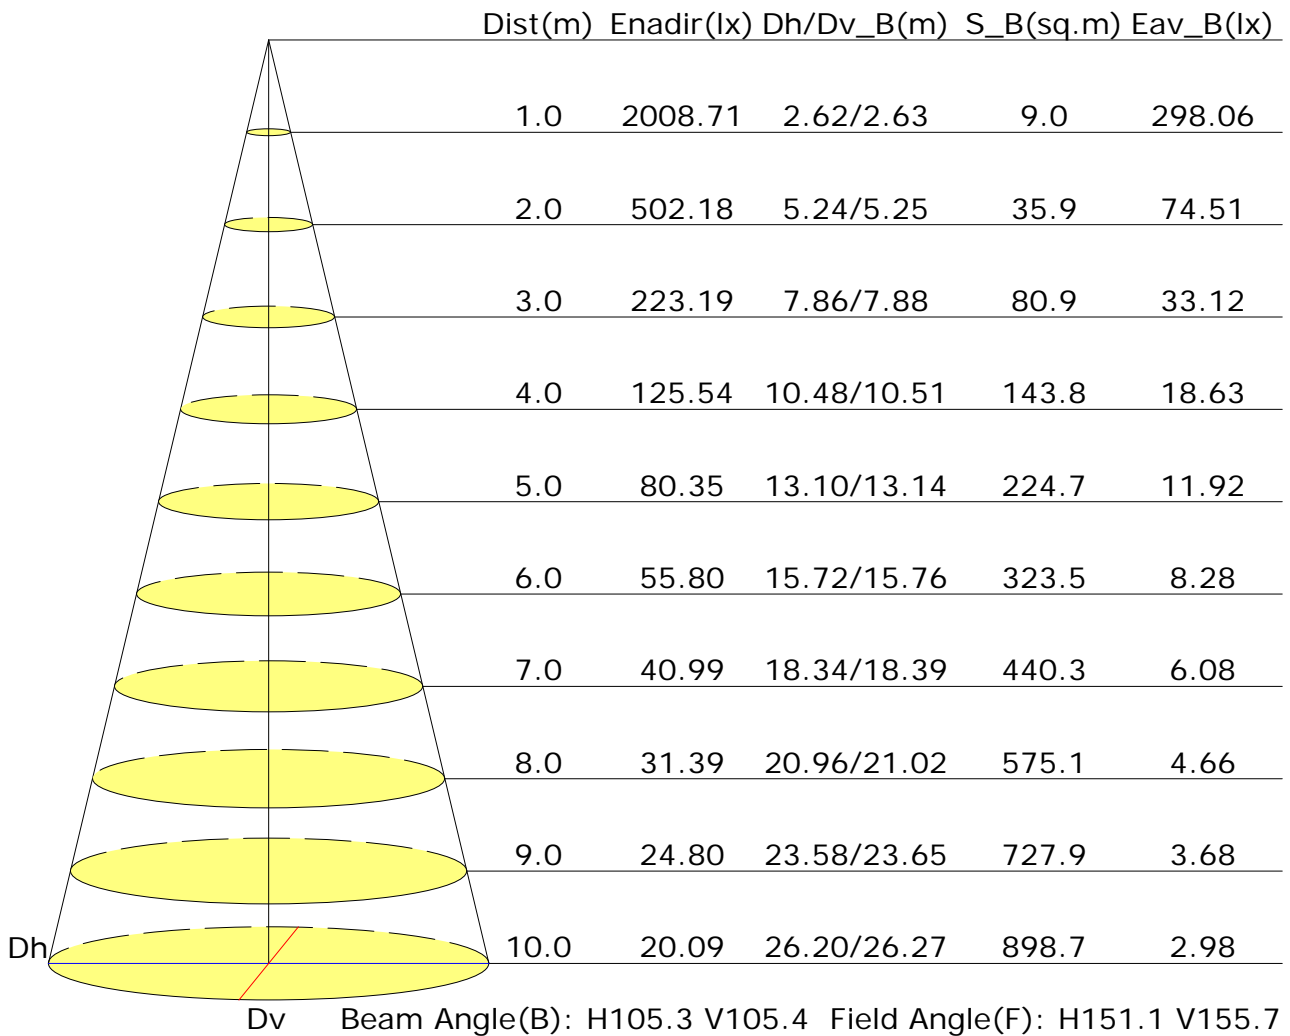

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Area Flux Table

Unit: lm


		Vertical plane																						
		-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90				
Flux(E)	Flux(T)	0.0	0.1	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.0	3.5	0.0	
0.0	3.1	0.1	0.2	0.2	0.4	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	0.1	0.0	3.5	0.0
8.7	25.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	0.1	0.0	4.3	0.0
81.9	88.4	0.3	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	0.1	0.0	4.3	0.0
199.3	203.5	0.9	0.9	1.8	1.8	2.5	3.2	4.3	5.0	5.4	5.4	5.0	4.2	3.1	2.5	1.7	0.9	0.9	0.3	0.1	0.1	0.0	46.7	6.0
3341.7	3446.4	0.6	0.6	2.2	5.2	7.5	12.6	15.1	16.7	17.7	17.7	16.6	15.0	12.5	7.4	5.1	2.1	0.6	0.1	0.1	0.1	0.0	154.7	141.6
488.2	492.5	0.1	0.9	3.9	8.9	15.9	24.9	30.8	35.8	38.1	38.2	35.9	31.0	25.0	16.0	8.9	3.9	0.9	0.1	0.1	0.1	0.0	319.3	315.3
2613.7	2617.8	0.1	1.2	5.2	11.9	19.2	27.8	34.4	39.5	42.1	42.1	39.6	34.6	28.0	19.3	12.1	5.2	1.2	0.1	0.1	0.1	0.0	363.6	360.5
7710.6	7715.7	0.2	1.5	6.0	13.2	19.5	27.4	34.0	38.4	40.8	40.8	38.4	34.2	27.7	19.7	13.5	6.0	1.5	0.2	0.2	0.2	0.0	363.1	360.3
6760.8	6766.8	0.2	1.7	6.4	14.3	21.8	29.0	35.2	38.9	41.1	41.0	38.9	35.2	29.8	22.8	15.0	6.6	1.7	0.2	0.2	0.2	0.0	379.7	377.2
7717.5	7722.6	0.2	1.8	6.6	15.2	24.8	35.1	42.7	47.1	50.3	50.8	48.0	43.7	37.3	27.2	16.4	6.8	1.8	0.2	0.2	0.2	0.0	456.0	453.3
5626.6	5630.6	0.2	1.9	7.0	16.9	29.3	42.9	54.2	61.8	66.2	66.3	62.9	56.0	45.6	32.2	18.4	7.3	2.0	0.2	0.2	0.2	0.0	571.4	569.0
6502.6	6507.0	0.2	2.1	7.7	18.9	34.3	50.5	62.7	72.1	77.1	77.2	73.1	64.5	53.0	37.2	20.4	8.0	2.3	0.3	0.3	0.3	0.0	661.6	659.5
502.6	503.3	0.3	2.2	7.9	19.5	36.0	50.7	63.4	73.4	78.7	79.1	74.8	66.0	53.7	38.9	20.7	8.3	2.5	0.3	0.3	0.3	0.0	676.4	674.4
6349.6	6354.3	0.3	2.2	7.9	19.5	36.0	50.7	63.4	73.4	78.7	79.1	74.8	66.0	53.7	38.9	20.7	8.3	2.5	0.3	0.3	0.3	0.0	676.4	674.4
204.8	208.9	0.3	2.2	7.7	18.4	33.9	47.7	60.8	70.6	75.1	75.6	71.9	63.5	51.3	36.9	19.4	8.3	2.6	0.3	0.3	0.3	0.0	646.5	644.4
88.6	94.4	0.3	2.1	7.1	16.2	29.7	45.8	62.7	77.5	82.5	82.6	78.1	65.3	50.5	32.1	16.9	8.0	2.6	0.3	0.3	0.3	0.0	660.2	658.1
13.8	28.1	0.2	2.0	6.2	13.3	23.7	36.8	51.0	63.4	69.0	69.2	63.9	52.7	38.7	24.0	13.7	7.3	2.4	0.3	0.3	0.3	0.0	537.8	535.5
0.0	3.4	0.2	1.7	5.3	11.2	18.4	25.8	34.5	41.5	45.2	45.2	41.5	34.2	24.5	16.3	10.8	6.3	2.2	0.3	0.3	0.3	0.0	365.2	362.4
	6573	0.2	1.5	4.5	9.8	15.8	18.2	19.7	21.7	22.9	23.0	21.8	19.0	15.4	12.1	8.6	5.2	1.9	0.2	0.2	0.2	0.0	221.4	217.7
	142.0	0.2	1.1	3.5	8.2	13.5	13.6	11.8	11.7	12.1	12.1	11.6	11.0	10.5	9.3	6.5	3.7	1.4	0.2	0.2	0.2	0.0	142.0	136.1
	6471	0.0	8.7	81.9	199.3	3341.7	488.2	2613.7	7710.6	760.8	762.7	717.5	626.6	502.6	349.6	204.8	88.6	13.8	0.0			0.0	6471	

Horizontal plane

C Plane (°): 0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator: 韩顺

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1600L
 Distance: 8.154 m
 Humidity:
 Inspector:

The Average Illuminance Effective Figure

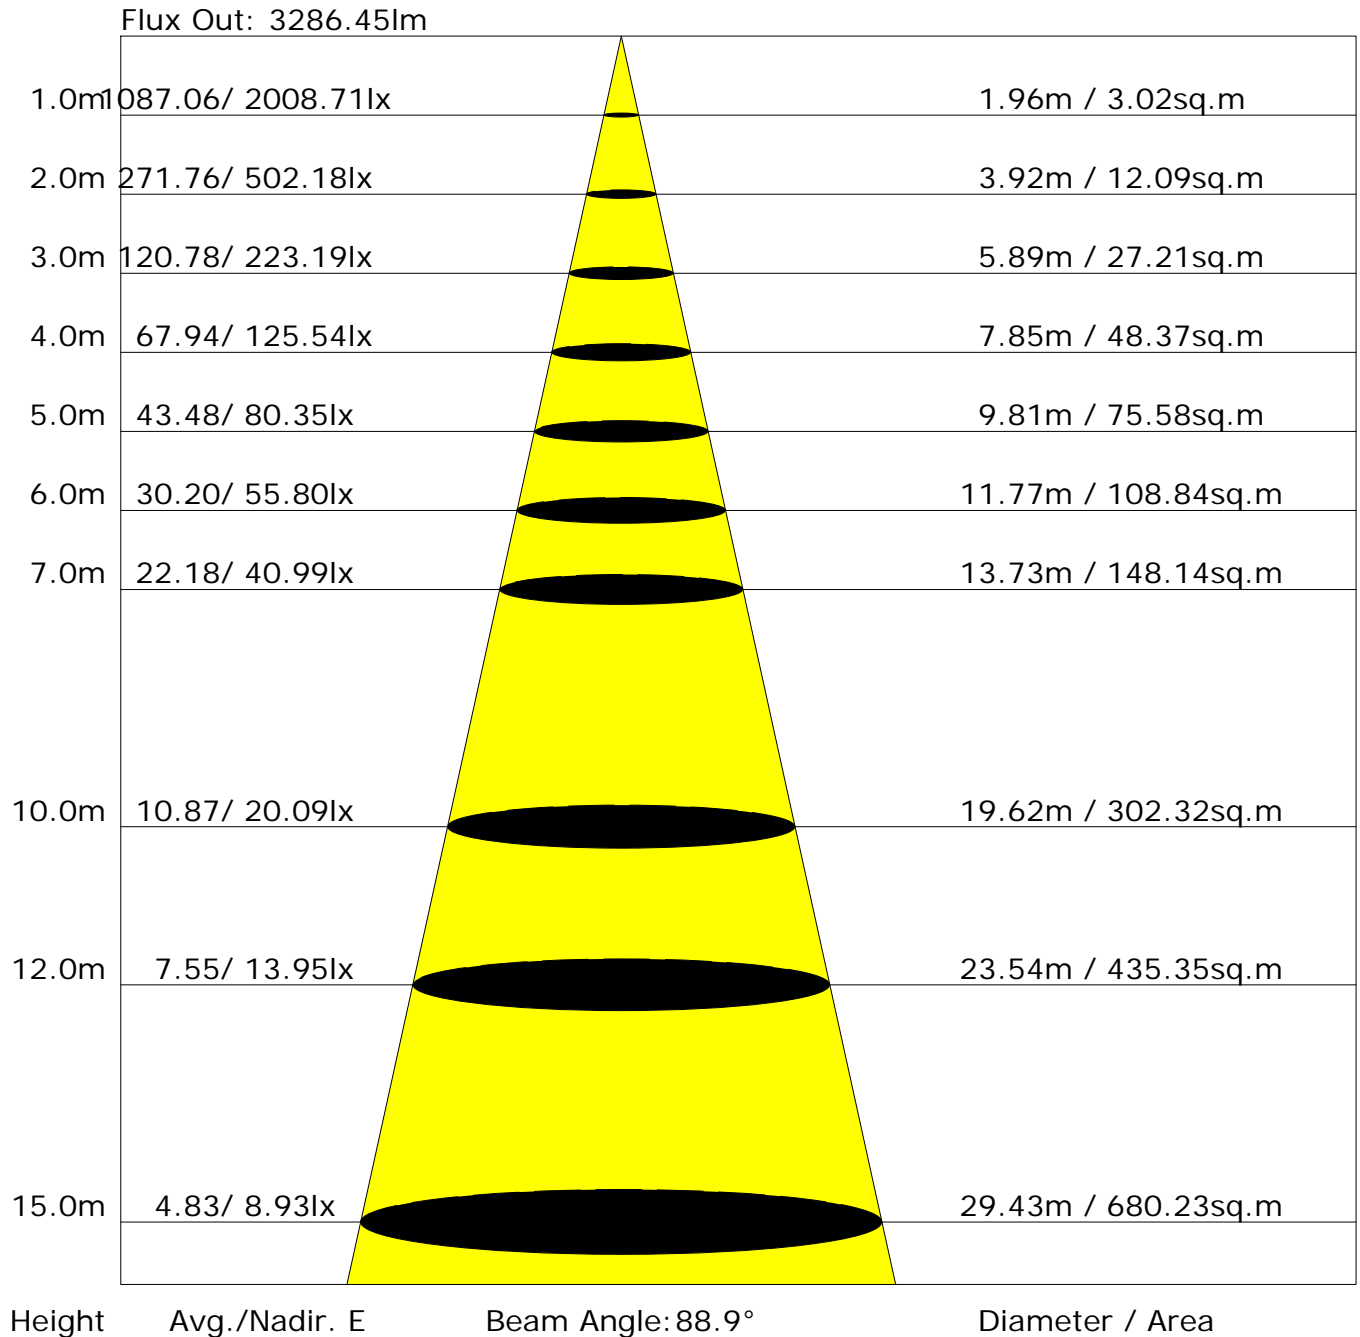

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.154 m
 Humidity:
 Inspector:

UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=4H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=8H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=12H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
Variations with the observer position at spacings:										
S=1.0H	-1.\$/-1.\$					-1.\$/-1.\$				
S=1.5H	-1.\$/-1.\$					-1.\$/-1.\$				
S=2.0H	-1.\$/-1.\$					-1.\$/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 6977Im ($8\log(F/F_0) = 6.7$).

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.154 m
 Humidity:
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

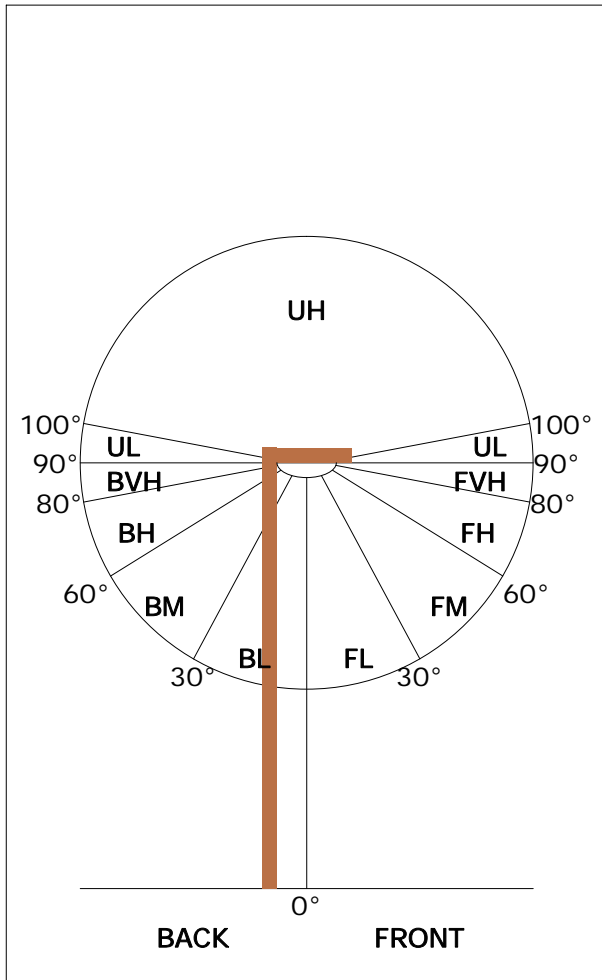

ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	3316	47.5
FL (0°-30°)	803	11.5
FM (30°-60°)	1831	26.2
FH (60°-80°)	579	8.3
FVH (80°-90°)	104	1.5
BACK LIGHT	3258	46.7
BL (0°-30°)	795	11.4
BM (30°-60°)	1772	25.4
BH (60°-80°)	577	8.3
BVH (80°-90°)	114	1.6
UP LIGHT	403	5.8
UL (90°-100°)	124	1.8
UH (100°-180°)	279	4.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U3 G2
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U3 G1

C Plane (°):0.0-360.0: 22.5
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.154 m
 Humidity:
 Inspector:

Candlepower Table

Unit: cd

GVC	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G0.0	2008.7	2000.1	1995.7	1995.6	1996.5	1998.5	2002.3	2002.9	2008.7	2000.1
G1.0	2009.3	2017.9	2027.6	2036.5	2040.4	2038.2	2031.2	2018.9	2007.8	1983.7
G2.0	2009.1	2031.8	2054.2	2071.1	2078.0	2073.1	2058.8	2032.3	2005.7	1964.3
G3.0	2008.0	2047.5	2083.6	2110.4	2119.3	2112.2	2086.6	2046.6	2001.8	1941.2
G4.0	2006.0	2061.8	2109.9	2145.5	2158.6	2147.5	2111.6	2058.1	1997.3	1915.8
G5.0	2004.1	2074.5	2134.9	2180.4	2196.0	2181.5	2137.4	2069.3	1993.6	1889.1
G6.0	2001.1	2088.6	2163.9	2219.6	2238.6	2220.2	2164.0	2080.0	1986.4	1854.0
G7.0	1997.7	2100.3	2189.1	2252.5	2275.3	2253.4	2188.1	2091.1	1979.0	1821.4
G8.0	1993.2	2111.1	2215.9	2287.4	2315.1	2288.5	2212.6	2100.0	1970.3	1784.6
G9.0	1988.3	2121.7	2242.1	2325.4	2359.4	2327.4	2239.8	2109.5	1962.0	1746.9
G10.0	1983.4	2133.0	2267.2	2363.0	2397.7	2363.1	2262.8	2117.6	1951.6	1709.7
G11.0	1977.3	2146.0	2293.0	2401.9	2441.2	2400.2	2289.7	2125.6	1939.7	1668.8
G12.0	1971.5	2154.4	2319.5	2437.7	2479.8	2437.4	2313.6	2132.5	1929.5	1632.2
G13.0	1964.8	2164.6	2345.3	2473.7	2517.4	2472.9	2338.9	2139.8	1918.8	1598.0
G14.0	1957.9	2176.1	2371.3	2510.5	2556.9	2507.9	2363.9	2146.3	1910.5	1560.4
G15.0	1950.7	2184.7	2397.7	2541.4	2588.7	2539.1	2388.1	2153.2	1900.9	1526.9
G16.0	1942.8	2194.4	2422.6	2572.6	2608.5	2567.6	2410.5	2159.4	1891.6	1489.2
G17.0	1933.0	2203.6	2449.8	2594.5	2629.8	2588.3	2434.0	2166.4	1881.4	1458.9
G18.0	1922.9	2211.9	2473.3	2612.9	2643.0	2604.8	2454.1	2172.2	1870.1	1433.3
G19.0	1913.5	2220.1	2496.2	2627.4	2650.7	2619.3	2474.3	2178.4	1858.5	1409.1
G20.0	1902.3	2226.6	2515.1	2636.7	2653.4	2625.5	2489.6	2185.5	1845.6	1391.3
G21.0	1890.3	2233.5	2533.2	2638.9	2651.7	2625.4	2500.4	2190.8	1830.7	1373.9
G22.0	1877.3	2241.1	2546.4	2636.8	2647.5	2621.9	2509.6	2196.7	1816.1	1361.1
G23.0	1864.3	2246.9	2556.1	2632.2	2643.4	2616.8	2513.9	2201.3	1800.8	1348.9
G24.0	1851.5	2252.9	2563.0	2627.4	2635.0	2610.4	2515.7	2206.0	1783.4	1337.6
G25.0	1836.6	2258.5	2564.3	2618.3	2625.7	2598.6	2509.0	2208.8	1765.8	1328.0
G26.0	1821.2	2264.1	2561.3	2607.6	2615.6	2586.2	2500.9	2211.9	1747.7	1319.9
G27.0	1805.7	2270.1	2552.9	2594.9	2604.7	2571.7	2488.1	2213.9	1728.2	1309.2
G28.0	1788.6	2272.5	2542.6	2581.2	2591.2	2556.3	2477.6	2212.8	1708.1	1298.9
G29.0	1772.5	2274.2	2536.3	2569.3	2577.2	2538.4	2463.6	2211.8	1687.2	1284.1
G30.0	1753.7	2274.5	2524.1	2551.9	2563.1	2519.9	2444.0	2208.4	1666.3	1268.4
G31.0	1735.3	2273.1	2508.2	2538.3	2543.9	2504.8	2423.3	2203.6	1644.4	1253.2
G32.0	1716.2	2270.2	2489.3	2524.3	2511.3	2485.3	2398.2	2193.9	1618.6	1233.0
G33.0	1695.8	2263.7	2469.1	2506.9	2474.7	2459.7	2375.9	2184.5	1593.9	1213.0
G34.0	1675.0	2255.7	2447.7	2482.6	2444.0	2425.2	2348.7	2172.0	1568.3	1189.2
G35.0	1651.3	2242.6	2423.4	2448.4	2428.9	2385.1	2320.1	2156.8	1538.1	1165.5
G36.0	1629.3	2228.5	2396.6	2417.8	2441.4	2356.0	2292.1	2142.6	1510.0	1144.6

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

GVC	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G37.0	1606.4	2215.2	2372.2	2394.9	2481.1	2342.5	2267.9	2126.8	1477.1	1124.5
G38.0	1578.2	2200.1	2344.1	2391.7	2547.1	2352.6	2237.7	2108.0	1447.0	1105.9
G39.0	1553.0	2186.4	2321.0	2411.6	2609.8	2385.2	2207.2	2089.0	1415.7	1087.8
G40.0	1522.5	2170.5	2290.6	2460.6	2673.5	2445.5	2167.0	2065.1	1382.4	1068.9
G41.0	1495.0	2152.4	2257.8	2518.7	2714.4	2515.3	2121.6	2041.4	1350.2	1051.2
G42.0	1461.3	2131.9	2217.5	2575.3	2742.0	2569.3	2077.7	2014.1	1316.3	1030.5
G43.0	1419.9	2105.5	2173.8	2624.9	2765.0	2617.4	2030.8	1985.0	1281.0	1005.7
G44.0	1387.5	2081.7	2133.9	2662.3	2781.4	2648.8	1995.8	1953.7	1247.1	986.2
G45.0	1354.7	2052.4	2100.9	2685.8	2792.8	2669.8	1969.5	1920.0	1212.4	967.4
G46.0	1317.3	2016.1	2078.2	2700.6	2796.3	2685.5	1952.8	1881.1	1180.1	949.8
G47.0	1282.3	1979.9	2070.8	2710.8	2790.9	2692.6	1947.1	1843.4	1146.8	932.8
G48.0	1241.2	1936.9	2078.0	2710.8	2775.9	2690.4	1944.5	1797.1	1112.1	915.9
G49.0	1203.1	1891.1	2092.4	2699.5	2750.9	2678.9	1945.8	1752.8	1079.3	899.4
G50.0	1163.8	1842.4	2111.3	2677.5	2719.9	2654.9	1948.2	1704.0	1046.5	884.3
G51.0	1122.2	1785.4	2131.8	2636.6	2674.3	2613.2	1947.4	1649.5	1011.4	867.2
G52.0	1086.1	1725.5	2141.5	2575.7	2605.8	2554.1	1938.9	1597.0	981.7	853.2
G53.0	1047.4	1667.8	2133.7	2499.7	2519.1	2469.6	1920.9	1541.0	948.0	838.3
G54.0	1006.7	1598.8	2103.8	2399.7	2406.6	2372.9	1880.9	1482.8	916.2	823.6
G55.0	967.7	1538.3	2060.1	2306.3	2298.8	2279.4	1829.4	1429.2	887.1	809.8
G56.0	926.8	1469.9	1997.2	2207.1	2179.4	2181.1	1769.8	1375.4	852.3	795.0
G57.0	888.1	1410.2	1934.3	2114.0	2086.9	2088.5	1712.0	1323.5	820.8	782.2
G58.0	845.9	1348.7	1859.0	2027.2	2013.3	2001.0	1658.2	1267.2	789.3	770.5
G59.0	800.6	1279.4	1772.2	1933.8	1941.0	1917.9	1597.7	1210.1	752.9	760.6
G60.0	753.2	1220.5	1687.1	1849.4	1879.3	1842.5	1542.9	1157.8	717.8	746.8
G61.0	703.4	1164.8	1601.2	1769.4	1820.5	1765.6	1485.9	1106.2	669.0	729.0
G62.0	644.8	1104.3	1506.2	1693.5	1743.2	1690.5	1422.8	1054.4	617.0	703.9
G63.0	584.5	1054.3	1425.4	1625.4	1674.5	1621.4	1363.1	1009.6	564.0	669.1
G64.0	527.8	1003.2	1337.3	1550.1	1600.1	1547.8	1300.1	958.6	513.9	632.5
G65.0	487.1	956.3	1260.8	1474.7	1524.2	1475.5	1235.6	913.7	475.4	599.7
G66.0	454.8	913.3	1178.6	1402.2	1447.8	1405.9	1174.6	867.0	439.9	563.4
G67.0	420.2	866.0	1088.0	1320.4	1357.2	1326.3	1109.1	817.2	410.9	526.3
G68.0	391.5	827.4	1013.5	1246.6	1269.8	1255.9	1055.2	773.2	383.1	484.3
G69.0	363.2	794.5	941.7	1176.2	1182.1	1181.2	1006.4	733.6	356.0	441.0
G70.0	334.2	760.9	876.3	1096.5	1091.1	1102.2	961.6	692.8	331.7	404.1
G71.0	310.2	733.7	822.2	1028.1	1012.4	1024.2	927.9	655.8	308.9	369.2
G72.0	284.5	704.5	774.3	951.3	927.3	951.8	896.6	618.7	283.0	336.3
G73.0	260.4	678.1	734.6	886.8	857.8	882.0	873.7	584.2	259.5	305.3

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Candlepower Table (Continue 2)

Unit: cd

GVC	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G74.0	238.1	652.0	701.4	821.6	790.7	819.4	853.5	552.8	232.9	254.3
G75.0	214.0	624.0	667.4	758.7	728.9	755.6	835.5	518.4	210.8	198.2
G76.0	193.3	598.1	641.6	706.1	678.5	700.7	818.8	489.3	188.8	148.5
G77.0	171.3	568.5	615.6	652.5	628.9	646.7	803.3	458.2	167.0	113.6
G78.0	154.1	542.5	592.5	610.5	588.5	605.1	790.5	432.9	150.6	98.6
G79.0	136.7	515.5	572.0	570.2	549.8	566.0	777.6	409.2	134.0	85.2
G80.0	119.1	488.9	550.9	532.4	513.6	528.6	766.1	383.6	117.6	71.5
G81.0	103.9	466.4	533.4	500.7	484.6	497.6	755.6	362.7	102.1	58.6
G82.0	88.8	444.0	517.1	470.1	457.8	469.5	743.9	343.0	86.0	22.2
G83.0	74.0	421.1	499.7	441.4	432.0	440.7	729.8	321.2	73.0	13.8
G84.0	61.5	398.7	484.0	417.7	409.3	416.4	715.1	302.8	60.7	12.4
G85.0	48.7	371.8	467.1	392.7	388.2	393.5	698.9	278.4	49.2	11.6
G86.0	39.1	338.5	452.3	372.8	371.1	375.2	681.4	254.0	39.8	11.5
G87.0	30.9	304.3	438.3	353.5	355.5	357.6	661.7	232.2	32.6	11.6
G88.0	23.8	268.5	421.9	334.4	341.8	339.9	638.0	212.1	26.5	11.9
G89.0	18.6	232.4	406.1	316.6	327.3	324.1	613.1	193.4	22.3	12.0
G90.0	15.7	197.2	388.8	299.9	312.4	308.1	588.1	174.4	19.3	12.0
G91.0	15.4	163.1	370.9	282.5	297.1	293.2	558.5	156.7	18.1	12.0
G92.0	15.8	137.9	354.4	268.0	284.0	280.9	528.2	142.7	18.1	12.1
G93.0	16.0	119.2	334.8	255.4	272.7	269.3	494.2	129.9	18.0	12.4
G94.0	16.1	107.7	317.5	243.5	263.4	257.9	460.2	120.5	17.8	12.6
G95.0	16.0	100.5	300.6	231.8	255.0	246.4	426.6	112.3	17.6	12.7
G96.0	15.8	93.4	280.7	221.5	248.3	235.6	387.9	105.2	17.3	13.0
G97.0	15.8	86.7	263.7	212.6	243.5	226.6	350.5	99.1	17.0	13.3
G98.0	15.8	80.7	245.9	205.6	239.6	218.8	315.5	90.6	16.7	13.5
G99.0	15.7	75.0	224.4	198.8	236.3	211.6	278.3	81.2	16.6	13.8
G100.0	15.7	71.1	205.9	193.6	233.3	205.9	245.3	74.8	16.6	14.1
G101.0	15.7	67.7	187.7	189.3	229.7	200.6	214.9	71.5	16.5	14.4
G102.0	15.7	64.8	173.4	186.7	225.2	196.8	191.2	69.3	16.5	14.6
G103.0	15.7	62.6	163.5	185.5	220.1	193.9	173.6	67.6	16.6	14.9
G104.0	15.8	60.5	154.9	185.4	215.2	191.9	158.9	66.3	16.8	15.2
G105.0	15.9	58.2	149.1	185.4	211.7	190.6	148.4	65.1	17.1	15.5
G106.0	16.0	55.9	144.0	186.3	208.8	190.2	140.4	63.4	17.3	15.9
G107.0	16.1	53.4	140.6	187.2	205.9	189.8	134.4	61.2	17.5	16.3
G108.0	16.3	51.2	138.4	186.0	203.9	187.2	130.3	58.9	17.6	16.6
G109.0	16.5	48.5	136.0	182.5	201.5	181.6	126.0	55.9	17.8	17.0
G110.0	16.9	46.8	134.3	177.8	196.7	175.1	122.3	52.9	18.1	17.4

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Candlepower Table (Continue 3)

Unit: cd

GVC	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G111.0	17.2	44.9	132.6	175.4	191.5	171.3	119.2	50.0	18.4	17.9
G112.0	17.6	42.8	131.8	172.7	183.5	166.8	116.0	46.8	18.6	18.3
G113.0	17.8	40.5	131.1	170.1	177.2	162.6	113.5	43.5	18.9	18.6
G114.0	18.1	38.2	131.7	167.9	171.3	159.7	111.7	40.3	19.2	19.2
G115.0	18.3	35.4	131.8	166.0	165.3	157.6	110.6	37.7	19.5	19.6
G116.0	18.5	32.4	131.0	165.8	160.3	157.5	109.7	35.3	19.7	20.0
G117.0	18.6	30.0	129.9	167.2	156.7	159.3	108.2	32.6	20.0	20.4
G118.0	18.7	28.4	129.1	169.2	152.5	162.2	106.7	30.6	20.2	20.7
G119.0	18.8	26.4	128.3	171.9	153.6	165.5	105.3	28.8	20.5	21.1
G120.0	19.0	24.4	127.7	179.4	157.8	171.7	103.9	26.8	20.6	21.5
G121.0	19.3	22.9	126.8	188.5	162.5	179.6	102.8	25.0	20.7	21.8
G122.0	19.5	22.1	124.3	198.6	168.7	191.4	100.8	23.4	20.9	22.2
G123.0	19.7	21.5	119.1	206.9	178.4	200.8	98.4	22.8	21.2	22.5
G124.0	19.9	21.1	109.6	207.2	189.0	202.3	94.9	22.3	21.4	22.8
G125.0	20.2	20.8	96.6	204.0	199.9	199.1	89.3	22.0	21.6	23.1
G126.0	20.4	20.7	87.3	200.9	202.8	195.4	82.9	21.8	21.8	23.4
G127.0	20.5	20.6	80.8	199.1	201.9	192.1	77.3	21.7	22.1	23.7
G128.0	20.8	20.7	75.0	197.3	201.1	189.6	72.4	21.7	22.3	24.0
G129.0	21.0	20.7	68.5	194.3	201.0	188.6	67.9	21.7	22.5	24.3
G130.0	21.3	20.8	58.8	188.7	202.3	185.9	60.5	21.7	22.7	24.5
G131.0	21.5	20.9	51.4	172.8	204.5	175.1	53.6	21.8	22.9	24.8
G132.0	21.8	21.0	45.2	150.6	204.3	158.0	47.4	21.8	23.2	25.0
G133.0	22.0	21.2	39.5	129.9	194.2	138.5	41.2	21.9	23.4	25.3
G134.0	22.2	21.3	36.0	114.1	174.5	124.5	37.0	22.0	23.6	25.6
G135.0	22.5	21.5	33.0	100.9	153.2	111.3	34.2	22.0	23.8	26.0
G136.0	22.7	21.6	30.5	89.9	134.9	97.1	31.3	22.1	24.0	26.3
G137.0	22.9	21.8	27.8	79.5	124.0	86.4	29.2	22.2	24.3	26.5
G138.0	23.2	22.0	24.6	68.3	113.8	76.0	26.1	22.3	24.4	26.9
G139.0	23.4	22.2	23.1	57.8	103.1	64.3	23.6	22.4	24.6	27.2
G140.0	23.6	22.4	22.5	49.0	86.7	53.5	22.7	22.5	24.8	27.5
G141.0	23.8	22.5	22.2	41.6	68.8	43.3	22.3	22.6	25.0	27.8
G142.0	24.0	22.7	21.6	36.0	57.7	36.4	22.1	22.8	25.2	28.0
G143.0	24.3	22.9	21.6	31.9	48.7	31.4	21.9	23.0	25.5	28.3
G144.0	24.5	23.2	21.4	29.2	40.9	28.3	21.7	23.2	25.6	28.6
G145.0	24.7	23.5	21.3	26.8	36.1	26.1	21.6	23.4	25.7	28.8
G146.0	25.0	23.7	21.4	22.4	31.7	22.7	21.5	23.5	26.0	29.0
G147.0	25.2	24.0	21.6	21.2	27.5	21.5	21.7	23.6	26.3	29.2

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Candlepower Table (Continue 4)

Unit: cd

GVC	C0.0	C22.5	C45.0	C67.5	C90.0	C112.5	C135.0	C157.5	C180.0	C202.5
G148.0	25.5	24.3	21.9	21.1	23.0	21.2	21.9	24.0	26.5	29.4
G149.0	25.8	24.5	22.2	21.2	21.5	21.2	22.2	24.5	26.8	29.6
G150.0	26.1	24.8	22.5	21.4	21.5	21.5	22.5	24.8	27.1	29.8
G151.0	26.3	25.0	22.9	21.6	21.7	21.6	22.8	25.0	27.3	29.9
G152.0	26.6	25.3	23.2	21.8	22.0	21.7	23.1	25.4	27.6	30.1
G153.0	26.9	25.6	23.6	22.2	22.1	22.1	23.5	25.6	27.8	30.3
G154.0	27.2	25.9	24.1	22.7	22.2	22.5	24.0	26.0	28.0	30.5
G155.0	27.4	26.2	24.5	23.2	22.6	23.0	24.4	26.3	28.3	30.6
G156.0	27.7	26.5	24.9	23.6	23.1	23.4	24.7	26.5	28.5	30.8
G157.0	27.9	26.8	25.3	24.1	23.5	23.9	25.1	26.8	28.7	30.9
G158.0	28.2	27.0	25.7	24.6	24.1	24.4	25.5	27.1	29.0	31.0
G159.0	28.4	27.3	26.0	25.0	24.5	24.8	25.8	27.4	29.2	31.2
G160.0	28.6	27.6	26.4	25.5	25.0	25.3	26.2	27.6	29.4	31.3
G161.0	28.9	27.8	26.7	25.9	25.5	25.6	26.5	27.9	29.6	31.4
G162.0	29.1	28.1	27.1	26.4	26.0	26.1	26.9	28.1	29.8	31.4
G163.0	29.4	28.3	27.4	26.8	26.4	26.5	27.3	28.4	29.9	31.5
G164.0	29.6	28.6	27.8	27.2	26.9	26.9	27.6	28.6	30.2	31.6
G165.0	29.8	28.8	28.1	27.6	27.2	27.3	27.9	28.9	30.3	31.7
G166.0	30.0	29.1	28.4	27.9	27.6	27.7	28.2	29.1	30.5	31.7
G167.0	30.3	29.4	28.7	28.3	28.0	28.1	28.6	29.4	30.7	31.8
G168.0	30.5	29.6	29.0	28.6	28.4	28.4	28.8	29.6	30.9	31.8
G169.0	30.8	29.8	29.3	29.0	28.8	28.8	29.1	29.8	31.0	31.8
G170.0	31.0	30.0	29.6	29.3	29.2	29.1	29.5	30.0	31.2	31.9
G171.0	31.2	30.1	29.8	29.6	29.5	29.4	29.7	30.2	31.4	31.9
G172.0	31.4	30.3	30.0	29.8	29.8	29.8	29.9	30.4	31.6	31.9
G173.0	31.6	30.5	30.3	30.1	30.1	30.1	30.2	30.6	31.7	31.9
G174.0	31.8	30.6	30.5	30.4	30.5	30.3	30.4	30.8	31.9	31.9
G175.0	31.9	30.8	30.6	30.6	30.8	30.6	30.6	30.9	31.9	31.8
G176.0	32.0	30.9	30.8	30.9	31.0	30.8	30.9	31.0	32.0	31.8
G177.0	32.1	31.1	30.9	31.0	31.3	31.0	31.0	31.1	32.1	31.8
G178.0	32.2	31.2	31.1	31.2	31.5	31.3	31.2	31.3	32.2	31.7
G179.0	32.3	31.4	31.3	31.4	31.6	31.5	31.4	31.4	32.2	31.6
G180.0	32.3	31.5	31.4	31.6	31.8	31.7	31.6	31.5	32.2	31.6

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Candlepower Table (Continue 5)

Unit: cd

GVC	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G0.0	1995.7	1995.6	1996.5	1998.5	2002.3	2002.9	2008.7			
G1.0	1966.4	1956.3	1954.5	1960.7	1973.1	1988.3	2009.3			
G2.0	1929.0	1905.0	1903.0	1915.9	1940.2	1971.7	2009.1			
G3.0	1877.3	1835.0	1823.9	1849.0	1897.3	1952.1	2008.0			
G4.0	1825.4	1758.0	1738.2	1775.3	1850.3	1933.3	2006.0			
G5.0	1764.7	1675.6	1657.6	1696.4	1794.7	1910.6	2004.1			
G6.0	1697.6	1599.0	1568.5	1614.4	1726.1	1883.7	2001.1			
G7.0	1639.1	1524.2	1495.8	1537.1	1664.2	1854.2	1997.7			
G8.0	1574.5	1467.6	1448.4	1474.6	1602.1	1818.9	1993.2			
G9.0	1520.1	1436.8	1424.9	1438.1	1540.9	1786.5	1988.3			
G10.0	1473.7	1418.5	1408.5	1417.7	1489.7	1750.7	1983.4			
G11.0	1439.5	1401.7	1393.3	1401.3	1447.2	1710.0	1977.3			
G12.0	1419.8	1388.3	1381.6	1387.8	1421.1	1670.8	1971.5			
G13.0	1403.4	1377.3	1371.6	1375.9	1403.9	1632.5	1964.8			
G14.0	1387.9	1365.7	1362.3	1365.3	1387.5	1597.5	1957.9			
G15.0	1375.4	1356.9	1354.2	1356.1	1374.8	1559.8	1950.7			
G16.0	1362.4	1347.1	1345.9	1346.9	1361.3	1520.3	1942.8			
G17.0	1350.9	1339.2	1341.6	1338.4	1350.4	1483.4	1933.0			
G18.0	1339.8	1333.3	1339.6	1332.9	1340.0	1451.1	1922.9			
G19.0	1328.6	1329.6	1339.0	1329.8	1328.7	1419.2	1913.5			
G20.0	1318.4	1327.8	1339.2	1327.0	1318.0	1393.7	1902.3			
G21.0	1307.3	1326.1	1339.8	1325.6	1307.8	1372.1	1890.3			
G22.0	1298.7	1325.5	1341.7	1325.0	1297.9	1353.2	1877.3			
G23.0	1291.2	1325.4	1344.3	1324.3	1290.1	1338.2	1864.3			
G24.0	1284.3	1325.7	1348.9	1326.1	1282.7	1322.5	1851.5			
G25.0	1279.4	1327.3	1354.0	1327.3	1277.1	1311.1	1836.6			
G26.0	1275.2	1329.6	1360.5	1330.4	1271.8	1301.6	1821.2			
G27.0	1270.1	1334.3	1368.1	1334.2	1266.7	1294.4	1805.7			
G28.0	1266.5	1338.8	1375.1	1338.7	1262.2	1288.8	1788.6			
G29.0	1261.1	1344.2	1383.0	1344.7	1257.5	1282.3	1772.5			
G30.0	1255.4	1349.1	1390.2	1350.4	1253.3	1274.8	1753.7			
G31.0	1250.6	1354.9	1396.1	1356.1	1250.3	1263.6	1735.3			
G32.0	1246.9	1359.3	1401.8	1361.9	1247.6	1249.2	1716.2			
G33.0	1243.5	1364.3	1405.6	1366.3	1245.3	1232.9	1695.8			
G34.0	1240.5	1367.3	1408.9	1369.8	1243.5	1215.7	1675.0			
G35.0	1236.9	1369.8	1411.4	1373.5	1240.5	1192.5	1651.3			
G36.0	1235.1	1371.8	1411.0	1375.3	1238.8	1170.3	1629.3			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Candlepower Table (Continue 6)

Unit: cd

GVC	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G37.0	1233.4	1372.2	1408.8	1375.8	1237.8	1147.7	1606.4			
G38.0	1232.1	1370.5	1404.5	1374.8	1236.4	1127.4	1578.2			
G39.0	1230.3	1367.9	1397.4	1371.4	1235.8	1109.1	1553.0			
G40.0	1227.7	1362.9	1385.8	1366.7	1234.1	1087.3	1522.5			
G41.0	1224.8	1354.7	1372.0	1359.0	1232.2	1068.3	1495.0			
G42.0	1222.3	1345.7	1356.3	1349.3	1229.9	1046.9	1461.3			
G43.0	1218.6	1330.1	1333.8	1335.4	1226.7	1022.0	1419.9			
G44.0	1214.4	1314.7	1310.6	1319.9	1222.2	998.2	1387.5			
G45.0	1208.0	1292.6	1278.4	1297.9	1216.8	975.3	1354.7			
G46.0	1201.6	1269.9	1246.4	1275.3	1210.9	956.3	1317.3			
G47.0	1196.3	1242.5	1208.7	1247.3	1205.9	939.2	1282.3			
G48.0	1186.3	1207.2	1164.5	1213.0	1197.4	919.7	1241.2			
G49.0	1174.9	1172.2	1118.8	1175.8	1184.3	903.2	1203.1			
G50.0	1160.5	1132.2	1069.6	1135.4	1169.4	886.7	1163.8			
G51.0	1142.9	1084.3	991.0	1085.7	1149.3	869.9	1122.2			
G52.0	1121.4	1037.4	840.7	1037.9	1126.2	855.4	1086.1			
G53.0	1094.1	971.4	674.1	967.0	1098.6	841.2	1047.4			
G54.0	1065.9	843.7	564.5	834.5	1070.3	827.7	1006.7			
G55.0	1034.8	687.3	485.2	674.6	1037.3	815.3	967.7			
G56.0	993.6	560.1	391.1	554.5	997.4	802.9	926.8			
G57.0	951.7	483.9	347.3	474.4	955.4	793.1	888.1			
G58.0	903.1	394.2	324.0	385.6	906.3	783.7	845.9			
G59.0	846.9	331.2	305.8	327.0	847.2	772.4	800.6			
G60.0	789.7	306.4	292.7	304.5	784.0	760.0	753.2			
G61.0	669.3	287.3	284.1	286.0	654.1	738.0	703.4			
G62.0	542.2	272.9	281.3	273.4	532.5	710.1	644.8			
G63.0	456.2	264.2	281.9	264.5	451.0	674.0	584.5			
G64.0	371.0	259.7	275.5	259.4	353.1	636.7	527.8			
G65.0	285.0	254.1	211.6	256.5	277.2	604.7	487.1			
G66.0	235.4	222.0	143.8	221.4	232.9	563.9	454.8			
G67.0	211.7	157.1	85.3	154.4	208.1	526.1	420.2			
G68.0	188.4	122.5	23.7	122.5	187.7	485.8	391.5			
G69.0	166.9	43.5	16.2	39.6	168.7	442.3	363.2			
G70.0	151.5	23.0	8.5	22.0	153.1	402.5	334.2			
G71.0	136.4	13.0	7.0	12.3	137.3	368.1	310.2			
G72.0	112.4	7.5	6.9	7.7	108.0	335.3	284.5			
G73.0	89.1	7.1	6.5	7.3	85.3	297.7	260.4			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Candlepower Table (Continue 7)

Unit: cd

GVC	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G74.0	43.8	6.9	6.3	7.1	39.9	237.0	238.1			
G75.0	29.1	6.6	6.4	6.9	25.6	186.3	214.0			
G76.0	9.3	6.5	6.3	6.9	9.3	131.8	193.3			
G77.0	8.6	6.5	6.3	6.8	8.7	111.3	171.3			
G78.0	8.1	6.5	6.6	6.9	8.3	97.3	154.1			
G79.0	7.9	6.7	6.9	7.2	8.1	84.2	136.7			
G80.0	7.6	7.1	7.3	7.5	7.8	69.5	119.1			
G81.0	7.8	7.4	7.6	7.8	8.0	49.7	103.9			
G82.0	8.1	7.7	7.9	8.1	8.2	20.0	88.8			
G83.0	8.3	8.1	8.3	8.5	8.4	16.2	74.0			
G84.0	8.6	8.5	8.6	8.9	8.7	14.2	61.5			
G85.0	8.9	8.9	9.1	9.3	8.9	13.0	48.7			
G86.0	9.1	9.3	9.4	9.6	9.1	12.4	39.1			
G87.0	9.4	9.7	9.9	10.1	9.4	11.7	30.9			
G88.0	9.7	10.1	10.3	10.5	9.7	11.3	23.8			
G89.0	10.1	10.6	10.8	11.0	10.0	11.3	18.6			
G90.0	10.4	11.1	11.3	11.4	10.3	11.4	15.7			
G91.0	10.7	11.6	11.8	11.9	10.6	11.5	15.4			
G92.0	11.1	12.1	12.3	12.4	10.9	11.5	15.8			
G93.0	11.5	12.7	12.9	13.0	11.3	11.6	16.0			
G94.0	11.9	13.2	13.4	13.5	11.6	11.9	16.1			
G95.0	12.3	13.7	14.0	14.0	11.9	12.2	16.0			
G96.0	12.7	14.4	14.6	14.6	12.4	12.4	15.8			
G97.0	13.1	14.9	15.2	15.1	12.7	12.6	15.8			
G98.0	13.6	15.4	15.9	15.6	13.2	12.9	15.8			
G99.0	14.0	16.0	16.5	16.2	13.6	13.1	15.7			
G100.0	14.4	16.5	17.1	16.7	14.0	13.3	15.7			
G101.0	14.9	17.2	17.8	17.3	14.4	13.5	15.7			
G102.0	15.4	17.7	18.4	17.8	14.9	13.8	15.7			
G103.0	15.8	18.2	19.0	18.4	15.4	14.1	15.7			
G104.0	16.4	18.7	19.6	18.9	15.9	14.4	15.8			
G105.0	16.9	19.3	20.2	19.4	16.4	14.8	15.9			
G106.0	17.5	19.8	20.8	19.9	16.9	15.2	16.0			
G107.0	18.0	20.4	21.4	20.4	17.4	15.6	16.1			
G108.0	18.6	20.9	21.9	20.9	17.9	16.0	16.3			
G109.0	19.1	21.4	22.5	21.5	18.5	16.4	16.5			
G110.0	19.7	21.9	23.0	21.9	18.9	16.8	16.9			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Candlepower Table (Continue 8)

Unit: cd

GVC	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G111.0	20.3	22.5	23.6	22.4	19.5	17.2	17.2			
G112.0	20.8	23.0	24.1	22.8	20.0	17.6	17.6			
G113.0	21.3	23.5	24.6	23.3	20.5	18.0	17.8			
G114.0	21.9	24.0	25.2	23.8	21.0	18.5	18.1			
G115.0	22.4	24.5	25.7	24.3	21.5	18.8	18.3			
G116.0	22.8	24.9	26.2	24.7	22.0	19.3	18.5			
G117.0	23.4	25.5	26.7	25.2	22.5	19.6	18.6			
G118.0	23.8	25.9	27.2	25.6	23.0	19.9	18.7			
G119.0	24.3	26.4	27.7	26.1	23.5	20.4	18.8			
G120.0	24.7	26.9	28.1	26.5	23.9	20.7	19.0			
G121.0	25.2	27.3	28.6	26.9	24.4	21.0	19.3			
G122.0	25.6	27.8	29.0	27.4	24.8	21.4	19.5			
G123.0	26.0	28.1	29.4	27.8	25.3	21.7	19.7			
G124.0	26.4	28.5	29.8	28.1	25.7	22.0	19.9			
G125.0	26.8	28.9	30.2	28.5	26.1	22.3	20.2			
G126.0	27.1	29.3	30.5	28.8	26.5	22.6	20.4			
G127.0	27.5	29.7	30.9	29.2	26.9	22.9	20.5			
G128.0	27.8	30.0	31.2	29.6	27.3	23.2	20.8			
G129.0	28.1	30.3	31.6	29.9	27.6	23.5	21.0			
G130.0	28.5	30.8	31.9	30.3	28.0	23.7	21.3			
G131.0	28.8	31.1	32.2	30.6	28.4	24.0	21.5			
G132.0	29.1	31.4	32.5	30.9	28.6	24.3	21.8			
G133.0	29.5	31.7	32.8	31.3	29.0	24.6	22.0			
G134.0	29.8	32.0	33.1	31.6	29.3	24.9	22.2			
G135.0	30.0	32.3	33.5	31.9	29.6	25.3	22.5			
G136.0	30.2	32.6	33.8	32.2	29.9	25.5	22.7			
G137.0	30.5	32.9	34.0	32.5	30.2	25.9	22.9			
G138.0	30.8	33.2	34.3	32.8	30.5	26.2	23.2			
G139.0	31.0	33.5	34.5	33.0	30.7	26.5	23.4			
G140.0	31.2	33.8	34.8	33.3	31.0	26.8	23.6			
G141.0	31.5	33.9	35.0	33.6	31.2	27.0	23.8			
G142.0	31.7	34.2	35.1	33.8	31.4	27.2	24.0			
G143.0	31.9	34.4	35.4	34.1	31.6	27.6	24.3			
G144.0	32.1	34.6	35.5	34.3	31.8	27.8	24.5			
G145.0	32.2	34.7	35.7	34.5	31.9	28.1	24.7			
G146.0	32.4	34.8	35.8	34.7	32.1	28.3	25.0			
G147.0	32.5	35.0	35.9	34.8	32.3	28.6	25.2			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector:

Candlepower Table (Continue 9)

Unit: cd

GVC	C225.0	C247.5	C270.0	C292.5	C315.0	C337.5	C360.0			
G148.0	32.7	35.0	36.0	35.0	32.4	28.8	25.5			
G149.0	32.8	35.1	36.1	35.1	32.5	29.0	25.8			
G150.0	32.9	35.2	36.1	35.2	32.6	29.2	26.1			
G151.0	33.1	35.2	36.2	35.3	32.7	29.4	26.3			
G152.0	33.1	35.2	36.3	35.3	32.8	29.6	26.6			
G153.0	33.2	35.2	36.3	35.3	32.8	29.8	26.9			
G154.0	33.2	35.3	36.3	35.3	32.9	30.0	27.2			
G155.0	33.3	35.3	36.3	35.3	32.9	30.2	27.4			
G156.0	33.3	35.2	36.2	35.2	33.0	30.3	27.7			
G157.0	33.3	35.1	36.0	35.2	33.0	30.4	27.9			
G158.0	33.3	35.1	35.9	35.1	33.0	30.6	28.2			
G159.0	33.3	35.0	35.7	35.0	33.0	30.7	28.4			
G160.0	33.3	34.8	35.6	34.9	33.0	30.9	28.6			
G161.0	33.2	34.7	35.4	34.8	33.0	31.0	28.9			
G162.0	33.1	34.5	35.2	34.6	32.9	31.1	29.1			
G163.0	33.0	34.3	35.0	34.5	32.9	31.2	29.4			
G164.0	32.9	34.2	34.8	34.3	32.8	31.3	29.6			
G165.0	32.8	33.9	34.6	34.2	32.8	31.4	29.8			
G166.0	32.8	33.8	34.4	34.0	32.8	31.5	30.0			
G167.0	32.7	33.5	34.1	33.8	32.7	31.6	30.3			
G168.0	32.6	33.3	33.9	33.7	32.6	31.7	30.5			
G169.0	32.5	33.1	33.8	33.5	32.6	31.7	30.8			
G170.0	32.5	32.9	33.6	33.3	32.5	31.8	31.0			
G171.0	32.4	32.8	33.4	33.1	32.5	31.8	31.2			
G172.0	32.3	32.6	33.2	33.0	32.4	31.9	31.4			
G173.0	32.2	32.5	33.1	32.8	32.3	31.9	31.6			
G174.0	32.1	32.4	32.9	32.7	32.3	31.9	31.8			
G175.0	32.0	32.2	32.7	32.5	32.2	31.9	31.9			
G176.0	31.9	32.1	32.6	32.3	32.1	31.8	32.0			
G177.0	31.9	32.0	32.4	32.2	32.0	31.8	32.1			
G178.0	31.8	31.9	32.2	32.0	31.9	31.7	32.2			
G179.0	31.6	31.8	32.0	31.8	31.8	31.7	32.3			
G180.0	31.5	31.6	31.9	31.6	31.6	31.6	32.3			

C Plane (°):0.0-360.0: 22.5

Test Lab:

Test Type: TYPE C

Temperature:

Operator: 韩顺

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.154 m

Humidity:

Inspector: