
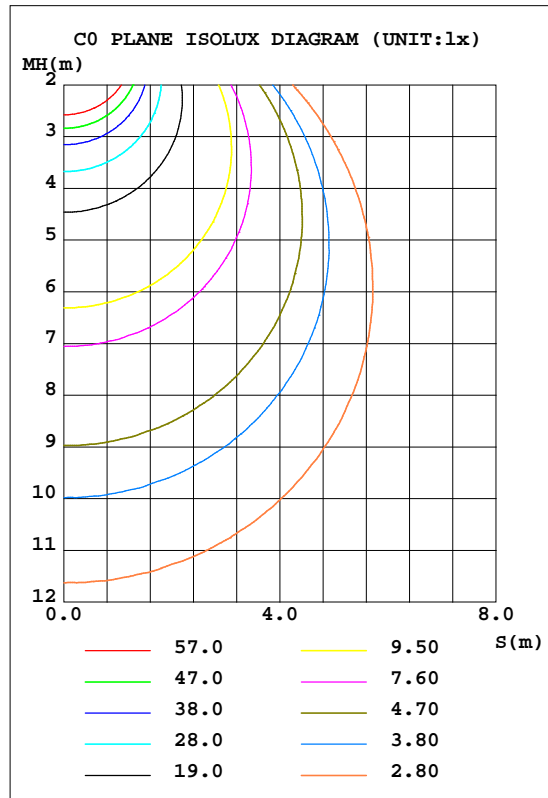


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 77.43 lm/W			
MODELASD	JBS-6D15AC(3000K)	I _{max} (cd)	381.0	S/MH(C0/180)	1.27
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1117.4	h UP, DN(C0-180)	0.2,49.6
NOMINAL FLUX(lm)	1117.37	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.9
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

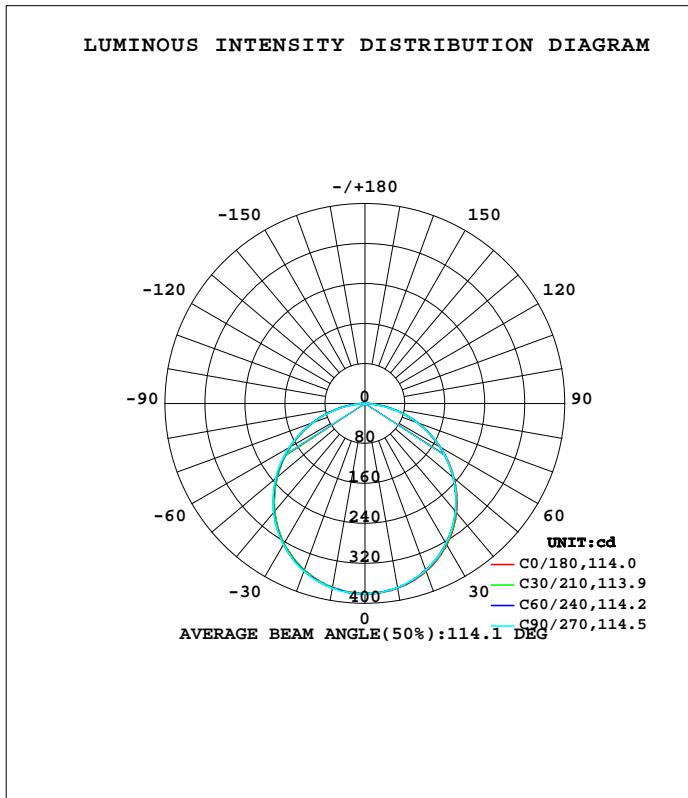

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	374.7	374.4	374.2	373.2	373.5	374.0	375.9	375.1	0- 10	36.03	36.03	3.22,3.22
20	357.3	355.5	355.0	353.8	354.9	355.8	357.1	357.4	10- 20	103.5	139.5	12.5,12.5
30	327.2	324.7	323.8	322.2	323.9	325.0	326.4	327.5	20- 30	157.6	297.1	26.6,26.6
40	285.1	282.1	282.1	280.0	281.5	282.7	284.8	285.4	30- 40	190.9	488.0	43.7,43.7
50	233.1	231.0	230.7	228.3	229.4	231.0	233.4	234.1	40- 50	199.0	687.0	61.5,61.5
60	174.1	172.9	172.8	170.4	170.8	172.6	174.9	175.3	50- 60	181.1	868.1	77.7,77.7
70	111.4	110.8	109.9	108.6	109.1	110.3	110.7	112.5	60- 70	140.4	1009	90.3,90.3
80	48.53	48.14	44.98	46.72	47.46	47.42	45.59	48.57	70- 80	83.28	1092	97.7,97.7
90	0.1406	0.0886	0.0741	0.1010	0.1294	0.2238	0.1853	0.1754	80- 90	20.71	1113	99.6,99.6
100	0.2309	0.2343	0.2491	0.2522	0.3606	0.3193	0.2893	0.3159	90-100	0.2175	1113	99.6,99.6
110	0.4824	0.4720	0.4913	0.4703	0.6461	0.5672	0.5449	0.5613	100-110	0.4199	1113	99.6,99.6
120	0.8221	0.7203	0.7266	0.7091	0.9180	0.8119	0.8137	0.8098	110-120	0.6480	1114	99.7,99.7
130	1.080	0.9564	0.9286	0.9206	1.163	1.016	1.042	1.100	120-130	0.8131	1115	99.8,99.8
140	1.035	1.003	1.056	1.022	1.244	1.172	1.345	1.153	130-140	0.8275	1115	99.8,99.8
150	1.149	1.192	1.242	1.200	1.353	1.301	1.527	1.284	140-150	0.7456	1116	99.9,99.9
160	1.318	1.338	1.386	1.371	1.475	1.417	1.443	1.398	150-160	0.6214	1117	99.9,99.9
170	1.475	1.498	1.541	1.499	1.597	1.600	1.931	1.707	160-170	0.4211	1117	100,100
180	1.597	1.627	1.628	1.613	1.618	1.627	1.628	1.616	170-180	0.1533	1117	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1395]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

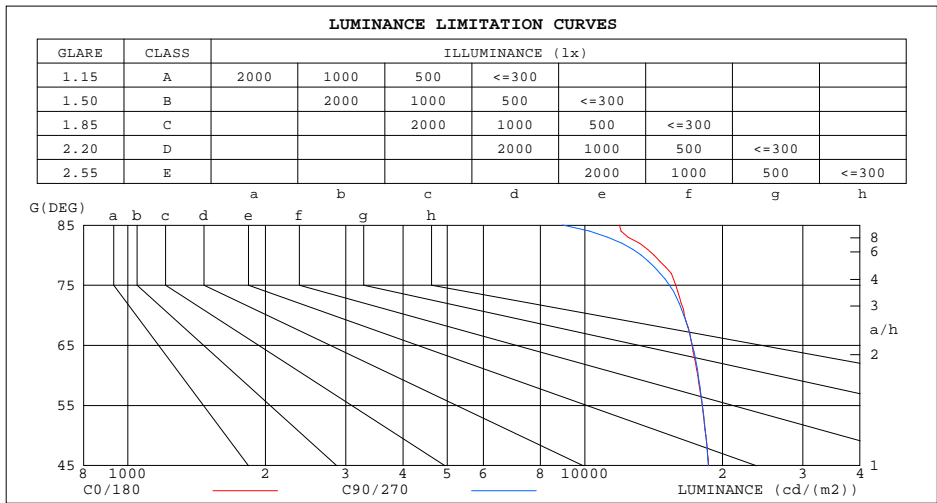

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11900	8950
80	14177	13276
75	15812	15323
70	16522	16465
65	17159	17199
60	17667	17717
55	18081	18078
50	18397	18401
45	18654	18652


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

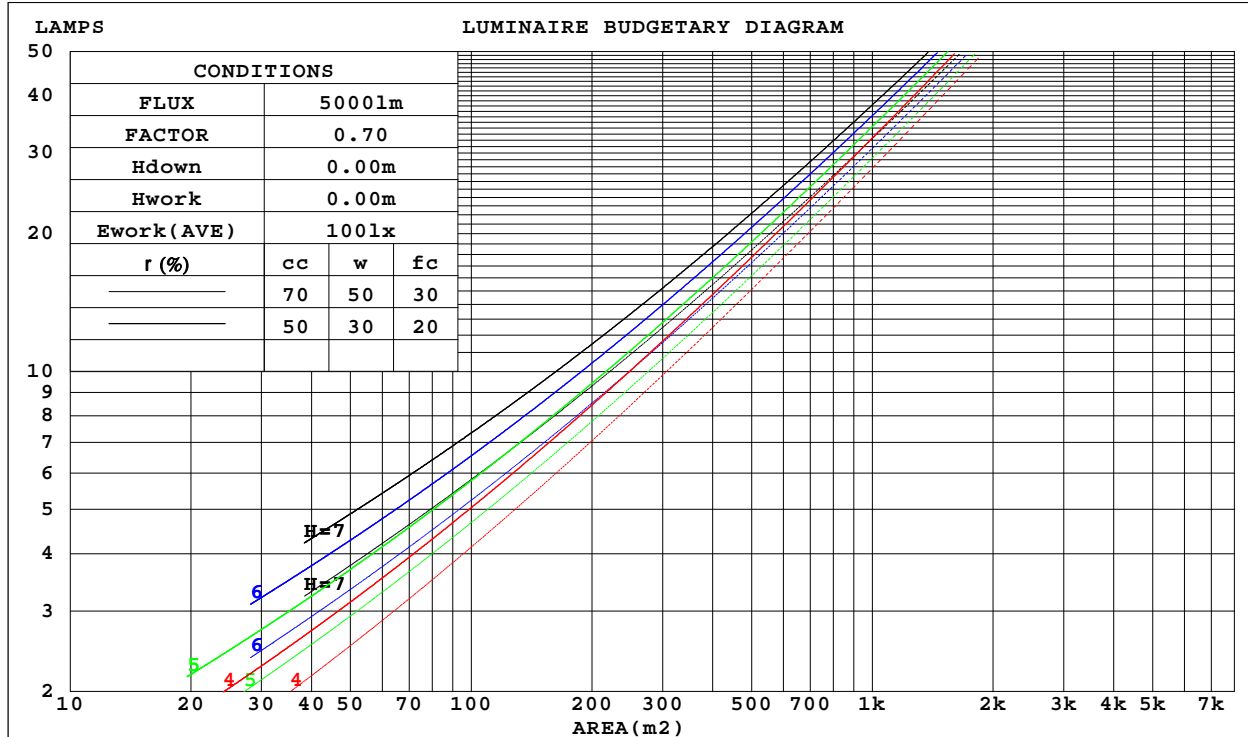

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

WEC AND CCEC

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.306	.174	.055	.292	.168	.054	.280	.161	.052	.268	.155	.050	
2.0	.294	.161	.049	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.237	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.167	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.102	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.053	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.126	.074	.037	.087	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.037	.120	.068	.032	.083	.048	.023	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.127	.068	.029	.109	.059	.025	.076	.042	.018	.044	.025	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.14*0.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.2	23.8	22.6	24.2	24.5	22.2	23.8	22.6	24.2	24.5
3H	24.1	25.6	24.5	25.9	26.3	24.1	25.6	24.5	25.9	26.3
4H	24.9	26.3	25.3	26.6	27.0	24.8	26.2	25.2	26.5	26.9
6H	25.4	26.7	25.8	27.1	27.5	25.3	26.6	25.7	27.0	27.4
8H	25.6	26.8	26.0	27.2	27.6	25.4	26.7	25.9	27.1	27.5
12H	25.7	26.9	26.1	27.3	27.7	25.5	26.7	25.9	27.1	27.5
4H 2H	22.9	24.3	23.3	24.6	25.0	22.8	24.2	23.2	24.6	25.0
3H	25.0	26.2	25.4	26.6	27.0	24.9	26.1	25.4	26.5	26.9
4H	25.9	26.9	26.3	27.4	27.8	25.8	26.9	26.2	27.3	27.7
6H	26.6	27.5	27.0	28.0	28.4	26.4	27.3	26.9	27.8	28.2
8H	26.8	27.7	27.3	28.1	28.6	26.6	27.5	27.0	27.9	28.4
12H	27.0	27.7	27.4	28.2	28.7	26.7	27.5	27.2	28.0	28.4
8H 4H	26.2	27.1	26.7	27.5	28.0	26.1	27.0	26.6	27.4	27.9
6H	27.0	27.8	27.5	28.3	28.8	26.8	27.6	27.3	28.1	28.6
8H	27.4	28.0	27.9	28.5	29.0	27.1	27.7	27.6	28.3	28.7
12H	27.6	28.2	28.1	28.7	29.2	27.2	27.8	27.8	28.3	28.9
12H 4H	26.2	27.0	26.7	27.5	28.0	26.2	26.9	26.6	27.4	27.9
6H	27.1	27.8	27.6	28.2	28.8	26.9	27.6	27.4	28.0	28.6
8H	27.5	28.1	28.0	28.6	29.1	27.2	27.8	27.7	28.3	28.8
CIE190: 2010										

CIE190: 2010
Area: 0.0196 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1395]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	70	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	104	99	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1395]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

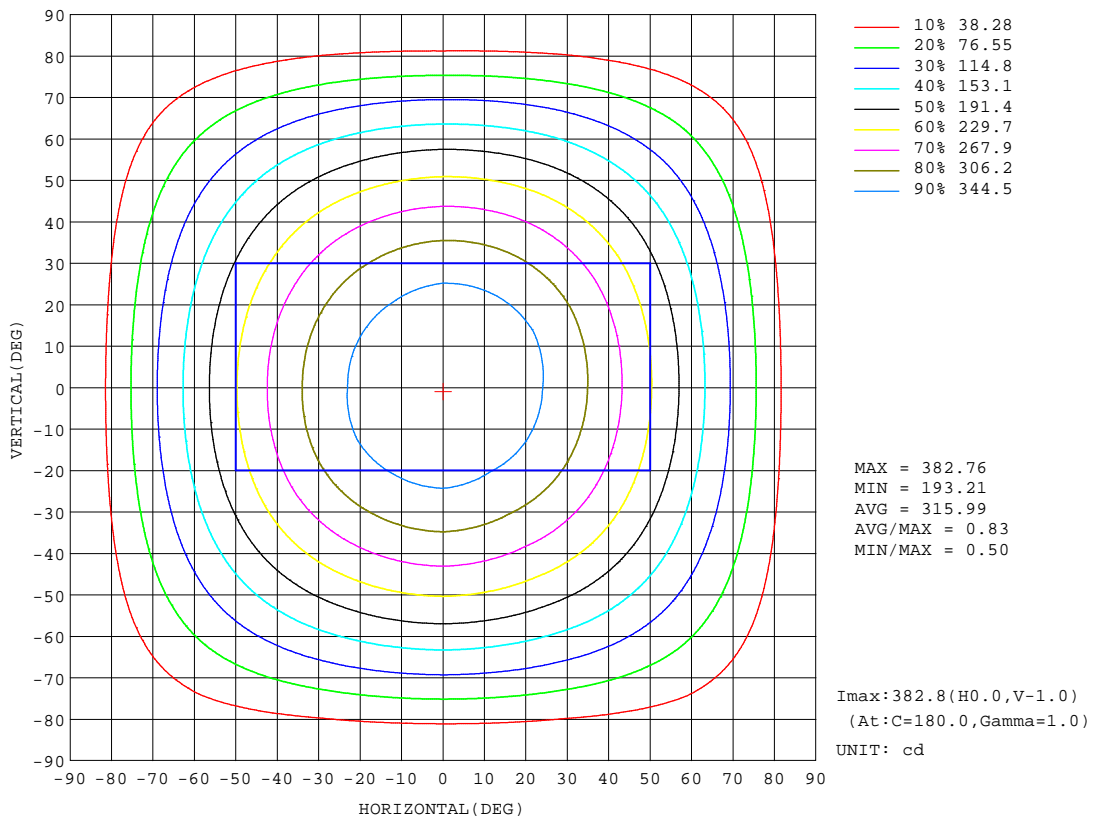


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1395]
 Remarks:

AAI Figure

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

Flux out:817.1 lm

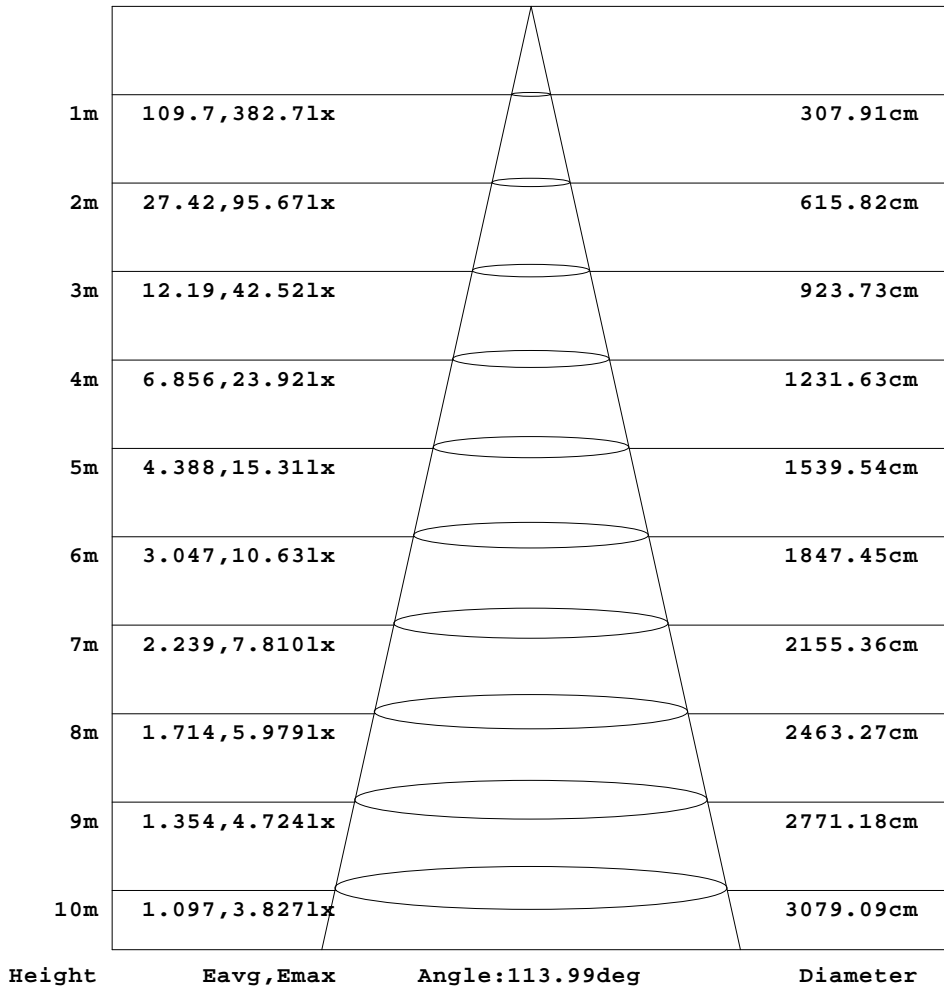


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

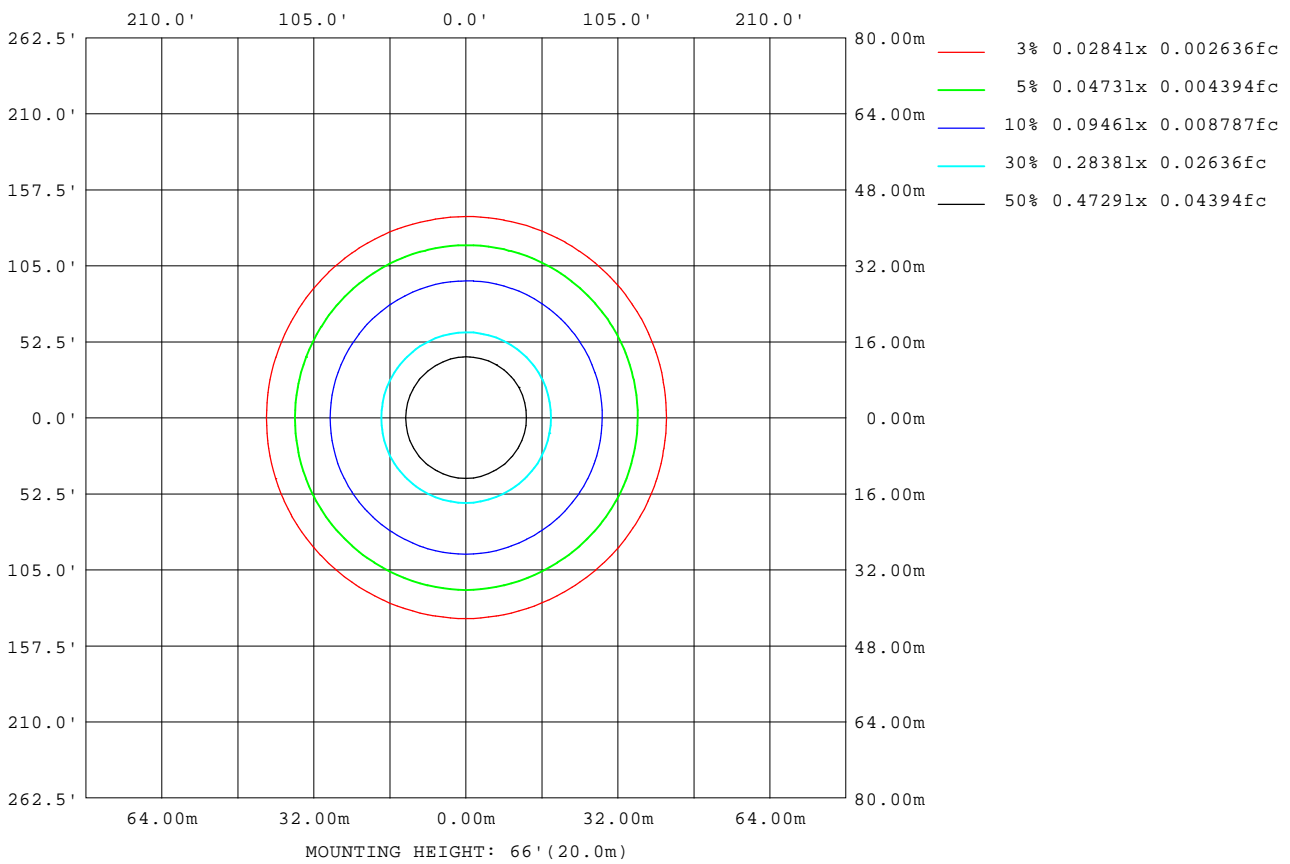

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

LED Avg.L Report

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	17079
L_0~180(75)av	15727
L_0~180(85)av	11441
L_90~270(65)av	17201
L_90~270(75)av	15324
L_90~270(85)av	8901
L_45(65)av	17133
L_45(75)av	15608
L_45(85)av	10119

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1395]
Remarks:

Planar Illuminance Curve

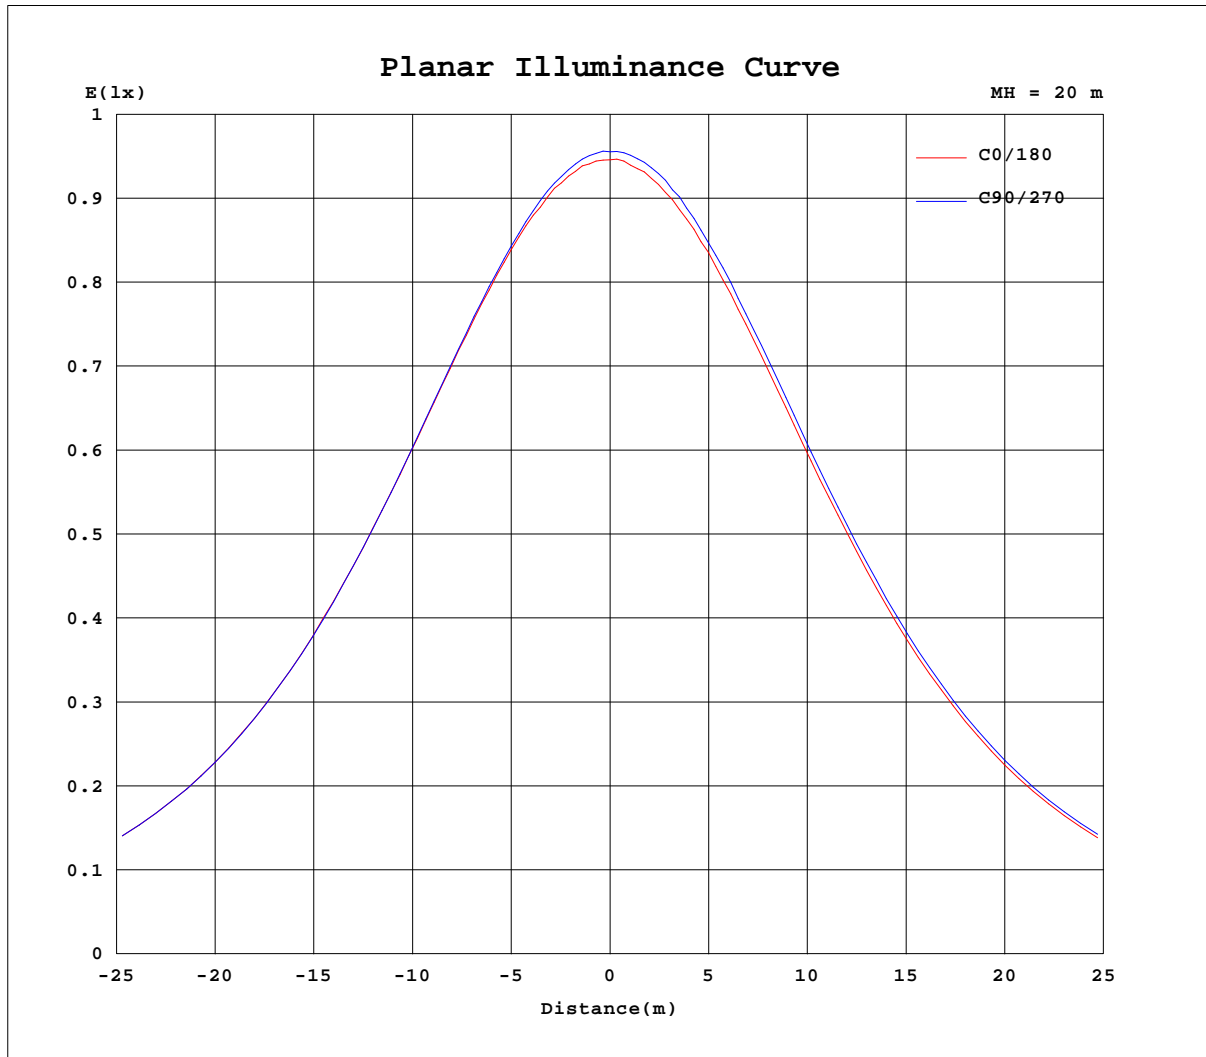

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1395]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.18V I:0.1221A P:14.430W PF:0.9836 Freq:59.98Hz Lamp Flux:1117.37x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	381	381	381	381	381	381	381	381	381	381	381	381						
5	379	379	379	379	378	378	379	378	380	380	379	379						
10	375	374	374	374	373	373	373	374	374	376	375	375						
15	368	367	367	366	365	365	366	366	367	368	368	368						
20	357	356	355	355	354	354	355	355	356	357	357	358						
25	344	343	341	341	339	340	340	341	342	343	344	344						
30	327	325	324	324	322	322	324	324	326	326	328	327						
35	308	306	304	304	302	302	304	304	306	307	308	308						
40	285	283	281	282	280	280	281	281	284	285	285	286						
45	260	259	257	257	255	255	256	257	259	260	261	261						
50	233	232	230	231	228	228	229	230	232	233	235	234						
55	204	203	202	202	200	200	201	201	204	205	206	205						
60	174	174	172	173	171	170	171	171	174	175	176	175						
65	143	142	142	142	140	140	140	140	143	143	144	144						
70	111	111	110	110	108	109	109	110	111	111	112	113						
75	80.7	80.7	78.0	77.4	76.7	78.5	78.9	78.9	79.1	78.1	79.9	81.2						
80	48.5	50.5	45.8	45.0	44.8	48.7	47.5	47.7	47.2	45.6	47.9	49.3						
85	20.4	20.5	16.1	15.2	15.2	19.3	18.6	15.8	16.8	15.2	17.1	17.5						
90	0.14	0.09	0.09	0.07	0.09	0.11	0.13	0.29	0.16	0.19	0.15	0.20						
95	0.10	0.14	0.09	0.14	0.28	0.17	0.23	0.24	0.24	0.20	0.24	0.21						
100	0.23	0.25	0.22	0.25	0.24	0.27	0.36	0.31	0.33	0.29	0.34	0.30						
105	0.34	0.38	0.32	0.36	0.31	0.38	0.50	0.43	0.47	0.43	0.47	0.42						
110	0.48	0.50	0.44	0.49	0.44	0.50	0.65	0.54	0.59	0.54	0.59	0.54						
115	0.66	0.64	0.56	0.61	0.54	0.63	0.79	0.67	0.72	0.68	0.73	0.67						
120	0.82	0.76	0.68	0.73	0.67	0.75	0.92	0.80	0.82	0.81	0.83	0.79						
125	0.96	0.92	0.78	0.83	0.75	0.86	1.06	0.93	0.94	0.91	0.93	1.13						
130	1.08	1.05	0.87	0.93	0.87	0.97	1.16	1.01	1.03	1.04	1.11	1.09						
135	1.07	0.96	0.92	0.98	0.90	0.99	1.22	1.11	1.12	1.21	1.33	1.09						
140	1.04	1.03	0.97	1.06	0.99	1.05	1.24	1.15	1.19	1.35	1.17	1.14						
145	1.12	1.13	1.09	1.20	1.10	1.14	1.29	1.22	1.24	1.41	1.25	1.20						
150	1.15	1.20	1.18	1.24	1.17	1.23	1.35	1.28	1.32	1.53	1.32	1.25						
155	1.22	1.29	1.26	1.31	1.28	1.40	1.39	1.35	1.37	1.69	1.36	1.32						
160	1.32	1.35	1.33	1.39	1.33	1.41	1.48	1.41	1.42	1.44	1.43	1.36						
165	1.41	1.41	1.43	1.47	1.42	1.46	1.54	1.56	1.51	1.79	1.51	1.71						
170	1.48	1.49	1.51	1.54	1.47	1.53	1.60	1.59	1.61	1.93	1.89	1.53						
175	1.54	1.58	1.56	1.59	1.56	1.59	1.62	1.63	1.62	1.68	1.62	1.55						
180	1.60	1.64	1.61	1.63	1.62	1.61	1.62	1.64	1.61	1.63	1.63	1.61						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks: