
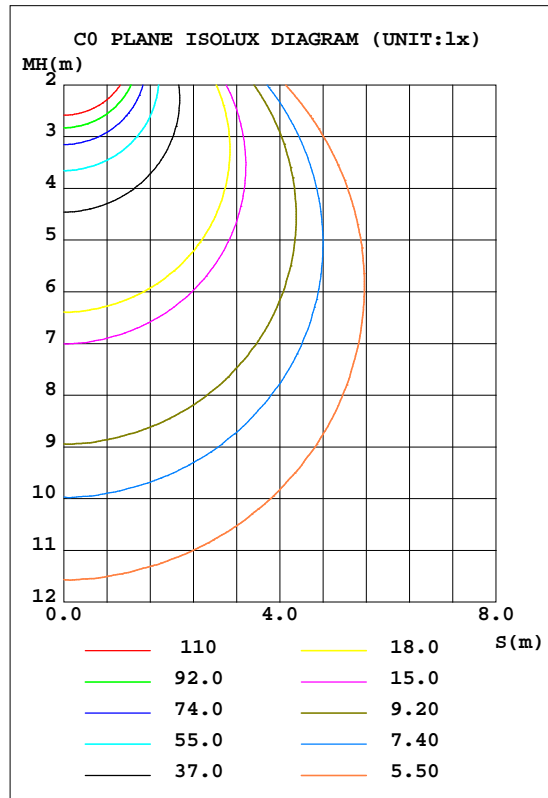


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.04 lm/W			
MABELJBS-12D24AC-WH(5000K)		I _{max} (cd)	737.2	S/MH(C0/180)	1.28
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2152.1	h UP, DN(C0-180)	0.2,49.2
NOMINAL FLUX(lm)	2152.08	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.4
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

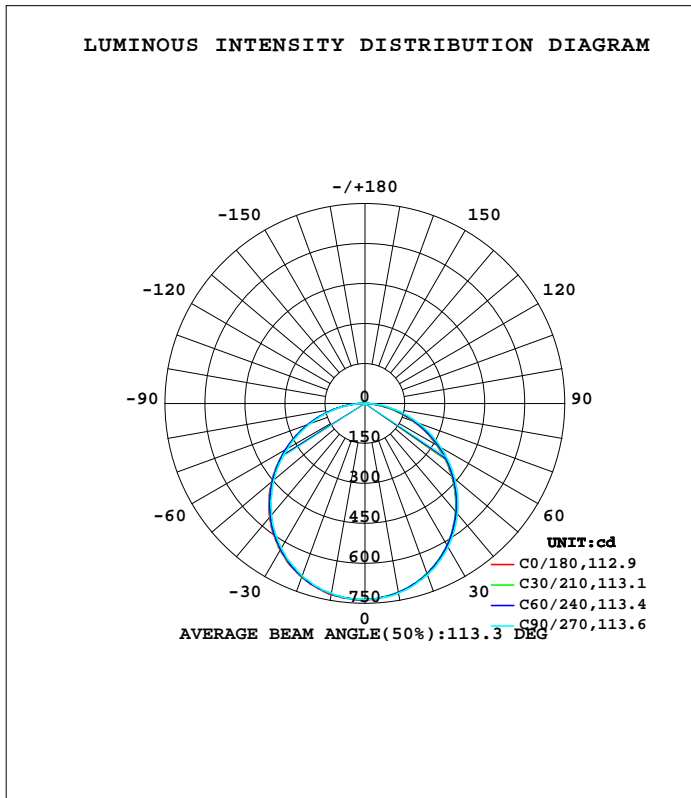

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0116]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	719.8	719.9	722.0	724.4	728.0	724.4	722.6	721.3	0- 10	69.61	69.61	3.23,3.23
20	680.1	679.9	685.3	688.4	694.4	691.1	688.3	682.4	10- 20	199.7	269.3	12.5,12.5
30	615.7	615.7	622.7	629.2	636.1	633.3	626.6	621.0	20- 30	303.4	572.7	26.6,26.6
40	529.4	530.9	540.0	548.7	556.9	552.6	545.4	536.1	30- 40	366.6	939.3	43.6,43.6
50	426.2	429.7	440.8	450.3	457.2	453.7	445.8	434.1	40- 50	381.1	1320	61.4,61.4
60	310.6	316.0	329.6	337.4	344.9	342.1	333.9	321.0	50- 60	345.7	1666	77.4,77.4
70	189.3	197.1	211.9	219.0	224.9	223.6	215.7	201.4	60- 70	267.2	1933	89.8,89.8
80	76.13	84.29	97.64	104.6	106.9	106.9	101.0	87.28	70- 80	160.7	2094	97.3,97.3
90	1.774	0.2612	0.2561	5.809	10.23	7.601	0.6988	0.3040	80- 90	48.91	2143	99.6,99.6
100	0.6013	0.5908	0.5920	0.5223	0.6021	0.5776	0.6073	0.6663	90-100	0.6789	2144	99.6,99.6
110	1.033	1.001	1.013	0.9327	1.033	0.9900	1.071	1.101	100-110	0.8470	2144	99.6,99.6
120	1.427	1.402	1.429	1.346	1.459	1.413	1.492	1.516	110-120	1.216	2146	99.7,99.7
130	1.741	1.714	1.764	1.692	1.848	1.767	1.833	1.828	120-130	1.437	2147	99.8,99.8
140	1.997	1.972	2.031	1.985	2.178	2.084	2.121	2.113	130-140	1.475	2149	99.8,99.8
150	2.300	2.251	2.281	2.249	2.450	2.350	2.361	2.367	140-150	1.371	2150	99.9,99.9
160	2.535	2.515	2.558	2.526	2.700	2.635	2.622	2.631	150-160	1.134	2151	100,100
170	2.790	2.784	2.809	2.830	2.897	2.872	2.857	2.830	160-170	0.7652	2152	100,100
180	2.977	2.975	2.963	2.985	2.977	2.983	2.963	2.985	170-180	0.2762	2152	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-11

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.0116]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

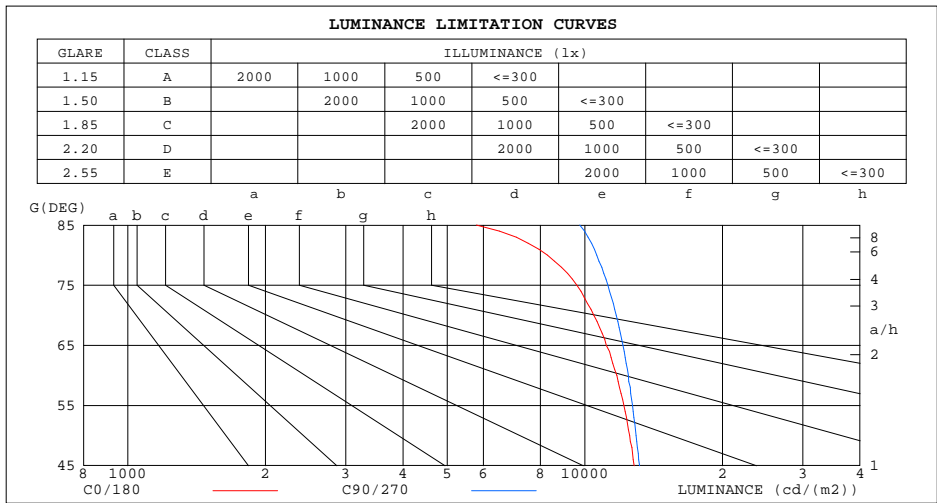

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	5792	9744
80	8290	10623
75	9602	11240
70	10465	11708
65	11148	12126
60	11748	12456
55	12172	12721
50	12537	12956
45	12828	13169


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0116]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

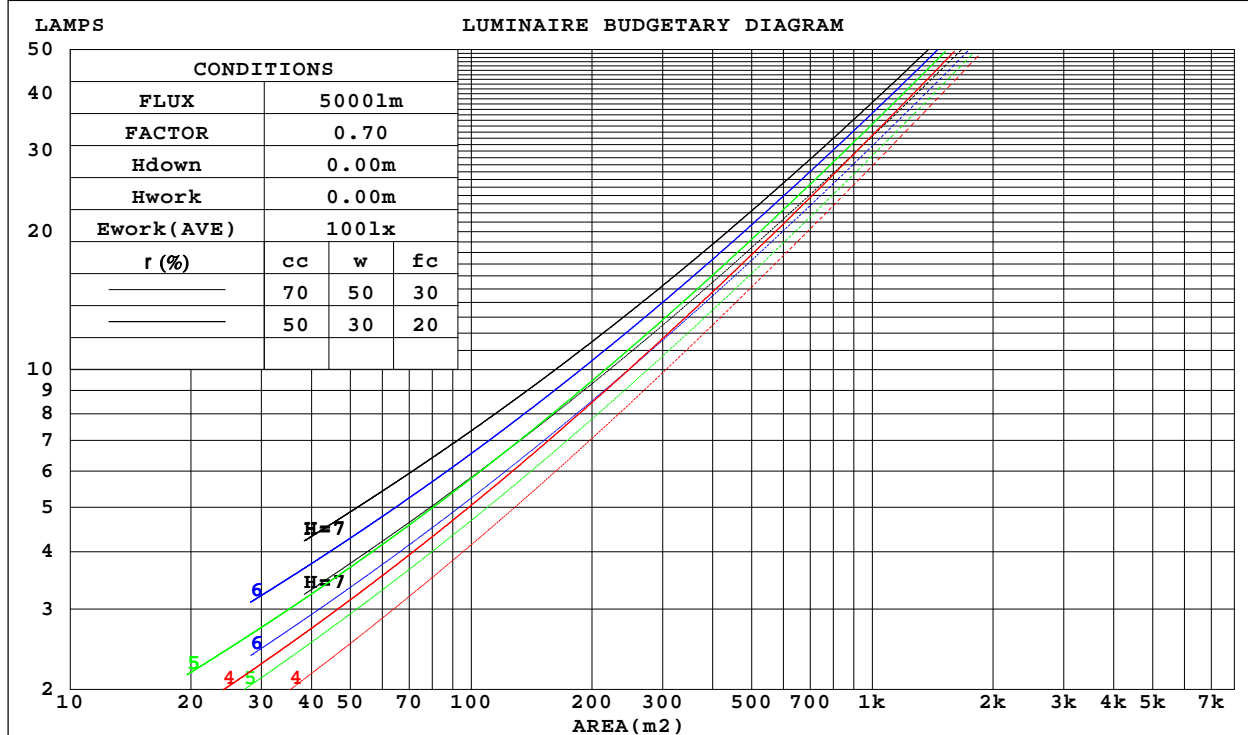

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0116]
 Remarks:

WEC AND CCEC

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.317	.180	.057	.309	.177	.056	.296	.170	.054	.283	.163	.052	.272	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.154	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.044	.267	.143	.043	.257	.139	.042	.247	.135	.042	.238	.132	.041	
4.0	.251	.131	.038	.247	.129	.038	.237	.126	.038	.228	.123	.037	.220	.120	.036	
5.0	.232	.118	.034	.228	.117	.034	.219	.114	.034	.212	.112	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.047	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.101	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.053	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.126	.074	.037	.087	.052	.026	.050	.031	.015	.016	.010	.005	
7.0	.139	.079	.036	.120	.068	.032	.083	.048	.022	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.127	.068	.028	.109	.059	.025	.076	.042	.018	.044	.025	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.022	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0116]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.23*0.23			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.6	22.3	21.0	22.6	22.9	21.0	22.7	21.4	23.0	23.3
3H	22.4	23.9	22.8	24.2	24.6	22.9	24.4	23.3	24.7	25.1
4H	23.0	24.4	23.4	24.8	25.2	23.7	25.1	24.1	25.4	25.8
6H	23.5	24.8	23.9	25.2	25.6	24.3	25.6	24.7	25.9	26.3
8H	23.6	24.9	24.1	25.3	25.7	24.5	25.7	24.9	26.1	26.5
12H	23.7	24.9	24.1	25.3	25.7	24.6	25.8	25.0	26.2	26.6
4H 2H	21.3	22.7	21.7	23.0	23.4	21.7	23.1	22.1	23.5	23.9
3H	23.3	24.4	23.7	24.9	25.3	23.8	25.0	24.3	25.4	25.8
4H	24.0	25.1	24.5	25.5	26.0	24.7	25.8	25.2	26.2	26.7
6H	24.6	25.6	25.1	26.0	26.5	25.5	26.4	25.9	26.8	27.3
8H	24.8	25.7	25.3	26.1	26.6	25.7	26.6	26.2	27.1	27.5
12H	24.9	25.7	25.4	26.2	26.7	25.9	26.7	26.4	27.2	27.7
8H 4H	24.4	25.3	24.8	25.7	26.2	25.1	26.0	25.6	26.4	26.9
6H	25.1	25.8	25.6	26.3	26.8	26.0	26.7	26.5	27.2	27.7
8H	25.3	26.0	25.8	26.5	27.0	26.3	27.0	26.9	27.5	28.0
12H	25.5	26.1	26.0	26.6	27.1	26.6	27.2	27.2	27.7	28.3
12H 4H	24.4	25.2	24.9	25.7	26.2	25.2	26.0	25.7	26.4	26.9
6H	25.2	25.8	25.7	26.3	26.8	26.1	26.8	26.6	27.2	27.8
8H	25.4	26.0	26.0	26.5	27.1	26.5	27.1	27.0	27.6	28.2
CIE190: 2010										

CIE190: 2010
Area: 0.0529 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-11

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.0116]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-11

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.0116]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

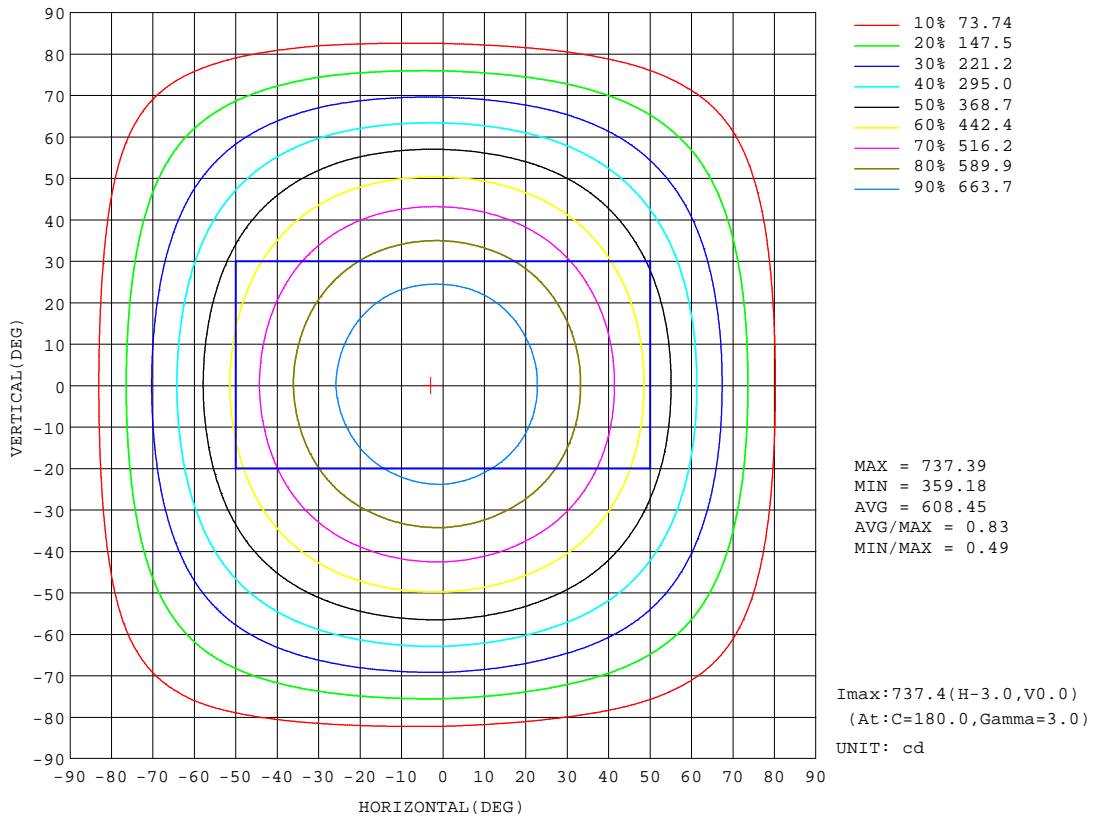


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0116]
 Remarks:

AAI Figure

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

Flux out:1569 lm

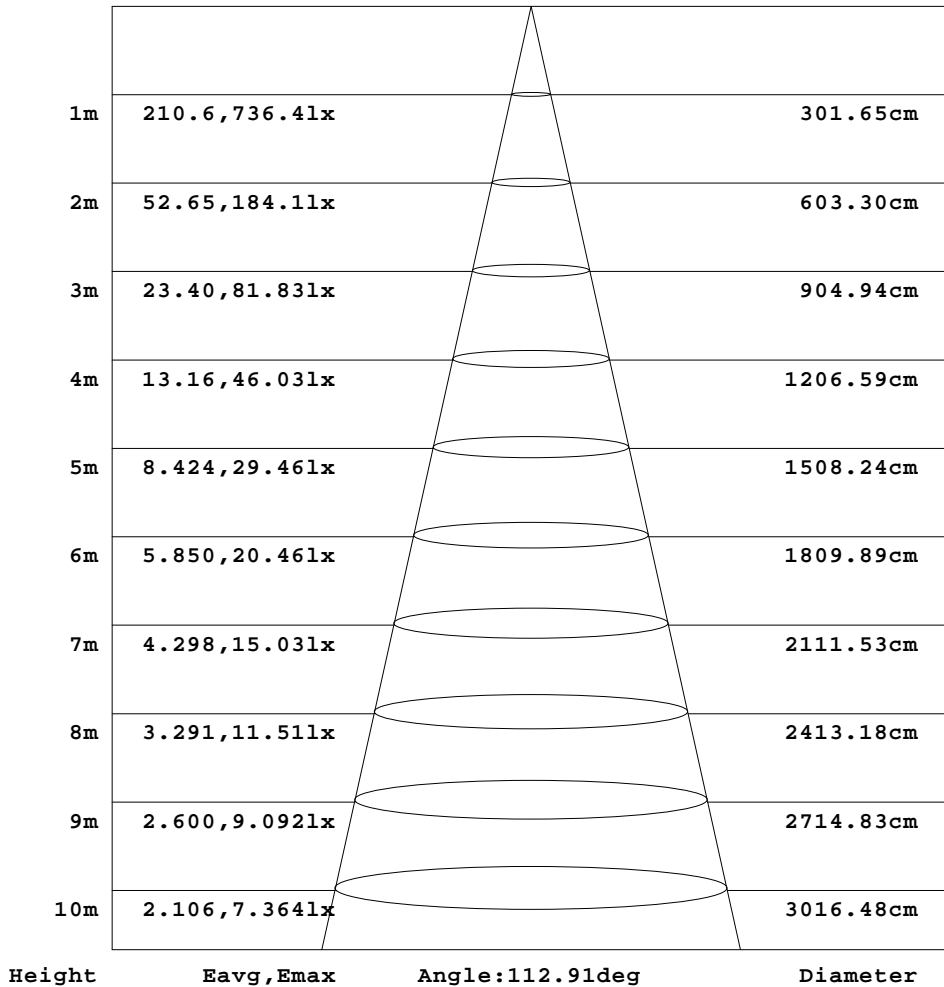


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0116]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

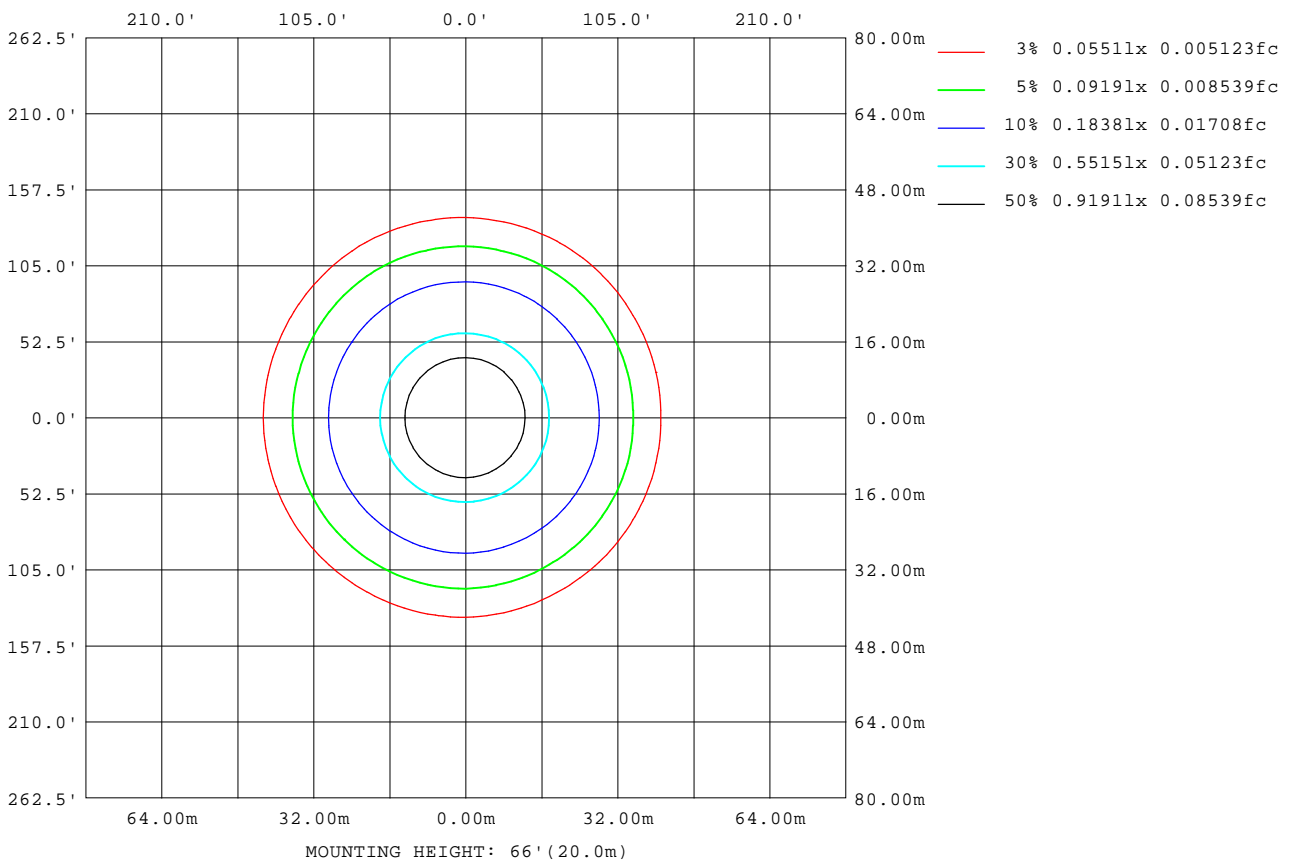

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0116]
 Remarks:

LED Avg.L Report

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	11957
L_0~180(75)av	10818
L_0~180(85)av	8752
L_90~270(65)av	12214
L_90~270(75)av	11376
L_90~270(85)av	10057
L_45(65)av	12073
L_45(75)av	11108
L_45(85)av	9342

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-11

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.0116]
Remarks:

Planar Illuminance Curve

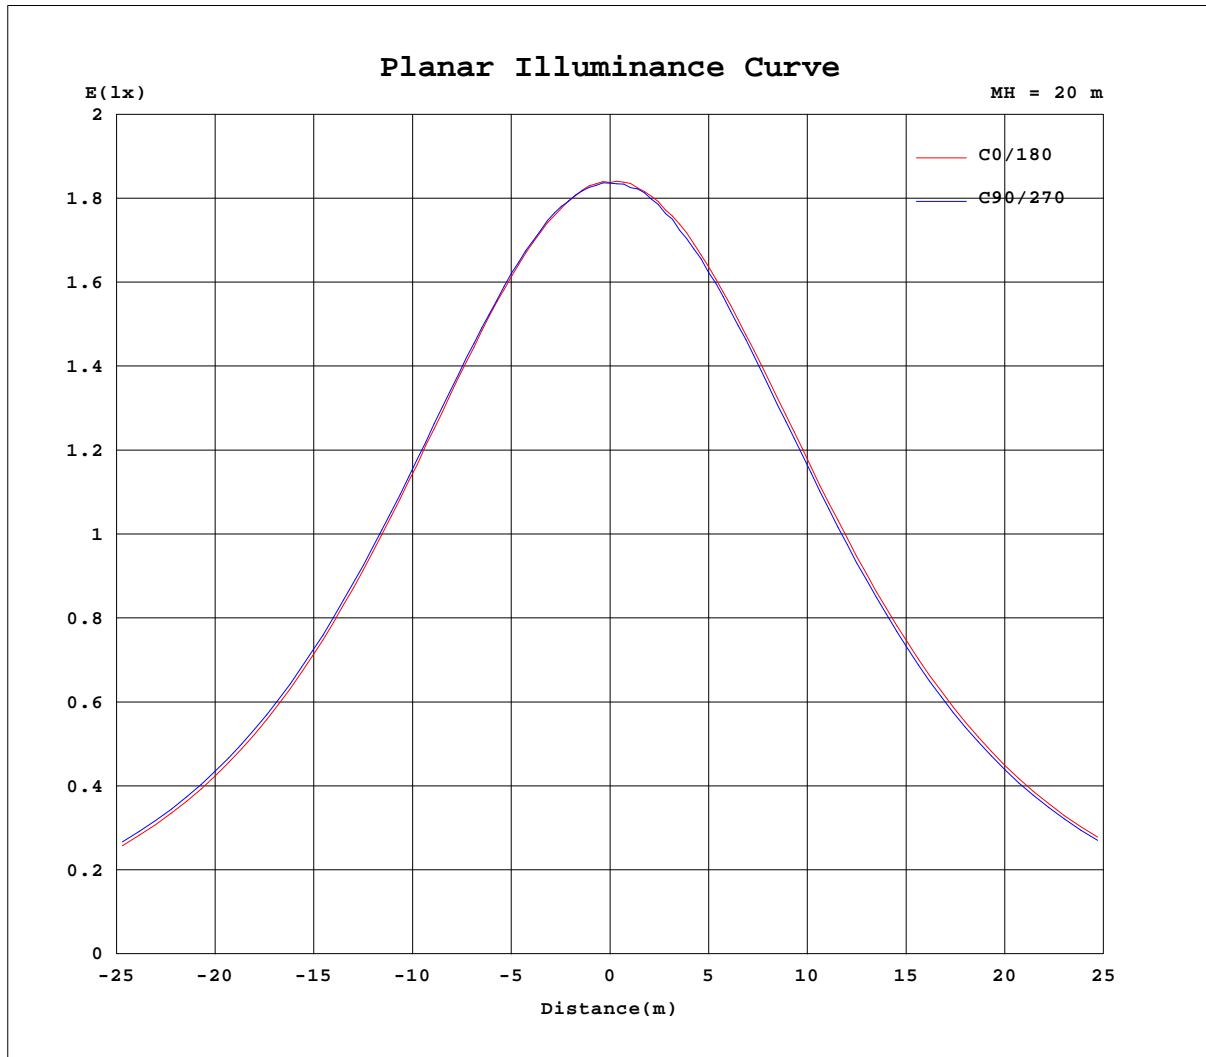

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0116]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.19V I:0.2063A P:24.445W PF:0.9858 Freq:59.98Hz Lamp Flux:2152.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	735	735	735	735	735	735	735	735	735	735	735	735						
5	731	730	730	732	733	732	735	732	733	734	733	732						
10	720	720	720	722	724	725	728	724	725	723	723	719						
15	703	702	703	707	709	709	714	712	711	710	708	702						
20	680	679	681	685	688	689	694	692	690	688	685	680						
25	651	650	651	656	661	664	668	666	665	660	657	652						
30	616	616	616	623	627	631	636	634	633	627	625	617						
35	575	575	577	585	589	594	599	596	595	590	584	577						
40	529	530	532	540	546	552	557	553	552	545	540	532						
45	480	481	484	493	497	504	509	506	505	497	492	483						
50	426	428	432	441	447	453	457	455	453	446	439	429						
55	369	371	376	386	392	397	402	400	398	391	384	374						
60	311	314	318	330	335	340	345	342	342	334	327	315						
65	249	254	259	271	276	282	286	283	284	275	267	255						
70	189	194	200	212	216	222	225	223	224	216	208	195						
75	131	136	143	154	159	163	165	164	165	158	149	138						
80	76.1	80.8	87.8	97.6	103	106	107	106	108	101	92.9	81.7						
85	26.7	30.9	36.1	45.0	49.7	54.0	54.0	52.3	52.1	47.8	39.8	30.0						
90	1.77	0.28	0.24	0.26	3.18	8.43	10.2	8.55	6.66	0.70	0.31	0.30						
95	0.40	0.43	0.35	0.41	0.35	0.36	0.42	0.38	0.42	0.42	0.47	0.44						
100	0.60	0.63	0.55	0.59	0.52	0.53	0.60	0.55	0.61	0.61	0.67	0.67						
105	0.80	0.84	0.75	0.80	0.71	0.72	0.82	0.74	0.81	0.84	0.89	0.87						
110	1.03	1.05	0.95	1.01	0.94	0.93	1.03	0.96	1.02	1.07	1.10	1.10						
115	1.23	1.26	1.18	1.20	1.16	1.15	1.25	1.18	1.24	1.29	1.31	1.32						
120	1.43	1.44	1.36	1.43	1.35	1.34	1.46	1.39	1.44	1.49	1.50	1.53						
125	1.59	1.59	1.55	1.60	1.54	1.54	1.65	1.59	1.61	1.68	1.68	1.70						
130	1.74	1.73	1.70	1.76	1.70	1.68	1.85	1.76	1.78	1.83	1.82	1.84						
135	1.87	1.88	1.82	1.89	1.85	1.83	2.00	1.94	1.93	1.98	1.96	1.97						
140	2.00	1.99	1.95	2.03	1.98	1.99	2.18	2.08	2.08	2.12	2.10	2.13						
145	2.15	2.11	2.10	2.15	2.11	2.12	2.31	2.26	2.21	2.26	2.24	2.24						
150	2.30	2.27	2.23	2.28	2.24	2.26	2.45	2.38	2.32	2.36	2.38	2.35						
155	2.44	2.39	2.39	2.43	2.38	2.43	2.58	2.52	2.49	2.48	2.52	2.49						
160	2.53	2.51	2.52	2.56	2.50	2.56	2.70	2.66	2.60	2.62	2.64	2.63						
165	2.68	2.64	2.67	2.70	2.65	2.67	2.81	2.79	2.74	2.76	2.75	2.75						
170	2.79	2.76	2.81	2.81	2.83	2.83	2.90	2.88	2.86	2.86	2.85	2.81						
175	2.91	2.89	2.93	2.90	2.90	2.91	2.97	2.94	2.95	2.94	2.93	2.94						
180	2.98	2.95	3.00	2.96	2.98	2.99	2.98	2.98	2.99	2.96	2.98	2.99						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0116]
 Remarks: