
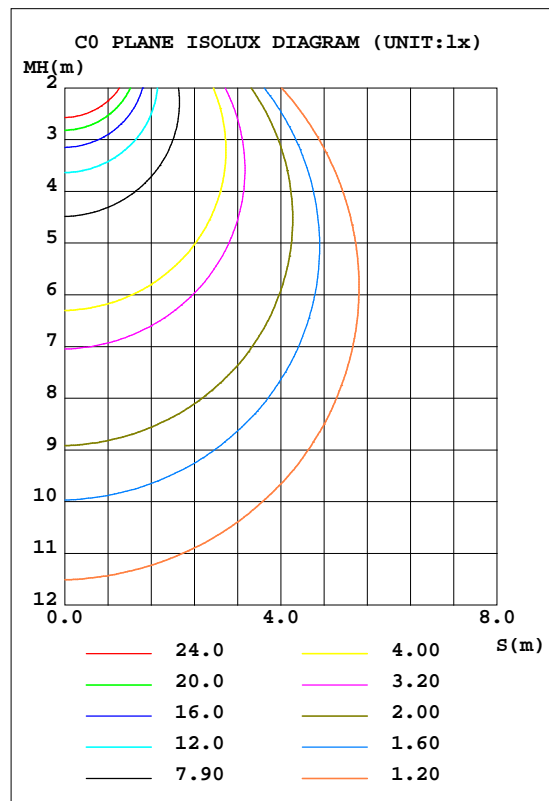


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.55lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	ASD-JBR-3D6AC(4000K)	Imax(cd)	159.4	S/MH(C0/180)	1.31
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	455.55	h UP, DN(C0-180)	0.2, 48.2
NOMINAL FLUX(lm)	455.551	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2, 51.4
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

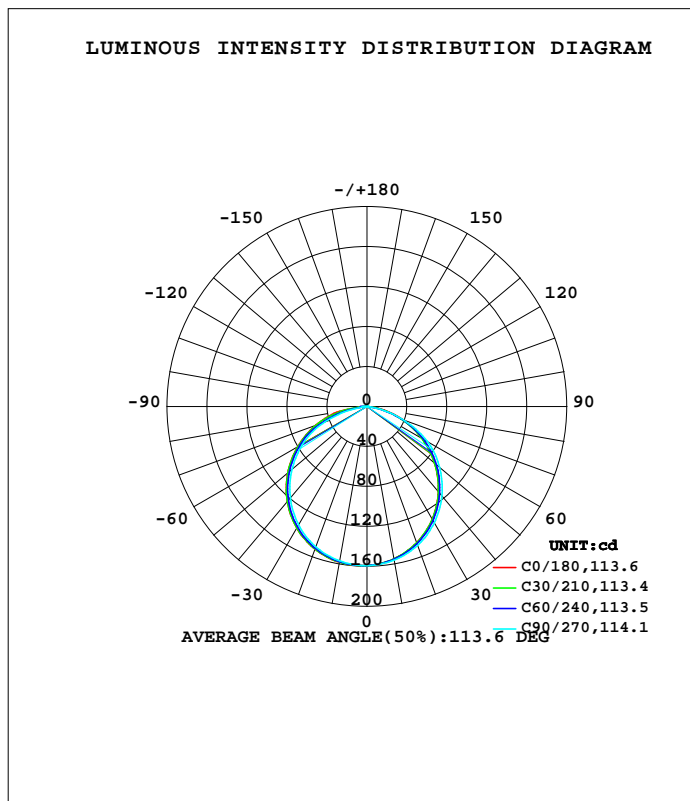

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.2093]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	154.9	155.0	156.1	157.3	158.1	157.9	156.9	155.7	0- 10	15.06	15.06	3.31,3.31
20	145.1	145.7	147.9	150.2	152.0	151.5	149.5	147.1	10- 20	43.25	58.31	12.8,12.8
30	130.5	131.3	134.6	138.0	140.5	139.8	136.8	133.3	20- 30	65.79	124.1	27.2,27.2
40	111.3	112.3	116.7	121.1	124.1	123.1	119.4	114.9	30- 40	79.62	203.7	44.7,44.7
50	88.41	89.66	95.02	100.2	103.5	102.3	97.98	92.77	40- 50	82.87	286.6	62.9,62.9
60	63.23	64.00	69.54	75.90	79.79	78.35	73.86	68.08	50- 60	75.26	361.8	79.4,79.4
70	37.42	35.96	37.94	47.02	54.20	51.15	44.28	41.97	60- 70	57.40	419.2	92,92
80	13.33	8.482	5.905	13.97	28.13	18.76	9.289	12.05	70- 80	30.35	449.6	98.7,98.7
90	0.0382	0.0079	0	0.9620	0.2349	1.134	0.0027	0.0459	80- 90	4.305	453.9	99.6,99.6
100	0.0229	0.0419	0.0383	0.0985	0.0839	0.0382	0.0228	0.0495	90-100	0.1229	454.0	99.7,99.7
110	0.1751	0.1294	0.1522	0.1541	0.1829	0.1294	0.1292	0.1636	100-110	0.1024	454.1	99.7,99.7
120	0.3046	0.2284	0.2436	0.2206	0.2745	0.2587	0.2434	0.2739	110-120	0.1963	454.3	99.7,99.7
130	0.3884	0.3076	0.3243	0.3158	0.3886	0.3206	0.3119	0.3481	120-130	0.2648	454.6	99.8,99.8
140	0.4343	0.3768	0.4035	0.3812	0.4421	0.3794	0.3740	0.4086	130-140	0.2823	454.9	99.9,99.9
150	0.4821	0.4307	0.4796	0.4375	0.4968	0.4339	0.4185	0.4420	140-150	0.2657	455.1	99.9,99.9
160	0.5038	0.4716	0.5023	0.5084	0.5426	0.4872	0.4794	0.4915	150-160	0.2177	455.4	100,100
170	0.5383	0.5317	0.5432	0.5309	0.5506	0.5347	0.5060	0.5170	160-170	0.1454	455.5	100,100
180	0.5867	0.5672	0.5631	0.5668	0.5486	0.5595	0.5327	0.5478	170-180	0.0514	455.6	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.2093]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.551x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

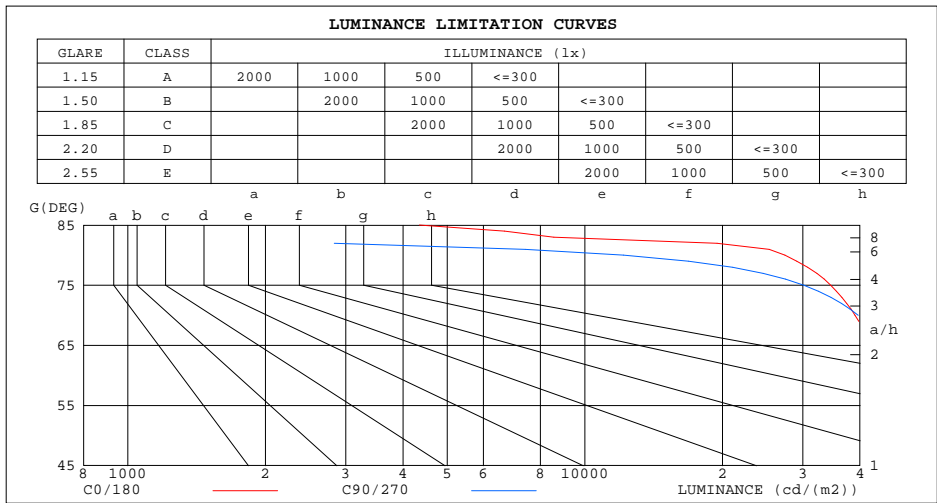

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	4349	888
80	27383	12149
75	34533	30123
70	39038	39625
65	42454	45676
60	45119	49686
55	47248	51682
50	49076	52811
45	50550	53676


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2093]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.55lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.78	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.47	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.45	.40	.38
7.0	.51	.43	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

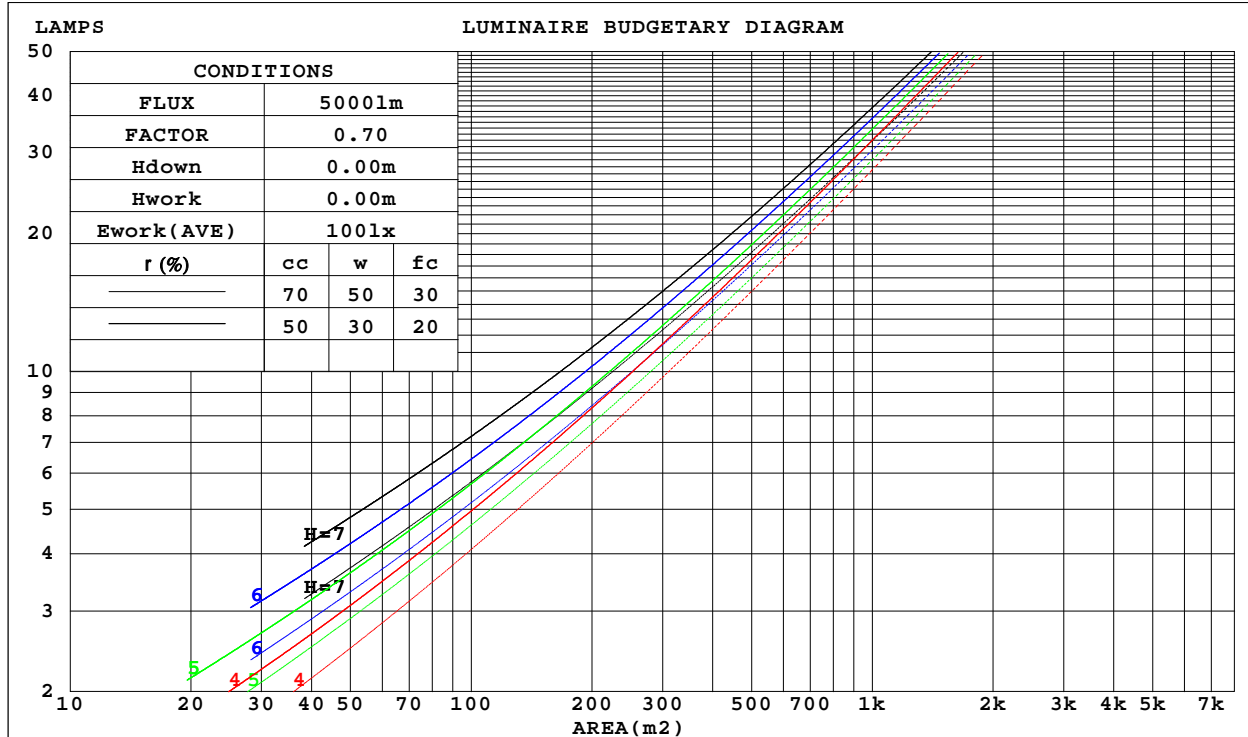

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2093]  
 Remarks:

WEC AND CCEC

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.551x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.300	.170	.054	.292	.167	.053	.279	.160	.051	.267	.154	.049	.255	.148	.048	
2.0	.286	.157	.048	.280	.154	.048	.268	.149	.046	.257	.144	.045	.247	.140	.044	
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.241	.132	.041	.232	.129	.040	
4.0	.247	.128	.038	.242	.127	.037	.233	.124	.037	.224	.120	.036	.216	.118	.036	
5.0	.229	.117	.034	.225	.115	.034	.216	.113	.033	.209	.110	.033	.201	.108	.032	
6.0	.213	.107	.031	.209	.105	.030	.201	.103	.030	.195	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027	
8.0	.185	.090	.025	.182	.090	.025	.176	.088	.025	.171	.086	.025	.165	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.151	.075	.021	.147	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.182	.159	.138	.156	.136	.119	.107	.094	.082	.061	.054	.048	.020	.017	.015	
2.0	.174	.135	.101	.149	.116	.088	.102	.080	.061	.059	.047	.036	.019	.015	.012	
3.0	.167	.117	.078	.143	.101	.067	.098	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.159	.104	.061	.137	.090	.053	.094	.062	.038	.054	.037	.022	.017	.012	.007	
5.0	.152	.093	.050	.130	.081	.044	.090	.056	.031	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.042	.124	.074	.037	.086	.052	.026	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.036	.119	.068	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.032	.113	.063	.028	.078	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.067	.028	.108	.058	.025	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.055	.022	.072	.039	.016	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2093]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.551x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: ASD LIGHTNG CORP			SUR.: φ0.06			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.2	26.8	25.5	27.1	27.4	26.1	27.7	26.5	28.0	28.4
3H	26.8	28.3	27.2	28.6	29.0	27.6	29.1	28.0	29.4	29.8
4H	27.4	28.7	27.8	29.1	29.5	28.0	29.4	28.4	29.8	30.1
6H	27.7	29.0	28.1	29.4	29.8	28.1	29.4	28.6	29.8	30.2
8H	27.8	29.0	28.2	29.4	29.8	28.1	29.3	28.5	29.7	30.1
12H	27.7	28.9	28.2	29.3	29.7	28.1	29.2	28.5	29.6	30.1
4H 2H	25.8	27.2	26.2	27.5	27.9	26.8	28.2	27.2	28.6	29.0
3H	27.6	28.7	28.0	29.1	29.6	28.6	29.7	29.0	30.1	30.5
4H	28.2	29.3	28.7	29.7	30.1	29.0	30.1	29.5	30.5	31.0
6H	28.7	29.6	29.1	30.0	30.5	29.2	30.1	29.7	30.6	31.0
8H	28.7	29.6	29.2	30.0	30.5	29.2	30.0	29.6	30.5	30.9
12H	28.7	29.5	29.2	30.0	30.4	29.1	29.9	29.6	30.4	30.9
8H 4H	28.4	29.3	28.9	29.7	30.2	29.4	30.2	29.9	30.7	31.2
6H	28.9	29.6	29.4	30.1	30.6	29.6	30.3	30.1	30.8	31.3
8H	29.0	29.6	29.5	30.1	30.6	29.5	30.2	30.1	30.7	31.2
12H	29.0	29.5	29.5	30.0	30.6	29.5	30.1	30.0	30.6	31.1
12H 4H	28.4	29.2	28.9	29.6	30.1	29.4	30.2	29.9	30.7	31.2
6H	28.9	29.5	29.4	30.0	30.5	29.6	30.3	30.1	30.7	31.3
8H	29.0	29.5	29.5	30.0	30.6	29.6	30.2	30.1	30.6	31.2
CIE190: 2010										

CIE190: 2010  
Area: 0.0028 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.2093]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.55lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.06$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	64	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	79	72	87	78	71	84	76	70	62
2.00	95	87	80	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	74
3.00	103	96	90	100	94	89	96	91	87	79
4.00	107	101	96	104	99	95	100	96	92	83
5.00	109	104	100	107	102	99	102	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity: 65.0%  
Test Distance: 8.600m [K=1.2093]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.55lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

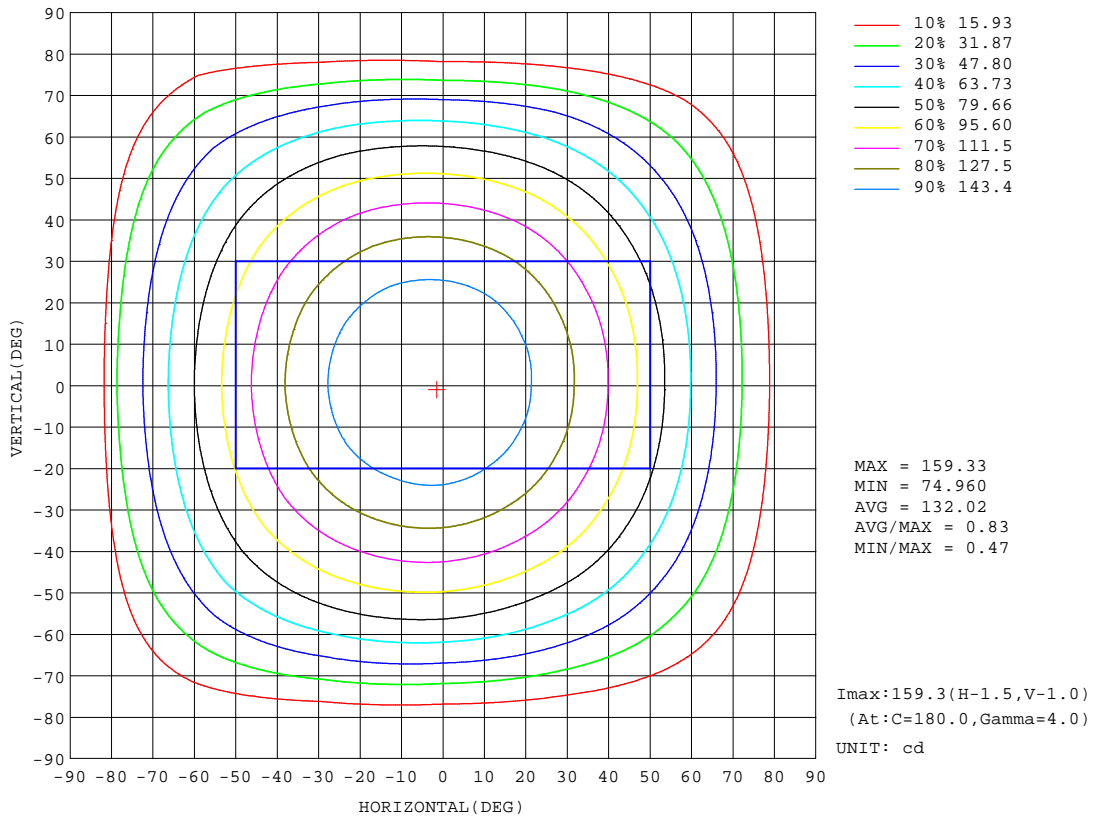

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2093]  
 Remarks:



AAI Figure

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.55lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

Flux out:340.7 lm

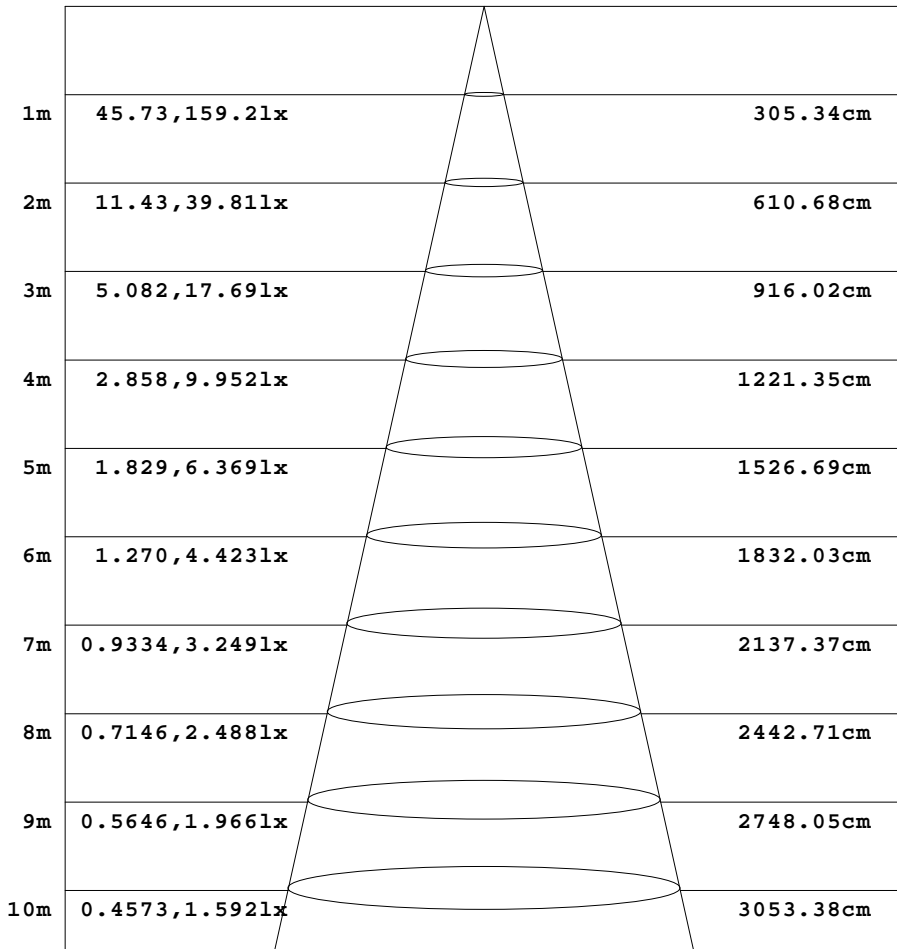

Height                      Eavg, Emax                      Angle:113.55deg                      Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2093]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.55lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.06$	Shielding Angle:

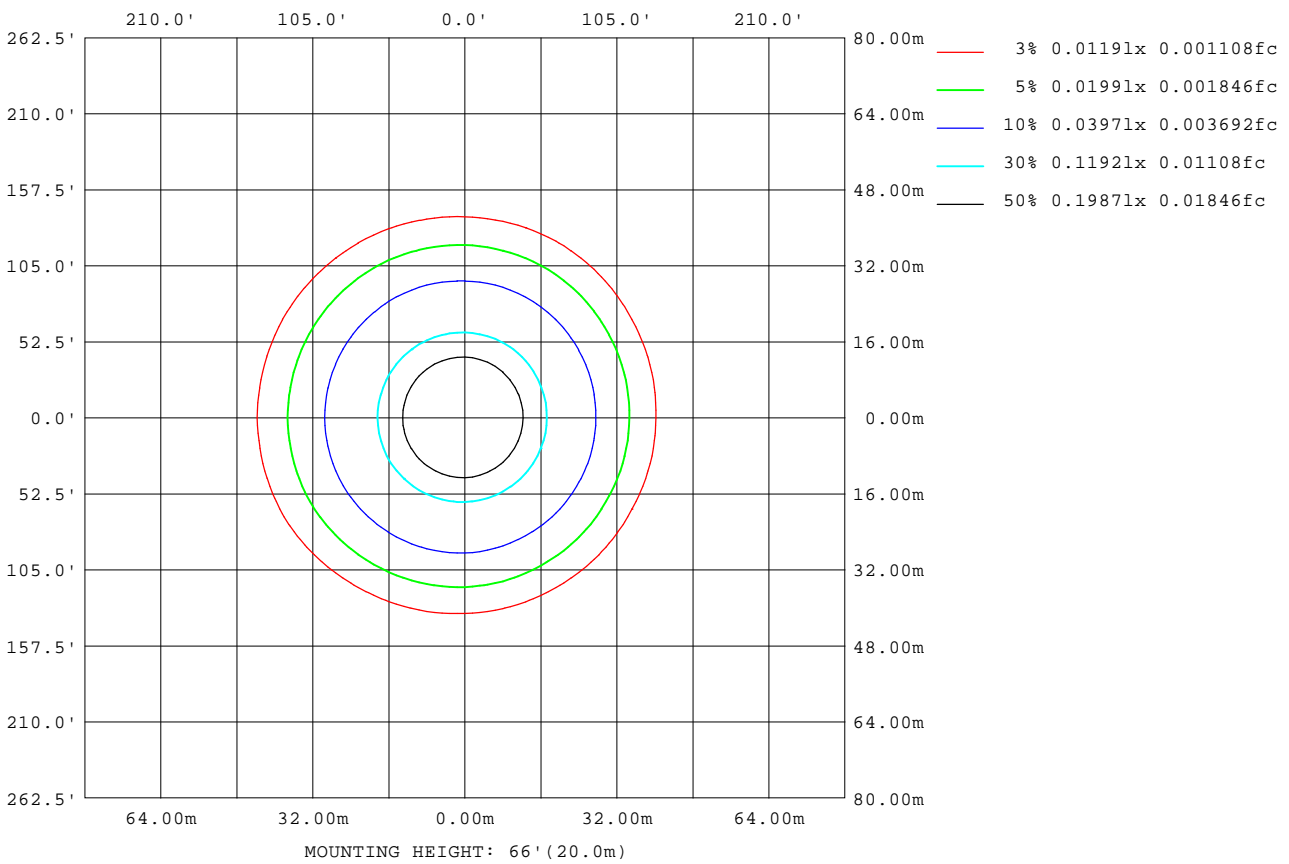

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.2093]  
 Remarks:

## LED Avg.L Report

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.551x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	49614
L_0~180(75)av	45788
L_0~180(85)av	17128
L_90~270(65)av	48255
L_90~270(75)av	33667
L_90~270(85)av	7658
L_45(65)av	49325
L_45(75)av	39862
L_45(85)av	6548

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.2093]  
Remarks:

Planar Illuminance Curve

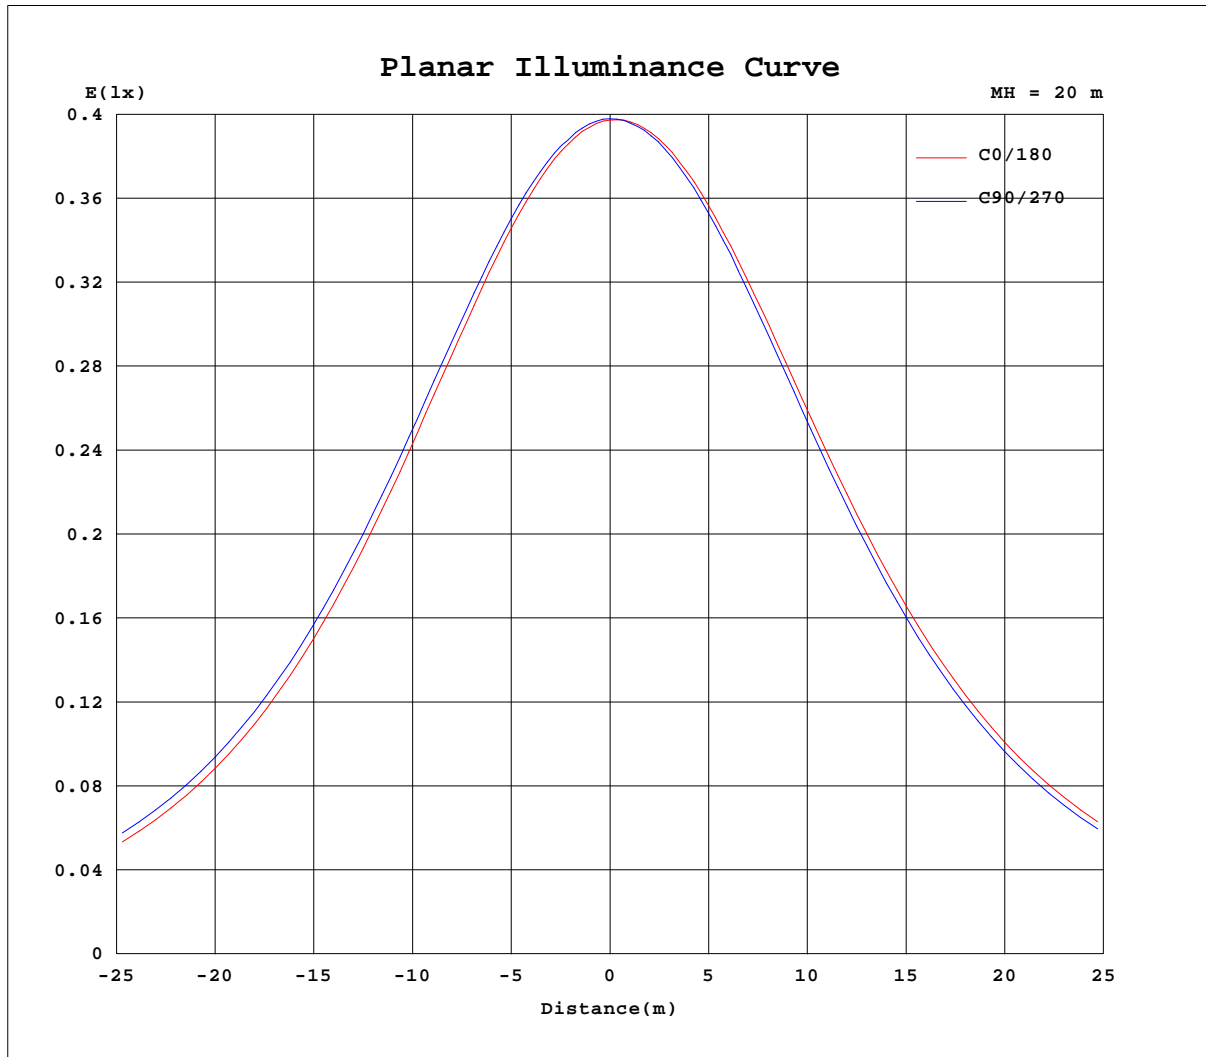

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.2093]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.24V I:0.0527A P:5.9700W PF:0.9419 Freq:60.00Hz Lamp Flux:455.551x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.06	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	159	159	159	159	159	159	159	159	159	159	159	159						
5	158	158	158	158	159	159	159	159	159	159	158	158						
10	155	155	155	156	157	158	158	158	158	157	156	155						
15	151	151	151	153	154	155	156	156	155	154	153	152						
20	145	145	146	148	149	151	152	152	151	150	148	146						
25	139	138	140	142	144	146	147	147	146	144	142	140						
30	131	131	132	135	137	139	140	140	139	137	135	132						
35	121	122	123	126	129	131	133	133	131	129	126	123						
40	111	111	113	117	120	123	124	124	122	119	117	113						
45	100	100	102	106	109	113	114	114	112	109	106	102						
50	88.4	88.5	90.8	95.0	98.5	102	104	103	101	98.0	94.9	90.7						
55	76.0	76.0	78.3	83.0	86.7	90.3	92.0	91.6	89.7	86.2	82.8	78.5						
60	63.2	62.9	65.1	69.5	73.7	78.1	79.8	79.4	77.4	73.9	70.4	65.8						
65	50.3	49.5	51.2	54.0	58.8	65.5	67.1	66.6	64.2	60.2	57.6	53.0						
70	37.4	35.8	36.1	37.9	42.9	51.1	54.2	53.6	48.7	44.3	43.7	40.2						
75	25.0	22.4	21.1	21.8	26.3	35.3	41.3	39.2	31.8	27.0	27.4	27.5						
80	13.3	10.5	6.51	5.91	9.24	18.7	28.1	23.2	14.3	9.29	10.9	13.2						
85	1.06	0.43	0.12	0.22	0.13	2.06	7.30	7.30	2.03	3.52	0.51	1.47						
90	0.04	0.00	0.02	0.00	0.00	1.92	0.23	2.26	0.01	0.00	0.00	0.09						
95	0.02	0.02	0.00	0.30	0.90	0.03	0.03	0.00	0.08	0.01	0.03	0.01						
100	0.02	0.08	0.01	0.04	0.10	0.10	0.08	0.01	0.07	0.02	0.08	0.02						
105	0.11	0.11	0.04	0.10	0.10	0.12	0.12	0.04	0.11	0.06	0.12	0.08						
110	0.18	0.18	0.08	0.15	0.11	0.20	0.18	0.09	0.17	0.13	0.19	0.14						
115	0.24	0.22	0.14	0.19	0.12	0.23	0.23	0.14	0.22	0.17	0.25	0.18						
120	0.30	0.27	0.18	0.24	0.16	0.28	0.27	0.21	0.31	0.24	0.30	0.25						
125	0.35	0.31	0.25	0.30	0.22	0.33	0.34	0.26	0.33	0.27	0.34	0.28						
130	0.39	0.35	0.27	0.32	0.27	0.37	0.39	0.30	0.34	0.31	0.38	0.32						
135	0.41	0.39	0.31	0.36	0.29	0.40	0.42	0.31	0.38	0.36	0.40	0.37						
140	0.43	0.41	0.34	0.40	0.33	0.44	0.44	0.34	0.42	0.37	0.43	0.39						
145	0.46	0.43	0.38	0.44	0.37	0.46	0.47	0.36	0.46	0.40	0.46	0.41						
150	0.48	0.48	0.39	0.48	0.39	0.49	0.50	0.39	0.48	0.42	0.46	0.42						
155	0.49	0.50	0.40	0.49	0.43	0.52	0.52	0.40	0.50	0.46	0.50	0.43						
160	0.50	0.52	0.42	0.50	0.49	0.53	0.54	0.46	0.52	0.48	0.52	0.46						
165	0.52	0.54	0.45	0.53	0.50	0.56	0.55	0.50	0.54	0.49	0.53	0.49						
170	0.54	0.56	0.50	0.54	0.51	0.56	0.55	0.53	0.54	0.51	0.53	0.50						
175	0.56	0.57	0.52	0.56	0.53	0.56	0.55	0.54	0.55	0.52	0.54	0.51						
180	0.59	0.57	0.56	0.56	0.58	0.56	0.55	0.57	0.55	0.53	0.54	0.56						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2093]  
 Remarks: