
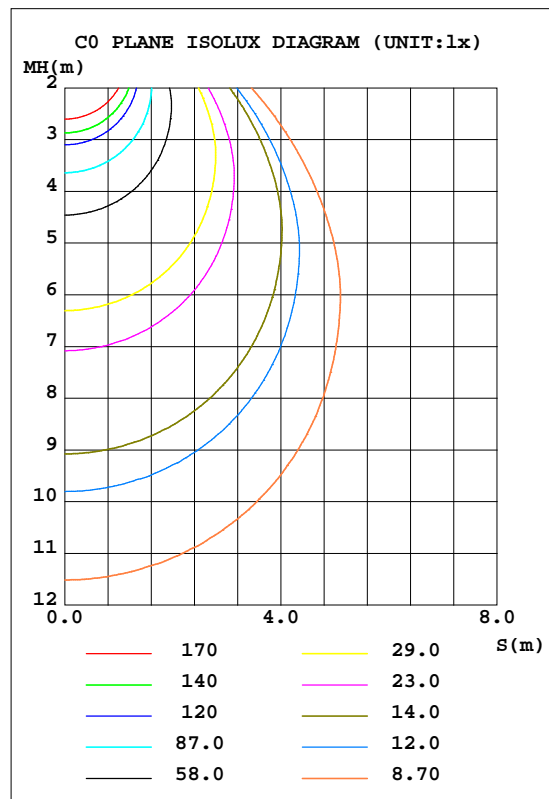


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.98 lm/W			
AMODEDL7-6DA30AC(30W 2700K)		I <sub>max</sub> (cd)	1154	S/MH(C0/180)	1.18
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	2437.4	h UP, DN(C0-180)	0.2,48.7
NOMINAL FLUX(lm)	2437.4	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.8
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

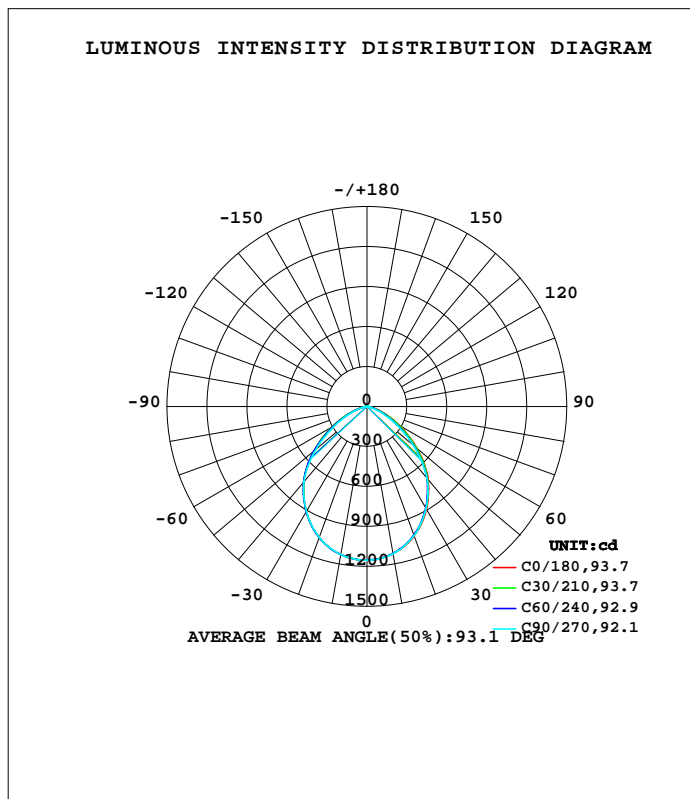

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-11-30

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1954]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1123	1121	1123	1124	1129	1129	1128	1126	0- 10	108.8	108.8	4.46,4.46
20	1034	1030	1032	1039	1048	1049	1046	1043	10- 20	306.9	415.7	17.1,17.1
30	891.9	884.2	885.7	897.0	910.6	912.6	910.7	904.7	20- 30	448.7	864.4	35.5,35.5
40	715.0	703.4	700.2	719.6	737.4	740.6	736.1	728.9	30- 40	508.6	1373	56.3,56.3
50	491.6	474.0	455.8	488.4	515.7	519.0	500.8	502.1	40- 50	471.3	1844	75.7,75.7
60	275.2	255.0	229.8	261.5	295.2	291.6	266.1	276.0	50- 60	337.5	2182	89.5,89.5
70	115.6	97.86	78.31	97.06	121.2	115.1	97.35	109.9	60- 70	178.9	2361	96.9,96.9
80	24.59	20.44	17.26	19.76	22.94	21.92	21.17	23.77	70- 80	57.58	2418	99.2,99.2
90	0.2564	0.0268	0.0077	0.0497	0.0688	0.0963	0.0848	0.0629	80- 90	8.730	2427	99.6,99.6
100	0.3269	0.2131	0.2441	0.2891	0.3811	0.3273	0.1445	0.2742	90-100	0.1463	2427	99.6,99.6
110	0.8898	0.7381	0.7391	0.7877	0.9065	0.8942	0.6315	0.7803	100-110	0.5481	2428	99.6,99.6
120	1.544	1.423	1.394	1.435	1.561	1.621	1.271	1.454	110-120	1.113	2429	99.7,99.7
130	2.222	2.108	2.041	2.086	2.276	2.344	1.956	2.154	120-130	1.625	2431	99.7,99.7
140	2.747	2.732	2.605	2.679	2.809	2.899	2.543	2.774	130-140	1.898	2432	99.8,99.8
150	3.257	3.257	3.077	3.189	3.297	3.333	3.099	3.303	140-150	1.876	2434	99.9,99.9
160	3.691	3.744	3.839	3.580	3.897	3.790	3.617	3.775	150-160	1.611	2436	99.9,99.9
170	3.912	4.151	4.303	3.909	4.301	4.062	3.907	4.141	160-170	1.104	2437	100,100
180	4.240	4.650	4.417	4.125	4.346	4.475	4.288	4.479	170-180	0.3999	2437	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-11-30

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.1954]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

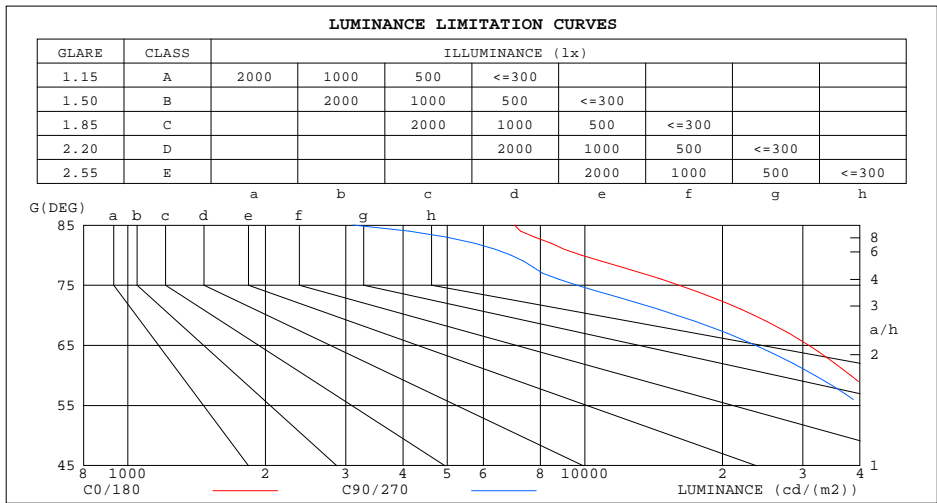

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	7013	3113
80	9834	6897
75	16078	9613
70	23466	15893
65	30934	23652
60	38223	31899
55	45759	40538
50	53111	49216
45	59824	57031


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-11-30

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1954]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	1.00	1.05	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.90	.88
2.0	.95	.89	.85	.93	.88	.84	.90	.85	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.85	.78	.72	.83	.77	.72	.81	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.69	.63	.75	.68	.62	.73	.66	.61	.70	.65	.60	.68	.64	.60	.58
5.0	.69	.61	.55	.68	.60	.55	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.54	.49	.62	.54	.48	.60	.53	.48	.58	.52	.47	.57	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.43	.52	.47	.42	.40
8.0	.52	.44	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

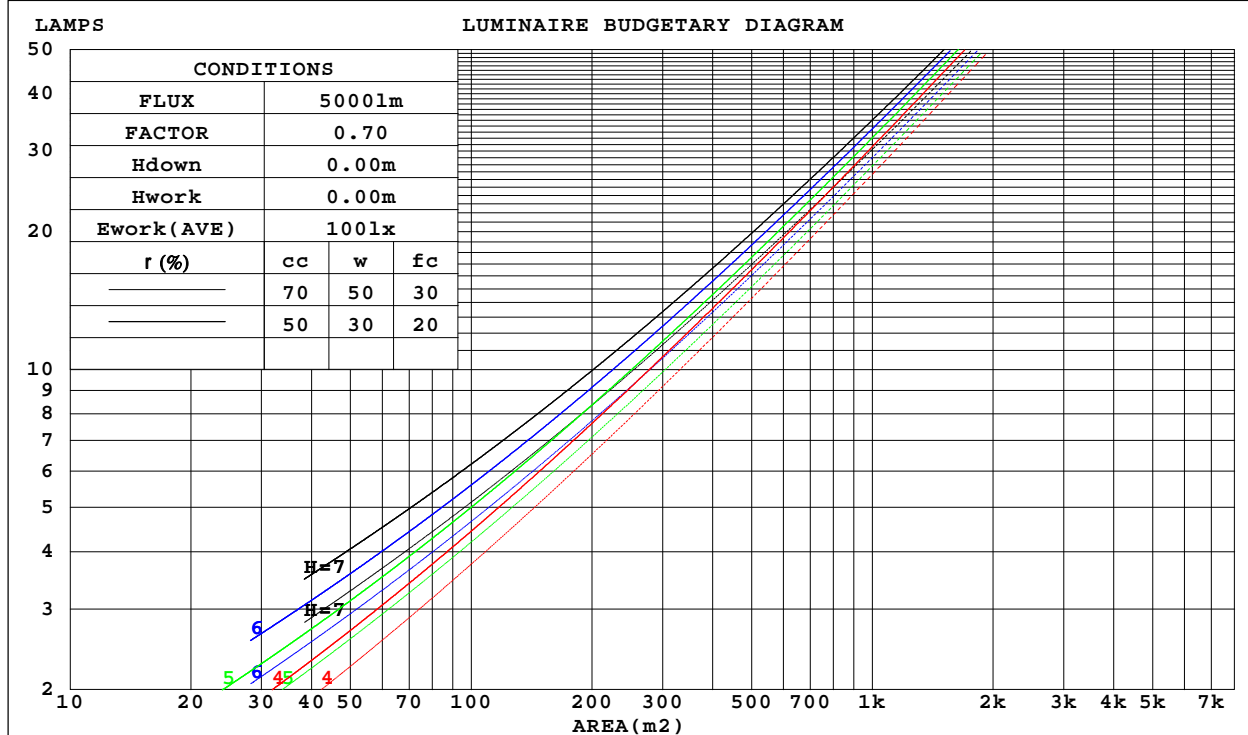

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-11-30

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1954]  
 Remarks:

WEC AND CCEC

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.252	.143	.045	.245	.140	.044	.232	.133	.042	.220	.127	.041	.209	.121	.039	
2.0	.245	.135	.041	.239	.132	.041	.228	.127	.039	.217	.122	.038	.207	.117	.037	
3.0	.233	.124	.037	.228	.122	.037	.217	.118	.036	.208	.114	.035	.199	.110	.034	
4.0	.219	.114	.034	.215	.112	.033	.206	.109	.033	.197	.106	.032	.190	.103	.031	
5.0	.206	.105	.030	.202	.104	.030	.194	.101	.030	.187	.098	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	.170	.089	.027	
7.0	.182	.090	.026	.179	.089	.025	.172	.087	.025	.167	.085	.025	.161	.084	.025	
8.0	.172	.084	.024	.169	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.074	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.060	.055	.049	.019	.018	.016	
2.0	.169	.135	.107	.145	.117	.092	.099	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.119	.073	.039	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.132	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.126	.072	.034	.109	.062	.030	.075	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-11-30

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1954]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.5	26.0	24.9	26.3	26.7	23.7	25.2	24.1	25.5	25.8
3H	25.4	26.7	25.8	27.1	27.4	24.3	25.6	24.7	25.9	26.3
4H	25.6	26.8	26.0	27.2	27.6	24.3	25.6	24.7	25.9	26.3
6H	25.6	26.8	26.1	27.1	27.5	24.3	25.5	24.8	25.8	26.2
8H	25.6	26.7	26.1	27.1	27.5	24.3	25.4	24.8	25.8	26.2
12H	25.6	26.6	26.1	27.0	27.5	24.3	25.3	24.7	25.7	26.1
4H 2H	24.8	26.0	25.2	26.4	26.8	24.1	25.3	24.5	25.7	26.0
3H	25.8	26.8	26.2	27.2	27.6	24.8	25.7	25.2	26.2	26.6
4H	26.0	26.9	26.5	27.4	27.8	24.8	25.7	25.3	26.2	26.6
6H	26.1	26.9	26.6	27.3	27.8	24.9	25.6	25.3	26.1	26.6
8H	26.1	26.8	26.6	27.3	27.8	24.9	25.6	25.3	26.0	26.5
12H	26.1	26.7	26.6	27.2	27.7	24.8	25.5	25.3	26.0	26.4
8H 4H	26.0	26.7	26.5	27.2	27.7	24.9	25.6	25.3	26.0	26.5
6H	26.1	26.7	26.6	27.2	27.7	24.9	25.5	25.4	26.0	26.5
8H	26.1	26.7	26.6	27.2	27.7	24.9	25.4	25.4	25.9	26.4
12H	26.1	26.6	26.7	27.1	27.7	24.9	25.3	25.4	25.8	26.4
12H 4H	26.0	26.6	26.5	27.1	27.6	24.8	25.5	25.3	26.0	26.5
6H	26.1	26.6	26.6	27.1	27.6	24.9	25.4	25.4	25.9	26.4
8H	26.1	26.6	26.6	27.1	27.7	24.9	25.4	25.4	25.9	26.4
CIE190: 2010										

CIE190: 2010  
Area: 0.0144 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-11-30

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.1954]  
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	53	47	41
0.80	74	64	58	73	64	57	72	63	57	51
1.00	83	73	67	81	72	66	79	73	66	60
1.25	89	80	74	88	80	74	85	78	73	67
1.50	94	86	80	92	85	79	89	83	78	72
2.00	100	93	87	98	92	87	95	89	85	78
2.50	103	97	92	101	95	91	97	93	89	81
3.00	106	100	96	104	99	95	100	96	92	84
4.00	109	104	101	107	103	99	103	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-11-30

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.1954]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

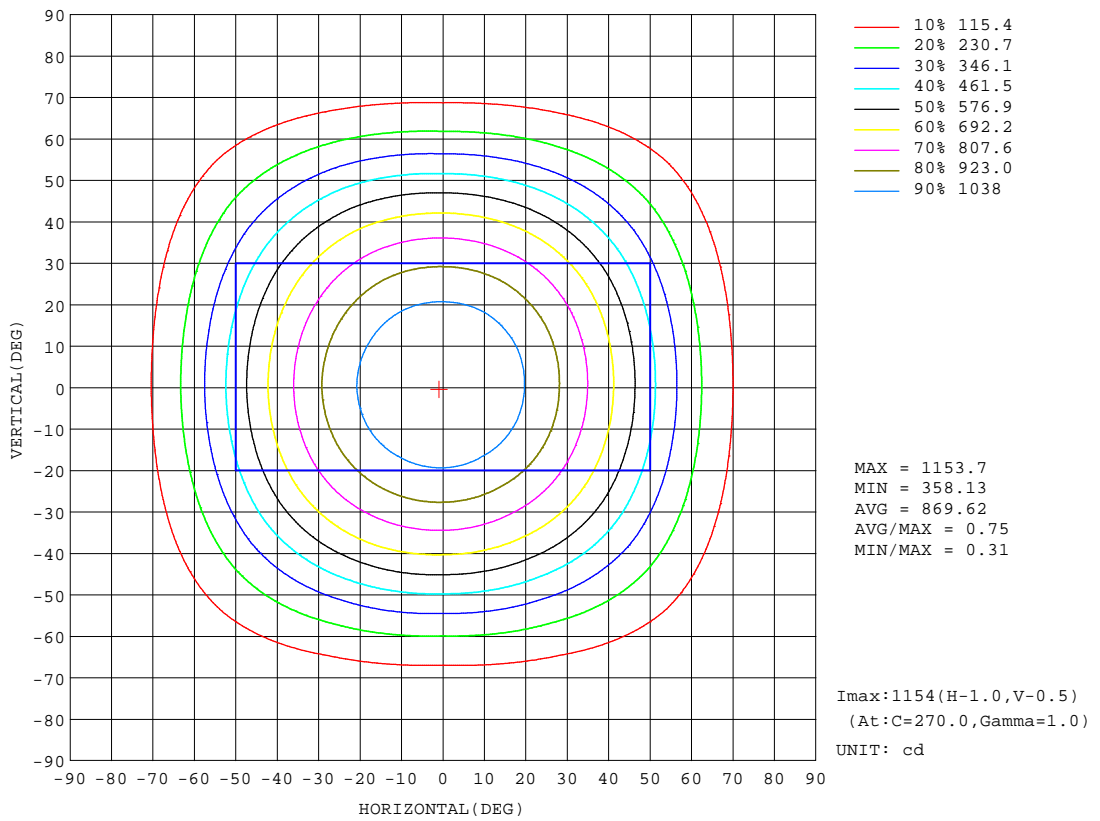

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-11-30


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1954]  
 Remarks:



AAI Figure

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:1714 lm

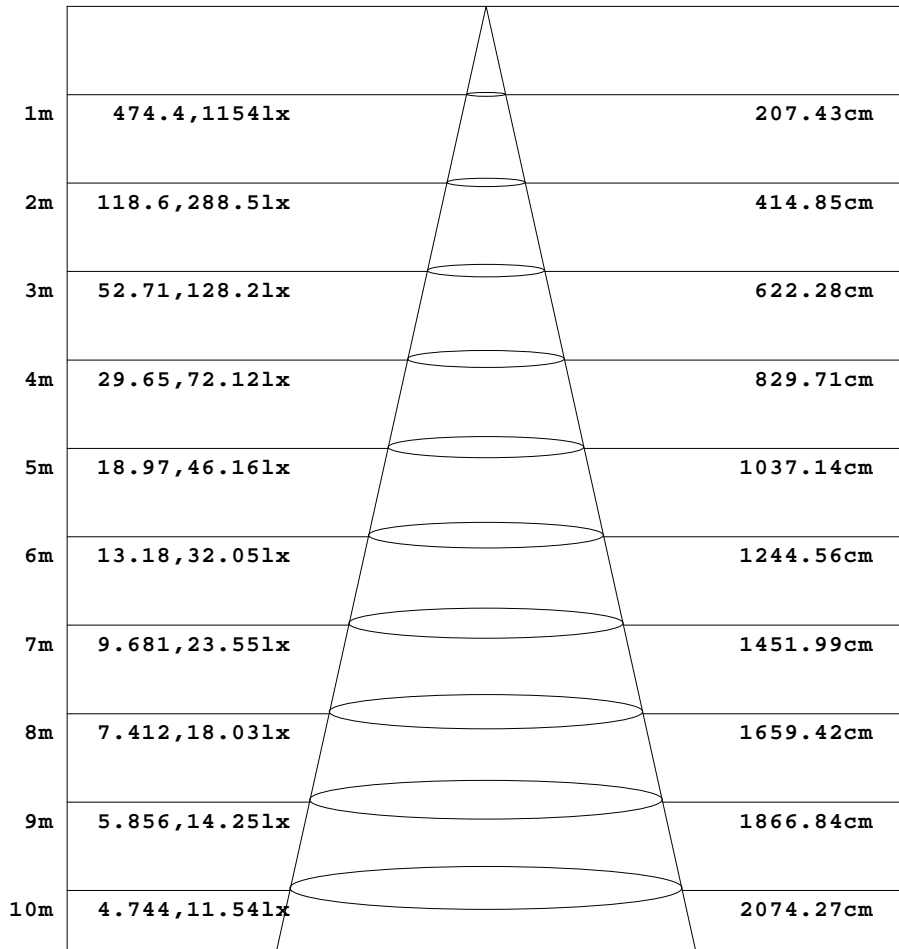

Height                      Eavg, Emax                      Angle:92.09deg                      Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-11-30

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1954]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

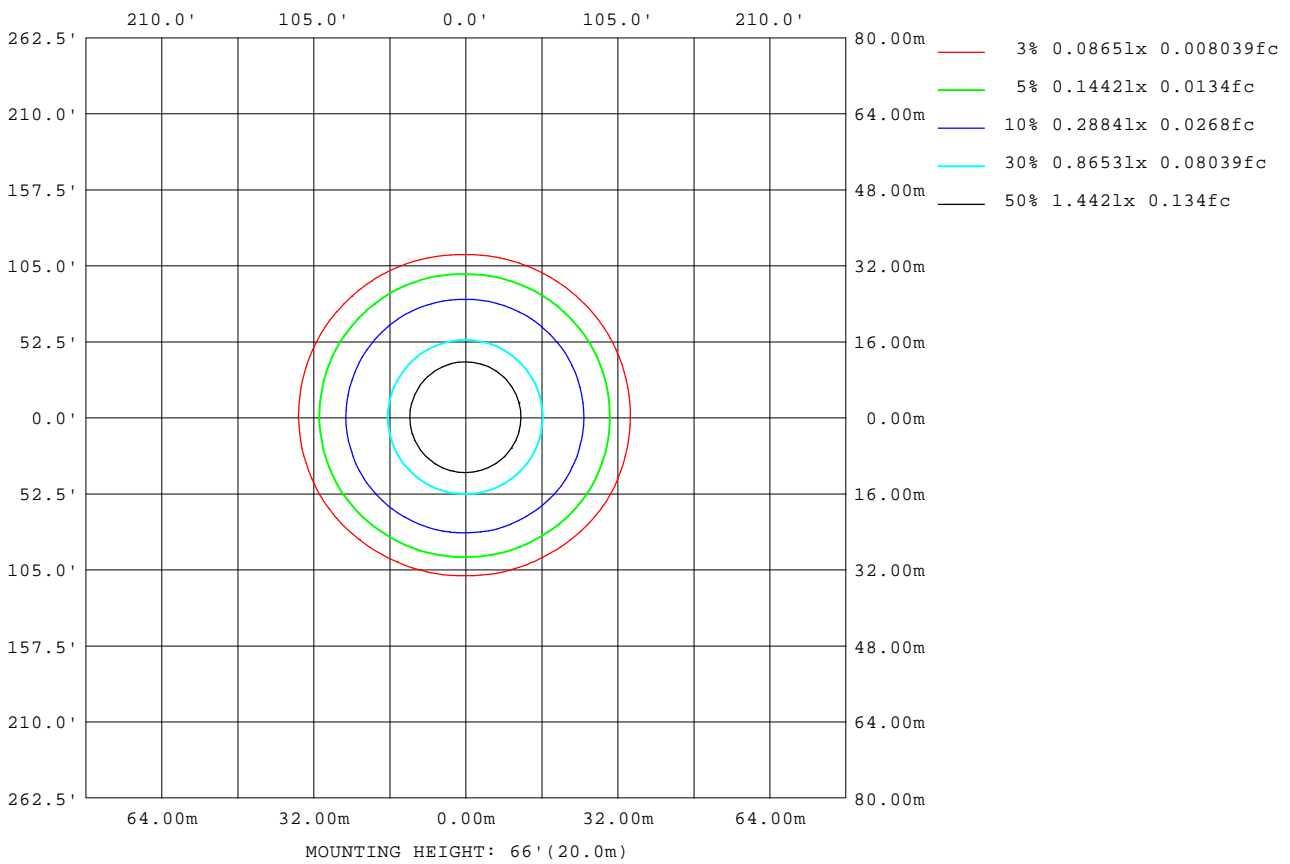

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-11-30

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.1954]  
 Remarks:

## LED Avg.L Report

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	31957
L_0~180(75)av	16033
L_0~180(85)av	6523
L_90~270(65)av	26012
L_90~270(75)av	10920
L_90~270(85)av	4280
L_45(65)av	29585
L_45(75)av	13564
L_45(85)av	5389

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-11-30

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.1954]  
Remarks:

Planar Illuminance Curve

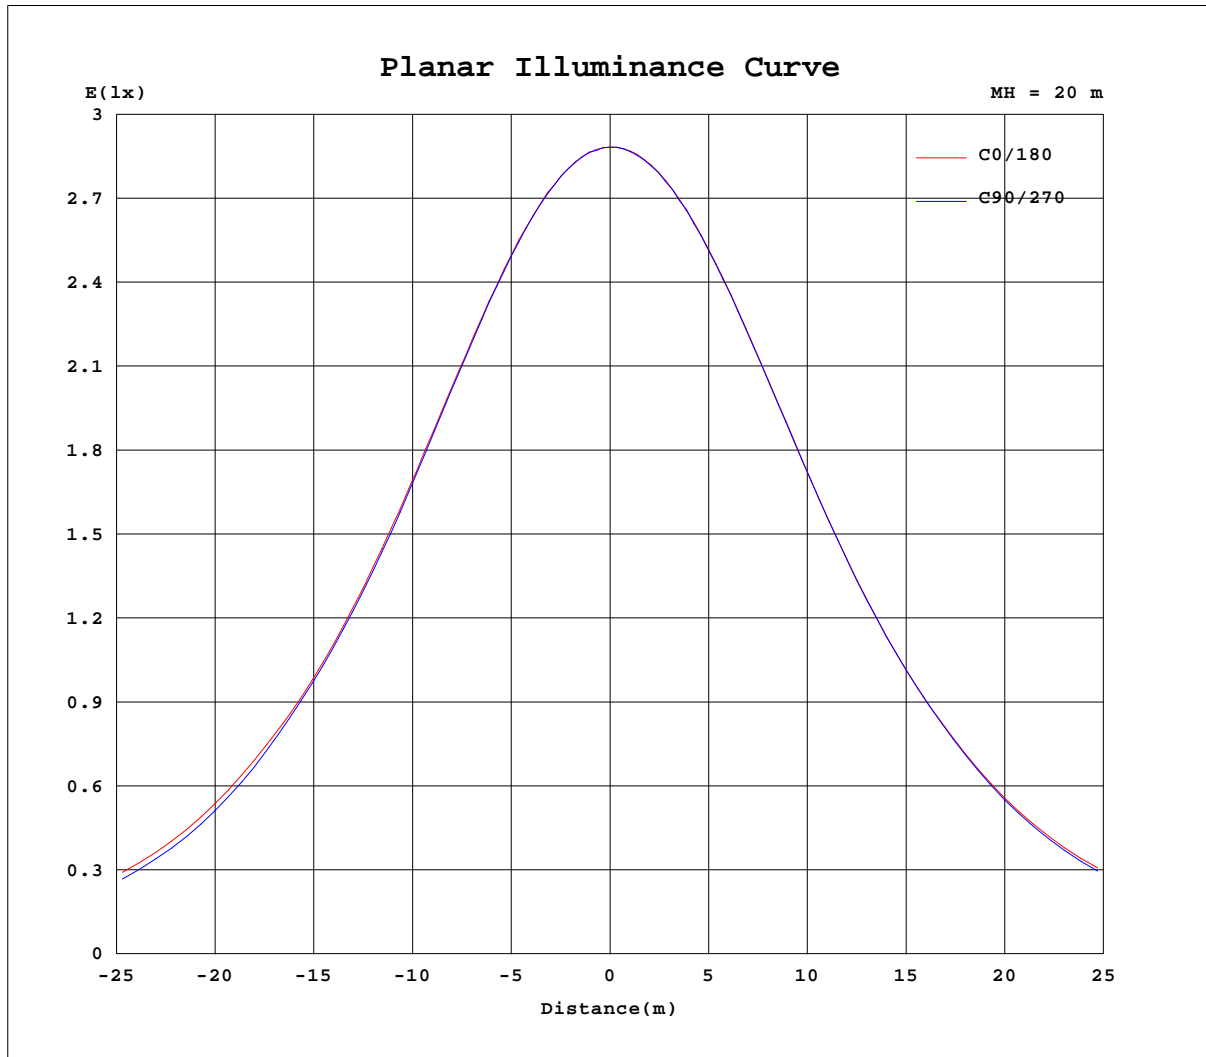

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-11-30

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.1954]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.12V I:0.2540A P:30.100W PF:0.9884 Freq:60.00Hz Lamp Flux:2437.4x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	1154	1154	1154	1154	1154	1154	1154	1154	1154	1154	1154	1154							
5	1145	1144	1144	1146	1145	1147	1148	1147	1149	1148	1146	1146							
10	1123	1122	1120	1123	1123	1124	1129	1129	1129	1128	1127	1125							
15	1086	1083	1081	1084	1086	1091	1095	1095	1096	1095	1094	1090							
20	1034	1031	1028	1032	1035	1043	1048	1048	1049	1046	1045	1041							
25	970	965	960	965	969	978	986	986	987	984	983	977							
30	892	887	882	886	892	902	911	912	914	911	908	902							
35	806	798	793	799	806	817	827	828	830	826	824	815							
40	715	708	698	700	712	727	737	740	742	736	733	725							
45	609	602	585	581	598	619	631	636	637	623	622	619							
50	492	486	462	456	474	503	516	521	517	501	503	501							
55	378	372	345	335	353	386	403	405	398	378	383	385							
60	275	269	241	230	245	278	295	298	285	266	272	280							
65	188	181	155	144	156	185	201	204	187	173	179	190							
70	116	109	87.1	78.3	85.8	108	121	123	108	97.3	104	116							
75	59.9	54.4	40.2	35.8	38.7	51.9	59.6	59.8	49.7	45.5	49.8	59.8							
80	24.6	22.2	18.7	17.3	18.1	21.5	22.9	22.0	21.8	21.2	22.7	24.8							
85	8.80	8.11	4.94	3.91	4.28	7.00	7.57	6.08	7.11	6.83	8.19	8.41							
90	0.26	0.05	0.00	0.01	0.02	0.08	0.07	0.14	0.05	0.08	0.02	0.11							
95	0.14	0.11	0.02	0.11	0.06	0.18	0.21	0.12	0.18	0.02	0.12	0.13							
100	0.33	0.27	0.15	0.24	0.23	0.35	0.38	0.30	0.36	0.14	0.25	0.30							
105	0.58	0.51	0.38	0.47	0.46	0.59	0.62	0.55	0.61	0.37	0.47	0.55							
110	0.89	0.79	0.68	0.74	0.73	0.85	0.91	0.86	0.93	0.63	0.72	0.84							
115	1.21	1.10	1.04	1.04	1.01	1.17	1.23	1.24	1.28	0.93	1.04	1.17							
120	1.54	1.43	1.41	1.39	1.35	1.52	1.56	1.58	1.66	1.27	1.39	1.52							
125	1.91	1.74	1.81	1.72	1.68	1.86	1.92	1.97	2.01	1.61	1.74	1.89							
130	2.22	2.06	2.15	2.04	2.00	2.17	2.28	2.31	2.38	1.96	2.08	2.23							
135	2.50	2.38	2.50	2.32	2.31	2.52	2.57	2.55	2.71	2.25	2.43	2.53							
140	2.75	2.65	2.81	2.60	2.59	2.77	2.81	2.83	2.97	2.54	2.74	2.81							
145	2.98	2.92	3.07	2.86	2.83	3.02	3.05	3.20	3.12	2.82	3.05	3.06							
150	3.26	3.18	3.33	3.08	3.11	3.27	3.30	3.39	3.27	3.10	3.33	3.27							
155	3.54	3.42	3.59	3.47	3.39	3.47	3.62	3.64	3.46	3.39	3.58	3.54							
160	3.69	3.65	3.84	3.84	3.62	3.54	3.90	3.92	3.66	3.62	3.75	3.80							
165	3.78	3.86	4.02	4.15	3.92	3.58	4.09	4.09	3.81	3.77	3.99	3.95							
170	3.91	4.05	4.25	4.30	4.11	3.71	4.30	4.18	3.94	3.91	4.14	4.14							
175	4.03	4.32	4.60	4.27	4.31	3.85	4.44	4.31	4.09	4.01	4.38	4.32							
180	4.24	4.77	4.53	4.42	4.30	3.95	4.35	4.64	4.31	4.29	4.45	4.51							

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-11-30

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1954]  
 Remarks: