
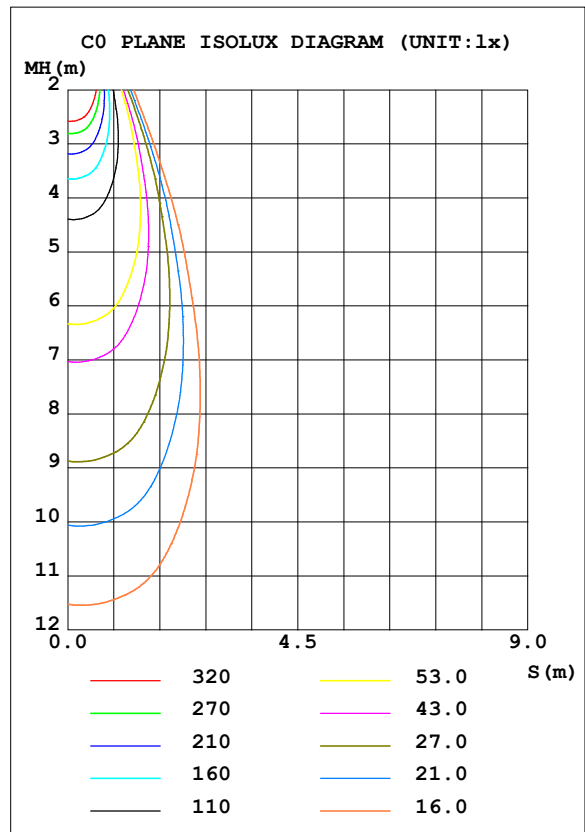


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 70.41 lm/W			
MODEL		I _{max} (cd)	2120	S/MH (C0/180)	0.58
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.58
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	987.13	<input type="checkbox"/> UP, DN (C0-180)	0.0, 53.5
NOMINAL FLUX (lm)	987.128	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 46.5
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

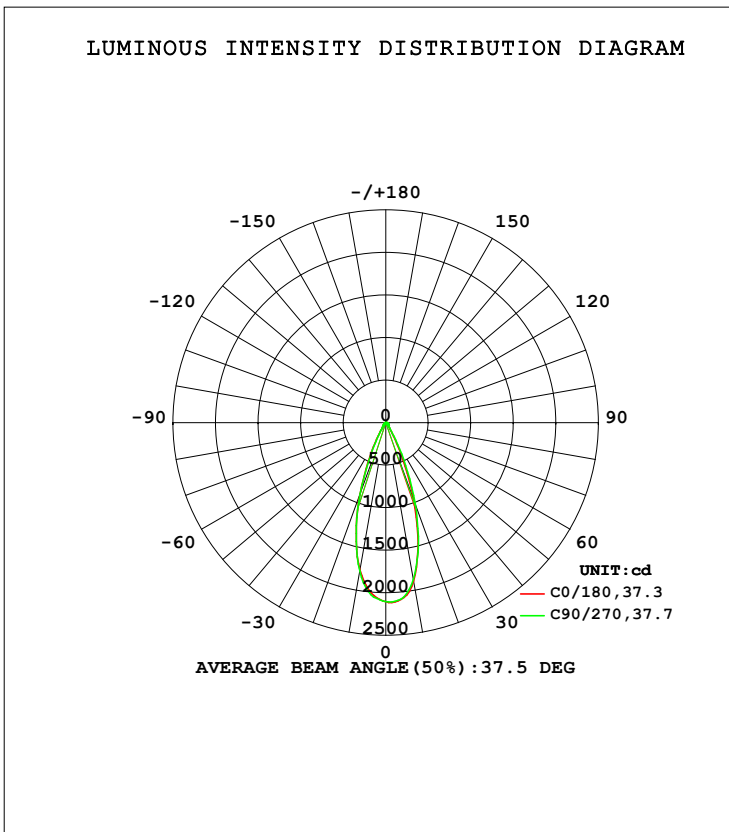

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1890	1900	1871	1778	1755	1749	1770	1791	0- 10	188.2	188.2	19.1,19.1
20	957.5	1161	1016	987.4	889.7	792.0	885.4	958.4	10- 20	383.0	571.2	57.9,57.9
30	182.5	466.5	238.5	327.7	183.6	230.6	163.6	270.4	20- 30	254.3	825.6	83.6,83.6
40	51.20	78.08	51.10	68.75	51.13	56.13	51.29	61.00	30- 40	72.88	898.4	91,91
50	31.90	35.67	32.70	35.81	32.43	35.73	32.41	35.27	40- 50	33.63	932.1	94.4,94.4
60	22.96	21.61	23.05	21.73	23.21	22.29	23.71	21.88	50- 60	24.90	957.0	96.9,96.9
70	13.68	13.37	13.63	13.36	14.00	14.11	14.51	13.68	60- 70	18.25	975.2	98.8,98.8
80	5.647	5.582	4.835	5.570	5.800	5.530	4.467	5.183	70- 80	10.17	985.4	99.8,99.8
90	0.0625	0.0379	0.0414	0.0376	0.0572	0.0572	0.0585	0.0567	80- 90	1.742	987.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:



LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	162	8
80	295	250
75	332	326
70	363	358
65	394	390
60	417	414
55	416	415
50	451	457
45	513	516


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.90	.96	.92	.89	.94	.90	.87	.92	.89	.86	.89	.87	.85	.83
4.0	.92	.87	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.85	.83	.80	.79
5.0	.88	.82	.78	.87	.82	.78	.85	.81	.77	.83	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.73	.79	.75	.72	.71
7.0	.79	.74	.70	.79	.74	.70	.78	.73	.70	.76	.72	.69	.75	.72	.69	.68
8.0	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
9.0	.73	.68	.64	.72	.67	.64	.71	.67	.64	.71	.66	.63	.70	.66	.63	.62
10.0	.70	.65	.61	.69	.64	.61	.69	.64	.61	.68	.64	.61	.67	.63	.61	.60

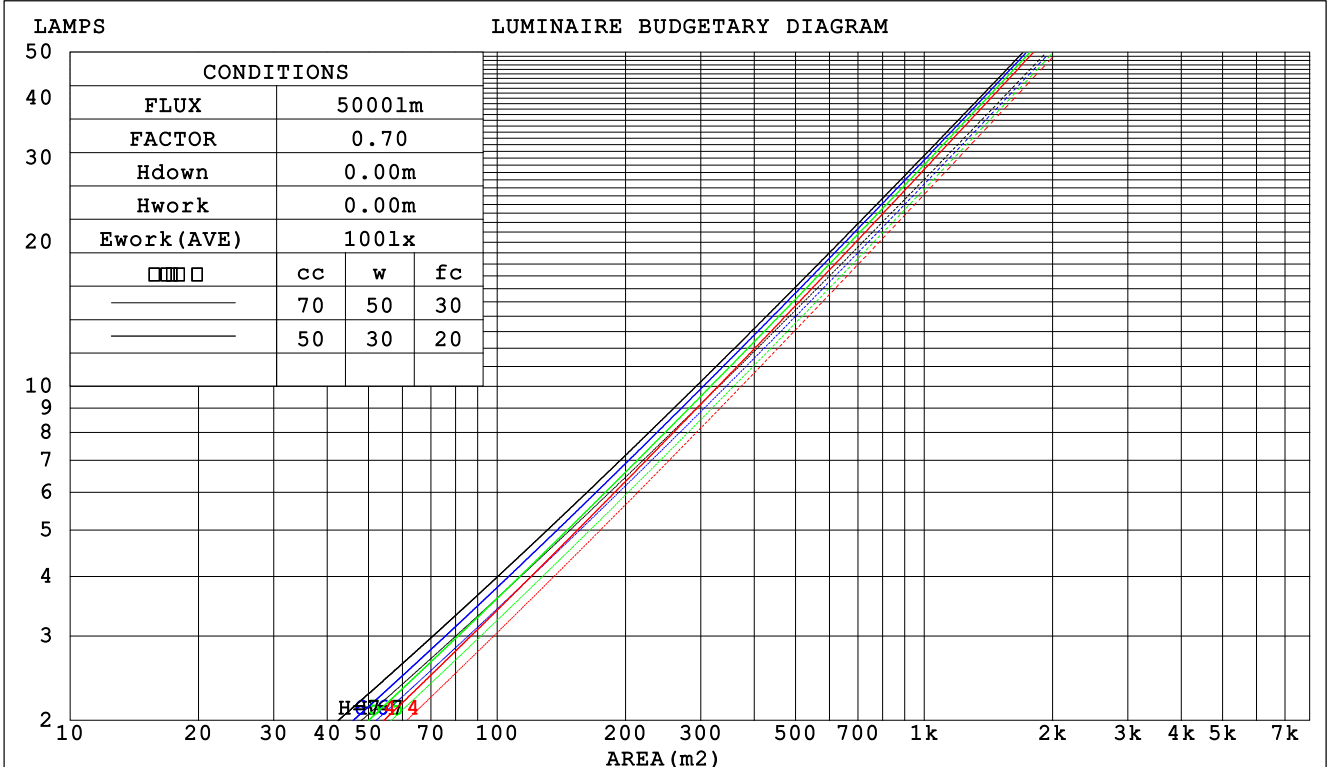

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.172 .098 .031	.165 .094 .030	.152 .087 .028	.141 .081 .026	.130 .075 .024	
2.0	.162 .089 .027	.156 .086 .026	.145 .081 .025	.136 .076 .024	.127 .072 .023	
3.0	.152 .081 .024	.147 .079 .024	.138 .075 .023	.130 .071 .022	.122 .068 .021	
4.0	.142 .074 .022	.138 .072 .021	.131 .069 .021	.124 .066 .020	.117 .064 .019	
5.0	.134 .068 .020	.131 .067 .020	.124 .065 .019	.118 .062 .019	.112 .060 .018	
6.0	.127 .064 .018	.124 .063 .018	.118 .061 .018	.113 .059 .017	.108 .057 .017	
7.0	.121 .060 .017	.118 .059 .017	.113 .057 .016	.108 .055 .016	.104 .054 .016	
8.0	.115 .056 .016	.113 .055 .016	.108 .054 .015	.104 .053 .015	.100 .051 .015	
9.0	.110 .053 .015	.108 .052 .015	.104 .051 .015	.100 .050 .014	.096 .049 .014	
10.0	.105 .050 .014	.103 .050 .014	.099 .049 .014	.096 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .086	.058 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.142 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.131 .099 .074	.112 .085 .064	.077 .059 .045	.045 .035 .027	.014 .011 .009	
5.0	.121 .087 .061	.104 .075 .053	.072 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.059 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.077 .046 .025	.054 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm										
NAME: ASD-CD-PS-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:5000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.8	5.7	5.0	5.8	6.0	5.2	6.1	5.5	6.2	6.4
3H	5.9	6.7	6.1	6.9	7.1	6.2	7.0	6.4	7.2	7.4
4H	6.3	7.1	6.6	7.3	7.5	6.6	7.3	6.8	7.5	7.8
6H	6.7	7.4	6.9	7.6	7.8	6.8	7.5	7.1	7.8	8.0
8H	6.7	7.4	7.0	7.7	7.9	6.9	7.5	7.2	7.8	8.0
12H	6.7	7.4	7.0	7.6	7.9	6.8	7.5	7.1	7.7	8.0
4H 2H	5.2	5.9	5.5	6.2	6.4	5.6	6.3	5.8	6.5	6.7
3H	6.5	7.1	6.8	7.4	7.7	6.7	7.4	7.0	7.6	7.9
4H	7.0	7.6	7.4	7.9	8.2	7.2	7.8	7.6	8.1	8.4
6H	7.5	8.0	7.9	8.4	8.7	7.6	8.1	8.0	8.5	8.8
8H	7.6	8.1	8.0	8.4	8.8	7.6	8.1	8.0	8.5	8.8
12H	7.6	8.1	8.0	8.4	8.8	7.6	8.0	8.0	8.4	8.8
8H 4H	7.2	7.7	7.6	8.1	8.4	7.4	7.9	7.8	8.2	8.6
6H	7.8	8.2	8.2	8.6	9.0	7.9	8.3	8.3	8.7	9.1
8H	8.0	8.3	8.4	8.7	9.2	7.9	8.3	8.4	8.7	9.1
12H	8.0	8.3	8.5	8.8	9.3	7.9	8.2	8.3	8.6	9.1
12H 4H	7.2	7.7	7.6	8.0	8.4	7.4	7.8	7.8	8.2	8.6
6H	7.8	8.2	8.3	8.6	9.0	7.9	8.2	8.3	8.7	9.1
8H	8.0	8.3	8.5	8.7	9.2	7.9	8.3	8.4	8.7	9.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.4					+ 0.4 / - 0.5				
1.5H	+ 0.3 / - 0.4					+ 0.5 / - 0.4				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				

CIE Pub.117, 987.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.0)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	79	76	86	79	75	85	79	75	72
0.80	93	87	83	93	87	83	92	86	83	79
1.00	98	92	88	97	92	88	95	92	87	83
1.25	102	97	93	101	96	92	99	95	92	87
1.50	105	100	96	104	99	96	101	98	95	90
2.00	108	103	100	106	102	99	103	100	98	92
2.50	110	105	102	108	104	101	105	102	99	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	113	110	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

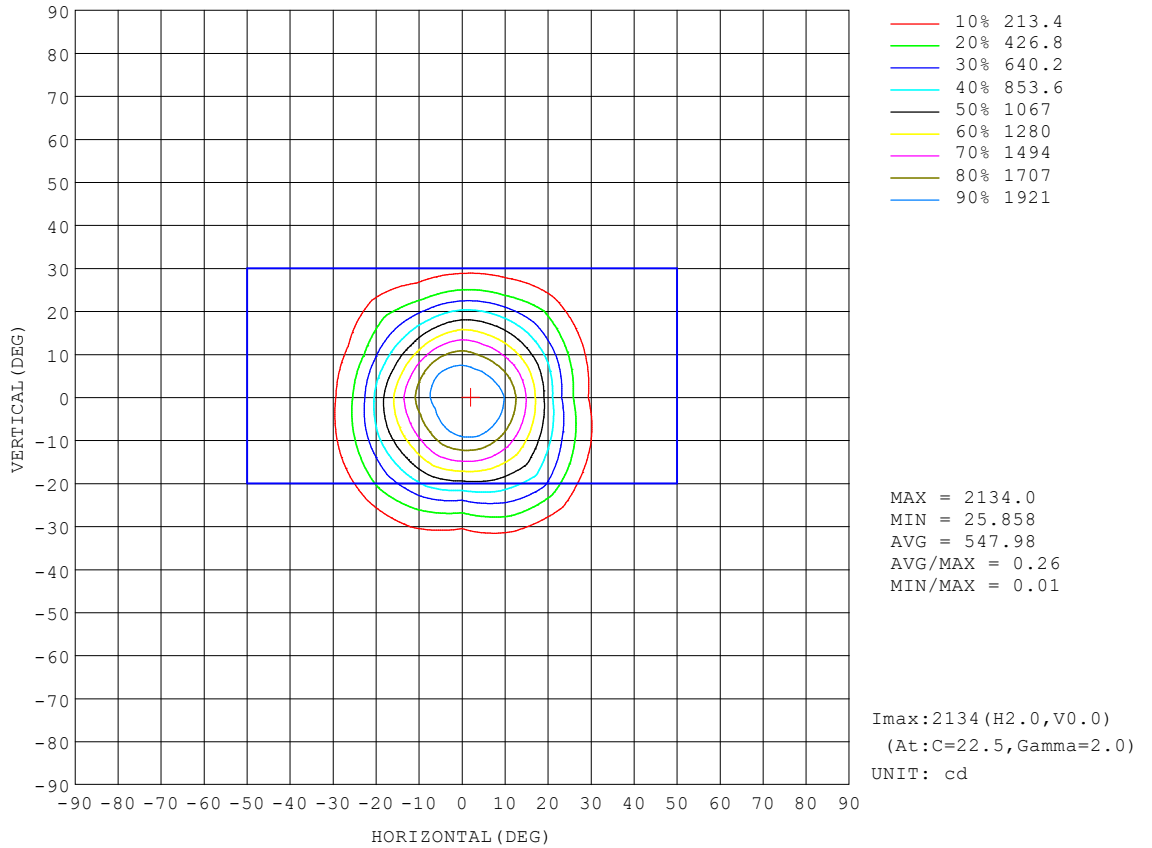


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

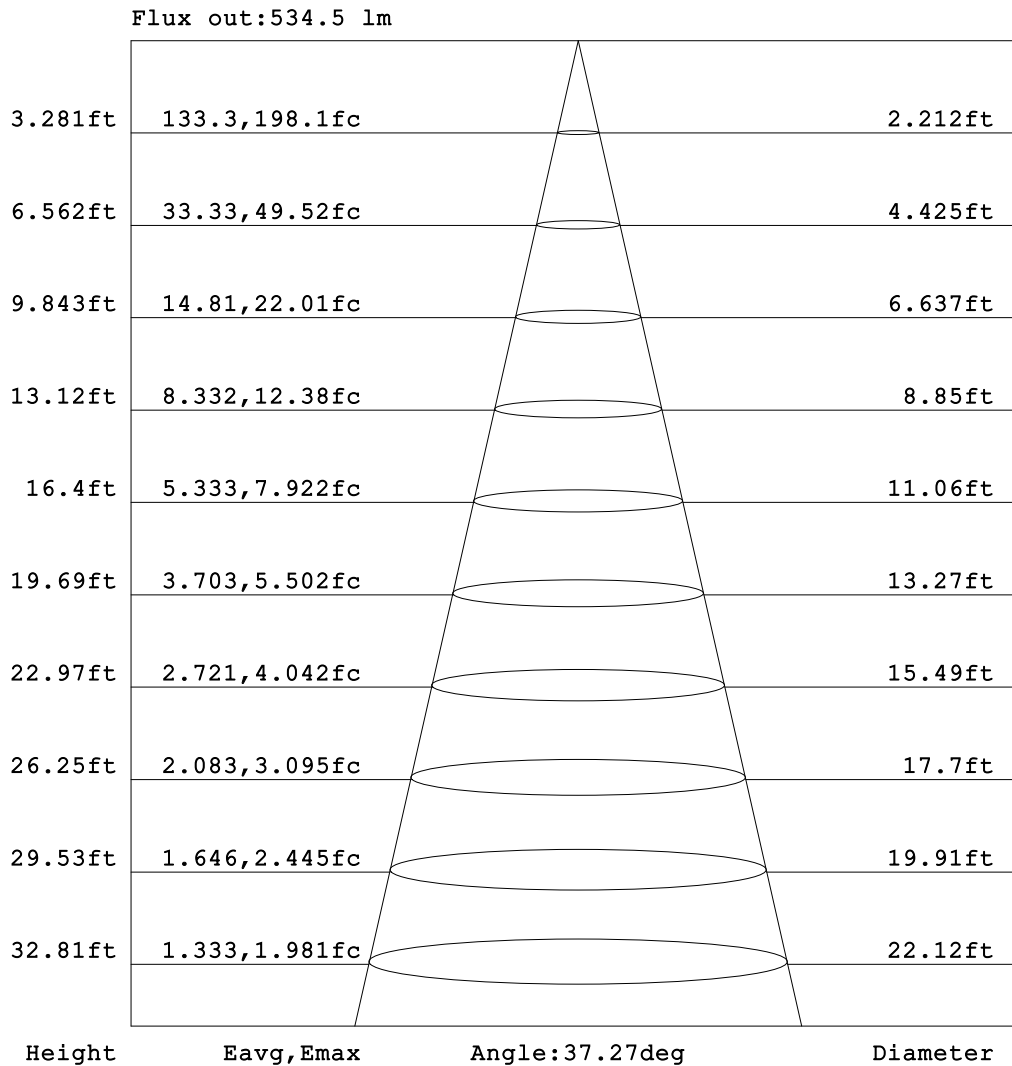


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

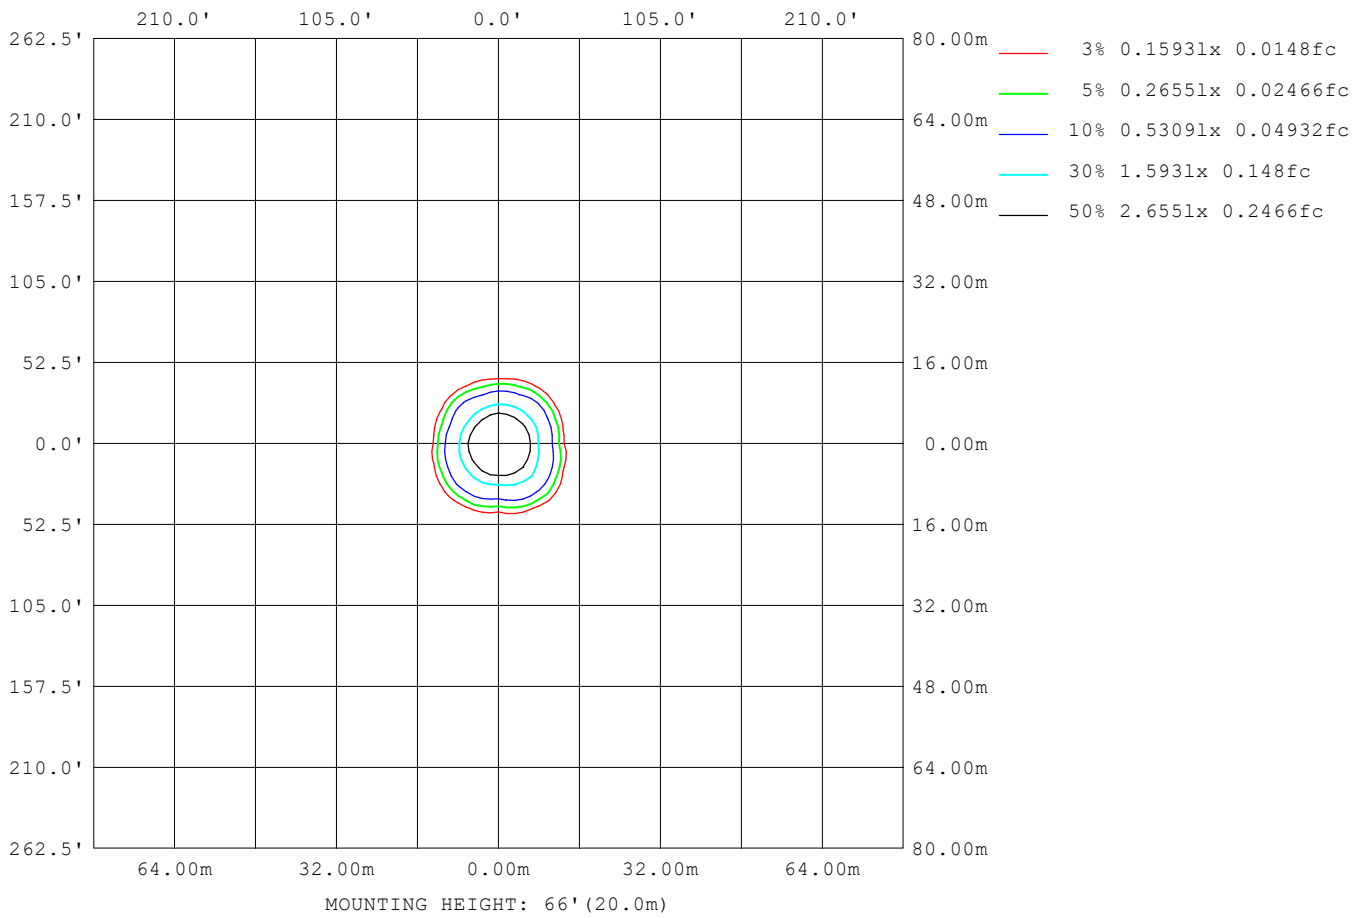

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	394
L_0~180 (75) av	332
L_0~180 (85) av	170
L_90~270 (65) av	400
L_90~270 (75) av	339
L_90~270 (85) av	7
L_45 (65) av	377
L_45 (75) av	331
L_45 (85) av	61

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

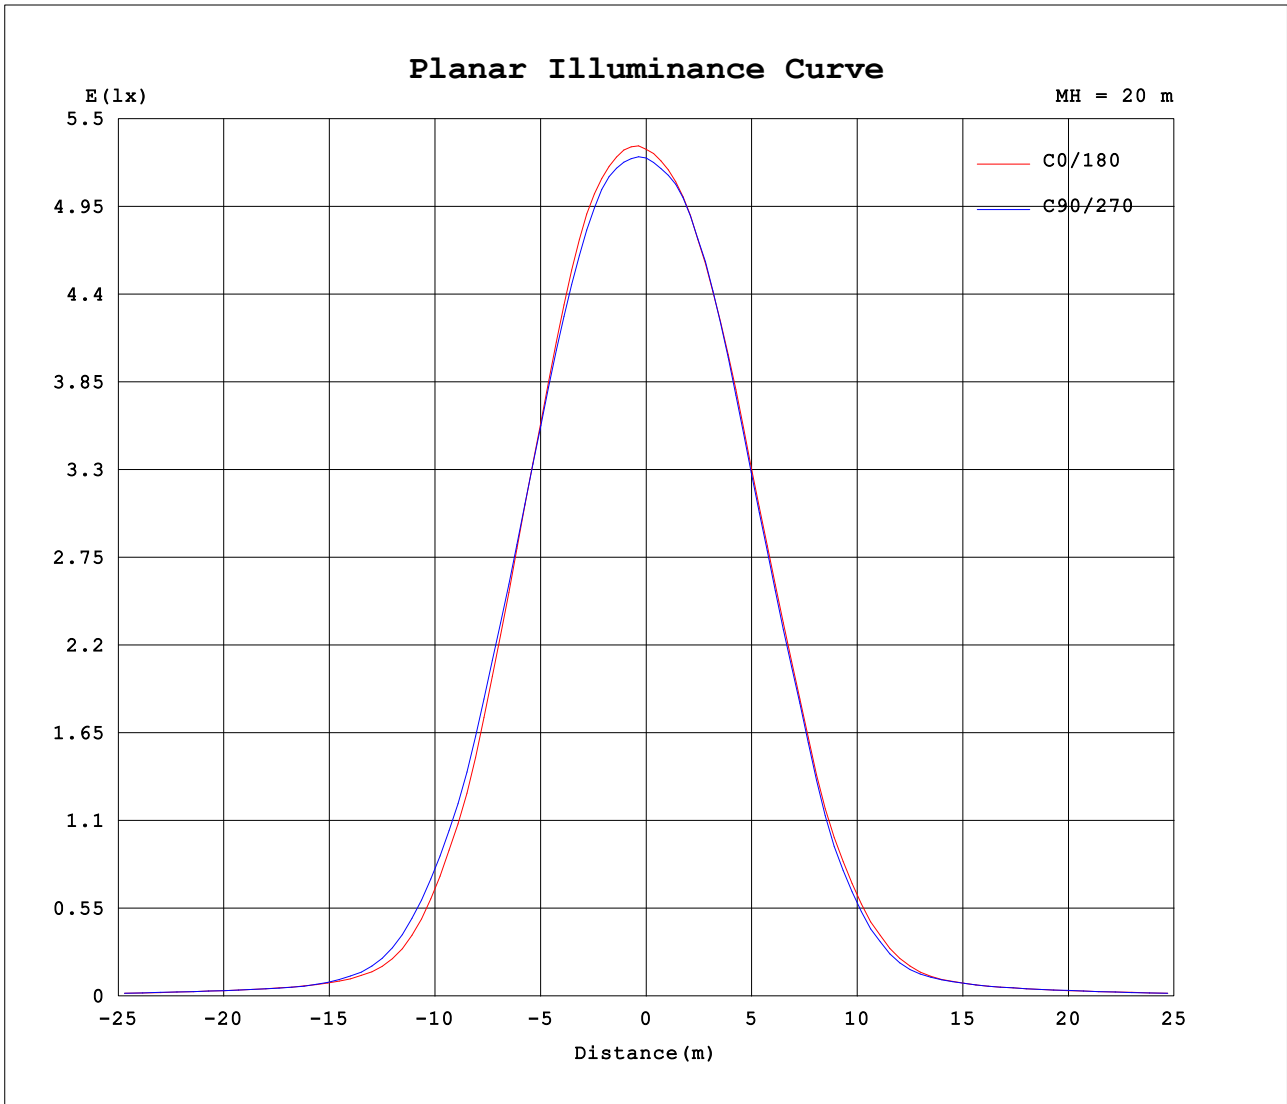

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.96V I:0.1185A P:14.019W PF:0.9482 Freq:59.98Hz Lamp Flux:987.128x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2105	2105	2105	2105	2105	2105	2105	2105	2105	2105	2105	2105	2105	2105	2105	2105			
5	2086	2105	2100	2094	2082	2057	2026	2011	2009	2015	2026	2025	2028	2023	2035	2056			
10	1890	1897	1900	1904	1871	1835	1778	1751	1755	1744	1749	1756	1770	1750	1791	1855			
15	1470	1500	1533	1522	1483	1471	1397	1373	1350	1274	1256	1291	1348	1344	1384	1454			
20	958	1060	1161	1109	1016	1040	987	965	890	812	792	812	885	916	958	994			
25	488	651	840	728	559	626	633	548	451	407	462	386	425	467	576	543			
30	182	317	466	398	239	318	328	252	184	176	231	163	164	195	270	233			
35	79.1	106	181	133	93.0	116	132	95.0	76.6	79.6	86.7	78.6	75.4	87.1	104	86.8			
40	51.2	56.9	78.1	59.3	51.1	58.1	68.7	56.2	51.1	53.4	56.1	53.7	51.3	56.0	61.0	54.6			
45	39.9	42.4	47.6	42.8	40.6	42.9	46.1	42.6	40.4	42.4	43.8	43.0	41.1	43.3	44.8	41.8			
50	31.9	34.6	35.7	35.1	32.7	35.2	35.8	34.8	32.4	34.5	35.7	34.6	32.4	34.5	35.3	33.9			
55	26.3	27.5	27.9	27.8	26.5	27.9	28.1	27.7	26.7	27.8	28.0	28.0	27.1	27.8	27.5	27.3			
60	23.0	23.0	21.6	23.2	23.0	23.1	21.7	23.0	23.2	23.2	22.3	23.6	23.7	23.3	21.9	23.0			
65	18.3	18.6	17.4	18.7	18.4	18.7	17.5	18.6	18.7	18.8	18.2	19.2	19.2	18.9	17.8	18.5			
70	13.7	13.9	13.4	13.9	13.6	13.9	13.4	13.9	14.0	14.1	14.1	14.5	14.5	14.3	13.7	13.8			
75	9.45	9.58	9.33	9.57	9.39	9.54	9.32	9.61	9.66	9.80	9.90	10.1	10.1	9.89	9.56	9.51			
80	5.65	5.72	5.58	5.20	4.84	5.19	5.57	5.76	5.80	5.87	5.53	4.72	4.47	4.54	5.18	5.65			
85	1.56	2.09	0.85	0.11	0.07	0.11	0.82	2.10	1.74	1.75	0.48	0.06	0.07	0.06	0.21	1.52			
90	0.06	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.06	0.06	0.06	0.06	0.06	0.05	0.06	0.06			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: