
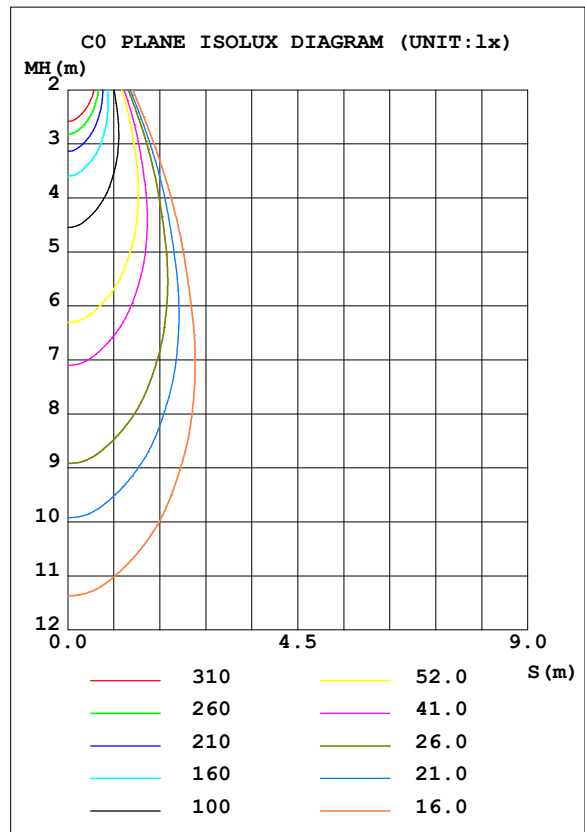


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 66.53 lm/W			
MODEL		I _{max} (cd)	2059	S/MH (C0/180)	0.59
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.57
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	923.77	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.5
NOMINAL FLUX (lm)	923.765	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.5
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

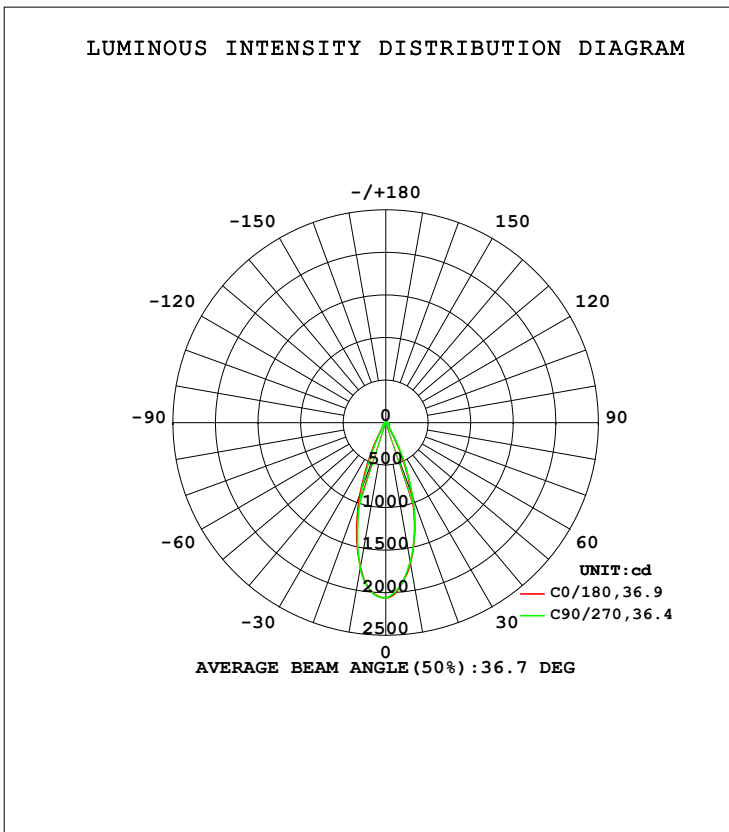

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1678	1676	1661	1705	1724	1733	1735	1732	0- 10	179.2	179.2	19.4,19.4
20	896.8	922.4	928.3	945.4	886.2	1003	813.4	915.9	10- 20	362.7	541.9	58.7,58.7
30	185.2	280.2	231.9	321.0	176.4	280.8	146.8	251.3	20- 30	236.6	778.5	84.3,84.3
40	46.56	57.39	46.39	64.01	47.26	57.31	47.15	55.78	30- 40	64.26	842.7	91.2,91.2
50	29.08	32.29	29.60	32.79	30.06	32.99	29.77	32.31	40- 50	30.66	873.4	94.5,94.5
60	21.08	19.71	21.03	19.96	21.37	20.41	21.63	20.11	50- 60	22.78	896.2	97,97
70	12.66	12.30	12.56	12.31	12.75	12.67	13.08	12.56	60- 70	16.69	912.9	98.8,98.8
80	5.275	5.173	4.470	5.147	5.237	4.868	3.961	4.761	70- 80	9.298	922.2	99.8,99.8
90	0.0592	0.0380	0.0388	0.0348	0.0545	0.0506	0.0522	0.0492	80- 90	1.590	923.8	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

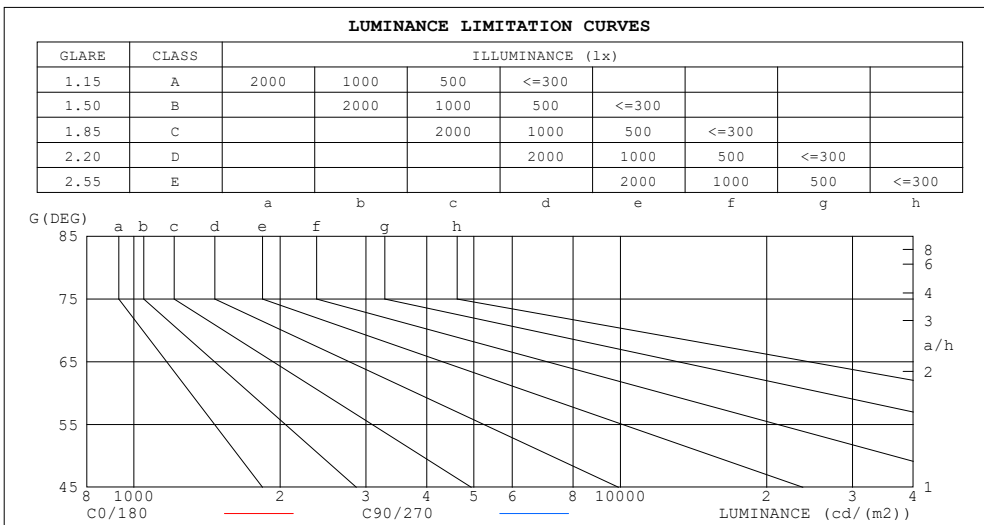

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	150	7
80	275	231
75	307	302
70	335	330
65	361	357
60	381	378
55	379	378
50	409	414
45	466	468


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.94	.92	.90	.88
3.0	.98	.93	.90	.97	.92	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.93	.88	.84	.92	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.84	.78	.74	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71
7.0	.80	.74	.71	.79	.74	.71	.78	.73	.70	.77	.73	.70	.76	.72	.69	.68
8.0	.76	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.65
9.0	.73	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.64	.63
10.0	.70	.65	.62	.70	.65	.62	.69	.65	.61	.68	.64	.61	.68	.64	.61	.60

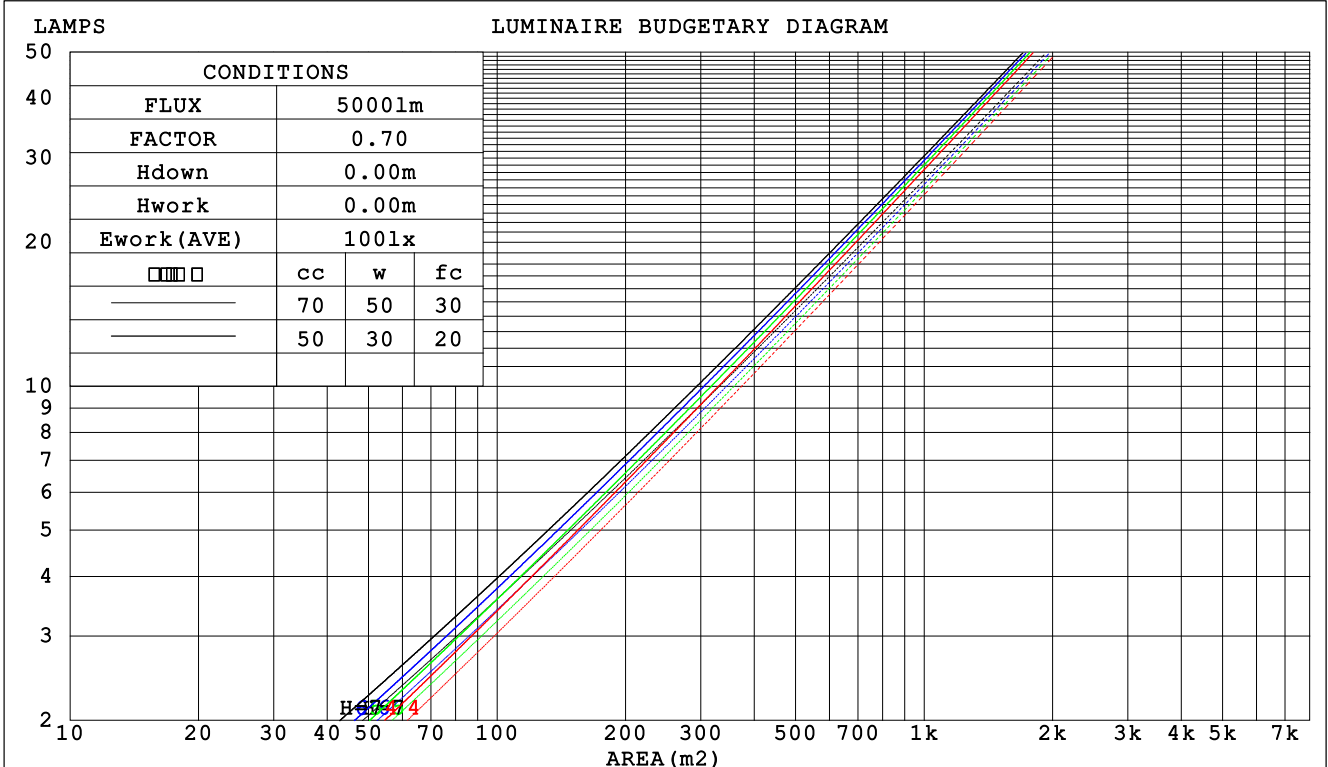

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.171 .097 .031	.164 .094 .030	.151 .087 .028	.140 .081 .026	.129 .075 .024	
2.0	.161 .088 .027	.155 .085 .026	.144 .080 .025	.135 .076 .024	.126 .071 .022	
3.0	.151 .080 .024	.146 .078 .024	.137 .074 .023	.129 .070 .022	.121 .067 .021	
4.0	.141 .074 .022	.137 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.133 .068 .020	.130 .067 .019	.123 .064 .019	.117 .062 .018	.111 .060 .018	
6.0	.126 .063 .018	.123 .062 .018	.117 .060 .018	.112 .058 .017	.107 .056 .017	
7.0	.120 .059 .017	.117 .058 .017	.112 .057 .016	.107 .055 .016	.103 .053 .016	
8.0	.114 .056 .016	.112 .055 .016	.107 .054 .015	.103 .052 .015	.099 .051 .015	
9.0	.109 .053 .015	.107 .052 .015	.103 .051 .014	.099 .050 .014	.095 .049 .014	
10.0	.104 .050 .014	.102 .049 .014	.099 .048 .014	.095 .047 .013	.092 .046 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .045	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.099 .063 .038	.086 .055 .033	.059 .038 .023	.034 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm										
NAME: ASD-CD-PS-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:3000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.3	5.1	4.5	5.3	5.5	4.5	5.4	4.7	5.5	5.7
3H	5.5	6.3	5.7	6.5	6.7	5.6	6.4	5.9	6.6	6.8
4H	6.0	6.7	6.2	6.9	7.2	6.1	6.8	6.4	7.0	7.3
6H	6.3	7.0	6.6	7.3	7.5	6.4	7.1	6.7	7.3	7.6
8H	6.4	7.1	6.7	7.3	7.6	6.4	7.1	6.7	7.3	7.6
12H	6.4	7.1	6.7	7.3	7.6	6.4	7.0	6.7	7.3	7.6
4H 2H	4.7	5.5	5.0	5.7	5.9	4.9	5.7	5.2	5.9	6.1
3H	6.1	6.8	6.5	7.1	7.3	6.2	6.9	6.6	7.2	7.4
4H	6.8	7.3	7.1	7.6	8.0	6.8	7.4	7.2	7.7	8.0
6H	7.2	7.8	7.6	8.1	8.4	7.2	7.8	7.6	8.1	8.4
8H	7.3	7.8	7.7	8.2	8.6	7.3	7.8	7.7	8.1	8.5
12H	7.4	7.8	7.8	8.2	8.6	7.2	7.7	7.6	8.1	8.4
8H 4H	7.0	7.4	7.3	7.8	8.2	7.0	7.5	7.4	7.9	8.2
6H	7.6	8.0	8.0	8.4	8.8	7.5	7.9	8.0	8.3	8.7
8H	7.7	8.1	8.2	8.5	8.9	7.6	8.0	8.0	8.4	8.8
12H	7.8	8.1	8.3	8.6	9.0	7.5	7.9	8.0	8.3	8.8
12H 4H	6.9	7.4	7.4	7.8	8.2	7.0	7.5	7.4	7.8	8.2
6H	7.6	7.9	8.0	8.3	8.8	7.6	7.9	8.0	8.3	8.8
8H	7.8	8.1	8.2	8.5	9.0	7.6	7.9	8.1	8.4	8.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.4				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				

CIE Pub.117, 923.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	79	76	85	79	75	72
0.80	94	87	84	93	87	83	92	87	83	79
1.00	98	92	88	97	92	88	96	92	88	83
1.25	102	97	93	101	96	93	99	95	92	87
1.50	105	100	96	104	99	96	101	98	95	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	106	102	108	104	101	105	102	100	94
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

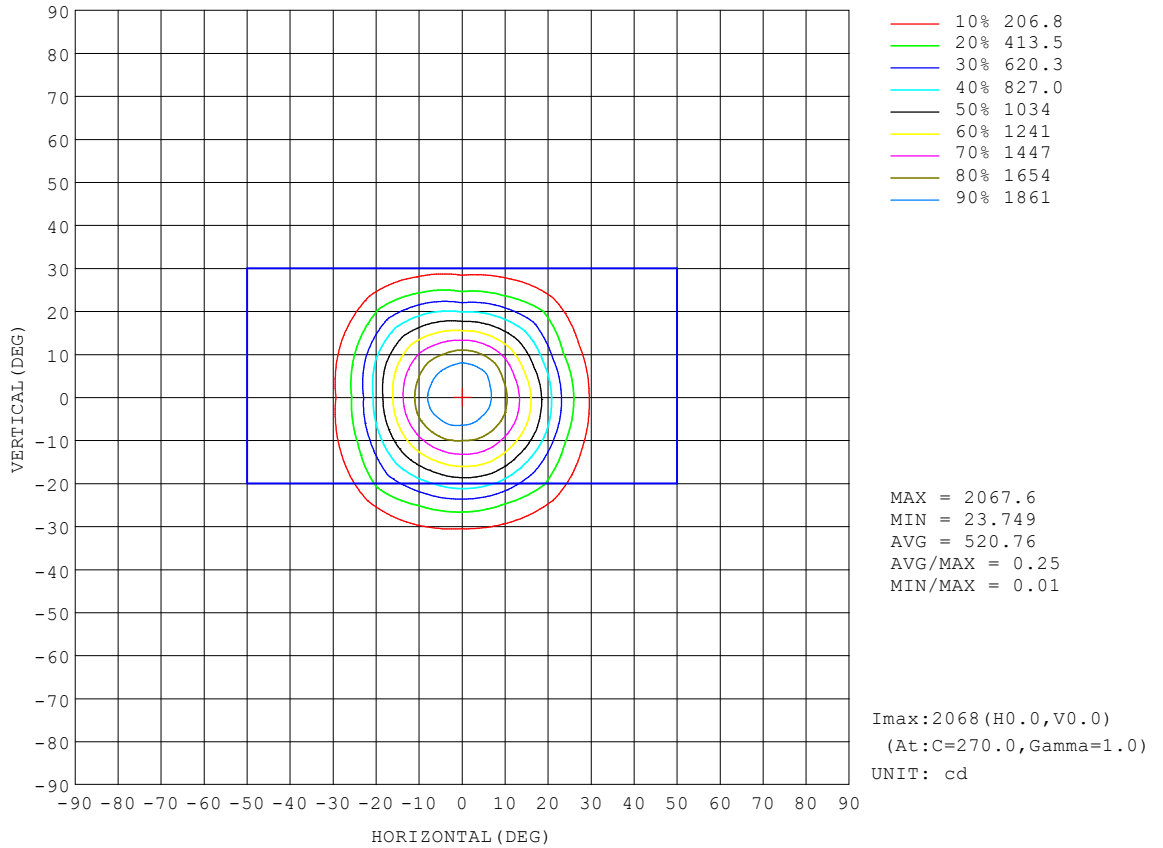


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

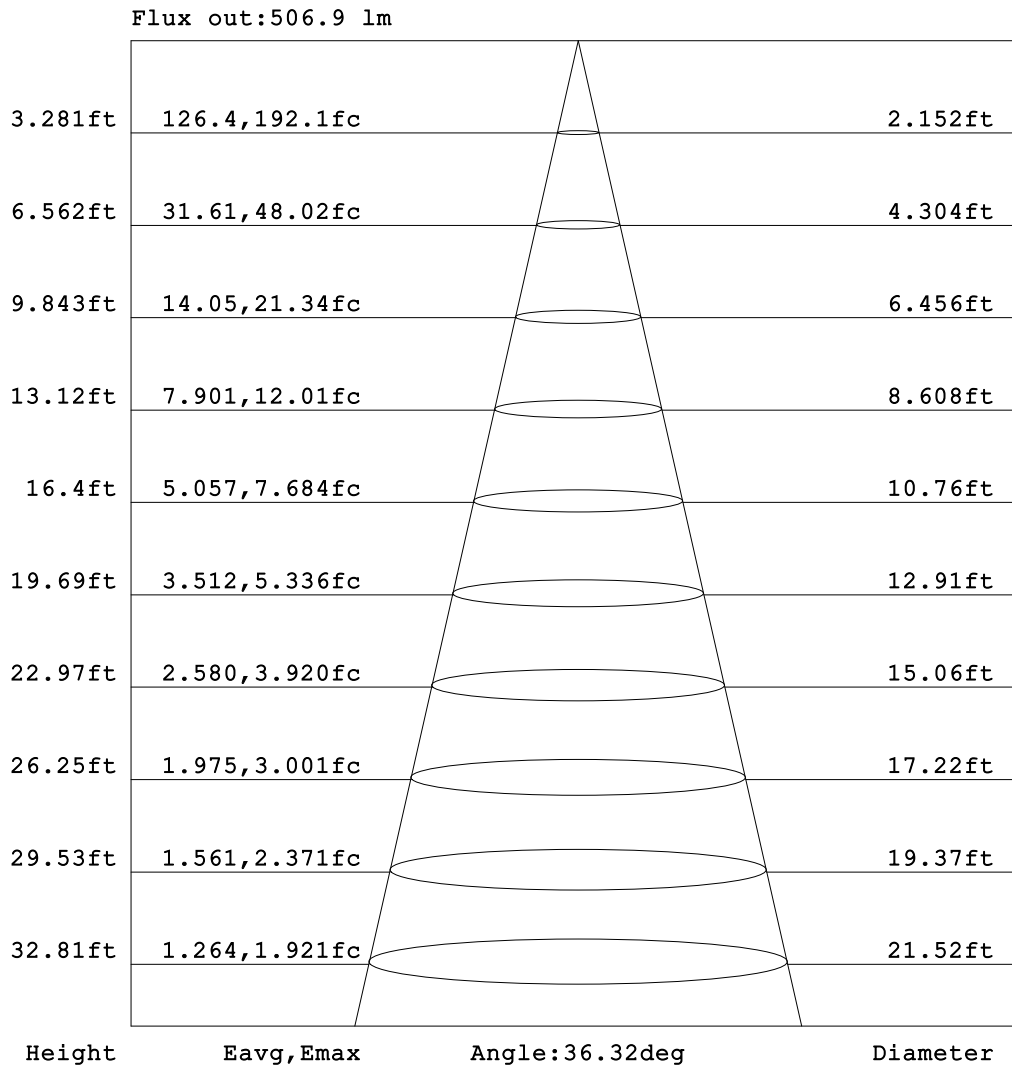


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

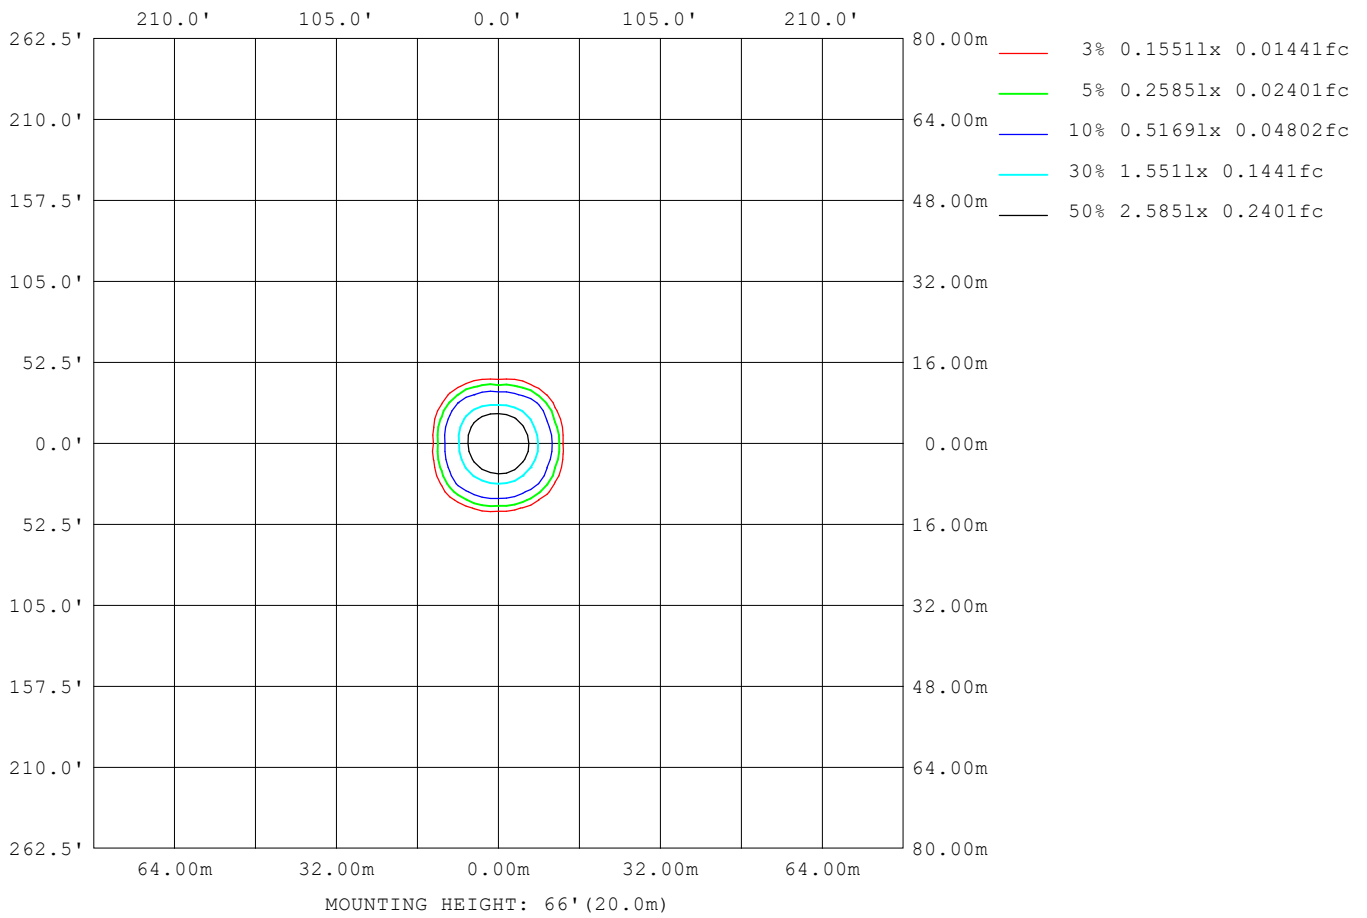

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	362
L_0~180 (75) av	305
L_0~180 (85) av	157
L_90~270 (65) av	365
L_90~270 (75) av	308
L_90~270 (85) av	7
L_45 (65) av	345
L_45 (75) av	303
L_45 (85) av	55

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

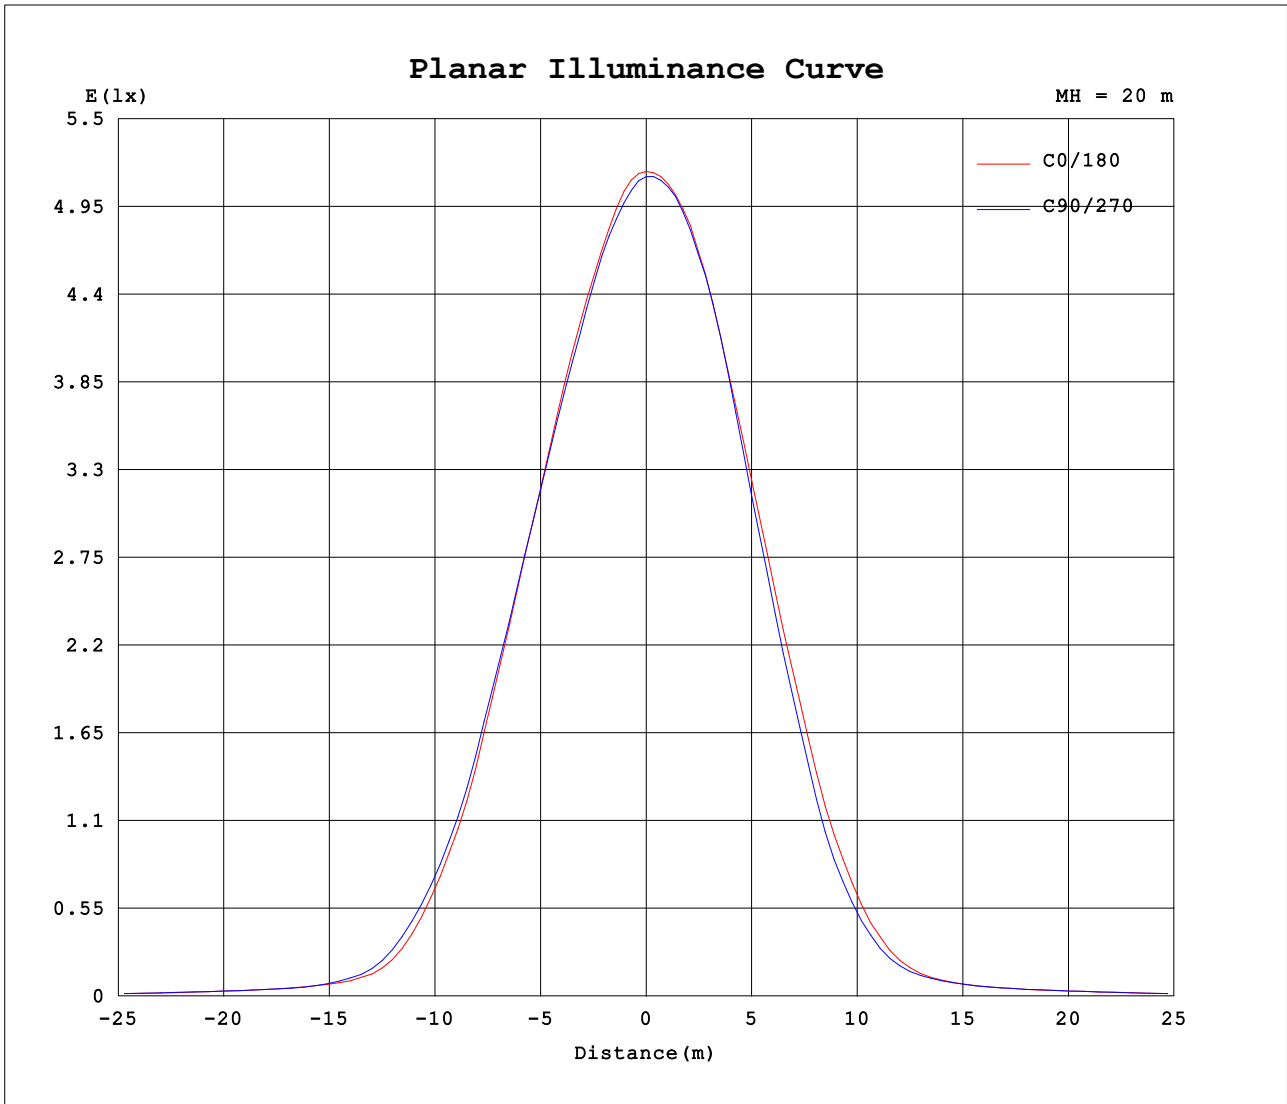

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.96V I:0.1174A P:13.884W PF:0.9476 Freq:59.98Hz Lamp Flux:923.765x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2059	2059	2059	2059	2059	2059	2059	2059	2059	2059	2059	2059	2059	2059	2059	2059			
5	1939	1927	1917	1925	1932	1955	1963	1986	1987	1980	1987	1988	1992	1989	1986	1959			
10	1678	1686	1676	1671	1661	1688	1705	1740	1724	1719	1733	1719	1735	1735	1732	1688			
15	1317	1330	1328	1336	1322	1319	1335	1337	1330	1365	1388	1332	1289	1306	1323	1294			
20	897	923	922	941	928	918	945	909	886	969	1003	912	813	863	916	875			
25	480	482	556	521	524	538	612	504	459	548	615	490	386	444	552	450			
30	185	213	280	241	232	262	321	237	176	234	281	199	147	188	251	192			
35	71.0	81.5	107	93.6	84.4	103	126	87.3	73.1	87.6	104	80.0	70.7	78.6	94.5	76.1			
40	46.6	49.8	57.4	50.8	46.4	52.9	64.0	51.4	47.3	50.8	57.3	50.3	47.1	50.9	55.8	49.7			
45	36.4	38.5	40.6	38.7	36.9	39.2	42.6	39.1	37.3	39.1	41.7	39.5	37.7	39.4	41.1	38.3			
50	29.1	31.3	32.3	31.6	29.6	32.0	32.8	32.1	30.1	32.0	33.0	31.9	29.8	31.6	32.3	31.0			
55	24.1	25.0	25.2	25.1	24.1	25.4	25.8	25.6	24.6	25.6	25.9	25.7	24.8	25.4	25.2	24.9			
60	21.1	20.9	19.7	21.1	21.0	21.1	20.0	21.2	21.4	21.3	20.4	21.6	21.6	21.4	20.1	21.0			
65	16.9	17.0	16.0	17.1	16.8	17.1	16.0	17.2	17.1	17.1	16.5	17.4	17.4	17.3	16.3	16.9			
70	12.7	12.8	12.3	12.8	12.6	12.8	12.3	12.8	12.7	12.8	12.7	13.1	13.1	13.0	12.6	12.7			
75	8.79	8.82	8.62	8.83	8.70	8.81	8.60	8.83	8.77	8.84	8.82	9.06	9.04	9.05	8.79	8.82			
80	5.28	5.30	5.17	4.80	4.47	4.79	5.15	5.28	5.24	5.25	4.87	4.16	3.96	4.08	4.76	5.26			
85	1.45	1.95	0.78	0.10	0.07	0.09	0.75	1.92	1.60	1.52	0.41	0.06	0.07	0.06	0.19	1.41			
90	0.06	0.04	0.04	0.03	0.04	0.03	0.03	0.03	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: