
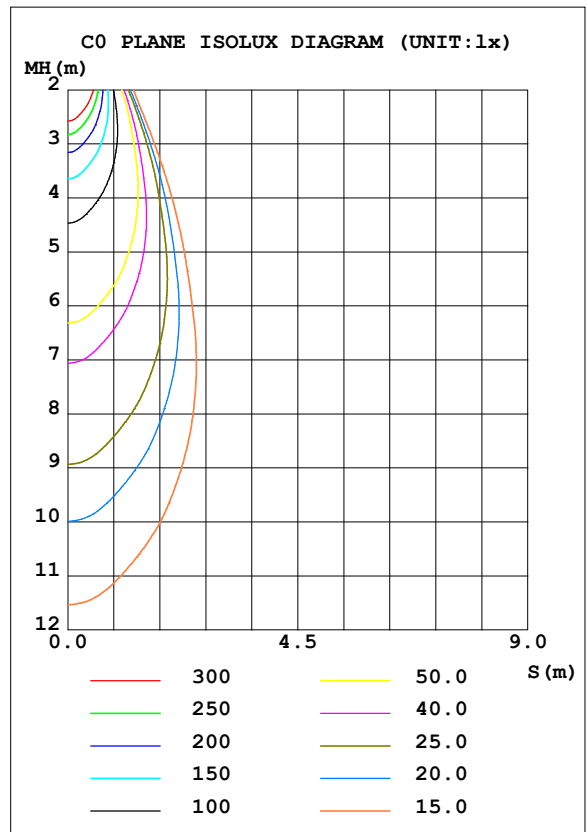


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 61.59 lm/W			
MODEL		I _{max} (cd)	1961	S/MH (C0/180)	0.59
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.56
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	871.13	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.9
NOMINAL FLUX (lm)	871.127	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.1
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

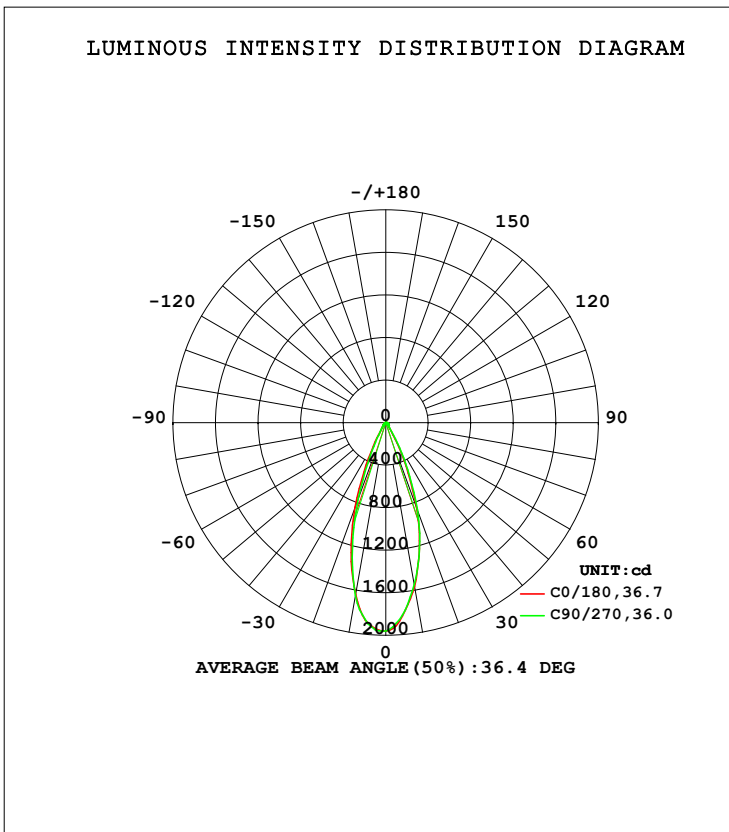

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1561	1557	1543	1613	1639	1651	1649	1642	0- 10	169.3	169.3	19.4,19.4
20	845.2	833.6	871.8	896.3	845.4	998.8	760.4	865.4	10- 20	342.1	511.4	58.7,58.7
30	178.6	233.2	222.0	306.8	168.7	279.4	137.8	239.5	20- 30	222.6	734.0	84.3,84.3
40	44.34	51.65	43.94	61.18	45.19	55.94	44.79	53.07	30- 40	60.30	794.3	91.2,91.2
50	27.64	30.57	27.96	31.06	28.70	31.43	28.26	30.65	40- 50	29.10	823.4	94.5,94.5
60	20.05	18.71	19.89	18.91	20.41	19.34	20.56	19.06	50- 60	21.61	845.0	97,97
70	12.05	11.67	11.93	11.66	12.12	11.98	12.36	11.92	60- 70	15.83	860.8	98.8,98.8
80	5.029	4.926	4.233	4.875	4.970	4.563	3.702	4.506	70- 80	8.809	869.6	99.8,99.8
90	0.0616	0.0345	0.0359	0.0324	0.0524	0.0474	0.0499	0.0453	80- 90	1.503	871.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

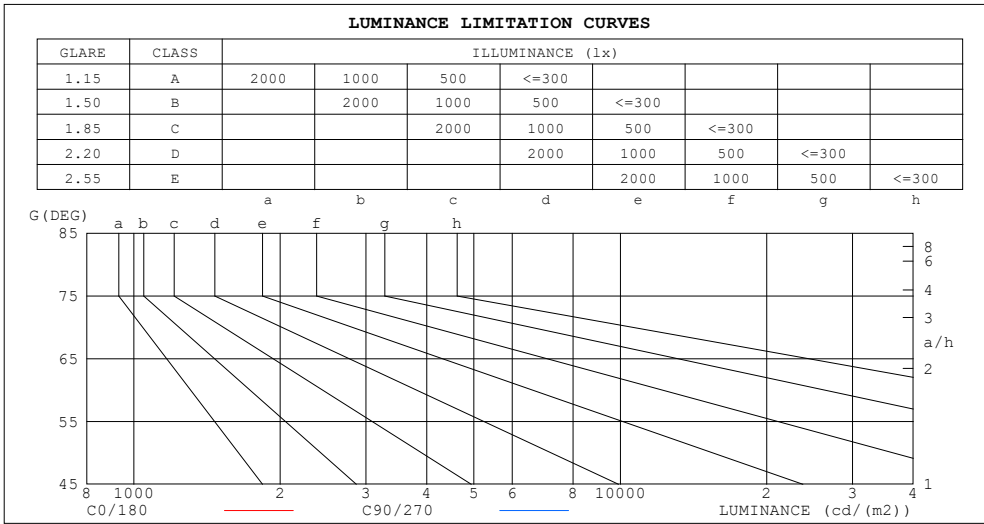

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	143	6
80	265	219
75	297	286
70	323	313
65	349	338
60	368	357
55	366	356
50	394	390
45	449	442


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.94	.92	.90	.88
3.0	.98	.93	.90	.97	.92	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.93	.88	.84	.92	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.84	.78	.74	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71
7.0	.80	.74	.71	.79	.74	.71	.78	.73	.70	.77	.73	.70	.76	.72	.69	.68
8.0	.76	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.65
9.0	.73	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.64	.63
10.0	.70	.65	.62	.70	.65	.62	.69	.65	.61	.68	.64	.61	.68	.64	.61	.60

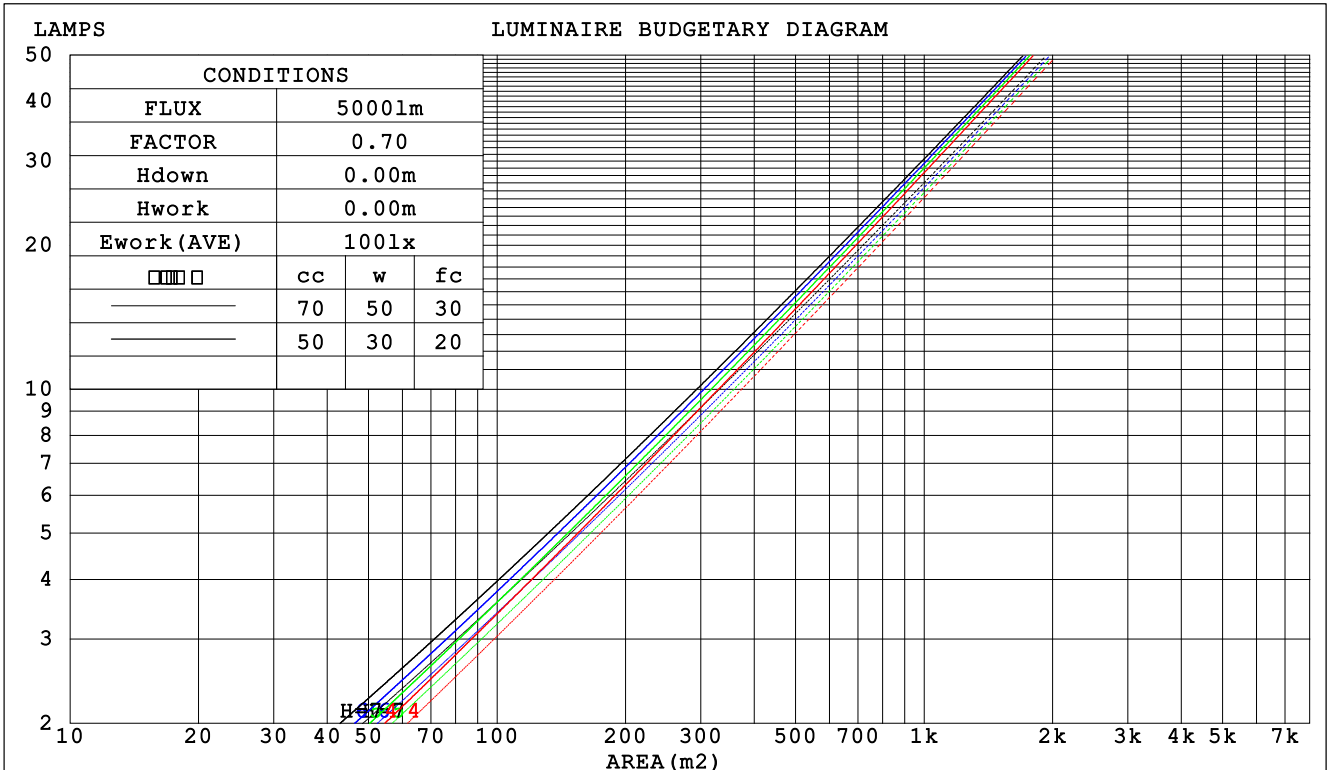

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.171 .097 .031	.164 .094 .030	.151 .087 .028	.140 .081 .026	.129 .075 .024	
2.0	.161 .088 .027	.155 .085 .026	.144 .080 .025	.135 .076 .024	.126 .071 .022	
3.0	.151 .080 .024	.146 .078 .024	.137 .074 .023	.129 .071 .022	.121 .067 .021	
4.0	.141 .074 .022	.137 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.133 .068 .020	.130 .067 .019	.123 .064 .019	.117 .062 .018	.111 .060 .018	
6.0	.126 .063 .018	.123 .062 .018	.117 .060 .018	.112 .058 .017	.107 .056 .017	
7.0	.120 .059 .017	.117 .058 .017	.112 .057 .016	.107 .055 .016	.103 .053 .016	
8.0	.114 .056 .016	.112 .055 .016	.107 .054 .015	.103 .052 .015	.099 .051 .015	
9.0	.109 .053 .015	.107 .052 .015	.103 .051 .014	.099 .050 .014	.095 .048 .014	
10.0	.104 .050 .014	.102 .049 .014	.099 .048 .014	.095 .047 .013	.092 .046 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .045	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.099 .063 .038	.086 .055 .033	.059 .038 .023	.034 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm										
NAME: ASD-CD-PS-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:2700K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.4	5.2	4.6	5.4	5.5	4.4	5.3	4.7	5.4	5.6
3H	5.6	6.4	5.8	6.6	6.8	5.6	6.4	5.8	6.6	6.8
4H	6.1	6.8	6.4	7.1	7.3	6.1	6.8	6.3	7.0	7.2
6H	6.5	7.2	6.8	7.4	7.6	6.4	7.1	6.7	7.3	7.6
8H	6.5	7.2	6.8	7.5	7.7	6.4	7.1	6.7	7.3	7.6
12H	6.5	7.2	6.9	7.5	7.7	6.4	7.0	6.7	7.3	7.5
4H 2H	4.8	5.6	5.1	5.8	6.0	4.9	5.6	5.1	5.8	6.0
3H	6.2	6.9	6.6	7.2	7.4	6.2	6.9	6.5	7.1	7.4
4H	6.9	7.5	7.2	7.8	8.1	6.8	7.4	7.2	7.7	8.0
6H	7.4	7.9	7.7	8.2	8.6	7.2	7.8	7.6	8.1	8.4
8H	7.5	8.0	7.9	8.3	8.7	7.3	7.8	7.7	8.1	8.5
12H	7.5	7.9	7.9	8.3	8.7	7.2	7.7	7.6	8.1	8.4
8H 4H	7.1	7.6	7.5	7.9	8.3	7.0	7.5	7.4	7.9	8.2
6H	7.7	8.1	8.1	8.5	8.9	7.6	8.0	8.0	8.3	8.8
8H	7.9	8.2	8.3	8.6	9.1	7.6	8.0	8.1	8.4	8.8
12H	7.9	8.2	8.4	8.7	9.2	7.6	7.9	8.0	8.3	8.8
12H 4H	7.1	7.5	7.5	7.9	8.3	7.0	7.5	7.4	7.8	8.2
6H	7.7	8.0	8.1	8.5	8.9	7.6	7.9	8.0	8.3	8.8
8H	7.9	8.2	8.4	8.6	9.1	7.6	8.0	8.1	8.4	8.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.4				
2.0H	+ 0.3 / - 0.2					+ 0.3 / - 0.4				

CIE Pub.117, 871.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.5)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	79	76	85	79	75	72
0.80	94	87	84	93	87	83	92	86	83	79
1.00	98	92	88	97	92	88	96	92	88	83
1.25	102	97	93	101	96	93	99	95	92	87
1.50	105	100	96	104	99	96	101	98	95	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	106	102	108	104	101	105	102	100	94
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

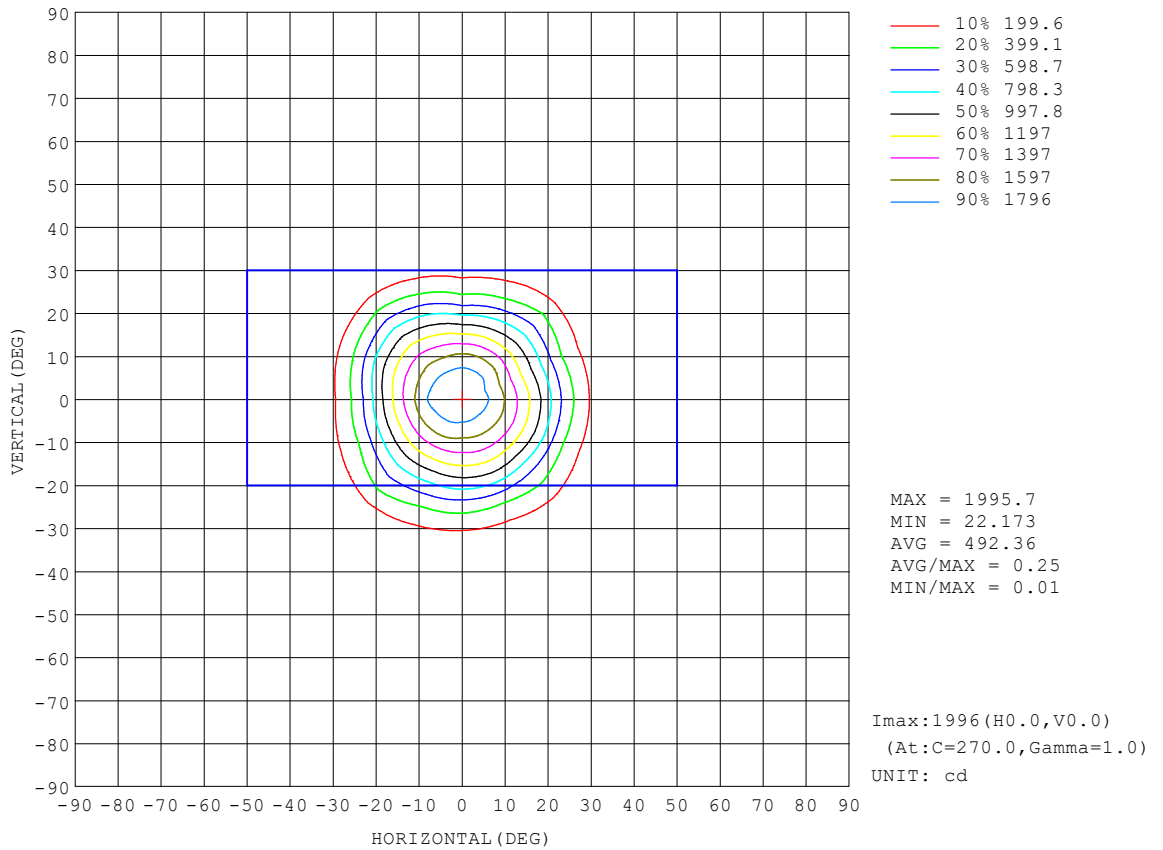


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

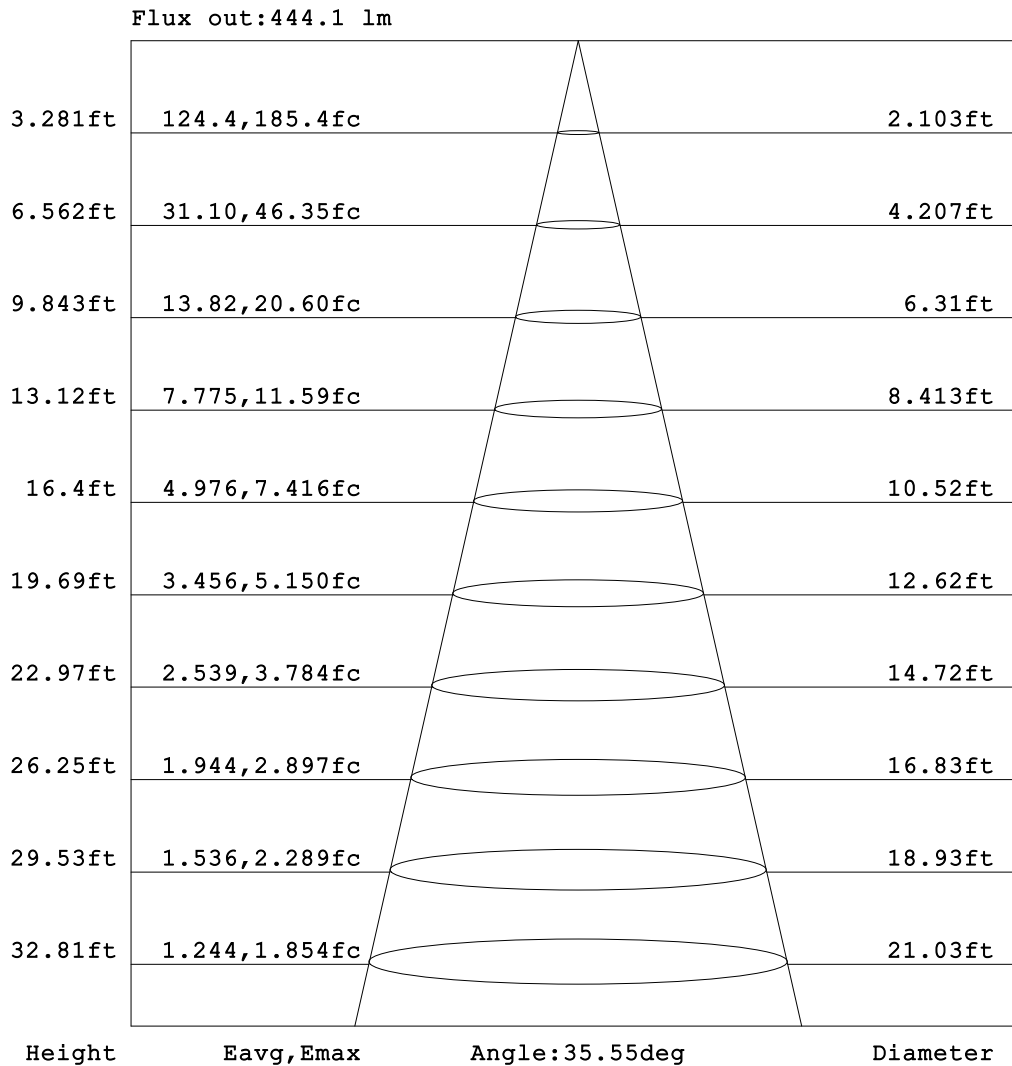


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

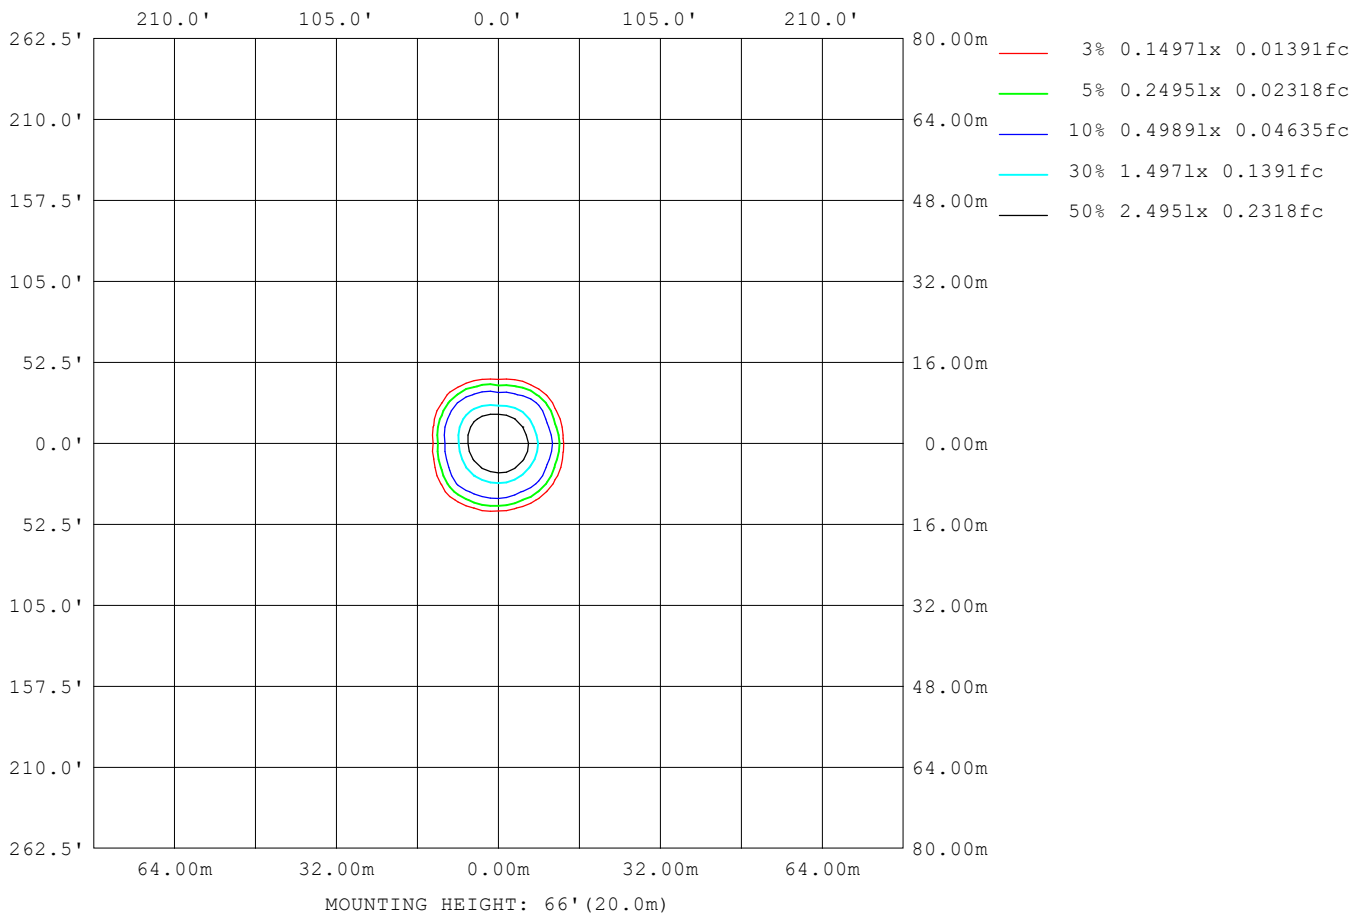

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	345
L_0~180 (75) av	290
L_0~180 (85) av	149
L_90~270 (65) av	345
L_90~270 (75) av	292
L_90~270 (85) av	6
L_45 (65) av	327
L_45 (75) av	287
L_45 (85) av	51

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

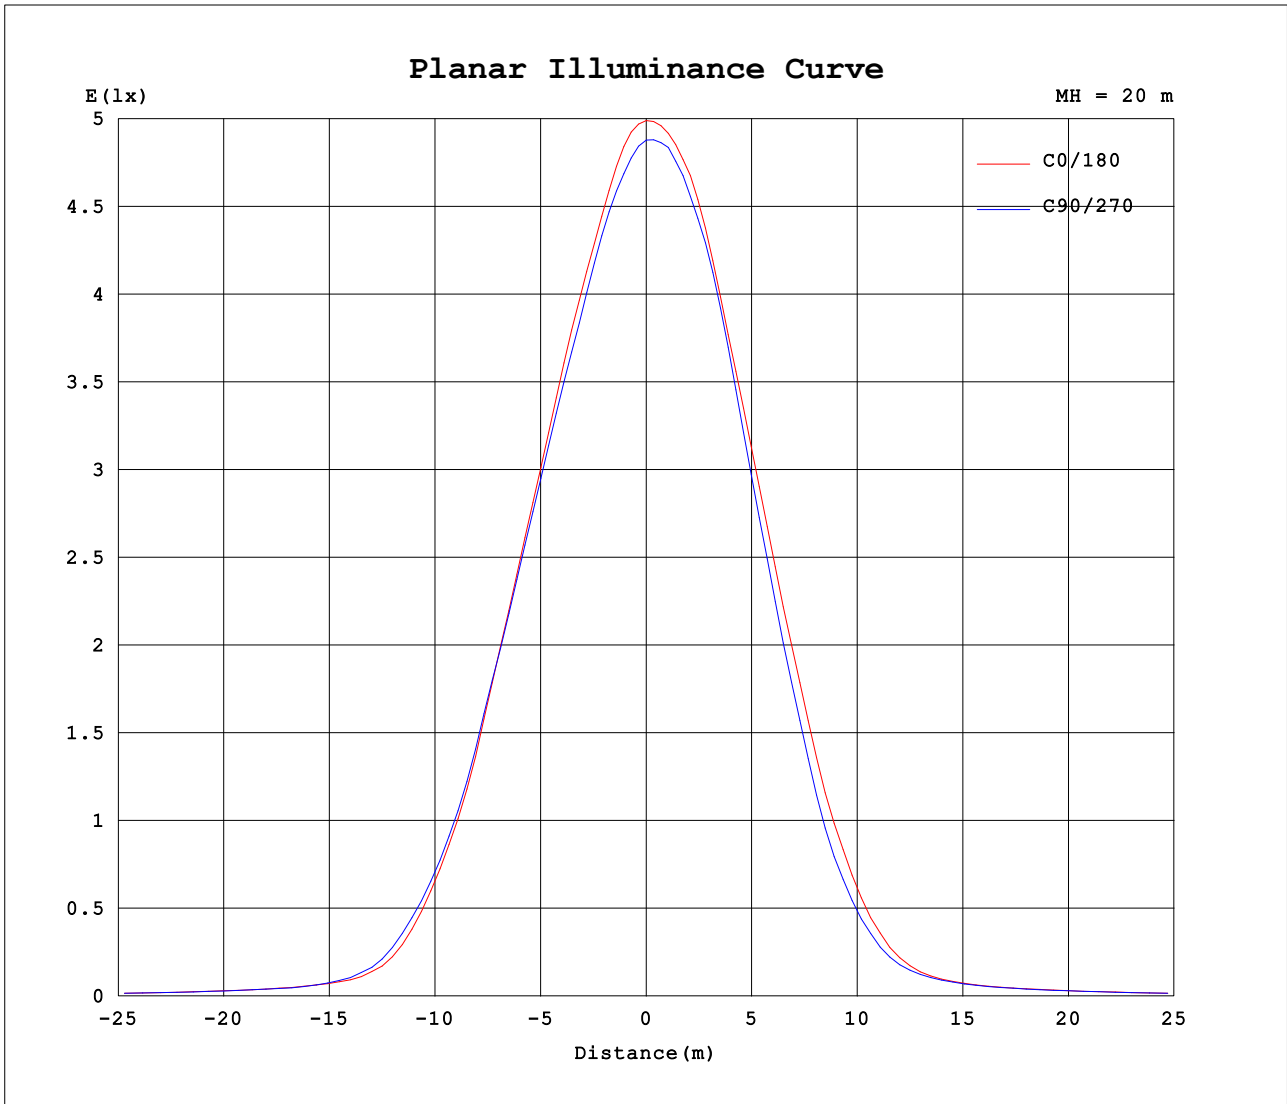

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.97V I:0.1196A P:14.144W PF:0.9477 Freq:59.98Hz Lamp Flux:871.127x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1959	1959	1959	1959	1959	1959	1959	1959	1959	1959	1959	1959	1959	1959	1959	1959			
5	1824	1809	1794	1806	1816	1842	1864	1895	1894	1885	1894	1889	1899	1892	1892	1852			
10	1561	1568	1557	1548	1543	1582	1613	1657	1639	1636	1651	1629	1649	1652	1642	1576			
15	1226	1238	1228	1237	1230	1229	1262	1269	1266	1319	1351	1277	1216	1237	1250	1203			
20	845	854	834	865	872	852	896	858	845	957	999	888	760	813	865	810			
25	457	428	476	458	493	498	581	472	441	550	618	486	360	419	523	411			
30	179	181	233	199	222	241	307	223	169	236	279	197	138	179	239	177			
35	67.5	74.6	90.2	82.6	78.5	97.0	120	82.9	70.4	86.5	104	77.6	67.5	74.7	89.5	71.8			
40	44.3	47.1	51.6	47.5	43.9	50.2	61.2	48.7	45.2	48.8	55.9	48.0	44.8	48.3	53.1	47.0			
45	34.6	36.7	37.9	36.7	34.9	37.2	40.5	36.9	35.6	37.3	40.1	37.5	35.7	37.3	39.1	36.2			
50	27.6	29.8	30.6	29.9	28.0	30.3	31.1	30.4	28.7	30.5	31.4	30.3	28.3	29.9	30.7	29.3			
55	22.9	23.8	23.8	23.8	22.8	24.0	24.4	24.2	23.5	24.4	24.6	24.3	23.5	24.1	23.9	23.5			
60	20.0	20.0	18.7	20.0	19.9	20.0	18.9	20.2	20.4	20.2	19.3	20.4	20.6	20.2	19.1	19.9			
65	16.1	16.2	15.2	16.2	15.9	16.2	15.2	16.3	16.3	16.2	15.6	16.5	16.5	16.4	15.5	16.0			
70	12.0	12.1	11.7	12.1	11.9	12.1	11.7	12.1	12.1	12.1	12.0	12.3	12.4	12.3	11.9	12.0			
75	8.38	8.42	8.20	8.39	8.27	8.37	8.16	8.35	8.33	8.33	8.32	8.52	8.51	8.53	8.34	8.34			
80	5.03	5.05	4.93	4.57	4.23	4.54	4.88	4.99	4.97	4.94	4.56	3.88	3.70	3.83	4.51	4.98			
85	1.36	1.86	0.74	0.09	0.06	0.08	0.70	1.82	1.53	1.42	0.37	0.06	0.06	0.05	0.17	1.33			
90	0.06	0.04	0.03	0.03	0.04	0.03	0.03	0.03	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: