
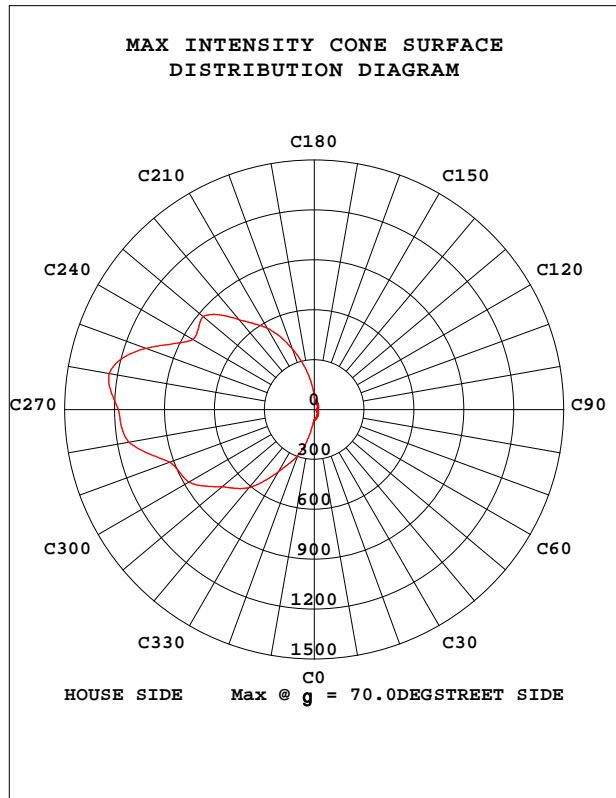


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:120.24V I:0.1394A P:16.524W PF:0.9856 Freq:59.98Hz Lamp Flux:2165.48x1 lm		
NAME: ASD-LSWP01-18DCC-PC(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 131.05 lm/W			
MSDELSWP01-18DCC-PC(3000K)		Imax(cd)	1252	h street_up(%)	1.0
NOMINAL POWER(W)	18	LOR(%)	100.0	h street_down(%)	8.9
RATED VOLTAGE(V)	110-277	TOTAL FLUX(lm)	2165	h house_up(%)	4.2
NOMINAL FLUX(lm)	2165.48	MAXIMUM @(C,g)	260,70.0	h house_down(%)	85.8
LAMPS INSIDE	1	h up(%)	5.3	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	120	h down(%)	94.7	SLI	15.755

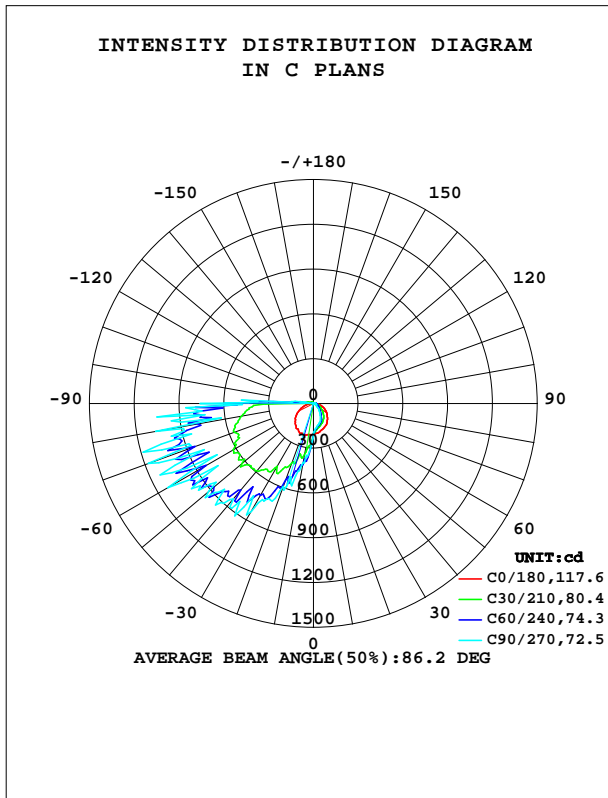


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9950]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:120.24V I:0.1394A P:16.524W PF:0.9856 Freq:59.98Hz Lamp Flux:2165.48x1 lm		
NAME: ASD-LSWP01-18DCC-PC(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

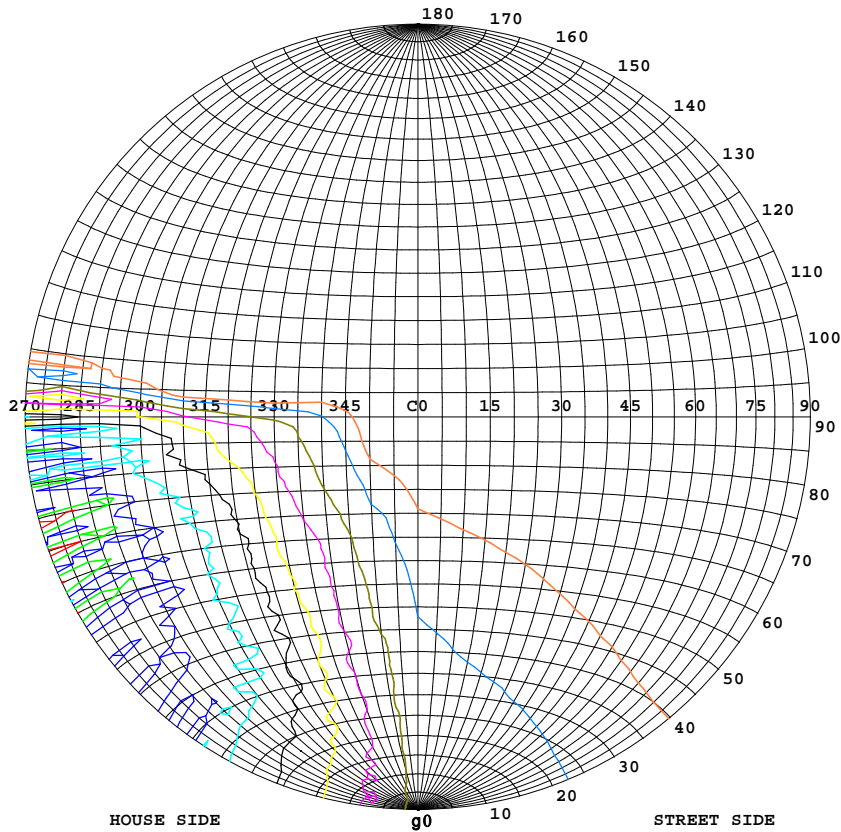

Classification:



IES:Type V - Very Short
 CIE:Narrow - Long
 IES:None cut-off
 CIE:Non-cut-off
 Max.At80:513.3cd/klm
 Max.At90:357.3cd/klm
 Max.80-90:513.3cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	1252
90%	1127
80%	1002
70%	876
60%	751
50%	626
40%	501
30%	376
20%	250
10%	125
5%	63

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9950]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

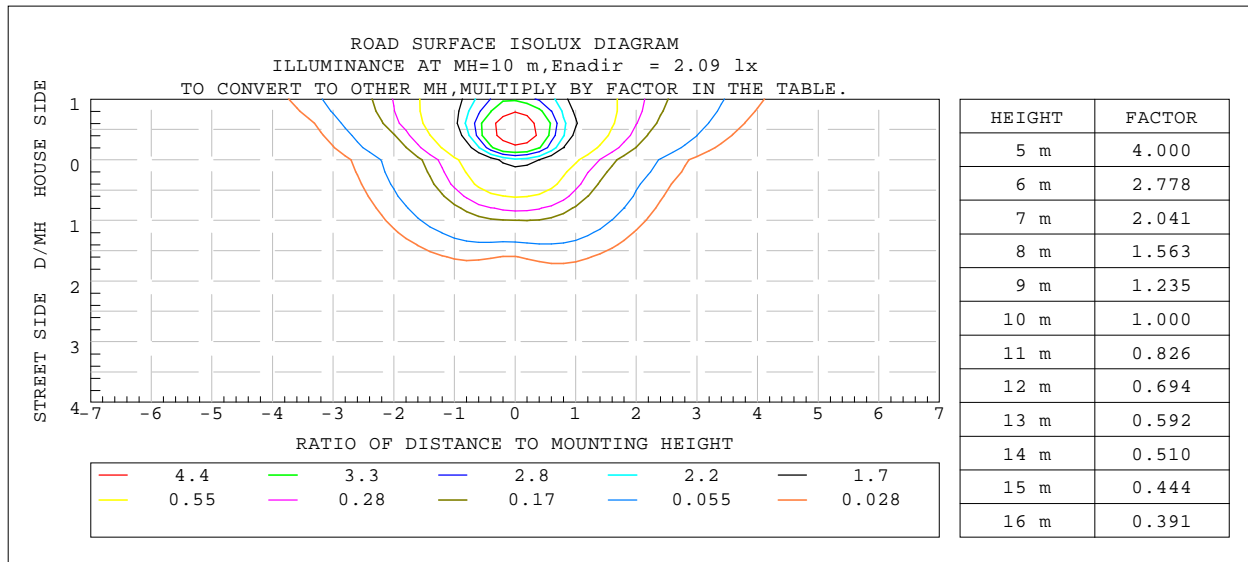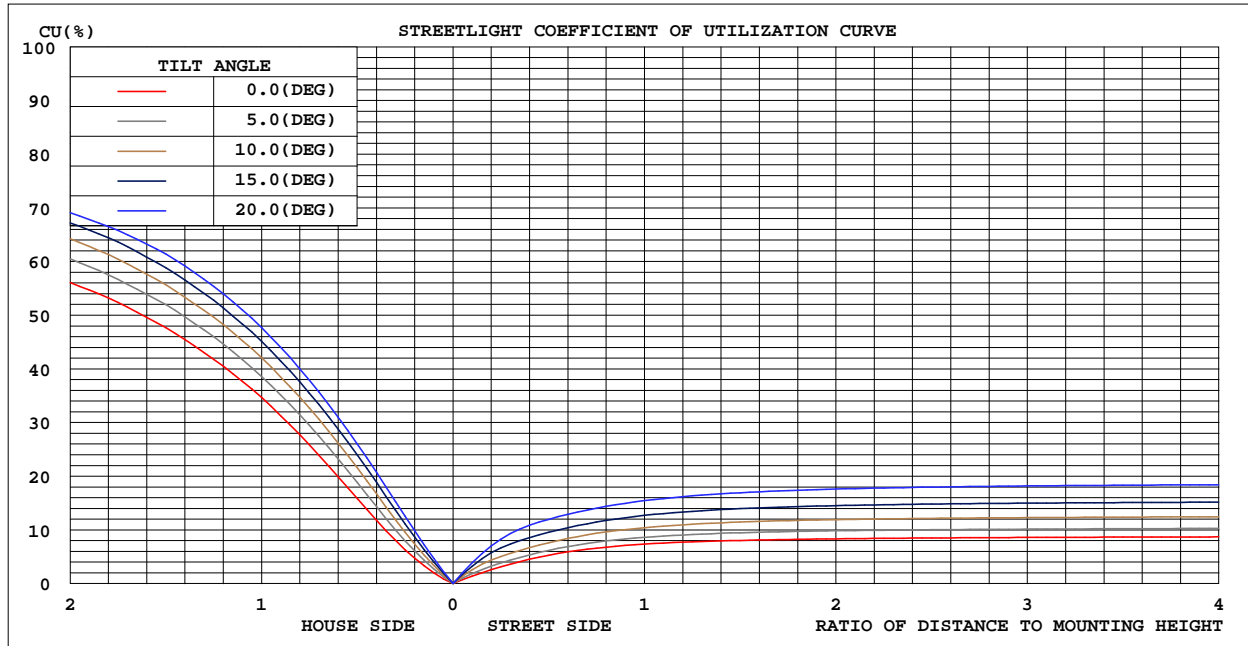

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-05-15

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.000m [K=0.9950]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:120.24V I:0.1394A P:16.524W PF:0.9856 Freq:59.98Hz Lamp Flux:2165.48x1 lm		
NAME: ASD-LSWP01-18DCC-PC(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	198.5	164.8	153.8	162.7	211.5	363.3	401.5	358.8	0- 10	23.22	23.22	1.07,1.07
20	183.6	143.2	132.4	141.5	216.7	517.3	590.7	509.2	10- 20	81.80	105.0	4.85,4.85
30	170.2	120.4	93.98	121.9	204.0	644.5	834.1	616.0	20- 30	153.4	258.4	11.9,11.9
40	146.5	88.86	61.69	92.41	187.6	728.4	833.7	687.1	30- 40	225.7	484.1	22.4,22.4
50	121.9	62.84	33.55	65.28	161.0	763.4	915.7	708.4	40- 50	282.4	766.5	35.4,35.4
60	95.87	42.33	17.07	44.20	125.4	749.2	1128	687.6	50- 60	321.8	1088	50.3,50.3
70	65.98	27.54	12.44	28.10	81.73	789.3	1177	668.1	60- 70	344.9	1433	66.2,66.2
80	33.71	17.52	8.120	17.06	43.74	630.9	1074	576.5	70- 80	339.4	1773	81.9,81.9
90	11.65	9.866	5.661	10.15	18.63	396.5	759.9	332.9	80- 90	278.4	2051	94.7,94.7
100	7.487	8.707	7.452	8.444	10.92	45.06	38.01	28.88	90-100	74.84	2126	98.2,98.2
110	8.855	10.69	7.941	10.46	9.568	9.944	3.657	14.86	100-110	14.35	2140	98.8,98.8
120	7.422	9.428	7.998	9.892	7.974	5.070	1.760	5.657	110-120	7.957	2148	99.2,99.2
130	7.312	7.026	7.384	7.047	8.634	4.791	2.777	7.229	120-130	6.598	2155	99.5,99.5
140	5.717	5.590	6.325	5.573	6.218	4.369	4.654	3.821	130-140	5.013	2160	99.7,99.7
150	4.193	4.678	5.330	4.531	4.042	3.255	4.664	1.715	140-150	2.857	2163	99.9,99.9
160	3.478	4.504	4.445	4.104	3.389	2.299	1.917	2.004	150-160	1.574	2164	99.9,99.9
170	4.105	3.841	3.707	3.801	3.857	3.047	2.488	2.877	160-170	0.9245	2165	100,100
180	3.614	3.854	3.339	3.587	3.614	3.861	3.303	3.592	170-180	0.3330	2165	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9950]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.24V I:0.1394A P:16.524W PF:0.9856 Freq:59.98Hz Lamp Flux:2165.48x1 lm		
NAME: ASD-LSWP01-18DCC-PC(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

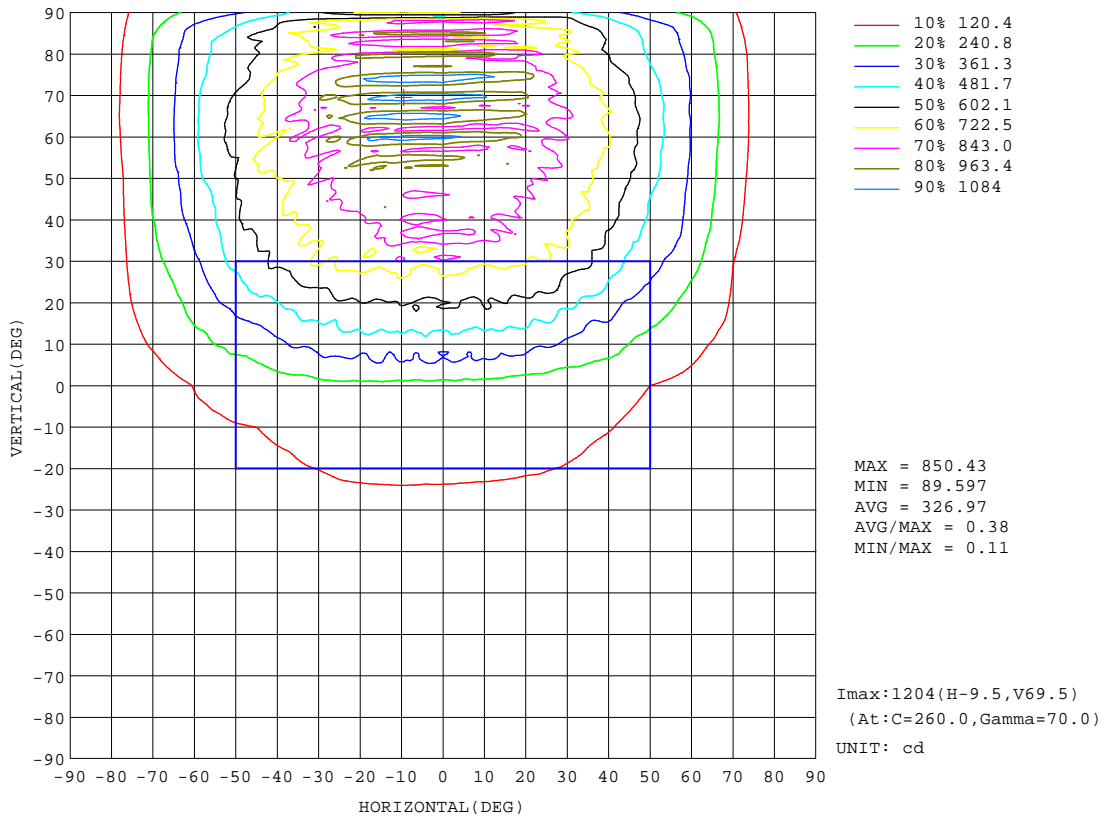

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9950]
 Remarks:

Planar Illuminance Curve

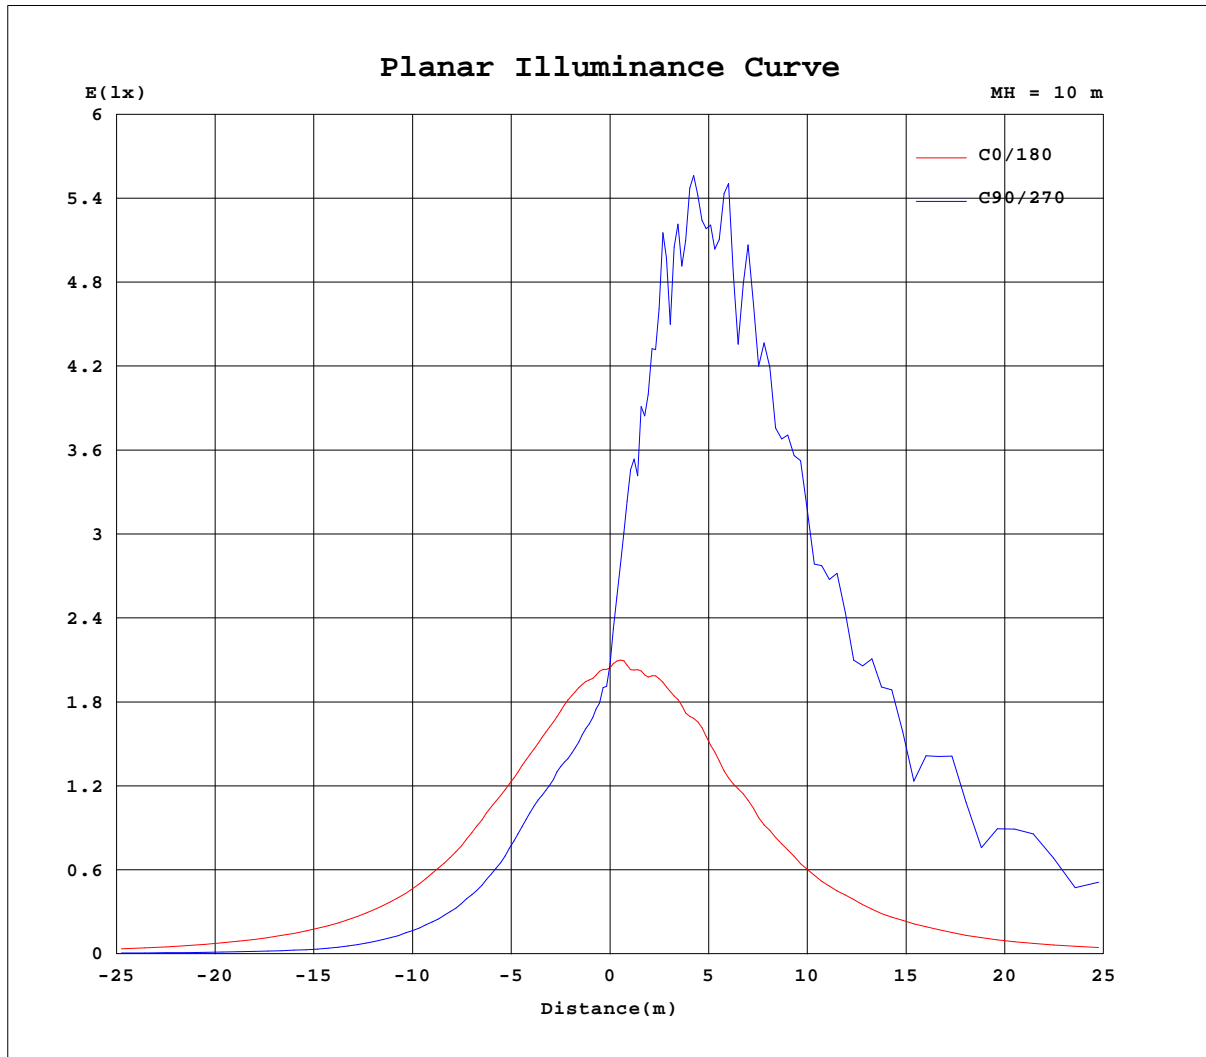


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-05-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.9950]
 Remarks:

LCS REPORT

Test:U:120.24V I:0.1394A P:16.524W PF:0.9856 Freq:59.98Hz Lamp Flux:2165.48x1 lm		
NAME: ASD-LSWP01-18DCC-PC(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

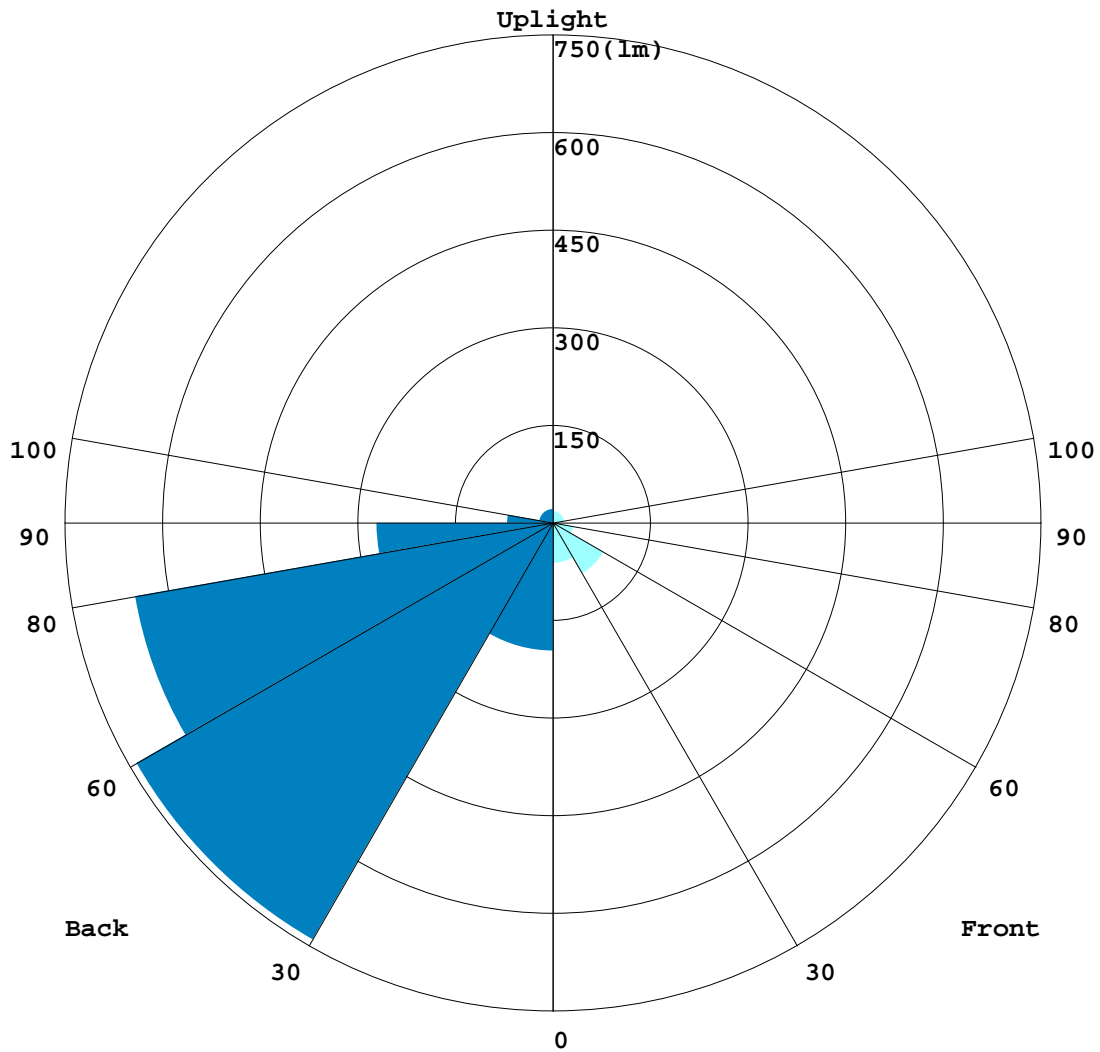

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9950]
 Remarks:

BUG REPORT

Test:U:120.24V I:0.1394A P:16.524W PF:0.9856 Freq:59.98Hz Lamp Flux:2165.48x1 lm		
NAME: ASD-LSWP01-18DCC-PC(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	61.805	2.9
FM - Front-Medium(30-60)	90.721	4.2
FH - Front-High(60-80)	32.36	1.5
FVH - Front-Very High(80-90)	7.3226	0.3
Total Forward Light	214.84	9.9

BL - Back-Low(0-30)	196.6	9.1
BM - Back-Medium(30-60)	739.16	34.1
BH - Back-High(60-80)	651.96	30.1
BVH - Back-Very High(80-90)	271.12	12.5
Total Back Light	1950.6	90.1

UL - Uplight-Low(90-100)	74.836	3.5
UH - Uplight-High(100-180)	39.607	1.8
Total Up Light	114.44	5.3

BUG(Back,Up,Glare) Rating	B2-U3-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	1858.8	91.814	1950.6
Street Side	192.21	22.628	214.84


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-05-15

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.000m [K=0.9950]
Remarks:

ROAD ISOCANDELA REPORT

Test:U:120.24V I:0.1394A P:16.524W PF:0.9856 Freq:59.98Hz Lamp Flux:2165.48x1 lm		
NAME: ASD-LSWP01-18DCC-PC(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

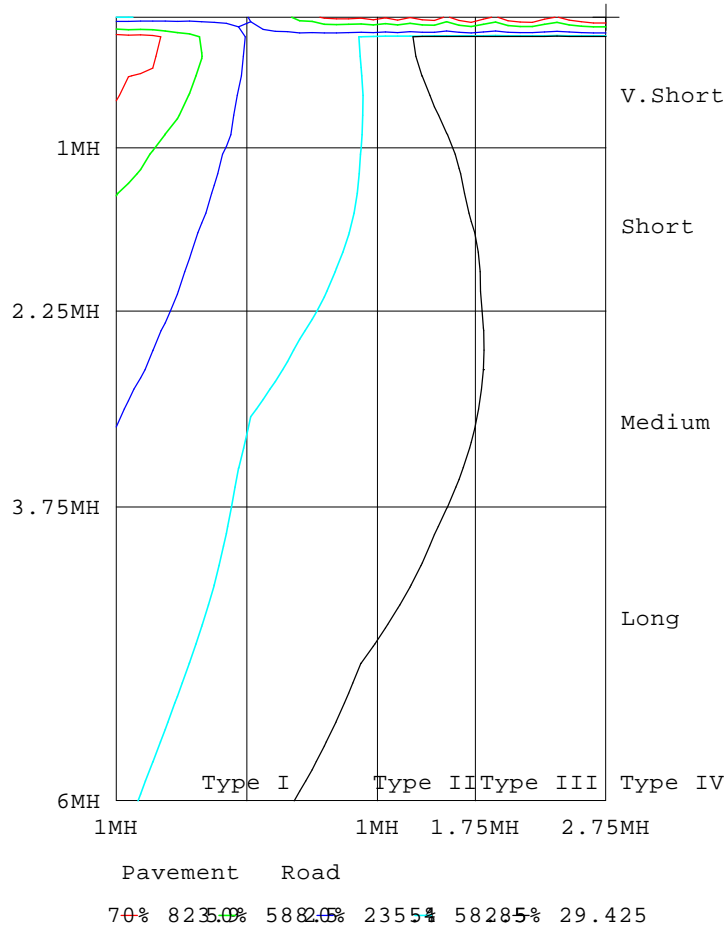

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-05-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.9950]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.24V I:0.1394A P:16.524W PF:0.9856 Freq:59.98Hz Lamp Flux:2165.48x1 lm		
NAME: ASD-LSWP01-18DCC-PC(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	207	207	207	207	207	207	207	207	207	207	207	207	207	207	207	207	207	207	207
5	202	191	195	183	182	178	176	173	172	171	172	172	174	175	178	189	183	194	211
10	199	188	178	170	167	162	160	156	156	154	155	155	158	161	165	170	176	182	211
15	190	176	167	160	155	150	149	148	146	144	146	146	147	149	153	159	167	183	218
20	184	168	158	149	146	140	137	134	135	132	133	132	136	139	144	149	159	171	217
25	177	160	149	143	136	131	126	119	117	115	118	121	127	129	135	140	150	164	220
30	170	151	139	130	126	115	106	98.5	95.7	94.0	96.2	100	110	118	126	131	140	154	204
35	160	140	129	121	112	98.2	89.4	80.7	78.7	77.1	79.3	83.2	91.6	102	115	120	130	143	202
40	147	128	117	108	95.3	82.5	73.9	66.5	63.3	61.7	64.2	68.6	77.1	86.0	98.9	110	118	132	188
45	134	116	107	93.6	81.3	69.3	61.2	53.6	49.3	47.7	50.7	56.0	63.2	71.6	84.1	96.8	107	119	173
50	122	104	94.1	80.0	68.3	57.4	49.4	41.5	35.1	33.6	37.1	43.6	51.8	59.9	70.7	83.1	94.9	107	161
55	109	91.8	81.3	67.6	56.9	46.7	38.3	30.0	23.8	22.3	26.0	32.4	40.7	48.7	58.8	69.9	83.2	94.5	142
60	95.9	80.7	69.3	57.3	47.3	37.4	30.4	23.2	18.0	17.1	19.5	25.3	32.2	39.5	49.0	58.7	70.7	81.7	125
65	81.5	68.0	56.8	47.1	38.3	30.1	25.6	19.6	15.3	14.6	16.4	21.7	26.8	31.4	39.5	47.1	56.8	67.5	102
70	66.0	53.8	44.5	37.3	30.3	24.9	22.6	16.9	13.0	12.4	13.7	18.9	22.8	25.3	30.9	37.0	44.3	53.4	81.7
75	49.0	39.3	33.4	28.3	23.7	20.4	18.6	14.1	10.6	9.94	11.4	15.5	18.6	20.2	23.7	27.5	32.4	39.8	62.2
80	33.7	26.8	23.1	20.6	18.4	16.7	16.2	12.3	8.89	8.12	9.75	13.6	15.9	16.3	17.8	19.4	22.1	27.2	43.7
85	20.9	16.6	15.1	14.6	14.4	14.1	14.2	10.7	7.83	6.92	8.55	12.1	13.9	13.6	13.5	13.3	14.0	16.8	28.7
90	11.7	9.74	9.07	9.72	9.86	9.87	8.99	7.83	6.29	5.66	6.86	8.62	9.43	10.2	10.1	9.15	9.12	10.9	18.6
95	8.57	7.97	7.72	7.82	7.24	6.50	7.20	6.81	6.50	6.20	6.54	7.34	6.73	7.31	8.40	7.90	8.03	9.00	13.0
100	7.49	7.41	7.45	7.28	8.25	9.16	9.00	7.92	7.92	7.45	7.72	7.88	8.86	8.64	8.25	8.09	7.99	8.46	10.9
105	8.26	7.53	7.51	8.21	9.70	11.3	9.42	8.12	8.08	7.77	7.93	8.31	9.77	11.0	8.78	7.62	7.58	8.08	10.5
110	8.86	8.16	8.34	9.09	10.7	10.7	8.89	8.15	8.17	7.94	8.07	8.22	9.03	11.2	9.69	8.55	7.77	7.83	9.57
115	8.07	7.89	8.50	9.08	10.9	10.2	8.40	7.99	8.20	8.02	8.10	7.92	8.39	10.8	9.82	8.68	8.07	7.73	8.56
120	7.42	7.60	8.17	8.91	10.16	8.70	7.92	7.98	8.15	8.00	8.09	7.68	7.89	9.28	10.5	8.50	8.25	7.46	7.97
125	7.38	7.43	7.91	8.54	8.89	7.59	7.35	7.86	8.05	7.93	8.03	7.53	7.29	7.75	9.63	8.41	7.94	7.67	8.32
130	7.31	7.37	7.70	8.41	7.22	6.83	6.57	7.36	7.54	7.38	7.51	6.98	6.60	6.79	7.31	8.93	7.86	7.39	8.63
135	7.06	7.23	7.54	6.46	6.24	6.08	6.08	6.58	6.80	6.82	6.65	6.19	5.96	6.00	6.11	6.51	7.45	7.88	9.18
140	5.72	5.70	5.58	5.52	5.78	5.40	5.77	6.04	6.28	6.33	6.17	5.80	5.52	5.73	5.41	5.33	5.36	5.35	6.22
145	4.62	4.85	5.07	5.33	4.70	4.93	5.59	5.75	5.75	5.79	5.70	5.63	5.21	4.72	5.30	4.97	4.72	4.41	4.28
150	4.19	4.19	3.71	4.34	4.72	4.64	5.00	5.19	5.34	5.33	5.28	4.98	4.71	4.59	4.47	3.90	4.31	4.15	4.04
155	3.21	3.49	3.64	3.93	4.48	4.64	4.71	4.85	4.91	4.87	4.86	4.59	4.63	4.48	4.22	3.55	3.28	3.18	3.01
160	3.48	3.71	3.69	4.03	4.46	4.55	4.53	4.43	4.46	4.45	4.46	4.41	4.49	4.37	3.84	3.49	3.60	3.49	3.39
165	3.85	4.09	4.31	4.27	4.37	4.32	4.17	4.08	4.14	4.08	4.09	4.06	4.12	4.12	4.03	4.07	3.97	3.71	3.76
170	4.11	4.17	4.02	3.89	3.91	3.77	3.82	3.78	3.79	3.71	3.72	3.61	3.60	3.77	3.83	3.76	3.78	3.63	3.86
175	3.81	3.71	3.63	3.54	3.58	3.54	3.54	3.46	3.45	3.44	3.47	3.41	3.40	3.38	3.40	3.38	3.36	3.54	3.76
180	3.61	3.56	3.55	3.58	3.82	3.89	3.87	3.80	3.86	3.34	3.76	3.67	3.67	3.59	3.59	3.52	3.52	3.48	3.61

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9950]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.24V I:0.1394A P:16.524W PF:0.9856 Freq:59.98Hz Lamp Flux:2165.48x1 lm		
NAME: ASD-LSWP01-18DCC-PC(3000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	207	207	207	207	207	207	207	207	207	207	207	207	207	207	207	207	207		
5	234	258	283	303	319	336	340	335	326	326	327	322	305	287	266	242	220		
10	259	306	347	378	349	417	439	424	402	431	429	384	346	372	328	282	240		
15	289	358	350	420	474	470	555	554	570	567	504	452	449	415	366	328	255		
20	311	353	424	477	557	546	617	573	591	612	568	545	555	463	405	353	261		
25	330	406	483	535	565	683	721	665	702	721	656	654	589	533	447	344	270		
30	349	428	487	592	697	712	762	757	834	786	688	687	658	573	494	374	258		
35	315	454	540	641	740	752	799	860	919	890	708	817	667	643	490	369	262		
40	327	442	589	706	751	758	932	812	834	895	855	837	749	624	497	360	261		
45	301	454	594	688	788	834	972	901	895	947	886	786	750	683	533	372	240		
50	293	488	626	709	817	871	945	964	916	963	884	831	738	678	520	363	222		
55	293	473	600	733	811	867	937	1017	997	953	957	847	721	673	487	356	209		
60	273	449	623	699	799	829	1018	1170	1128	1057	885	872	734	641	482	349	183		
65	241	416	546	750	847	772	1037	1154	1134	1034	879	860	747	652	455	341	159		
70	216	389	565	706	872	844	1078	1252	1177	1133	926	873	722	614	429	296	139		
75	191	352	539	672	792	927	1088	1110	1057	1143	985	813	719	574	405	250	106		
80	136	310	488	588	674	787	1051	1111	1074	1083	786	733	630	523	375	219	68.1		
85	109	272	434	577	627	805	1008	1074	1054	982	765	698	589	456	334	182	39.2		
90	75.5	186	273	347	445	598	747	774	760	670	572	493	382	284	211	126	26.0		
95	31.7	51.1	24.3	30.8	52.5	106	155	178	152	212	140	86.4	24.8	15.8	12.2	24.8	12.1		
100	19.7	48.4	6.35	36.4	53.6	25.8	39.8	38.0	38.0	45.0	40.9	35.7	37.0	20.7	3.49	33.0	9.14		
105	21.6	35.6	44.7	23.7	14.1	14.7	3.50	3.60	3.22	3.95	5.14	12.2	5.68	28.8	47.2	26.0	12.8		
110	17.1	25.1	24.7	16.0	3.96	2.06	3.69	3.70	3.66	3.52	3.00	3.54	2.69	27.1	23.1	17.8	11.6		
115	12.6	13.2	11.3	8.91	4.95	2.90	1.83	1.39	1.24	1.52	2.07	4.58	3.22	11.5	11.8	10.3	8.74		
120	9.38	11.2	11.9	6.10	4.05	3.08	2.29	1.89	1.76	2.01	2.40	3.75	3.31	8.02	9.90	8.98	7.31		
125	11.8	16.2	14.9	5.61	4.05	3.47	2.73	2.32	2.15	2.41	2.81	3.55	4.13	9.35	11.0	9.04	7.40		
130	12.2	18.2	15.9	5.50	4.09	3.95	3.67	2.95	2.78	3.11	3.44	3.77	4.31	10.2	14.8	10.5	7.77		
135	11.2	10.7	6.89	4.53	4.34	4.69	4.29	3.93	3.83	4.11	4.05	4.33	3.89	5.14	9.13	11.1	7.79		
140	5.36	3.98	3.50	4.44	4.30	4.67	4.74	4.70	4.65	4.69	4.46	4.20	3.88	3.76	3.50	4.53	5.13		
145	3.98	3.38	3.56	3.39	3.92	4.70	4.84	4.70	4.75	4.65	4.47	4.13	3.28	1.81	3.00	3.40	3.79		
150	3.81	3.34	2.03	3.39	3.12	4.34	4.55	4.51	4.66	4.42	4.20	3.69	1.45	1.99	1.69	2.76	3.41		
155	2.66	2.36	2.18	2.13	3.75	1.67	1.62	2.65	2.93	2.37	1.39	2.46	1.68	1.73	1.84	2.07	2.36		
160	2.77	2.60	2.42	2.38	2.22	2.14	1.68	2.09	1.92	1.70	1.46	1.78	1.92	2.08	2.18	2.24	2.75		
165	3.19	2.90	2.77	2.61	2.26	2.16	2.00	1.88	1.77	1.77	1.84	1.96	2.30	2.48	2.59	2.71	3.29		
170	3.60	3.25	3.39	3.12	2.97	2.76	2.72	2.60	2.49	2.48	2.52	2.60	2.66	3.09	3.15	3.50	3.74		
175	3.64	3.78	3.92	3.90	3.78	3.75	3.44	3.59	3.56	3.54	3.39	3.41	3.36	3.40	3.40	3.51	3.56		
180	3.57	3.55	3.58	3.82	3.90	3.86	3.80	3.87	3.30	3.76	3.68	3.67	3.59	3.59	3.53	3.52	3.47		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9950]
 Remarks: