
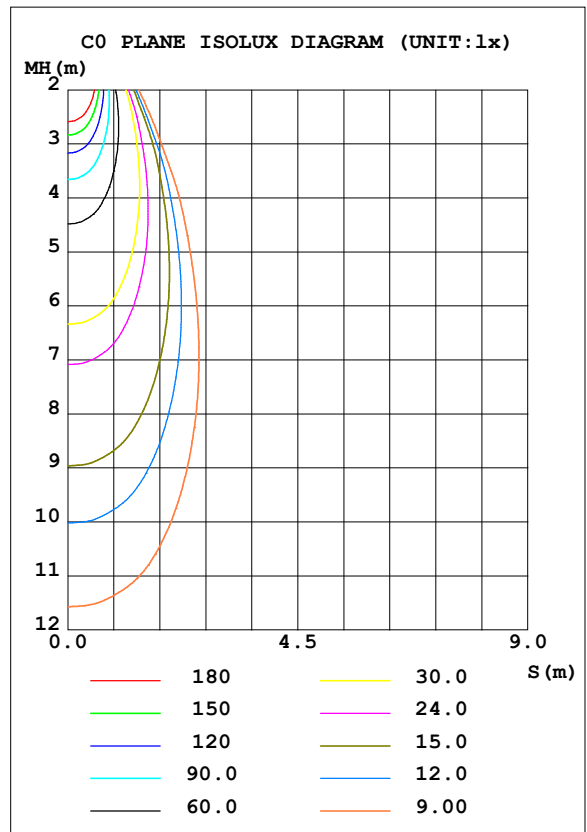


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 71.00 lm/W			
MODEL		I <sub>max</sub> (cd)	1203	S/MH (C0/180)	0.60
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	0.62
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	561.56	<input type="checkbox"/> UP, DN (C0-180)	0.0, 48.4
NOMINAL FLUX (lm)	561.557	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 51.6
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

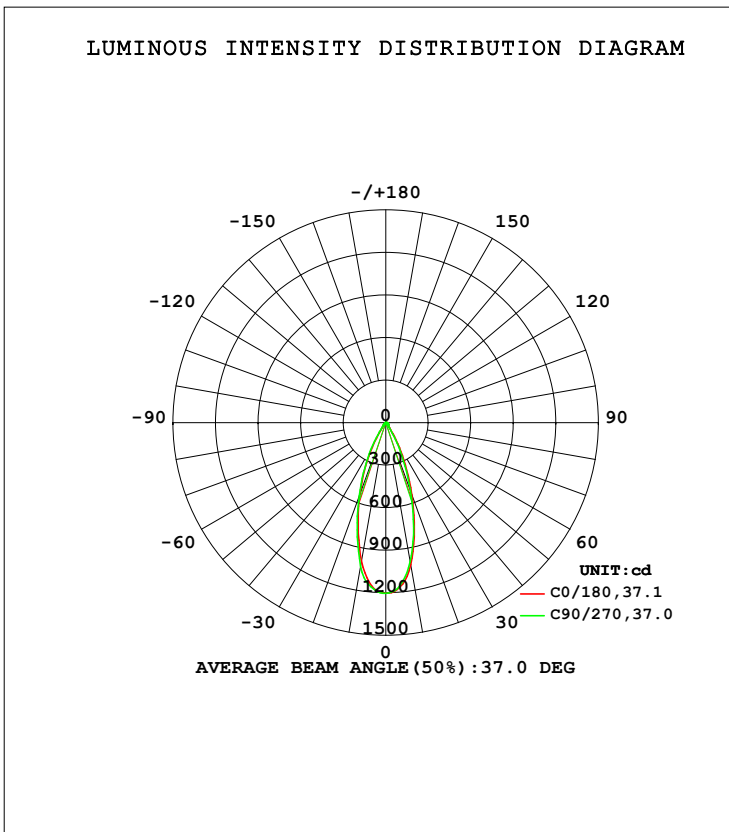

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1016	994.8	996.3	1002	990.8	999.6	1028	1024	0- 10	105.9	105.9	18.8,18.8
20	538.2	526.1	510.6	488.1	531.1	550.2	551.5	593.7	10- 20	211.2	317.0	56.5,56.5
30	169.8	155.1	135.8	138.9	163.4	186.6	187.1	226.7	20- 30	153.5	470.5	83.8,83.8
40	32.91	31.59	28.76	29.44	32.04	34.07	33.11	37.15	30- 40	45.68	516.2	91.9,91.9
50	19.10	18.63	18.63	18.69	18.94	19.17	19.40	19.42	40- 50	18.54	534.7	95.2,95.2
60	11.34	11.19	11.17	11.13	11.18	11.25	11.44	11.50	50- 60	13.17	547.9	97.6,97.6
70	6.276	6.252	6.316	6.290	6.146	6.054	6.114	6.227	60- 70	8.597	556.5	99.1,99.1
80	2.487	2.166	1.673	2.129	2.385	2.166	1.934	2.233	70- 80	4.351	560.8	99.9,99.9
90	0.0200	0.0144	0.0164	0.0117	0.0240	0.0214	0.0217	0.0224	80- 90	0.7211	561.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

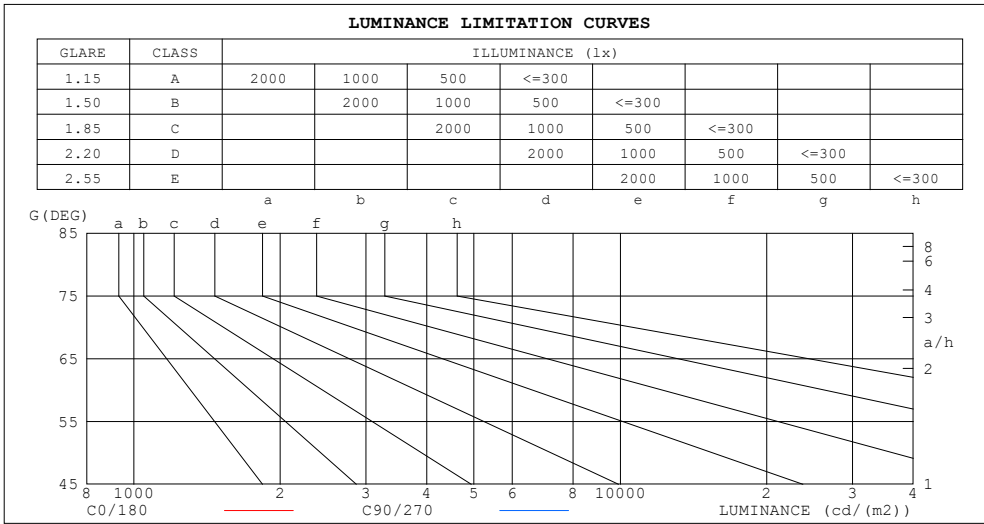

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	56	3
80	129	87
75	146	141
70	165	166
65	186	186
60	204	201
55	229	222
50	268	261
45	294	286


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.93	.90	.97	.92	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.84
4.0	.93	.88	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.73	.79	.75	.73	.71
7.0	.79	.74	.70	.79	.74	.70	.78	.73	.70	.77	.72	.69	.75	.72	.69	.68
8.0	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
9.0	.73	.67	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.70	.66	.63	.62
10.0	.70	.65	.61	.69	.64	.61	.68	.64	.61	.68	.64	.61	.67	.63	.61	.59

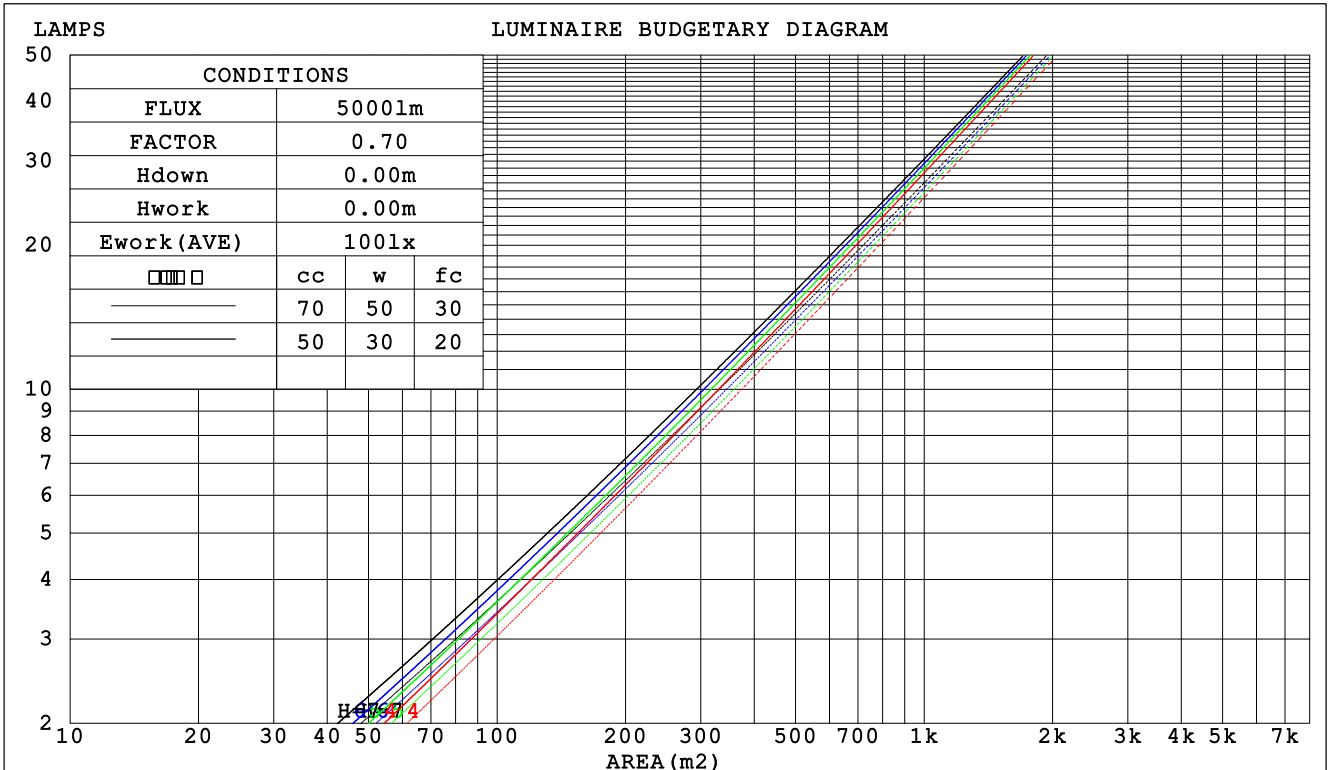

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.170 .096 .031	.163 .093 .030	.150 .086 .028	.139 .080 .026	.128 .074 .024	
2.0	.160 .088 .027	.154 .085 .026	.144 .080 .025	.134 .075 .024	.125 .071 .022	
3.0	.150 .080 .024	.146 .078 .023	.137 .074 .023	.129 .070 .022	.121 .067 .021	
4.0	.142 .074 .022	.138 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.134 .068 .020	.130 .067 .019	.124 .064 .019	.118 .062 .018	.112 .060 .018	
6.0	.127 .064 .018	.124 .063 .018	.118 .061 .018	.113 .059 .017	.108 .057 .017	
7.0	.121 .060 .017	.118 .059 .017	.113 .057 .016	.108 .055 .016	.104 .054 .016	
8.0	.115 .056 .016	.113 .055 .016	.108 .054 .015	.104 .053 .015	.100 .051 .015	
9.0	.110 .053 .015	.108 .052 .015	.104 .051 .015	.100 .050 .014	.096 .049 .014	
10.0	.105 .050 .014	.103 .050 .014	.100 .049 .014	.096 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .045	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.072 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.059 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.077 .046 .025	.054 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm										
NAME: ASD-CD-PR-2D8AC-WH					TYPE:			WEIGHT:		
SPEC.:3000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.6	5.4	4.8	5.6	5.8	4.0	4.9	4.3	5.1	5.2
3H	5.3	6.1	5.6	6.3	6.5	4.9	5.7	5.2	5.9	6.1
4H	5.6	6.4	5.9	6.6	6.8	5.3	6.0	5.5	6.2	6.4
6H	5.8	6.6	6.1	6.8	7.0	5.4	6.1	5.7	6.3	6.6
8H	5.9	6.5	6.2	6.8	7.1	5.4	6.1	5.7	6.3	6.6
12H	5.8	6.5	6.2	6.8	7.0	5.3	6.0	5.7	6.3	6.5
4H 2H	4.8	5.6	5.1	5.8	6.0	4.4	5.1	4.7	5.4	5.6
3H	5.8	6.4	6.1	6.7	7.0	5.5	6.1	5.8	6.4	6.6
4H	6.2	6.8	6.5	7.1	7.4	5.9	6.5	6.2	6.8	7.1
6H	6.5	7.0	6.9	7.4	7.7	6.1	6.6	6.5	6.9	7.3
8H	6.6	7.0	6.9	7.4	7.8	6.1	6.6	6.5	6.9	7.3
12H	6.5	7.0	7.0	7.4	7.8	6.0	6.5	6.4	6.9	7.2
8H 4H	6.3	6.8	6.7	7.1	7.5	6.0	6.5	6.4	6.9	7.2
6H	6.7	7.1	7.1	7.5	7.9	6.3	6.7	6.7	7.1	7.5
8H	6.8	7.2	7.3	7.6	8.0	6.3	6.6	6.7	7.1	7.5
12H	6.8	7.1	7.3	7.6	8.0	6.2	6.5	6.7	7.0	7.4
12H 4H	6.3	6.7	6.7	7.1	7.5	6.0	6.4	6.4	6.8	7.2
6H	6.7	7.0	7.1	7.5	7.9	6.3	6.6	6.7	7.1	7.5
8H	6.8	7.1	7.3	7.6	8.0	6.3	6.6	6.8	7.0	7.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.6					+ 0.4 / - 0.5				
1.5H	+ 0.8 / - 0.3					+ 0.3 / - 0.3				
2.0H	+ 0.5 / - 0.5					+ 0.6 / - 0.6				

CIE Pub.117, 561.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.0)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	98	93	89	98	92	89	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

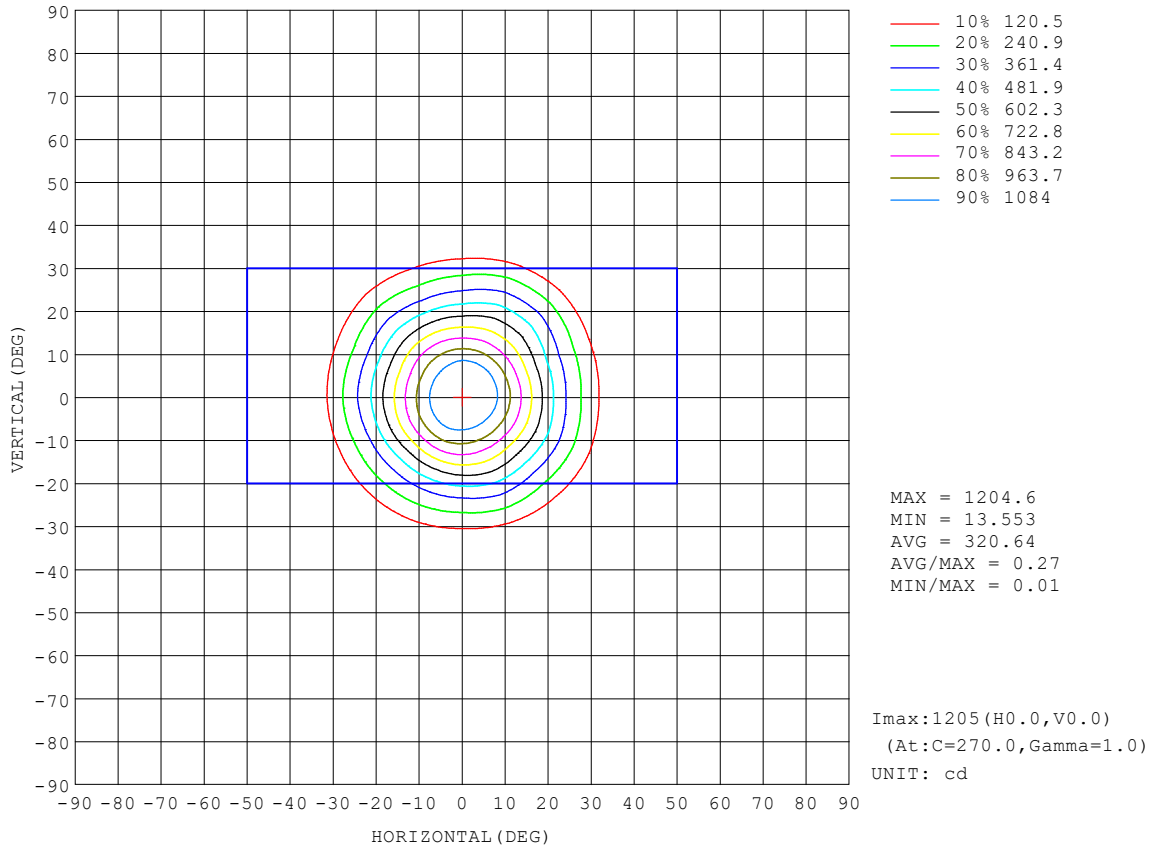


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

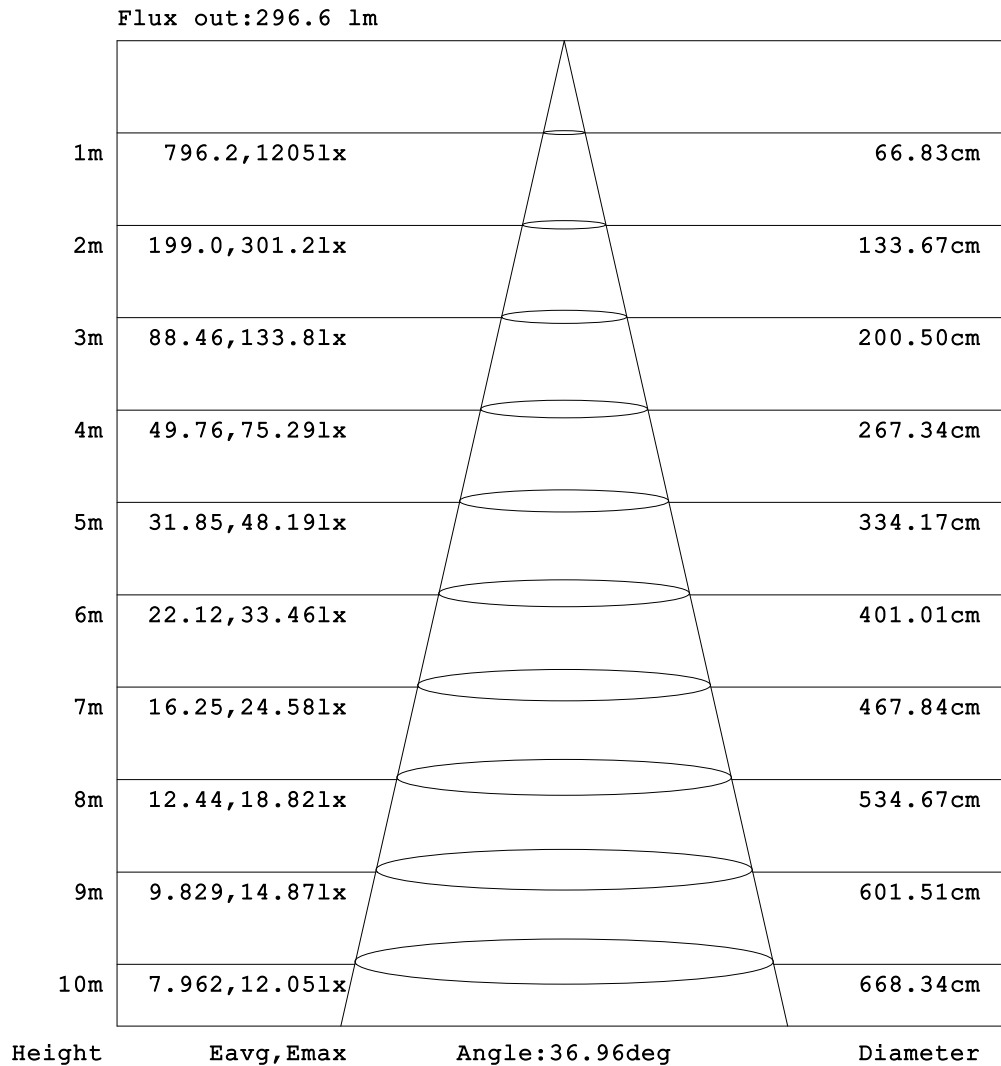


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

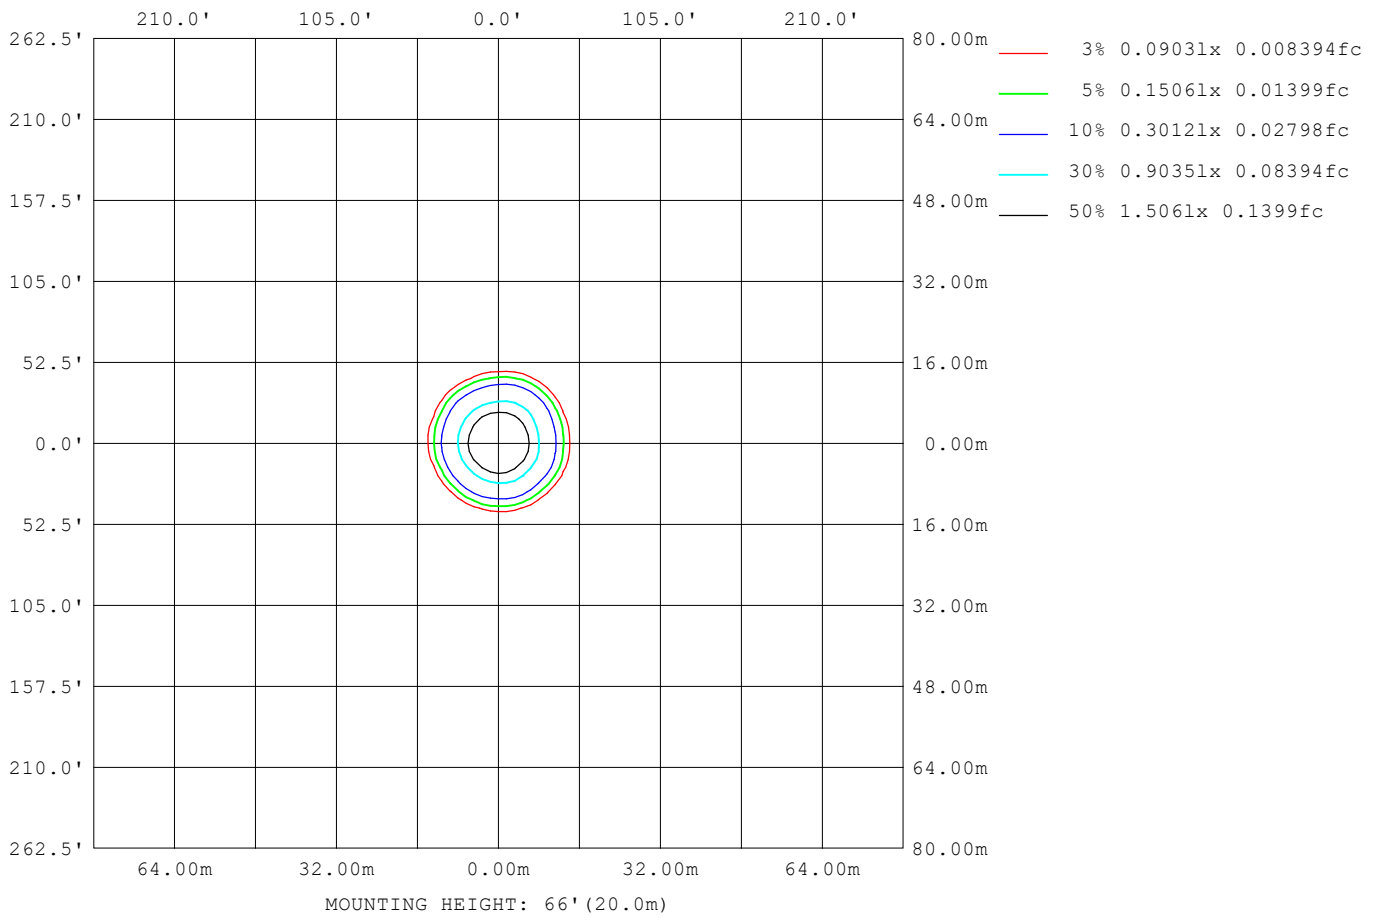

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.00V I:0.0964A P:7.9093W PF:0.9366 Freq:59.98Hz Lamp Flux:561.557x1 lm		
NAME: ASD-CD-PR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	184
L_0~180 (75) av	144
L_0~180 (85) av	58
L_90~270 (65) av	185
L_90~270 (75) av	141
L_90~270 (85) av	11
L_45 (65) av	185
L_45 (75) av	144
L_45 (85) av	34

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

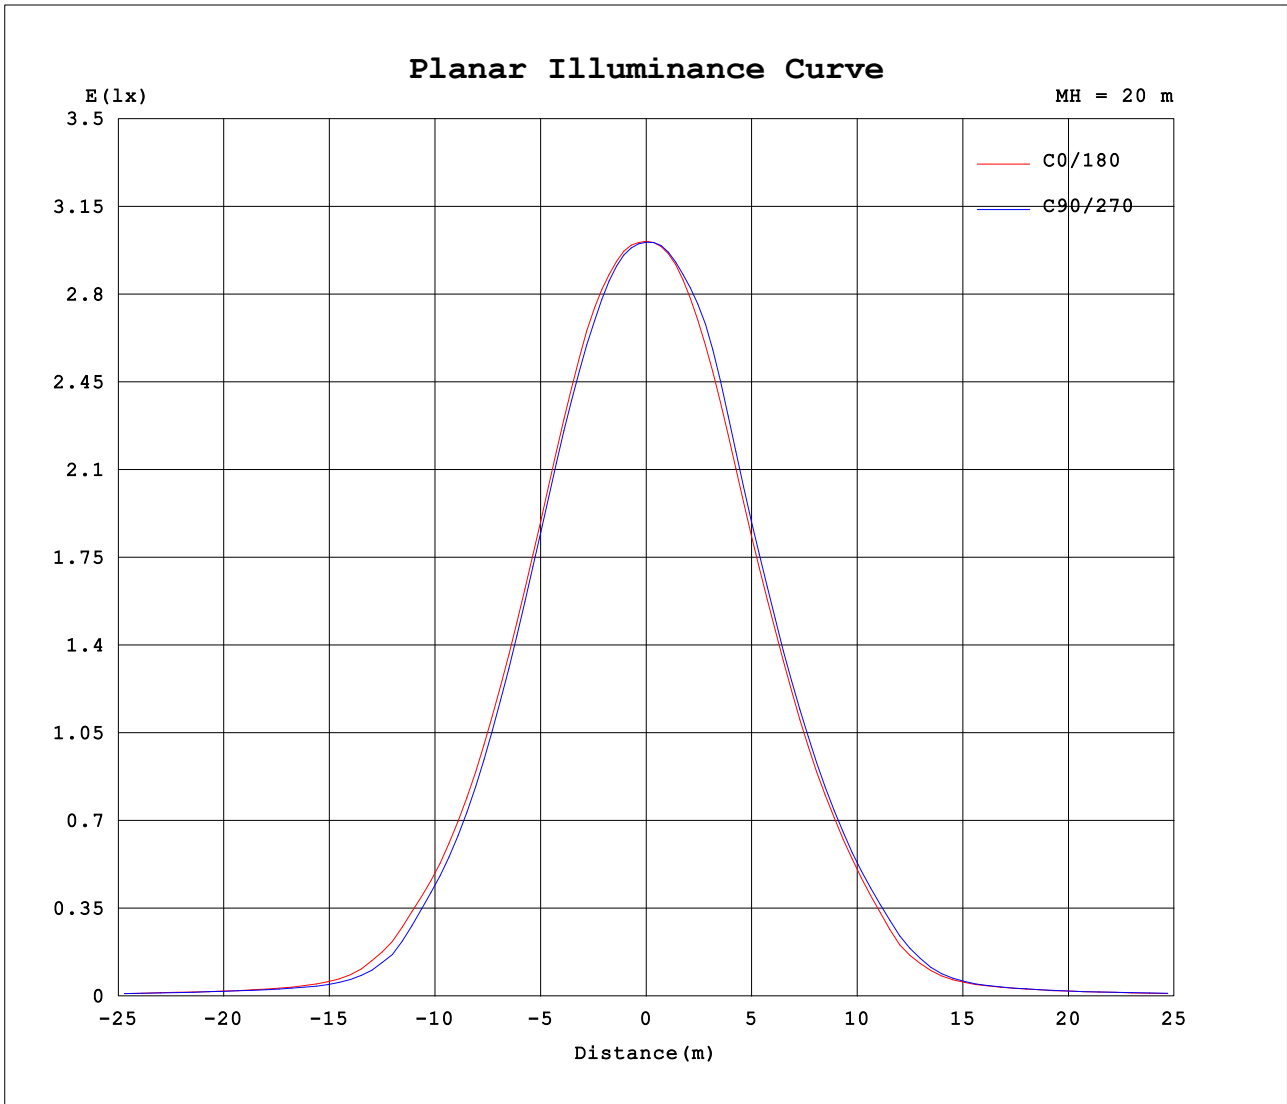

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

