
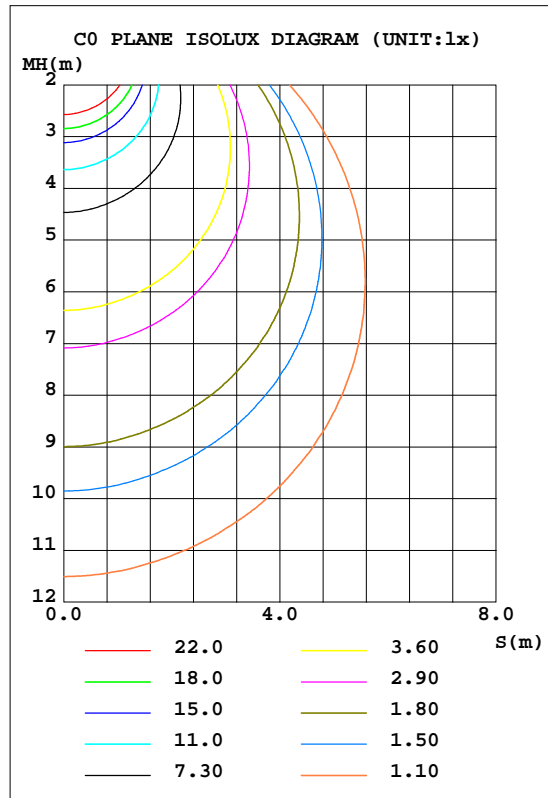


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 67.31 lm/W			
MODEL	ASD-JBS-3D6AC(2700K)	I <sub>max</sub> (cd)	145.7	S/MH(C0/180)	1.27
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	420	h UP, DN(C0-180)	0.8,47.8
NOMINAL FLUX(lm)	420	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.8,50.6
LAMPS INSIDE	1	h up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	98.4	CIBSE SHR MAX	1.35

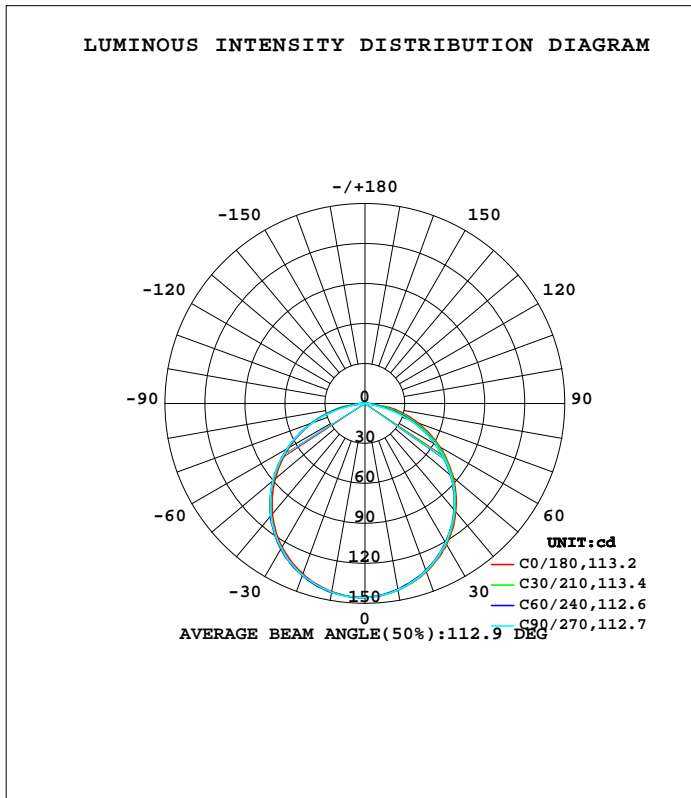

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	142.2	141.9	142.1	142.8	143.3	143.9	143.9	143.5	0- 10	13.77	13.77	3.26,3.26
20	134.6	133.5	133.6	134.9	136.0	137.4	137.0	136.4	10- 20	39.46	53.23	12.6,12.6
30	122.3	121.1	120.9	122.6	124.4	126.0	125.7	124.9	20- 30	59.96	113.2	26.8,26.8
40	106.0	104.5	104.3	106.0	108.1	109.9	110.0	109.1	30- 40	72.51	185.7	44,44
50	86.52	84.74	84.26	86.18	88.00	90.00	90.26	89.76	40- 50	75.43	261.1	61.8,61.8
60	64.67	61.99	61.02	63.42	65.46	67.09	67.26	67.86	50- 60	68.36	329.5	78,78
70	41.89	37.60	34.66	37.88	41.91	42.17	41.50	43.52	60- 70	52.16	381.7	90.3,90.3
80	19.93	12.09	6.315	10.50	19.04	16.22	12.17	16.54	70- 80	28.61	410.3	97.1,97.1
90	1.040	1.083	0.9950	1.092	1.043	1.220	1.033	1.441	80- 90	5.404	415.7	98.4,98.4
100	1.054	1.127	1.164	1.128	0.9957	1.087	1.002	1.046	90-100	1.288	417.0	98.7,98.7
110	1.010	1.052	1.048	1.036	0.9926	1.047	1.004	1.029	100-110	1.115	418.1	99,99
120	1.010	1.034	1.022	1.019	1.014	1.047	1.007	1.027	110-120	1.019	419.1	99.2,99.2
130	1.010	1.042	1.053	1.028	1.050	1.062	1.009	1.039	120-130	0.9258	420.0	99.4,99.4
140	1.010	1.050	1.072	1.040	1.071	1.084	1.030	1.046	130-140	0.8094	420.8	99.6,99.6
150	1.080	1.067	1.105	1.091	1.111	1.101	1.039	1.067	140-150	0.6681	421.5	99.8,99.8
160	1.105	1.114	1.156	1.149	1.178	1.133	1.097	1.118	150-160	0.5122	422.0	99.9,99.9
170	1.167	1.173	1.213	1.190	1.216	1.179	1.180	1.140	160-170	0.3264	422.3	100,100
180	1.215	1.208	1.229	1.209	1.222	1.226	1.200	1.194	170-180	0.1134	422.5	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

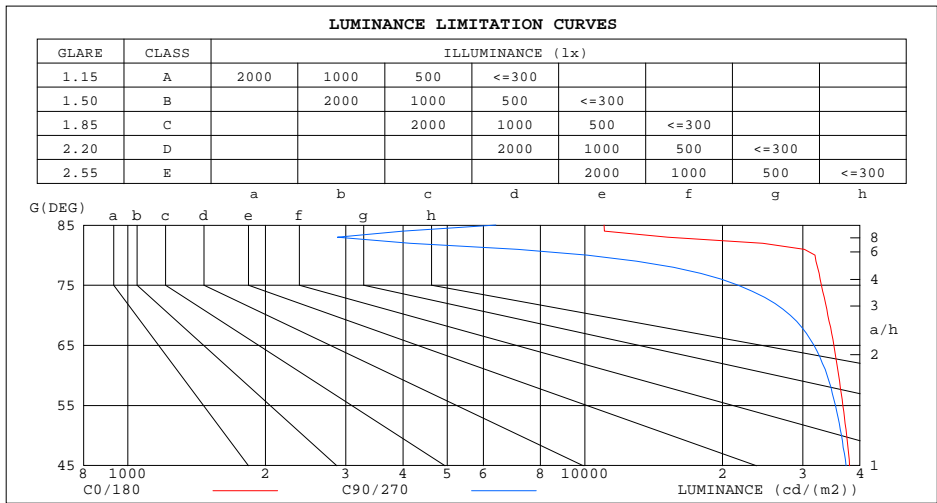

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11017	6393
80	31905	10112
75	32923	21658
70	34039	28172
65	35076	31716
60	35951	33932
55	36712	35351
50	37411	36445
45	37950	37296


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.84	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.65	.78	.70	.64	.74	.68	.63	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.57	.52	.61	.56	.52	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

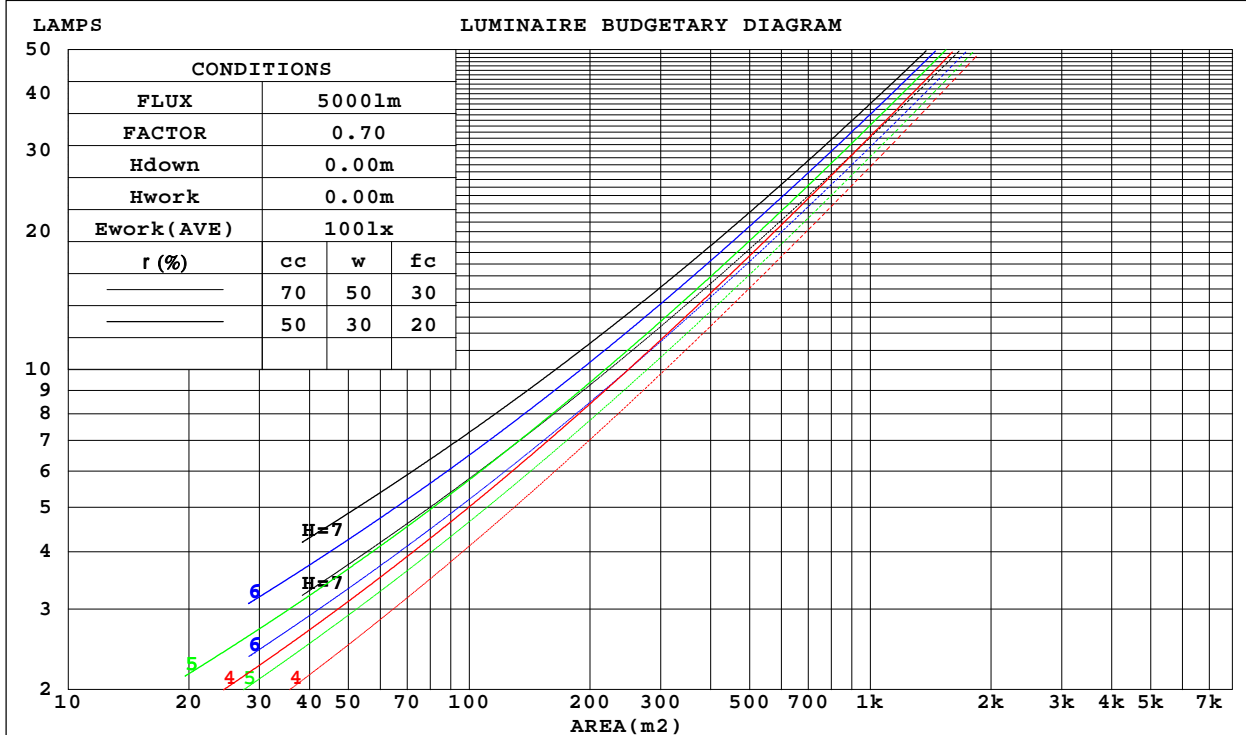

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

WEC AND CCEC

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.303	.172	.055	.296	.169	.054	.282	.162	.052	.269	.155	.050	.257	.149	.048	
2.0	.288	.158	.048	.281	.155	.048	.269	.150	.046	.257	.144	.045	.247	.140	.044	
3.0	.268	.142	.043	.262	.140	.042	.251	.136	.041	.240	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.232	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.229	.117	.034	.225	.115	.034	.216	.112	.033	.208	.109	.033	.200	.107	.032	
6.0	.213	.107	.031	.209	.105	.030	.201	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.174	.091	.027	
8.0	.185	.090	.025	.182	.089	.025	.175	.088	.025	.169	.086	.025	.164	.084	.024	
9.0	.173	.084	.023	.170	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.203	.203	.203	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.169	.147	.164	.145	.127	.112	.100	.088	.065	.058	.051	.021	.019	.016	
2.0	.184	.144	.111	.158	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.177	.127	.087	.151	.109	.076	.104	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.071	.145	.098	.062	.100	.068	.043	.058	.040	.026	.019	.013	.008	
5.0	.162	.103	.060	.139	.089	.052	.096	.062	.037	.055	.037	.022	.018	.012	.007	
6.0	.155	.095	.052	.133	.082	.045	.092	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.148	.088	.046	.127	.076	.040	.088	.053	.028	.051	.031	.017	.016	.010	.006	
8.0	.141	.082	.041	.122	.071	.036	.084	.050	.026	.049	.030	.015	.016	.010	.005	
9.0	.135	.077	.038	.117	.067	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.130	.073	.035	.112	.063	.031	.078	.045	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.06*0.06			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.6	26.2	24.9	26.5	26.9	24.4	26.0	24.8	26.3	26.7
3H	26.5	27.9	26.9	28.3	28.7	26.0	27.4	26.4	27.8	28.2
4H	27.2	28.6	27.6	28.9	29.4	26.4	27.8	26.8	28.1	28.6
6H	27.8	29.1	28.2	29.5	29.9	26.5	27.8	27.0	28.2	28.6
8H	27.9	29.2	28.4	29.6	30.0	26.5	27.7	27.0	28.1	28.6
12H	28.0	29.1	28.4	29.5	30.0	26.5	27.6	26.9	28.1	28.5
4H 2H	25.1	26.5	25.6	26.9	27.3	25.0	26.4	25.5	26.8	27.2
3H	27.2	28.4	27.7	28.8	29.3	26.8	27.9	27.2	28.4	28.8
4H	28.1	29.1	28.6	29.6	30.1	27.3	28.3	27.8	28.8	29.3
6H	28.8	29.7	29.3	30.2	30.7	27.5	28.4	28.0	28.9	29.4
8H	29.0	29.9	29.5	30.3	30.8	27.5	28.3	28.0	28.8	29.3
12H	29.1	29.8	29.6	30.3	30.8	27.5	28.2	28.0	28.7	29.2
8H 4H	28.3	29.2	28.8	29.7	30.2	27.6	28.4	28.1	28.9	29.4
6H	29.2	29.8	29.7	30.4	30.9	27.8	28.5	28.3	29.0	29.5
8H	29.4	30.0	29.9	30.5	31.1	27.8	28.4	28.3	28.9	29.4
12H	29.4	30.0	30.0	30.5	31.1	27.8	28.3	28.3	28.8	29.4
12H 4H	28.3	29.1	28.8	29.6	30.1	27.6	28.4	28.1	28.9	29.4
6H	29.2	29.8	29.7	30.3	30.8	27.8	28.4	28.4	28.9	29.5
8H	29.4	30.0	29.9	30.5	31.1	27.8	28.3	28.3	28.9	29.5
CIE190: 2010										

CIE190: 2010  
Area: 0.0036 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-22

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.1860]  
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	80	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	92	87	82	73
3.00	102	95	90	100	93	88	95	90	86	77
4.00	106	100	96	103	98	94	99	95	91	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.1860]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

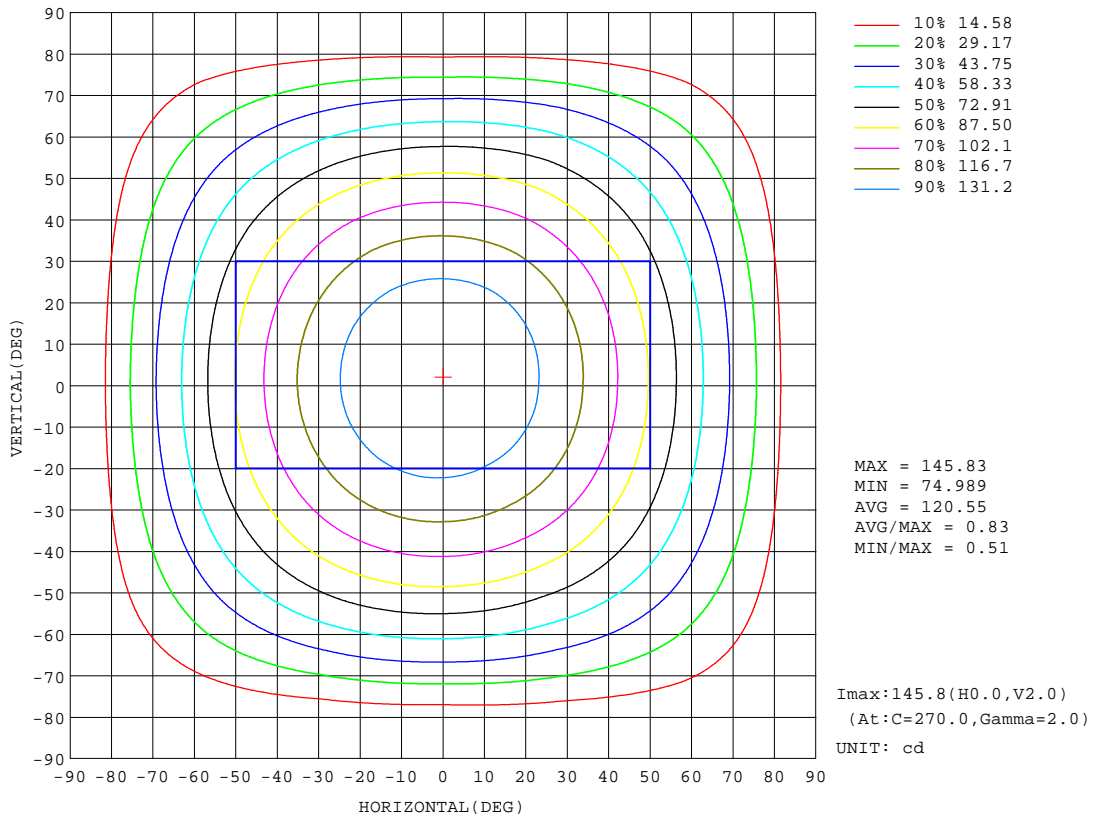

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-22


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:



AAI Figure

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

Flux out:310.3 lm

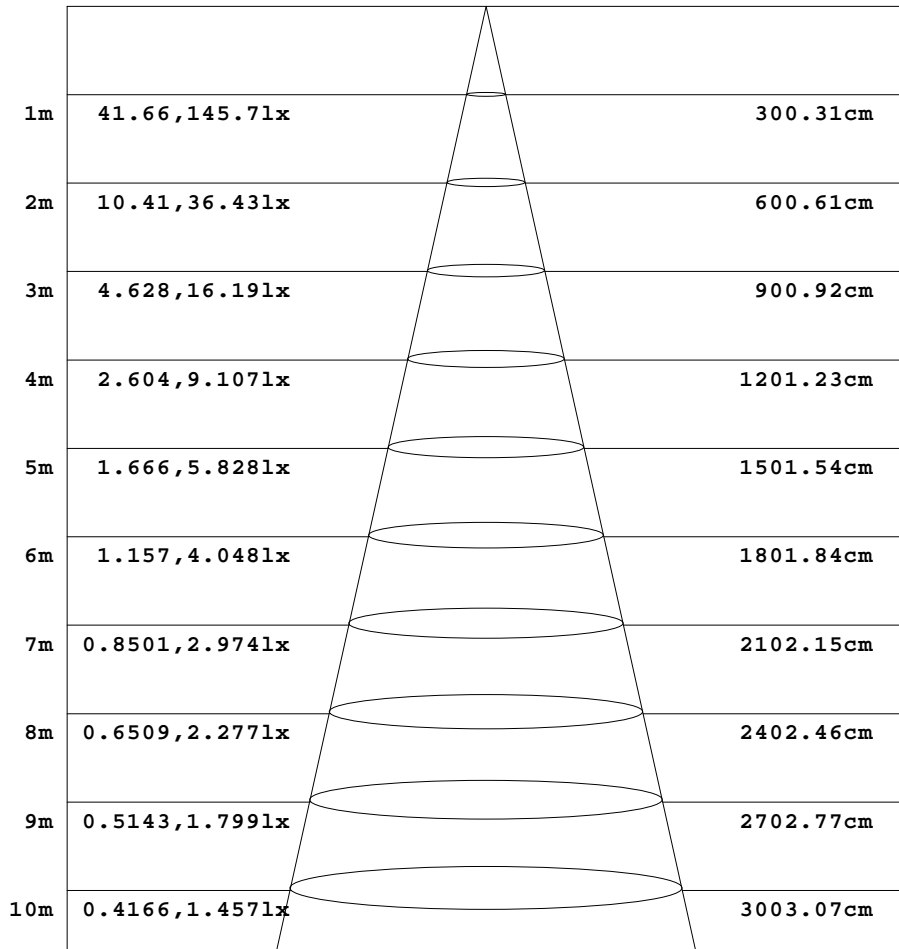

Height                      Eavg, Emax                      Angle:112.67deg                      Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

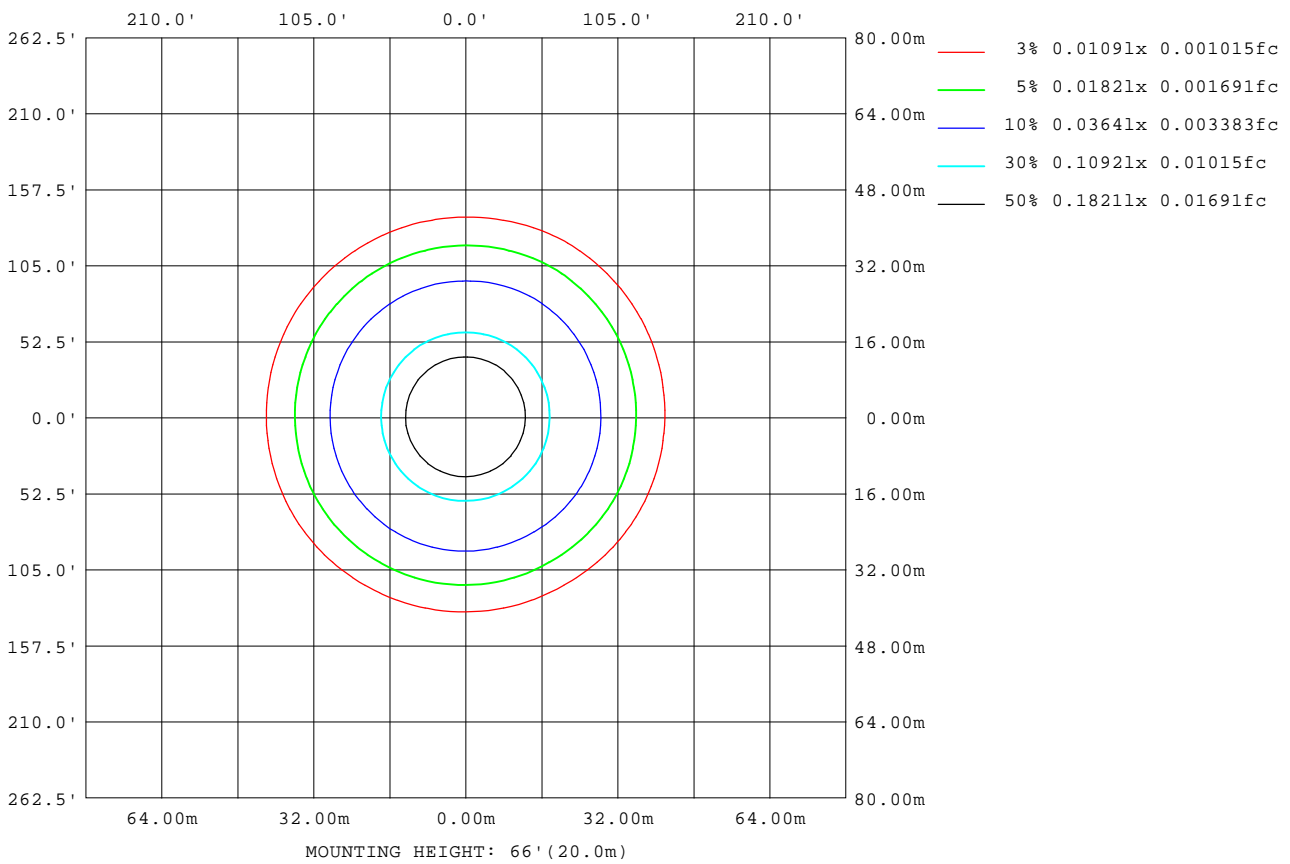

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.1860]  
 Remarks:

## LED Avg.L Report

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	35186
L_0~180(75)av	32692
L_0~180(85)av	13832
L_90~270(65)av	33837
L_90~270(75)av	25389
L_90~270(85)av	6951
L_45(65)av	34835
L_45(75)av	29254
L_45(85)av	9626

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-22

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.1860]  
Remarks:

Planar Illuminance Curve

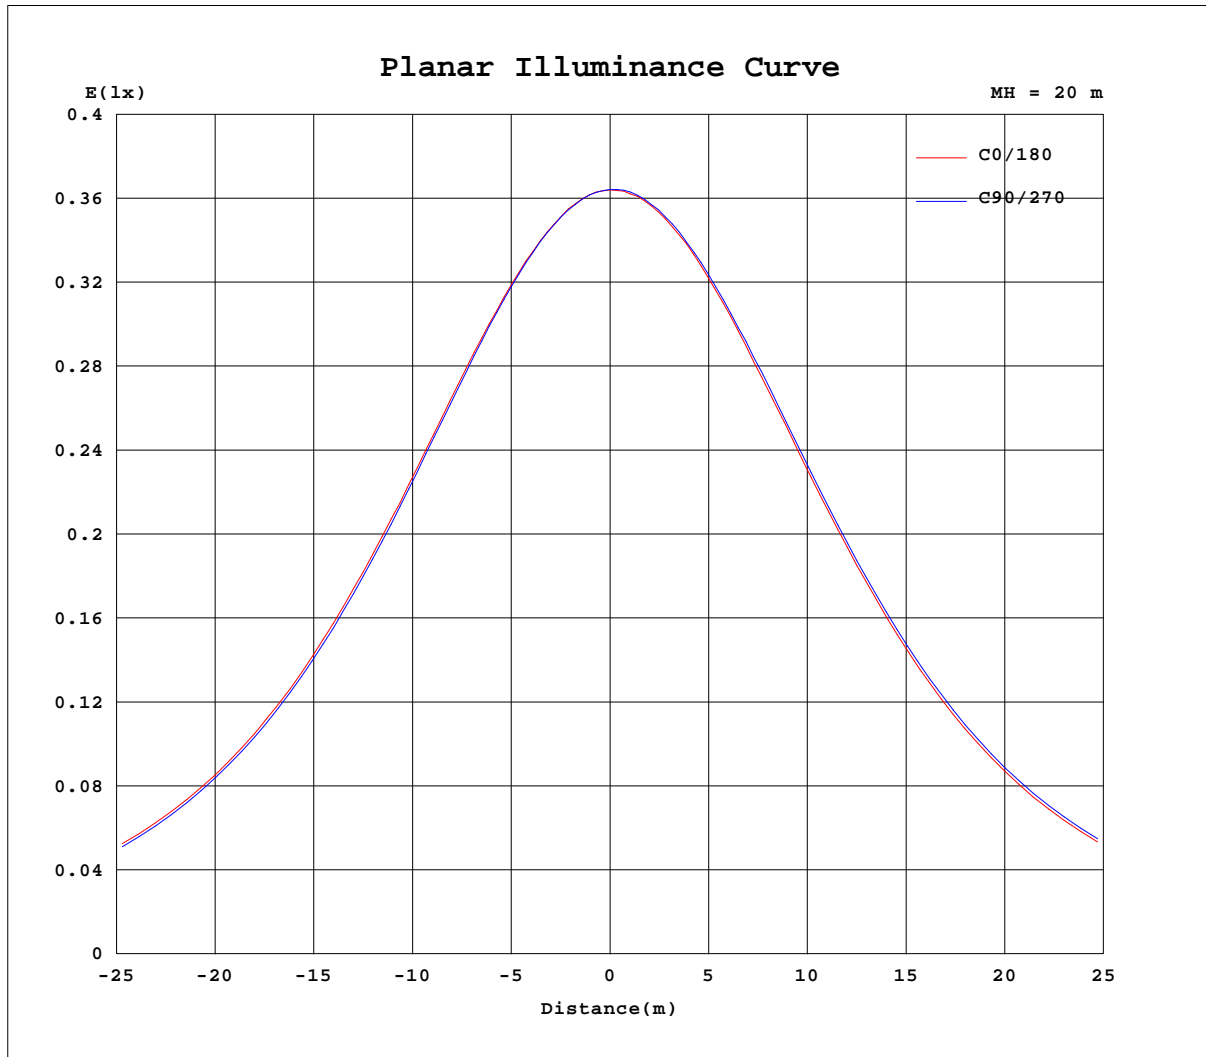

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.1860]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.97V I:0.0549A P:6.2400W PF:0.9387 Freq:60.00Hz Lamp Flux:420x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	146	146	146	146	146	146	146	146	146	146	146	146						
5	145	144	144	144	145	145	145	145	145	145	145	145						
10	142	142	142	142	143	143	143	144	144	144	144	143						
15	139	139	138	138	139	140	140	141	141	141	141	140						
20	135	134	133	134	134	135	136	137	137	137	137	136						
25	129	128	127	128	129	130	131	132	132	132	132	131						
30	122	122	121	121	122	123	124	126	126	126	126	124						
35	115	114	113	113	114	115	117	118	119	118	118	117						
40	106	105	104	104	105	107	108	110	110	110	110	108						
45	96.5	95.8	94.5	94.9	95.9	97.1	98.5	100	101	100	101	98.8						
50	86.5	85.6	83.9	84.3	85.6	86.7	88.0	89.7	90.3	90.3	90.7	88.8						
55	75.8	74.8	72.5	72.9	74.5	75.7	76.9	78.7	79.1	79.1	80.1	78.2						
60	64.7	63.3	60.7	61.0	62.5	64.4	65.5	67.0	67.2	67.3	68.7	67.0						
65	53.3	51.5	48.4	48.2	49.6	52.4	53.7	54.9	54.7	54.8	56.5	55.6						
70	41.9	39.4	35.8	34.7	36.0	39.8	41.9	42.4	41.9	41.5	43.4	43.6						
75	30.7	27.4	22.7	20.2	21.7	26.7	30.3	30.0	28.8	27.2	29.6	31.1						
80	19.9	15.4	8.83	6.32	7.63	13.4	19.0	17.9	14.6	12.2	14.9	18.2						
85	3.45	3.89	1.28	2.00	1.77	2.34	5.23	5.96	1.94	2.36	1.84	5.37						
90	1.04	1.08	1.09	0.99	1.03	1.16	1.04	1.27	1.17	1.03	1.14	1.74						
95	1.08	1.13	1.85	1.37	1.80	1.20	1.00	1.24	1.15	1.04	1.19	1.15						
100	1.05	1.11	1.14	1.16	1.09	1.17	1.00	1.14	1.04	1.00	1.04	1.06						
105	1.01	1.05	1.11	1.11	1.08	1.05	0.99	1.08	1.04	1.00	1.03	1.04						
110	1.01	1.05	1.05	1.05	1.05	1.02	0.99	1.06	1.03	1.00	1.02	1.03						
115	1.01	1.05	1.04	1.01	1.04	1.02	1.00	1.06	1.03	1.01	1.02	1.02						
120	1.01	1.05	1.02	1.02	1.02	1.01	1.01	1.06	1.04	1.01	1.04	1.02						
125	1.01	1.06	1.02	1.04	1.02	1.02	1.03	1.06	1.05	1.01	1.05	1.02						
130	1.01	1.06	1.02	1.05	1.03	1.03	1.05	1.06	1.07	1.01	1.06	1.02						
135	1.01	1.06	1.03	1.06	1.03	1.04	1.06	1.06	1.09	1.03	1.06	1.02						
140	1.01	1.07	1.03	1.07	1.03	1.05	1.07	1.06	1.11	1.03	1.07	1.02						
145	1.03	1.08	1.04	1.08	1.06	1.06	1.08	1.06	1.13	1.03	1.09	1.02						
150	1.08	1.09	1.05	1.10	1.11	1.08	1.11	1.06	1.14	1.04	1.12	1.02						
155	1.09	1.11	1.07	1.13	1.17	1.09	1.14	1.08	1.15	1.08	1.14	1.04						
160	1.10	1.14	1.09	1.16	1.18	1.12	1.18	1.09	1.17	1.10	1.18	1.05						
165	1.14	1.17	1.10	1.19	1.18	1.17	1.20	1.13	1.18	1.12	1.19	1.07						
170	1.17	1.22	1.12	1.21	1.18	1.20	1.22	1.17	1.19	1.18	1.20	1.08						
175	1.19	1.23	1.18	1.22	1.20	1.21	1.22	1.19	1.22	1.19	1.20	1.09						
180	1.21	1.23	1.19	1.23	1.21	1.21	1.22	1.22	1.24	1.20	1.20	1.19						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-22

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks: