
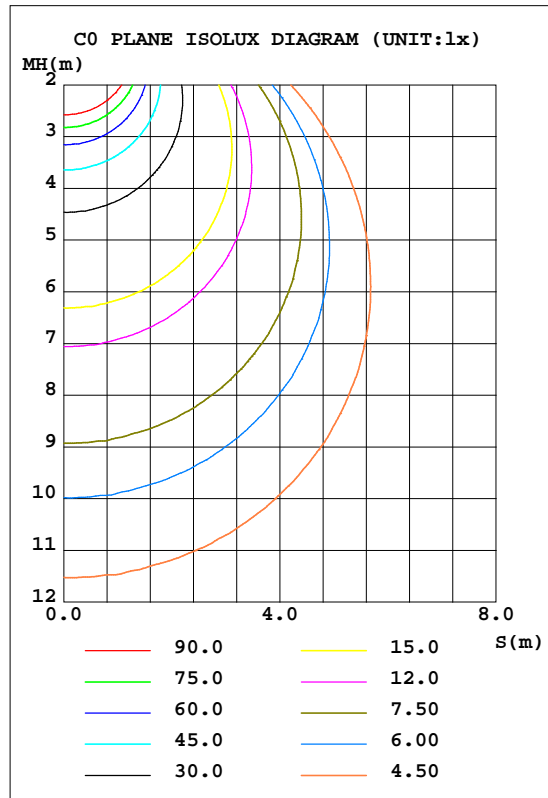


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 84.33 lm/W			
MOBESD-JBS-8D20AC-WH(4000K)		I _{max} (cd)	598.7	S/MH(C0/180)	1.25
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1721.3	h UP, DN(C0-180)	0.2,50.2
NOMINAL FLUX(lm)	1721.25	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.4
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

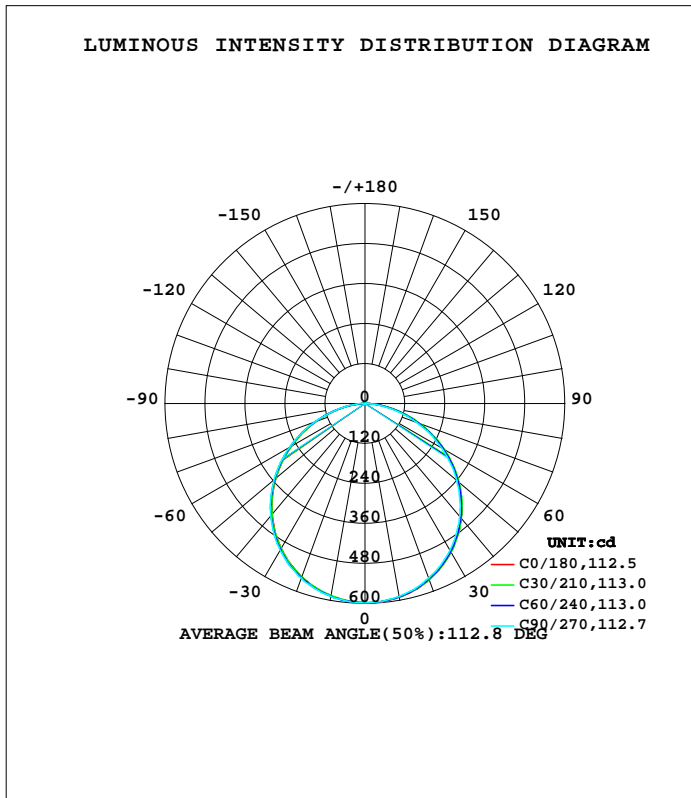

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9128]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	590.5	589.5	588.3	586.4	586.4	586.5	588.6	589.7	0- 10	56.60	56.60	3.29,3.29
20	563.4	561.6	558.6	554.7	554.1	555.4	558.6	561.6	10- 20	162.5	219.1	12.7,12.7
30	515.5	515.2	509.1	503.3	503.2	504.8	509.5	513.2	20- 30	247.1	466.2	27.1,27.1
40	449.3	448.6	442.3	435.7	433.7	436.0	440.5	446.2	30- 40	298.7	765.0	44.4,44.4
50	367.1	367.2	360.0	351.8	349.2	352.0	356.4	363.6	40- 50	309.9	1075	62.4,62.4
60	272.3	272.9	265.6	257.3	254.3	256.7	260.1	268.7	50- 60	278.8	1354	78.6,78.6
70	171.2	171.8	164.0	156.0	153.6	155.8	158.3	166.5	60- 70	210.9	1565	90.9,90.9
80	75.35	74.60	66.85	60.83	60.70	60.45	62.91	67.30	70- 80	119.3	1684	97.8,97.8
90	3.590	1.180	0.1997	0.2170	0.2692	0.3779	0.2563	0.7677	80- 90	29.79	1714	99.6,99.6
100	0.3945	0.4434	0.4427	0.4787	0.5861	0.5745	0.5073	0.5247	90-100	0.4467	1714	99.6,99.6
110	0.7328	0.7500	0.7941	0.8087	0.9679	0.9387	0.8976	0.8738	100-110	0.7028	1715	99.6,99.6
120	1.075	1.090	1.141	1.149	1.341	1.288	1.271	1.244	110-120	1.013	1716	99.7,99.7
130	1.375	1.368	1.419	1.440	1.653	1.585	1.557	1.529	120-130	1.207	1717	99.8,99.8
140	1.614	1.602	1.679	1.685	1.870	1.819	1.795	1.767	130-140	1.244	1718	99.8,99.8
150	1.874	1.851	1.930	1.934	2.096	2.036	1.973	1.964	140-150	1.155	1719	99.9,99.9
160	2.078	2.103	2.147	2.170	2.247	2.244	2.186	2.168	150-160	0.9527	1720	99.9,99.9
170	2.329	2.352	2.381	2.361	2.430	2.463	2.420	2.389	160-170	0.6429	1721	100,100
180	2.516	2.565	2.550	2.528	2.547	2.565	2.537	2.530	170-180	0.2339	1721	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9128]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

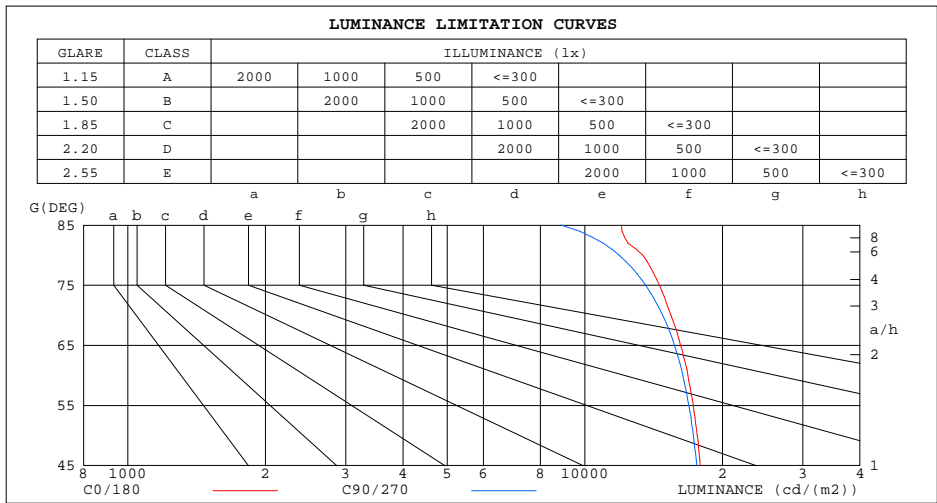

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12032	8865
80	13388	11880
75	14562	13591
70	15439	14798
65	16200	15708
60	16802	16394
55	17277	16894
50	17621	17283
45	17879	17592


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9128]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.78	.75	.72	.69
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.29
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.26
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

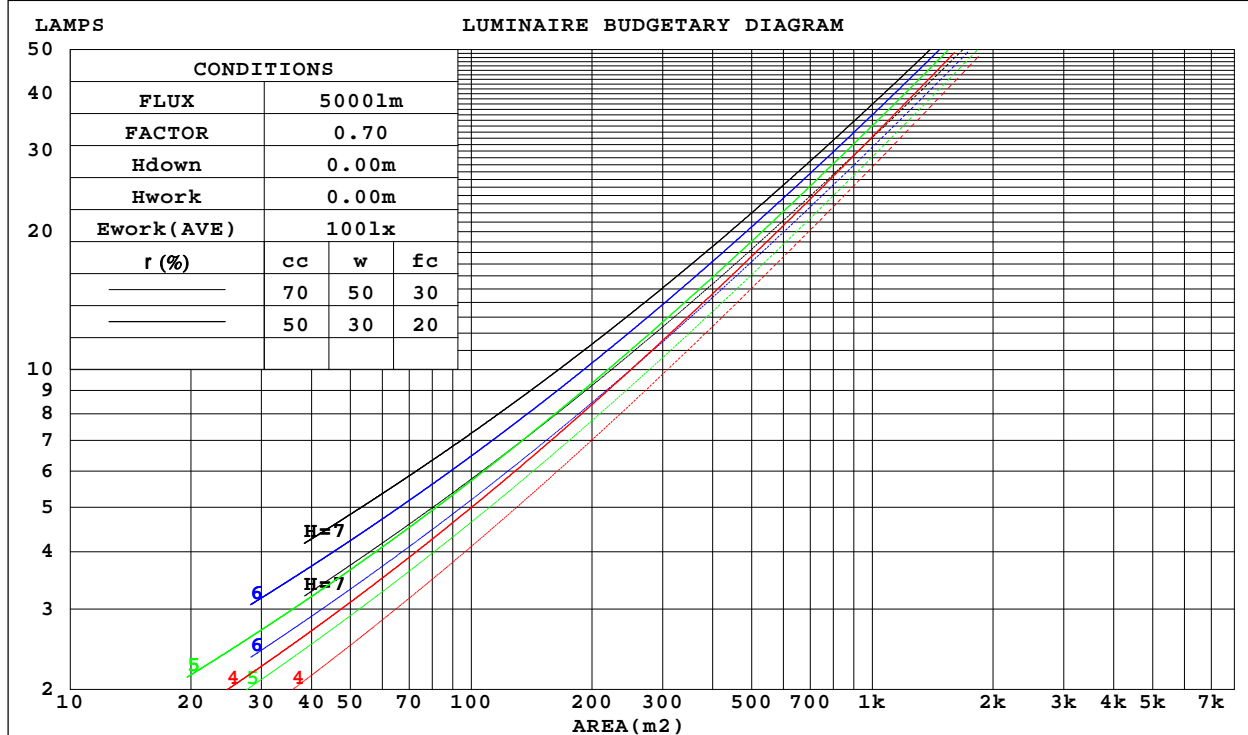

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9128]
 Remarks:

WEC AND CCEC

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.055	.301	.172	.054	.287	.165	.053	.275	.159	.051	.263	.153	.049	
2.0	.291	.159	.049	.284	.157	.048	.272	.151	.047	.261	.147	.046	.251	.142	.045	
3.0	.269	.143	.043	.264	.141	.043	.253	.137	.042	.243	.133	.041	.234	.130	.040	
4.0	.249	.129	.038	.244	.128	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036	
5.0	.230	.117	.034	.226	.116	.034	.217	.113	.033	.210	.111	.033	.202	.108	.032	
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.101	.030	.189	.099	.029	
7.0	.199	.098	.028	.195	.097	.028	.189	.095	.027	.182	.093	.027	.176	.092	.027	
8.0	.186	.091	.025	.182	.090	.025	.176	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.147	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.160	.138	.157	.137	.119	.107	.094	.082	.062	.055	.048	.020	.018	.015	
2.0	.176	.135	.102	.150	.116	.088	.103	.081	.061	.059	.047	.036	.019	.015	.012	
3.0	.168	.118	.078	.144	.102	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.160	.104	.062	.137	.090	.054	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.051	.131	.081	.044	.090	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.086	.043	.125	.074	.037	.086	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.037	.119	.068	.032	.083	.048	.023	.048	.028	.013	.015	.009	.004	
8.0	.132	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.029	.109	.059	.025	.075	.042	.018	.044	.025	.011	.014	.008	.004	
10.0	.121	.064	.026	.104	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9128]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.18*0.18			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.2	23.8	22.6	24.2	24.5	21.9	23.5	22.3	23.8	24.2
3H	24.1	25.5	24.4	25.9	26.2	23.7	25.2	24.1	25.5	25.9
4H	24.8	26.2	25.2	26.5	26.9	24.3	25.7	24.7	26.1	26.5
6H	25.3	26.6	25.7	27.0	27.4	24.8	26.1	25.2	26.5	26.9
8H	25.5	26.7	25.9	27.1	27.5	24.9	26.2	25.4	26.6	27.0
12H	25.6	26.8	26.0	27.2	27.6	25.0	26.2	25.5	26.6	27.0
4H 2H	22.9	24.2	23.3	24.6	25.0	22.5	23.9	22.9	24.2	24.6
3H	24.9	26.1	25.4	26.5	26.9	24.5	25.6	24.9	26.1	26.5
4H	25.8	26.8	26.2	27.3	27.7	25.3	26.3	25.7	26.7	27.2
6H	26.5	27.4	26.9	27.8	28.3	25.8	26.8	26.3	27.2	27.7
8H	26.7	27.5	27.1	28.0	28.5	26.0	26.9	26.5	27.3	27.8
12H	26.8	27.6	27.3	28.1	28.6	26.1	26.9	26.6	27.4	27.9
8H 4H	26.1	27.0	26.6	27.4	27.9	25.5	26.4	26.0	26.8	27.3
6H	26.9	27.6	27.4	28.1	28.6	26.2	26.9	26.7	27.4	27.9
8H	27.2	27.9	27.7	28.4	28.9	26.5	27.1	27.0	27.6	28.1
12H	27.5	28.0	28.0	28.5	29.1	26.6	27.2	27.1	27.7	28.3
12H 4H	26.1	26.9	26.6	27.4	27.9	25.6	26.3	26.0	26.8	27.3
6H	27.0	27.6	27.5	28.1	28.6	26.3	26.9	26.8	27.4	27.9
8H	27.3	27.9	27.9	28.4	29.0	26.5	27.1	27.1	27.6	28.2
CIE190: 2010										

CIE190: 2010
Area: 0.0324 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9128]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	46	39	55	45	38	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	49
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	89	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	101	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=0.9128]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

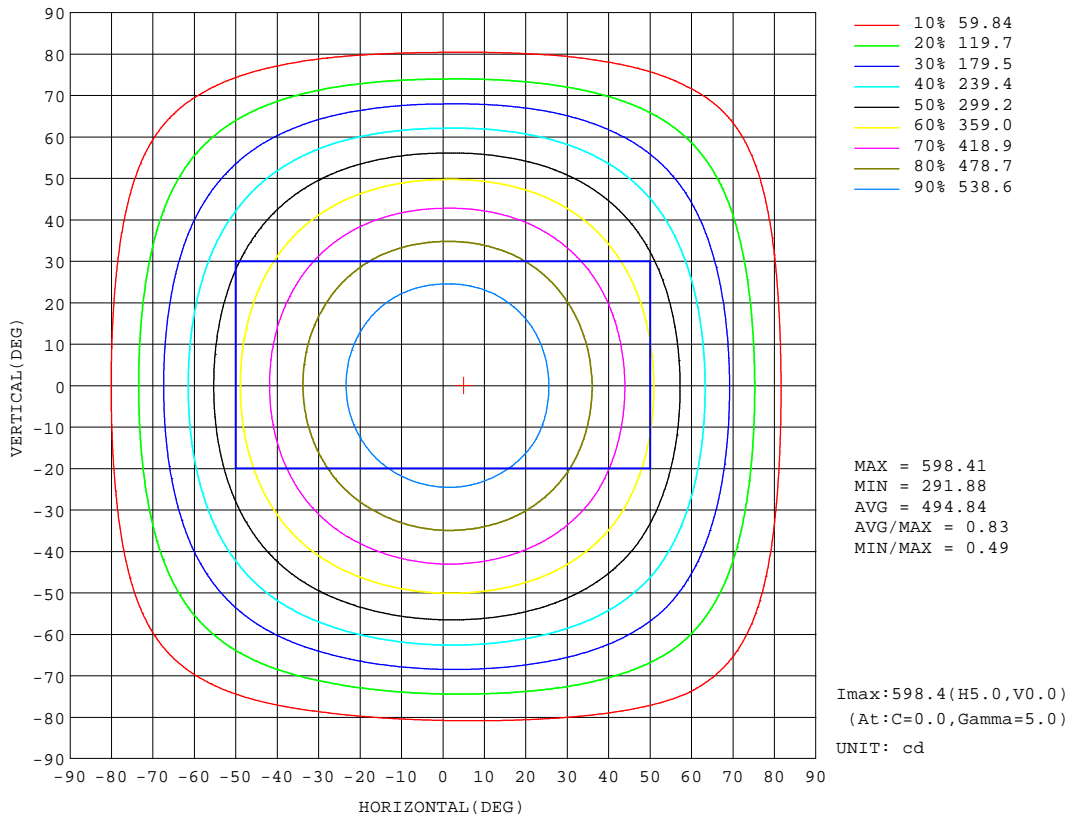


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9128]
 Remarks:

AAI Figure

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

Flux out:1276 lm

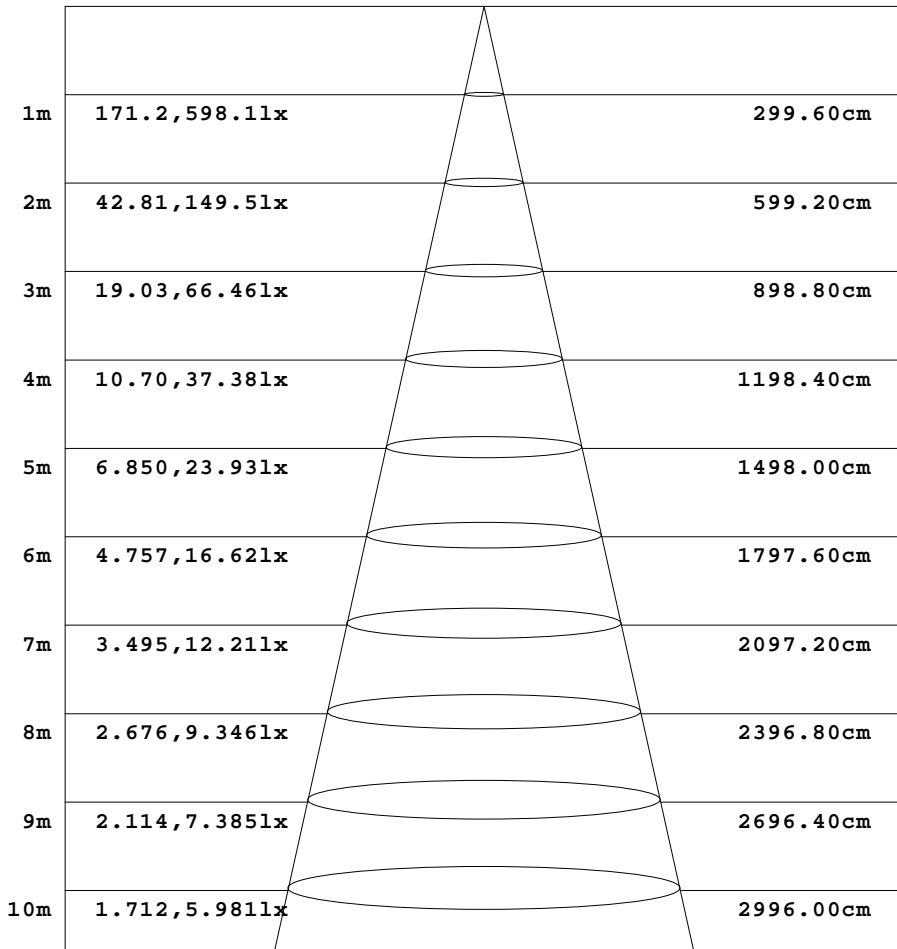

Height Eavg, Emax Angle:112.55deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9128]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

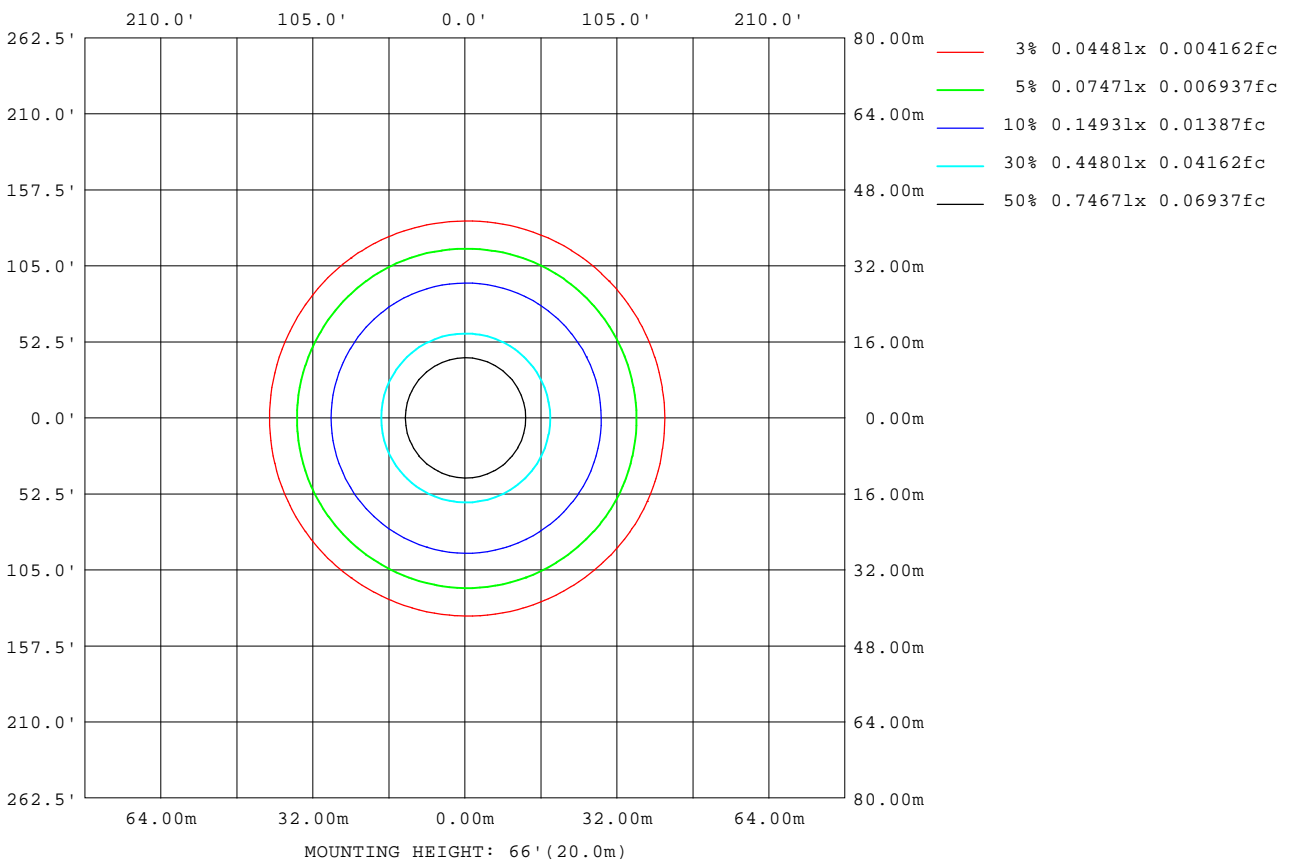

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9128]
 Remarks:

LED Avg.L Report

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	15548
L_0~180(75)av	13544
L_0~180(85)av	9882
L_90~270(65)av	15511
L_90~270(75)av	13300
L_90~270(85)av	8233
L_45(65)av	15596
L_45(75)av	13470
L_45(85)av	8882

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9128]
Remarks:

Planar Illuminance Curve

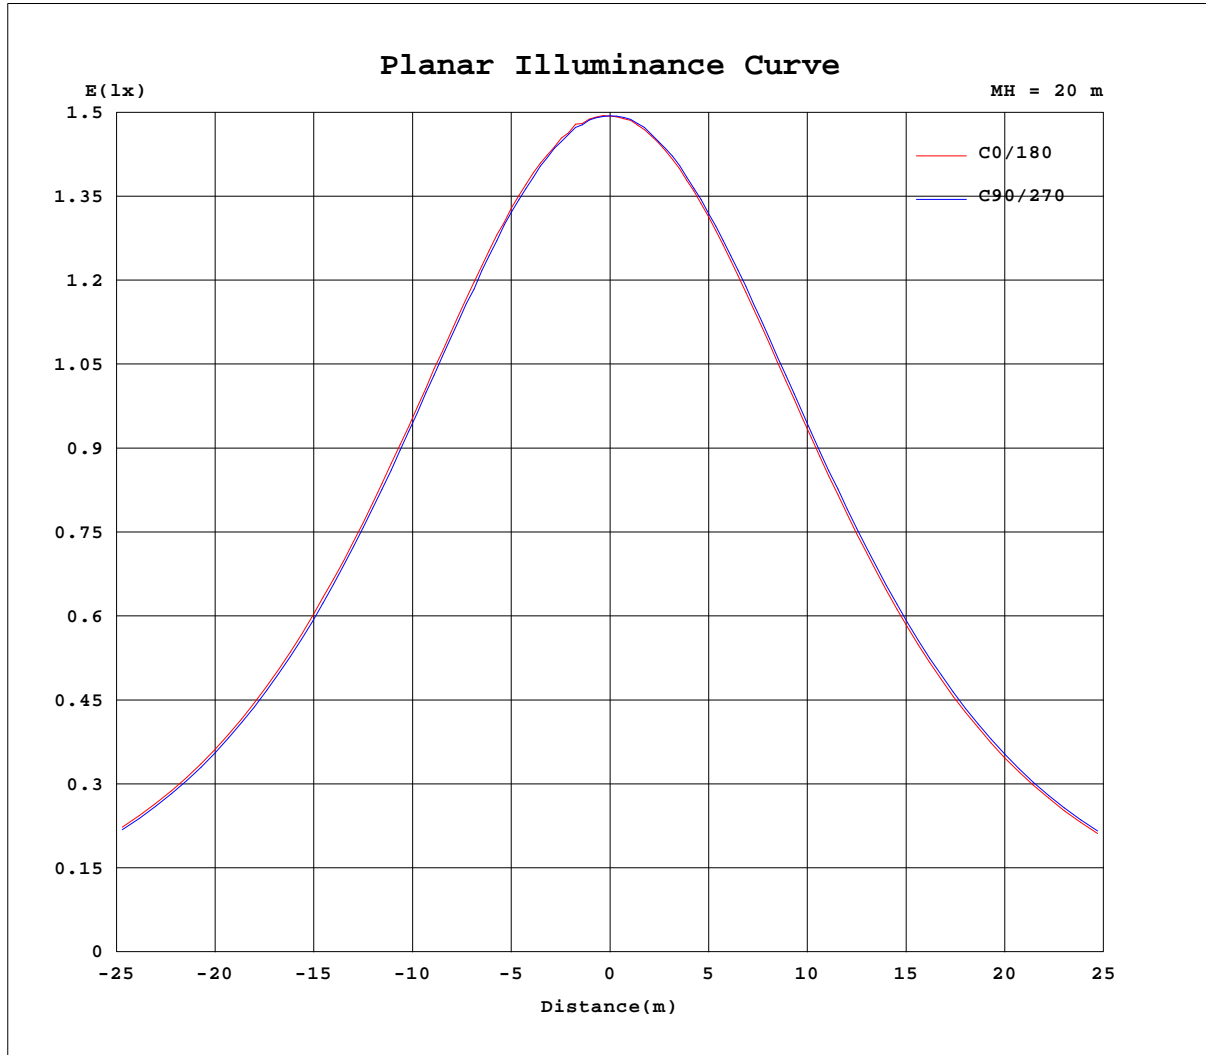

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9128]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.19V I:0.1722A P:20.410W PF:0.9858 Freq:59.98Hz Lamp Flux:1721.25x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.18*0.18	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	598	598	598	598	598	598	598	598	598	598	598	598						
5	599	596	596	596	595	595	595	594	595	596	596	597						
10	591	590	589	588	586	587	586	586	587	589	589	590						
15	579	578	578	577	573	573	572	572	575	576	577	579						
20	563	562	561	559	555	554	554	554	557	559	561	562						
25	541	541	539	537	531	531	531	531	535	536	539	541						
30	515	516	514	509	505	502	503	503	507	510	512	514						
35	485	485	483	478	473	471	471	471	475	477	481	483						
40	449	450	447	442	437	435	434	434	438	441	445	448						
45	410	411	408	403	397	394	393	394	398	400	405	408						
50	367	369	365	360	353	350	349	350	354	356	362	365						
55	321	323	319	314	307	304	302	303	307	310	316	319						
60	272	275	271	266	259	256	254	254	259	260	267	270						
65	222	225	220	215	208	206	204	204	209	210	216	219						
70	171	174	169	164	157	155	154	154	158	158	165	168						
75	122	124	120	114	108	105	105	106	109	109	114	118						
80	75.4	77.0	72.2	66.9	61.6	60.0	60.7	58.4	62.5	62.9	66.8	67.8						
85	34.0	35.0	29.5	25.0	21.9	22.0	21.8	18.4	22.0	21.5	25.9	26.3						
90	3.59	2.15	0.20	0.20	0.21	0.22	0.27	0.48	0.28	0.26	0.25	1.28						
95	0.25	0.37	0.42	0.33	0.46	0.38	0.41	0.40	0.40	0.35	0.39	0.36						
100	0.39	0.42	0.46	0.44	0.50	0.46	0.59	0.57	0.58	0.51	0.53	0.52						
105	0.56	0.60	0.56	0.62	0.62	0.64	0.77	0.74	0.76	0.70	0.72	0.67						
110	0.73	0.75	0.75	0.79	0.80	0.82	0.97	0.93	0.95	0.90	0.89	0.86						
115	0.90	0.92	0.91	0.96	0.97	1.01	1.16	1.12	1.12	1.08	1.07	1.05						
120	1.08	1.10	1.08	1.14	1.13	1.17	1.34	1.30	1.28	1.27	1.26	1.23						
125	1.23	1.25	1.22	1.30	1.29	1.34	1.49	1.44	1.44	1.42	1.40	1.39						
130	1.37	1.37	1.37	1.42	1.42	1.46	1.65	1.59	1.58	1.56	1.55	1.51						
135	1.49	1.49	1.49	1.53	1.54	1.58	1.79	1.72	1.71	1.70	1.67	1.63						
140	1.61	1.61	1.60	1.68	1.68	1.69	1.87	1.84	1.80	1.80	1.79	1.74						
145	1.75	1.73	1.74	1.83	1.79	1.85	1.99	1.94	1.92	1.89	1.92	1.85						
150	1.87	1.85	1.86	1.93	1.92	1.94	2.10	2.04	2.03	1.97	1.99	1.94						
155	1.96	1.97	2.00	2.06	2.01	2.07	2.19	2.17	2.13	2.10	2.08	2.07						
160	2.08	2.09	2.12	2.15	2.16	2.18	2.25	2.27	2.22	2.19	2.17	2.16						
165	2.20	2.21	2.24	2.28	2.26	2.26	2.35	2.36	2.32	2.32	2.31	2.25						
170	2.33	2.32	2.38	2.38	2.35	2.37	2.43	2.49	2.43	2.42	2.43	2.35						
175	2.44	2.44	2.51	2.46	2.49	2.49	2.53	2.55	2.49	2.51	2.50	2.45						
180	2.52	2.57	2.56	2.55	2.55	2.51	2.55	2.57	2.56	2.54	2.54	2.52						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9128]
 Remarks: