
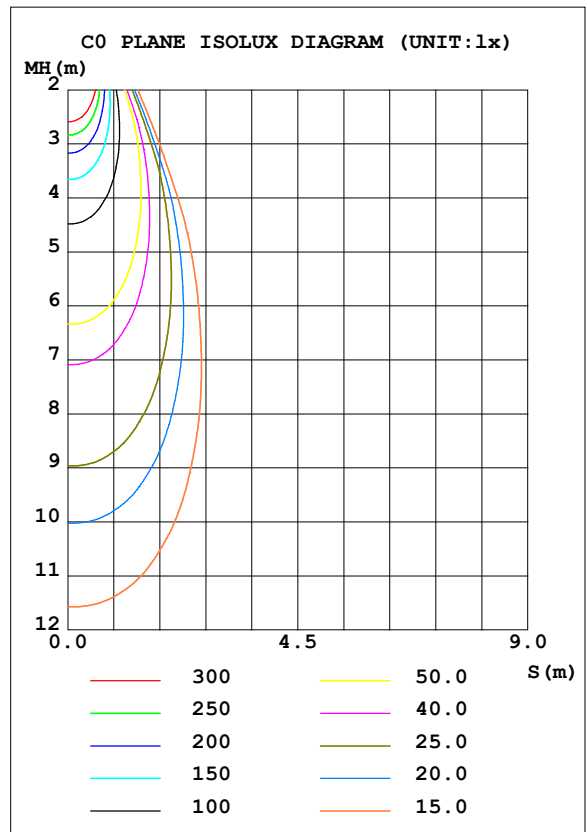


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.58 lm/W			
MODEL		I <sub>max</sub> (cd)	2007	S/MH (C0/180)	0.61
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	934.43	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.9
NOMINAL FLUX (lm)	934.427	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.1
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

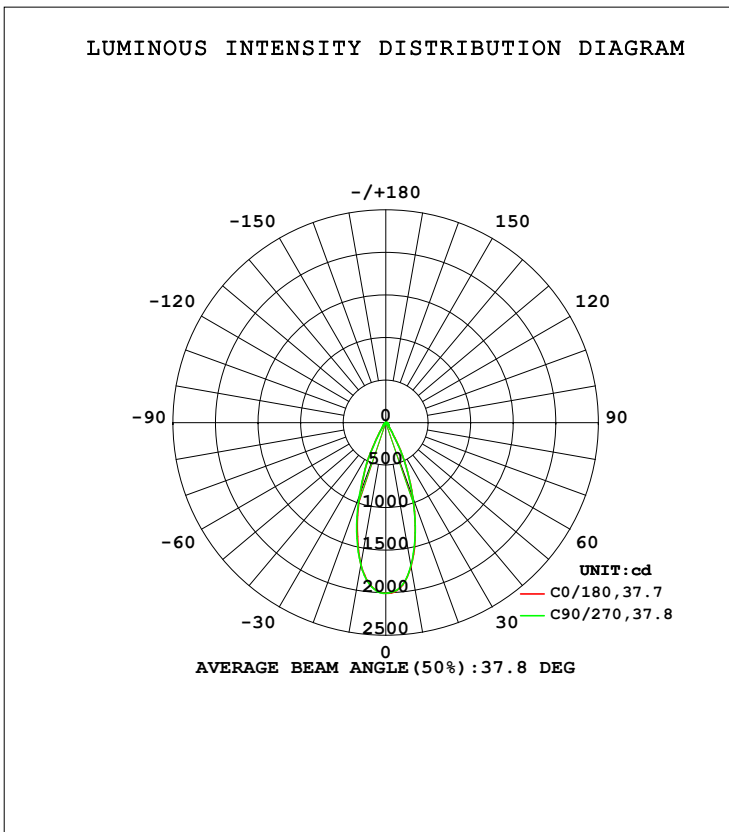

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum,lamp
10	1716	1718	1710	1709	1689	1696	1693	1714	0- 10	177.9	177.9	19,19
20	932.8	972.0	923.5	911.5	885.9	906.3	903.2	942.4	10- 20	364.2	542.0	58,58
30	250.1	280.7	247.2	234.5	218.7	220.4	215.4	245.9	20- 30	250.5	792.6	84.8,84.8
40	57.04	61.04	59.01	56.49	54.25	54.15	53.58	55.28	30- 40	68.51	861.1	92.2,92.2
50	31.59	32.72	33.04	31.87	30.36	29.26	29.70	30.75	40- 50	31.96	893.0	95.6,95.6
60	17.04	17.57	17.80	17.20	16.42	15.84	16.06	16.56	50- 60	20.48	913.5	97.8,97.8
70	9.447	9.841	9.880	9.404	8.763	8.372	8.514	8.938	60- 70	12.55	926.1	99.1,99.1
80	4.225	4.443	3.809	3.927	3.598	3.290	3.395	3.765	70- 80	6.710	932.8	99.8,99.8
90	0.0297	0.0254	0.0371	0.0247	0.0364	0.0384	0.0421	0.0367	80- 90	1.640	934.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

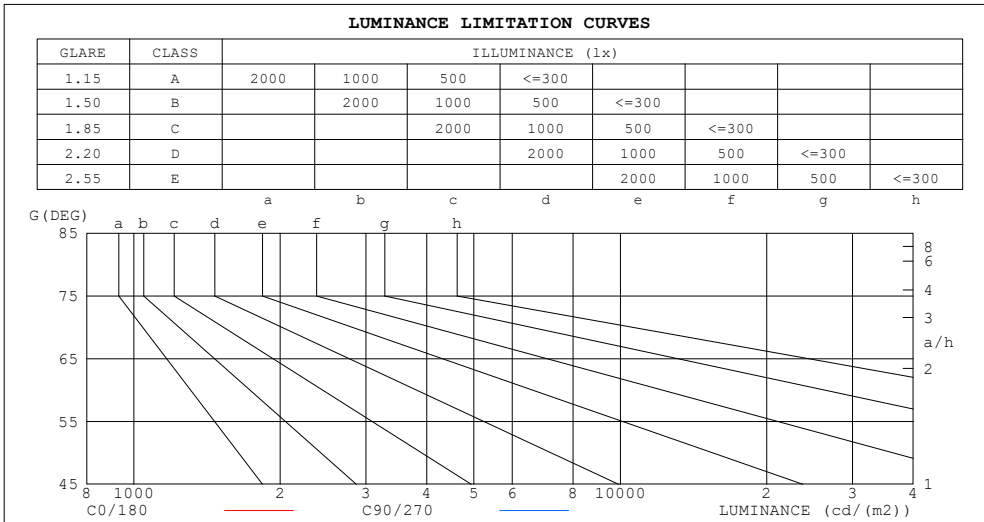

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	138	20
80	219	197
75	230	242
70	249	260
65	273	285
60	307	320
55	358	371
50	443	462
45	522	536


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.97	1.03	.99	.96	.99	.97	.94	.97	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.87	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.84	.90	.86	.83	.88	.84	.82	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.79	.86	.81	.78	.84	.80	.77	.82	.79	.77	.75
6.0	.84	.79	.75	.83	.78	.75	.82	.77	.74	.80	.76	.74	.79	.76	.73	.72
7.0	.80	.75	.71	.79	.74	.71	.78	.74	.70	.77	.73	.70	.76	.72	.70	.68
8.0	.76	.71	.68	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.65
9.0	.73	.68	.65	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.67	.64	.63
10.0	.70	.65	.62	.70	.65	.62	.69	.65	.62	.68	.64	.61	.68	.64	.61	.60

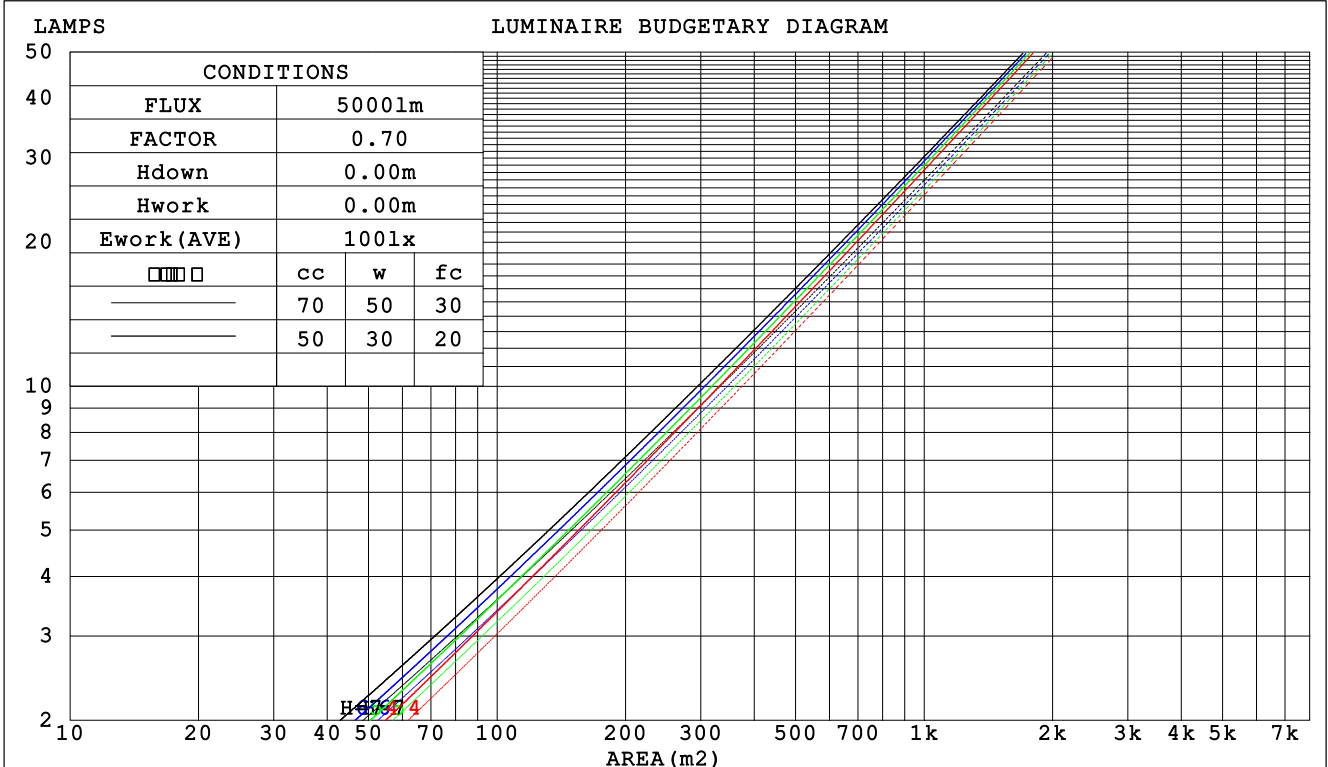

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.168 .096 .030	.161 .092 .029	.149 .085 .027	.137 .079 .025	.127 .073 .024	
2.0	.158 .087 .027	.153 .084 .026	.142 .079 .025	.132 .074 .023	.124 .070 .022	
3.0	.149 .079 .024	.144 .077 .023	.135 .073 .022	.127 .070 .021	.119 .066 .020	
4.0	.140 .073 .021	.136 .071 .021	.128 .068 .020	.121 .065 .020	.115 .062 .019	
5.0	.132 .067 .020	.129 .066 .019	.122 .064 .019	.116 .061 .018	.110 .059 .018	
6.0	.125 .063 .018	.122 .062 .018	.117 .060 .017	.111 .058 .017	.106 .056 .017	
7.0	.119 .059 .017	.117 .058 .017	.112 .056 .016	.107 .055 .016	.102 .053 .016	
8.0	.114 .056 .016	.111 .055 .015	.107 .053 .015	.103 .052 .015	.099 .051 .015	
9.0	.109 .053 .015	.107 .052 .015	.103 .051 .014	.099 .050 .014	.095 .048 .014	
10.0	.104 .050 .014	.102 .049 .014	.099 .048 .014	.095 .047 .013	.092 .046 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.154 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .075	.112 .085 .065	.077 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.120 .087 .062	.103 .075 .054	.071 .052 .038	.041 .031 .023	.013 .010 .007	
6.0	.112 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.012 .009 .006	
7.0	.105 .069 .044	.091 .060 .038	.063 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.099 .063 .038	.085 .055 .033	.059 .038 .023	.034 .023 .014	.011 .007 .005	
9.0	.094 .057 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm										
NAME: ASD-CD-CR-2D15AC-CH/BK					TYPE:			WEIGHT:		
SPEC.:3500K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.3	5.1	4.5	5.3	5.4	4.5	5.3	4.7	5.5	5.6
3H	4.9	5.7	5.2	5.9	6.1	5.1	5.9	5.4	6.1	6.3
4H	5.2	6.0	5.5	6.2	6.4	5.4	6.2	5.7	6.4	6.6
6H	5.5	6.2	5.8	6.4	6.7	5.7	6.4	6.0	6.6	6.8
8H	5.6	6.2	5.9	6.5	6.7	5.7	6.4	6.0	6.6	6.9
12H	5.6	6.2	5.9	6.5	6.7	5.7	6.3	6.0	6.6	6.9
4H 2H	4.5	5.3	4.8	5.5	5.7	4.7	5.4	5.0	5.6	5.9
3H	5.4	6.0	5.7	6.3	6.5	5.6	6.2	5.9	6.5	6.7
4H	5.8	6.4	6.1	6.7	7.0	6.0	6.6	6.3	6.9	7.2
6H	6.2	6.7	6.5	7.0	7.4	6.3	6.8	6.7	7.2	7.5
8H	6.3	6.8	6.7	7.1	7.5	6.4	6.9	6.8	7.2	7.6
12H	6.3	6.8	6.7	7.1	7.5	6.4	6.8	6.8	7.2	7.6
8H 4H	5.9	6.4	6.3	6.8	7.1	6.1	6.6	6.5	6.9	7.3
6H	6.4	6.8	6.9	7.2	7.6	6.6	7.0	7.0	7.3	7.8
8H	6.6	7.0	7.1	7.4	7.9	6.7	7.0	7.1	7.5	7.9
12H	6.8	7.1	7.2	7.5	8.0	6.7	7.0	7.2	7.4	7.9
12H 4H	5.9	6.4	6.3	6.7	7.1	6.1	6.5	6.5	6.9	7.3
6H	6.5	6.8	6.9	7.2	7.7	6.6	6.9	7.0	7.3	7.8
8H	6.7	7.0	7.2	7.4	7.9	6.7	7.0	7.2	7.5	7.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.6					+ 0.5 / - 0.7				
1.5H	+ 0.6 / - 0.4					+ 0.7 / - 0.4				
2.0H	+ 0.8 / - 0.6					+ 0.8 / - 0.6				

CIE Pub.117, 934.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.2)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	73
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	101	97	93	100	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

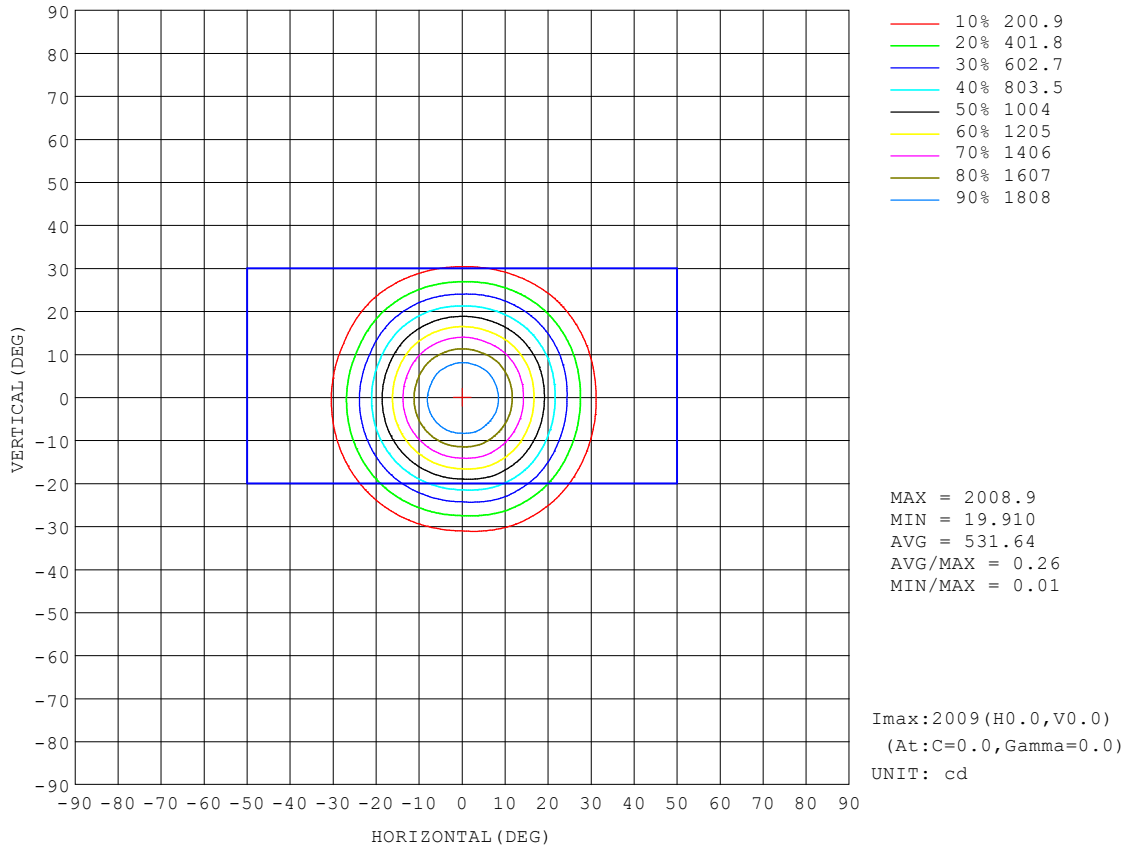


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

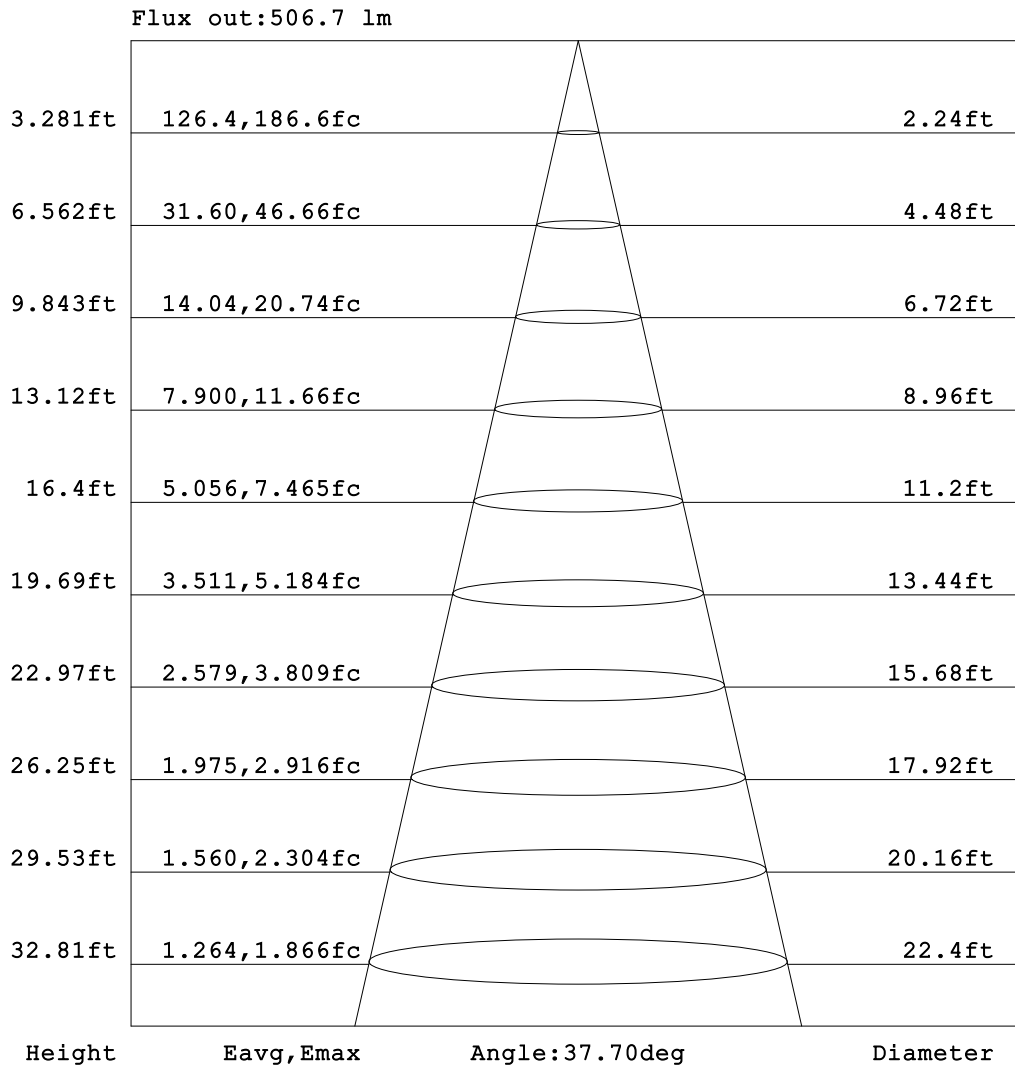


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

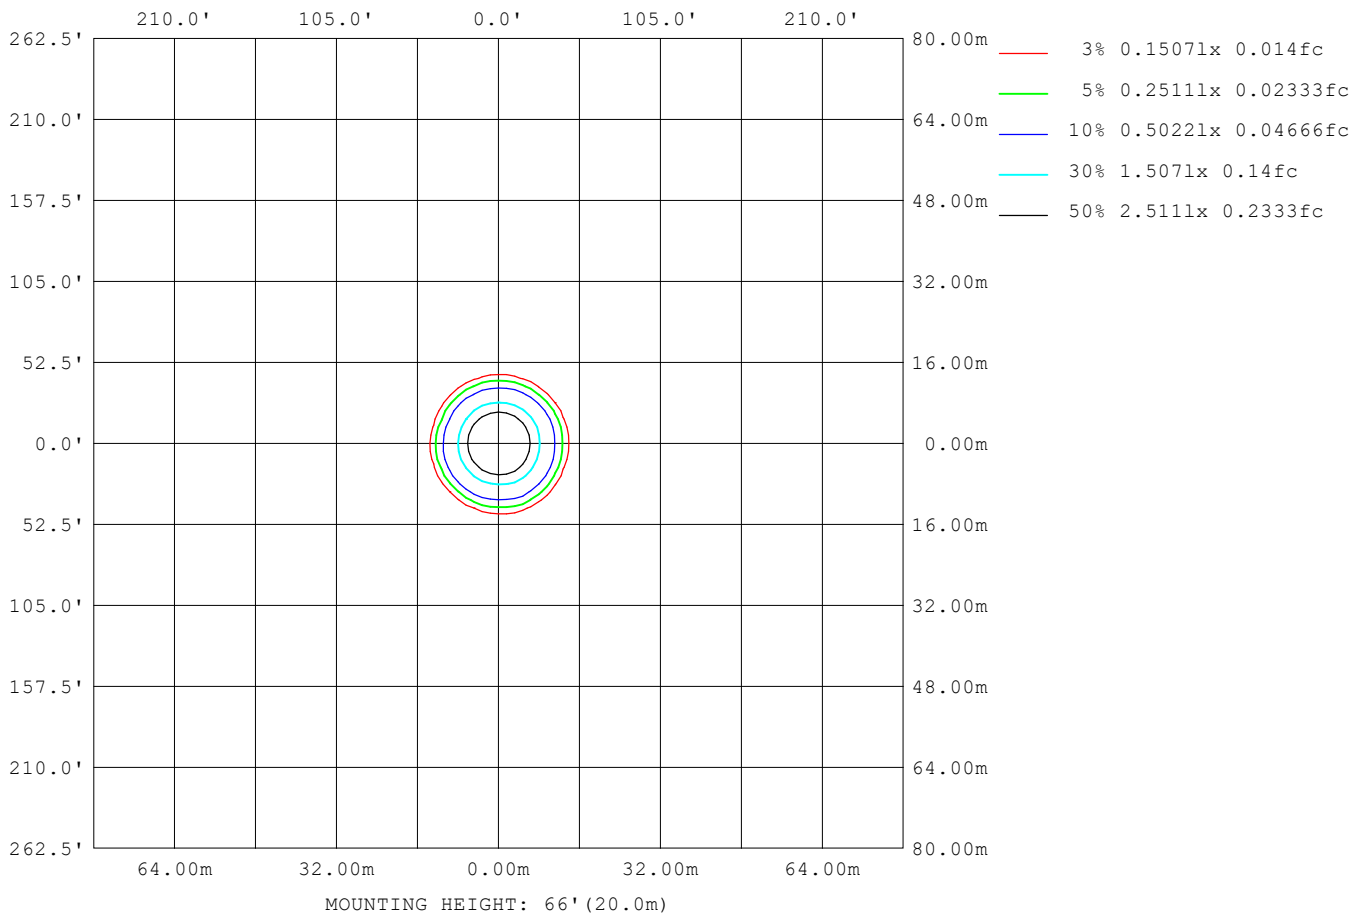

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	266
L_0~180 (75) av	219
L_0~180 (85) av	122
L_90~270 (65) av	269
L_90~270 (75) av	220
L_90~270 (85) av	71
L_45 (65) av	267
L_45 (75) av	219
L_45 (85) av	149

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

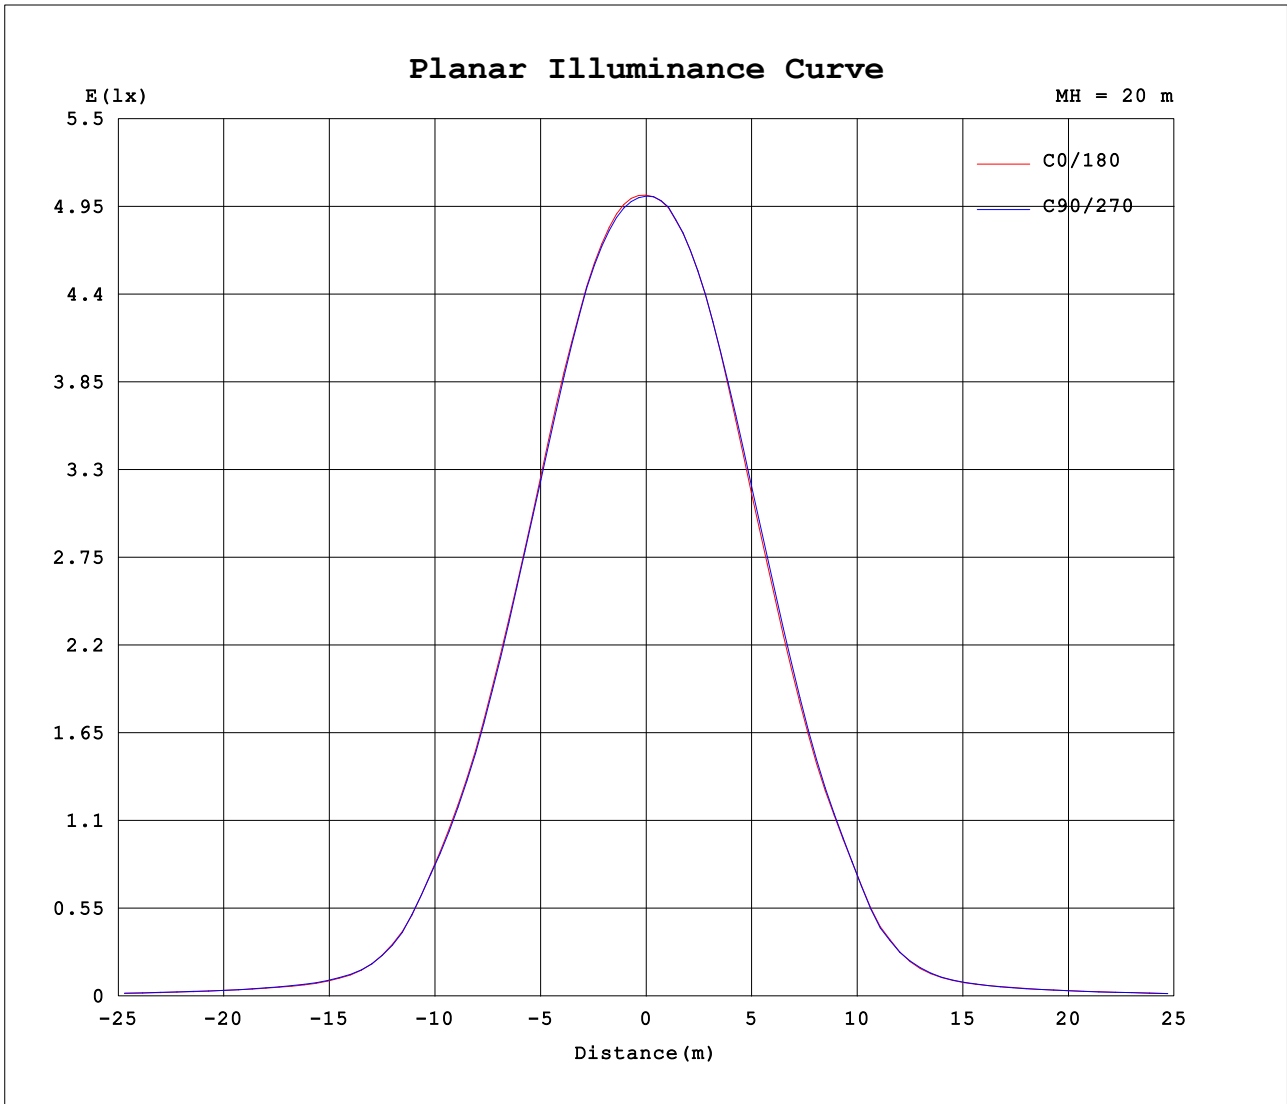

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-10-20

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.02V I:0.1074A P:12.700W PF:0.9488 Freq:59.98Hz Lamp Flux:934.427x1 lm		
NAME: ASD-CD-CR-2D15AC-CH/BK	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007	2007			
5	1948	1953	1950	1951	1943	1946	1937	1941	1934	1927	1934	1927	1937	1936	1949	1944			
10	1716	1725	1718	1723	1710	1714	1709	1701	1689	1683	1696	1689	1693	1694	1714	1714			
15	1345	1357	1368	1371	1338	1331	1321	1312	1301	1303	1322	1319	1324	1325	1349	1354			
20	933	947	972	970	924	917	912	899	886	878	906	909	903	919	942	946			
25	563	573	606	607	555	552	553	540	529	507	532	538	534	562	580	581			
30	250	261	281	282	247	250	234	229	219	202	220	215	215	227	246	250			
35	97.2	100	108	109	100.0	97.2	95.6	89.6	85.1	82.7	88.4	89.0	87.4	93.5	97.9	99.5			
40	57.0	58.6	61.0	60.9	59.0	57.8	56.5	55.0	54.2	53.9	54.1	53.0	53.6	53.8	55.3	56.5			
45	40.9	41.6	42.0	42.2	42.1	41.8	41.0	40.3	39.6	38.8	38.5	38.4	39.0	39.4	39.9	40.3			
50	31.6	32.4	32.7	33.1	33.0	32.8	31.9	31.1	30.4	29.5	29.3	29.1	29.7	30.2	30.7	30.9			
55	22.8	23.3	23.6	23.8	23.7	23.4	22.8	22.3	21.8	21.4	21.3	21.1	21.4	21.7	22.1	22.3			
60	17.0	17.4	17.6	17.9	17.8	17.7	17.2	16.8	16.4	15.9	15.8	15.8	16.1	16.2	16.6	16.7			
65	12.8	13.1	13.3	13.5	13.4	13.3	12.9	12.5	12.2	11.8	11.7	11.6	11.9	12.0	12.3	12.5			
70	9.45	9.69	9.84	9.95	9.88	9.72	9.40	9.09	8.76	8.48	8.37	8.36	8.51	8.69	8.94	9.16			
75	6.62	6.84	6.96	7.04	6.96	6.80	6.52	6.25	5.96	5.70	5.60	5.59	5.72	5.88	6.12	6.35			
80	4.23	4.43	4.44	4.13	3.81	3.79	3.93	3.85	3.60	3.38	3.29	3.27	3.40	3.54	3.76	3.98			
85	1.33	2.33	1.63	0.73	0.19	0.43	1.27	1.73	1.02	1.51	1.26	1.11	1.18	1.32	1.59	2.03			
90	0.03	0.03	0.03	0.03	0.04	0.03	0.02	0.02	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-20

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: