


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 71.38 lm/W			
MODELASD	JBR-4D12AC(5000K)	I _{max} (cd)	297.9	S/MH(C0/180)	1.27
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	860.79	h UP, DN(C0-180)	0.2, 49.6
NOMINAL FLUX(lm)	860.787	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2, 50.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

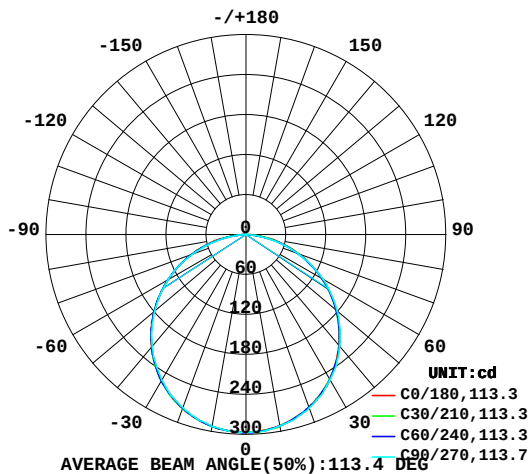

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

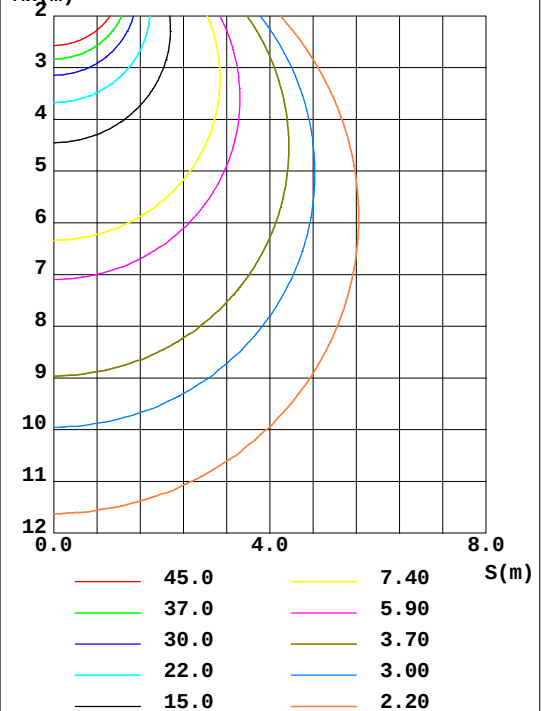

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	291.1	292.0	291.8	292.6	292.5	292.3	292.6	291.8	0- 10	28.12	28.12	3.27,3.27
20	275.9	276.1	277.3	277.8	278.2	277.7	276.6	276.9	10- 20	80.68	108.8	12.6,12.6
30	250.6	251.5	252.4	253.0	253.8	254.1	252.6	252.0	20- 30	122.6	231.4	26.9,26.9
40	217.1	217.8	219.0	220.1	221.0	220.0	219.1	218.8	30- 40	148.1	379.5	44.1,44.1
50	176.5	176.9	179.1	179.5	180.4	179.8	179.0	178.4	40- 50	154.0	533.5	62,62
60	131.1	131.6	133.1	134.3	134.7	134.6	134.2	133.7	50- 60	139.9	673.4	78.2,78.2
70	83.75	82.48	82.32	85.06	86.77	85.88	83.89	85.59	60- 70	108.1	781.5	90.8,90.8
80	37.77	33.07	30.34	34.44	40.44	35.45	31.91	35.58	70- 80	62.90	844.4	98.1,98.1
90	0.0393	0.0333	0.0002	0.0366	0.0731	0.0996	0.0999	0.0996	80- 90	13.25	857.6	99.6,99.6
100	0.0989	0.1091	0.1260	0.1224	0.2317	0.2085	0.1389	0.1855	90-100	0.0973	857.7	99.6,99.6
110	0.2511	0.2550	0.2848	0.2815	0.4302	0.5039	0.3375	0.3808	100-110	0.2832	858.0	99.7,99.7
120	0.4232	0.4403	0.4504	0.4438	0.6486	0.6225	0.4965	0.5598	110-120	0.4226	858.4	99.7,99.7
130	0.5555	0.5695	0.6224	0.5730	0.8137	0.7502	0.6686	0.6989	120-130	0.5272	859.0	99.8,99.8
140	0.6284	0.6754	0.7284	0.6857	0.8594	0.8299	0.7812	0.8029	130-140	0.5436	859.5	99.9,99.9
150	0.7409	0.7748	0.8211	0.8016	0.9169	0.8841	0.8607	0.8904	140-150	0.4971	860.0	99.9,99.9
160	0.8268	0.9335	0.9270	0.9076	0.9794	0.9866	0.9269	0.9514	150-160	0.4068	860.4	100,100
170	0.9789	1.014	1.026	1.059	1.045	1.042	0.9998	1.014	160-170	0.2765	860.7	100,100
180	1.072	1.086	1.079	1.077	1.085	1.093	1.073	1.073	170-180	0.0998	860.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:

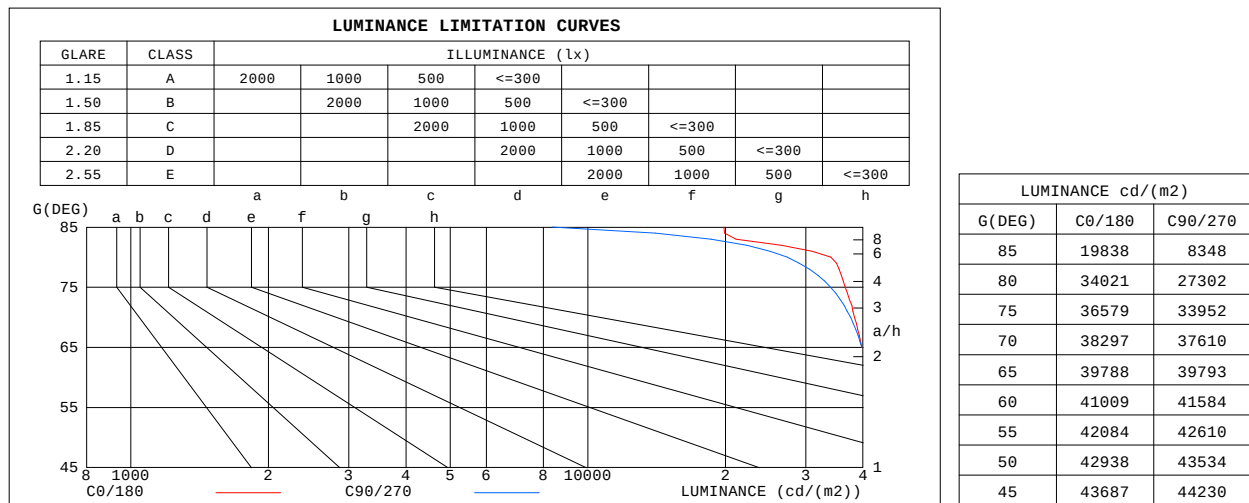


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1279]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.62	.56	.52	.49
5.0	.63	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

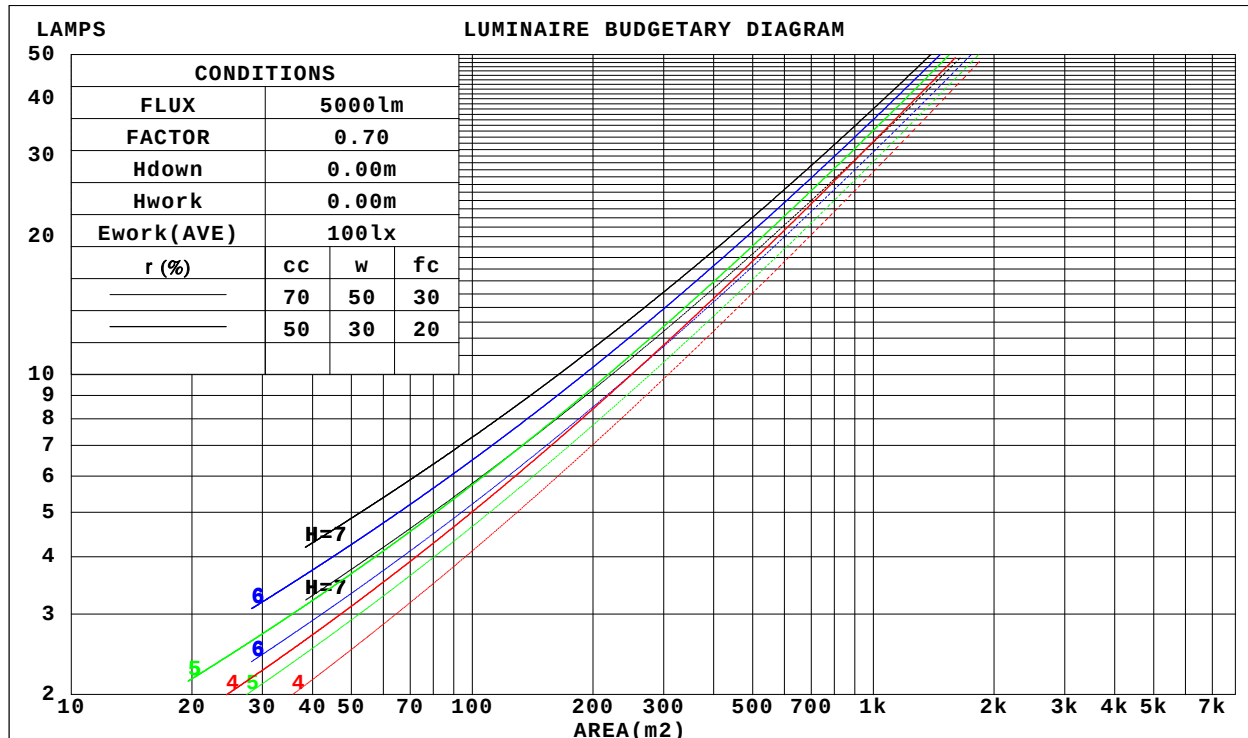

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

WEC AND CCEC

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm					
NAME:			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: ASD LIGHTNG CORP			SUR.: φ0.09		Shielding Angle:

r c c	80%			70%			50%			30%			10%			0	
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
r f c	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.309	.176	.056	.301	.172	.055	.288	.165	.053	.276	.159	.051	.264	.153	.049		
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.147	.046	.253	.143	.045		
3.0	.271	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.130	.040		
4.0	.250	.130	.038	.245	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036		
5.0	.231	.118	.034	.227	.116	.034	.218	.114	.033	.210	.111	.033	.203	.109	.033		
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030		
7.0	.199	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025		
9.0	.174	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023		
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021		

r c c	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.183	.159	.137	.157	.136	.118	.107	.094	.082	.062	.054	.048	.020	.017	.015	
2.0	.175	.135	.101	.150	.116	.087	.103	.080	.061	.059	.047	.036	.019	.015	.012	
3.0	.167	.117	.077	.144	.101	.067	.099	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.160	.104	.061	.137	.090	.053	.094	.063	.037	.055	.037	.022	.018	.012	.007	
5.0	.152	.093	.050	.131	.081	.043	.090	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.042	.125	.074	.037	.086	.052	.026	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.036	.119	.068	.031	.082	.048	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.067	.028	.108	.059	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.104	.055	.022	.072	.039	.016	.042	.023	.009	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: ASD LIGHTNG CORP					SUR.: $\varphi 0.09$			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.8	25.5	27.1	27.4	25.2	26.9	25.6	27.2	27.5	
	3H	27.0	28.5	27.4	28.8	29.2	27.0	28.5	27.4	28.9	29.2
	4H	27.7	29.1	28.1	29.5	29.9	27.7	29.1	28.1	29.4	29.8
	6H	28.3	29.6	28.7	30.0	30.4	28.1	29.4	28.5	29.8	30.2
	8H	28.4	29.7	28.8	30.1	30.5	28.2	29.4	28.6	29.8	30.2
	12H	28.5	29.7	28.9	30.0	30.5	28.2	29.4	28.6	29.8	30.2
4H	2H	25.8	27.2	26.2	27.5	27.9	25.9	27.3	26.3	27.7	28.0
	3H	27.9	29.0	28.3	29.4	29.8	27.9	29.1	28.3	29.5	29.9
	4H	28.7	29.8	29.2	30.2	30.6	28.7	29.8	29.1	30.2	30.6
	6H	29.4	30.3	29.9	30.8	31.2	29.2	30.1	29.7	30.6	31.1
	8H	29.6	30.5	30.1	30.9	31.4	29.3	30.2	29.8	30.6	31.1
	12H	29.7	30.5	30.2	30.9	31.4	29.4	30.1	29.8	30.6	31.1
8H	4H	29.0	29.9	29.5	30.3	30.8	29.0	29.9	29.5	30.3	30.8
	6H	29.8	30.5	30.3	31.0	31.5	29.7	30.4	30.2	30.9	31.3
	8H	30.1	30.7	30.6	31.2	31.7	29.8	30.5	30.3	31.0	31.5
	12H	30.2	30.8	30.7	31.3	31.9	29.9	30.4	30.4	30.9	31.5
12H	4H	29.0	29.8	29.5	30.3	30.8	29.1	29.8	29.6	30.3	30.8
	6H	29.9	30.5	30.4	31.0	31.5	29.7	30.4	30.2	30.8	31.4
	8H	30.2	30.7	30.7	31.2	31.8	29.9	30.5	30.4	31.0	31.5
CIE190: 2010											

CIE190: 2010
Area: 0.0064 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1279]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	38	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	74	64	57	72	65	56	49
1.25	83	72	65	81	72	65	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:

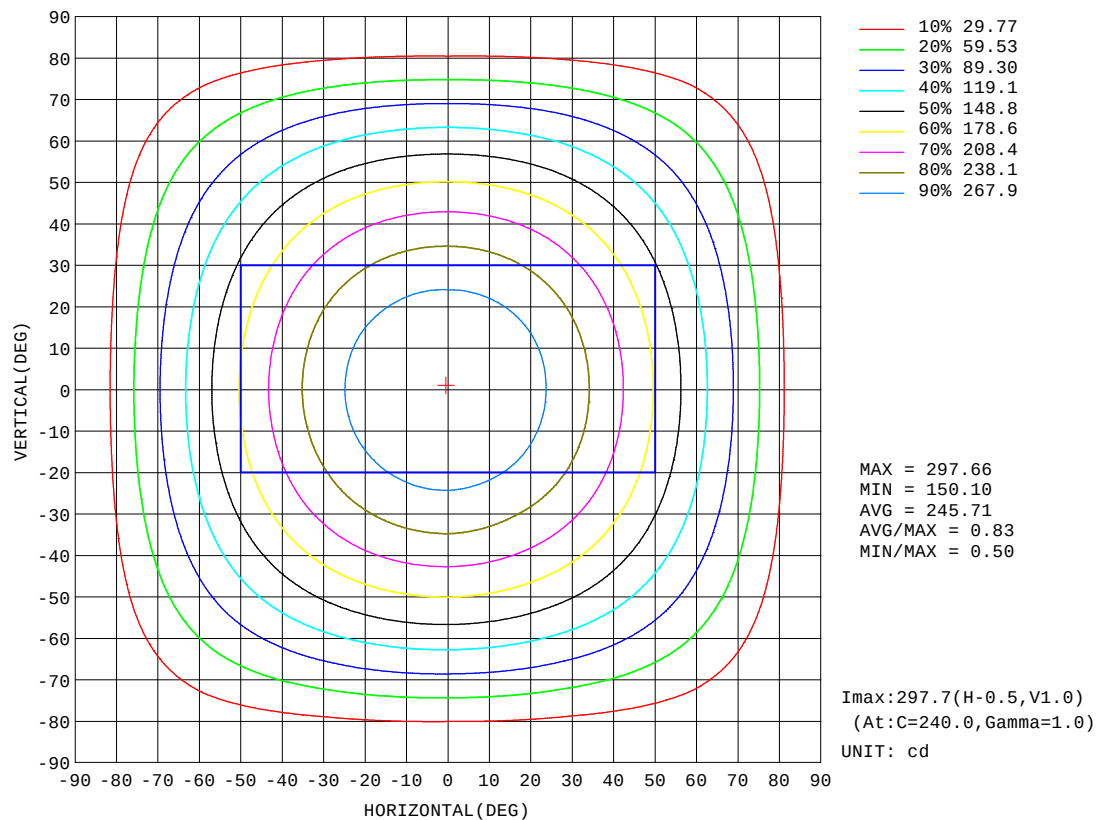


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1279]
Remarks:

AAI Figure

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:

Flux out:634.0 lm

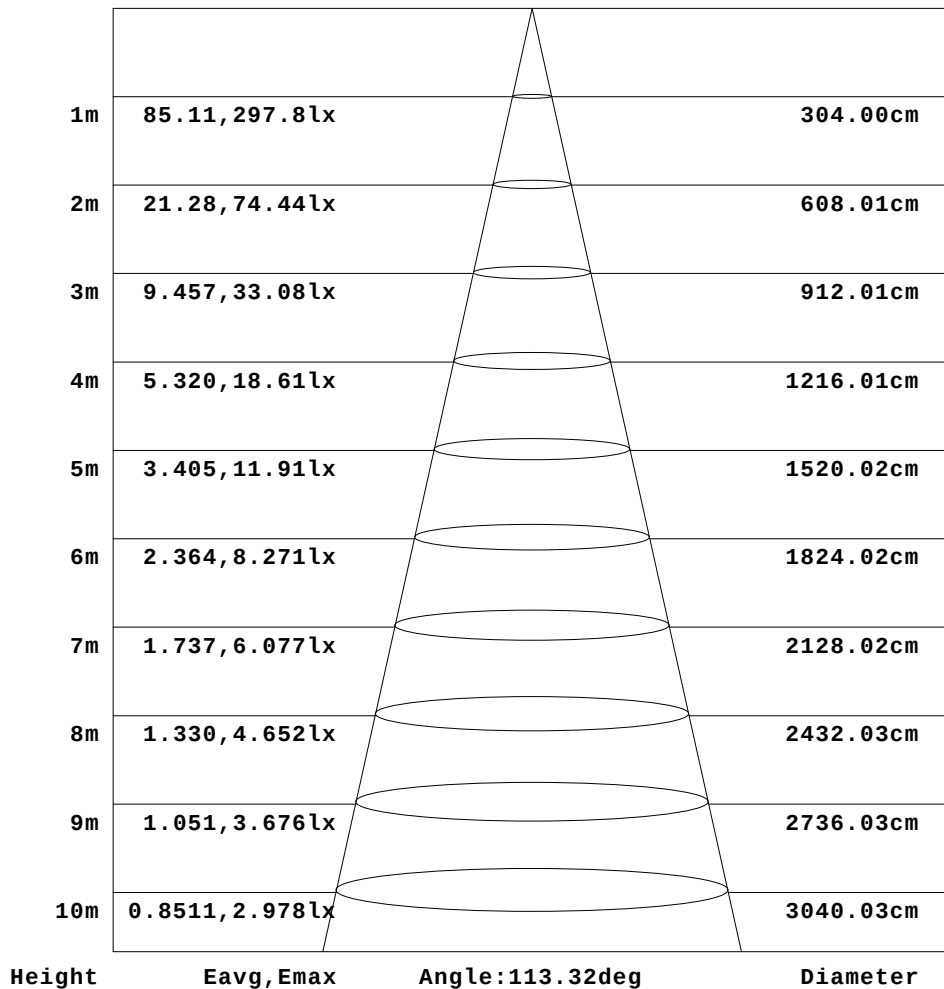


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:

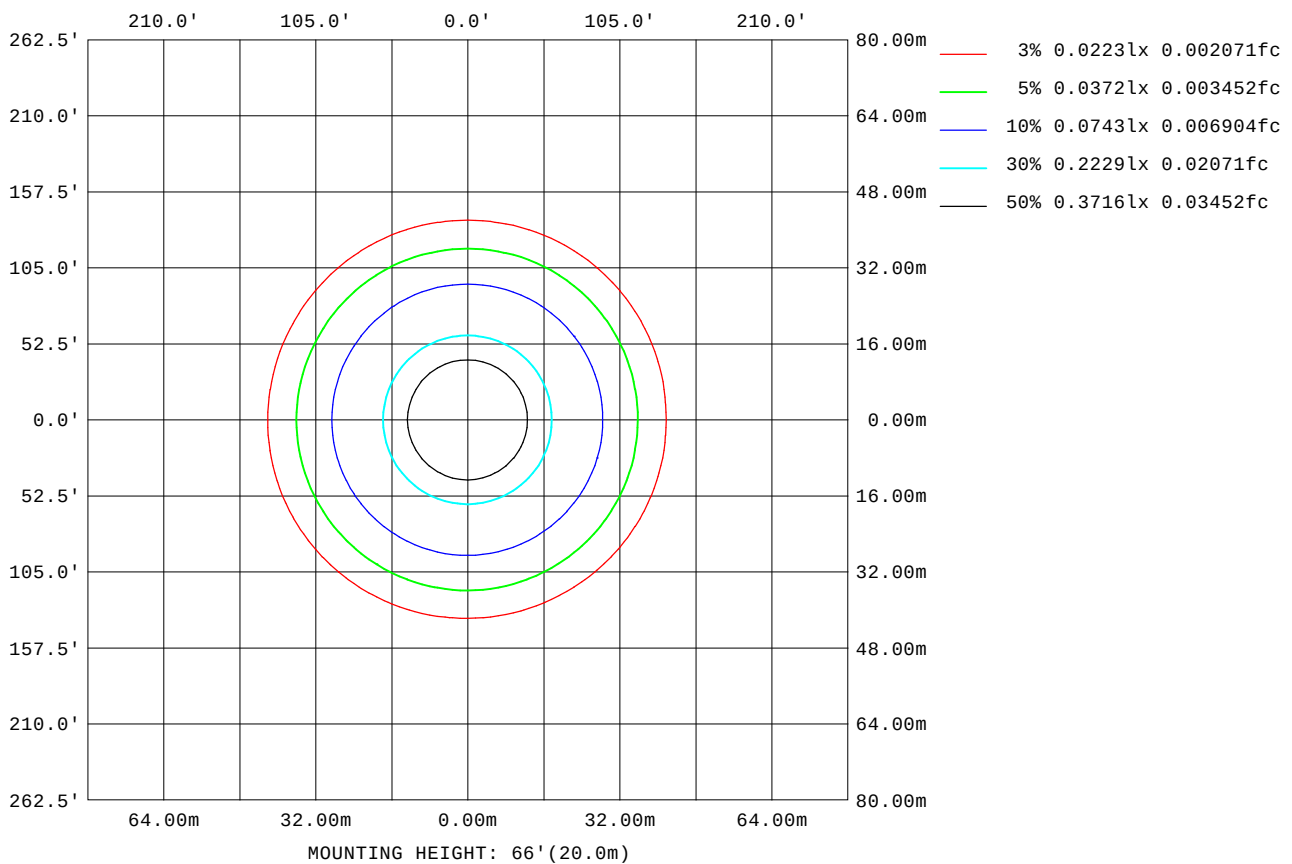

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

LED Avg.L Report

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	40356
L_0~180(75)av	37351
L_0~180(85)av	18947
L_90~270(65)av	40171
L_90~270(75)av	34474
L_90~270(85)av	10190
L_45(65)av	40534
L_45(75)av	36015
L_45(85)av	18503

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1279]
Remarks:

Planar Illuminance Curve

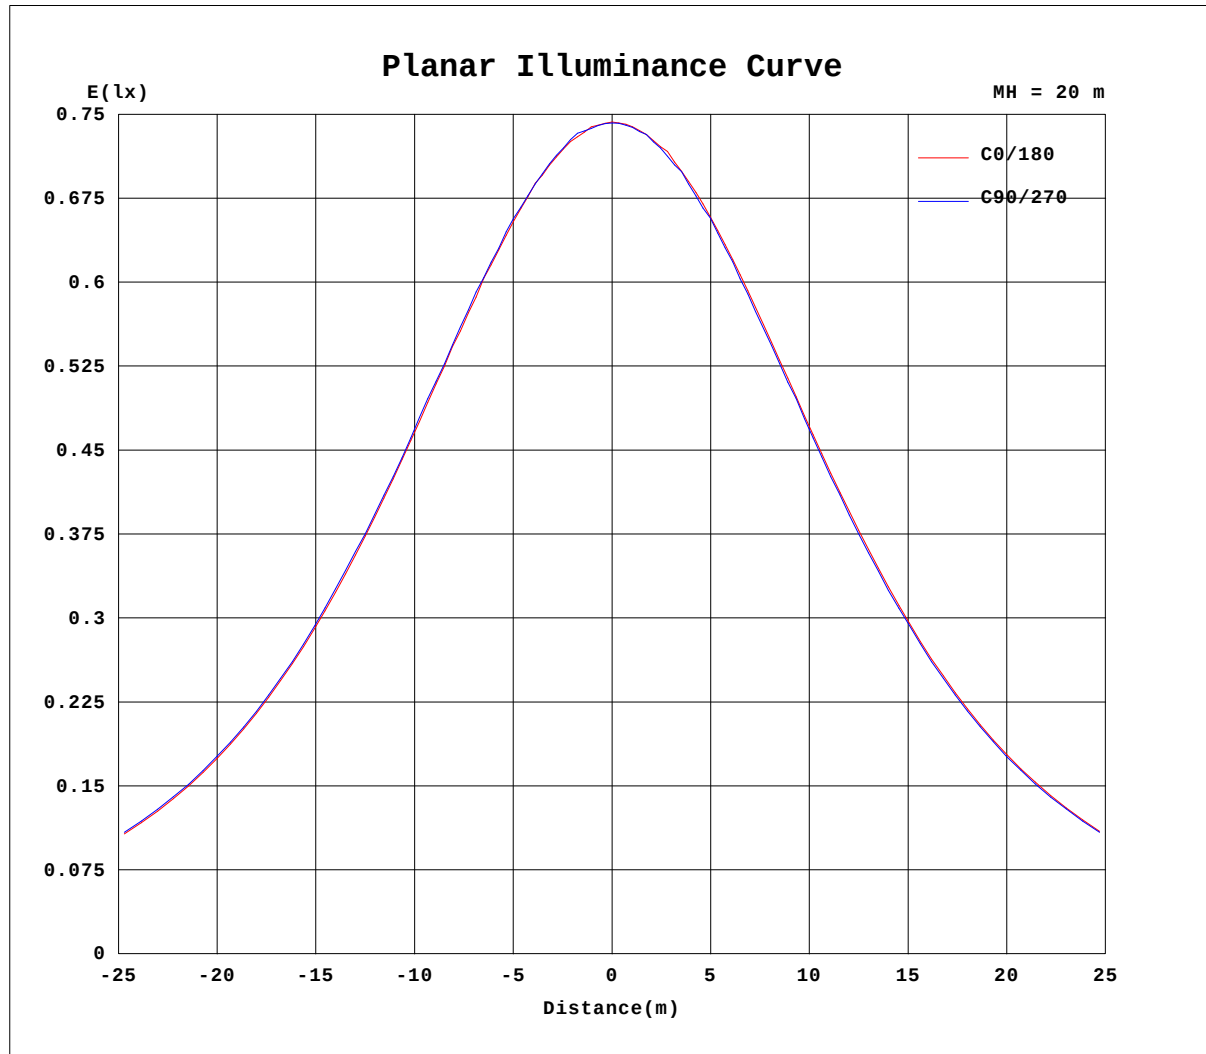

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1279]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.21V I:0.1023A P:12.060W PF:0.9804 Freq:59.98Hz Lamp Flux:860.787x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	297	297	297	297	297	297	297	297	297	297	297	297						
5	295	296	296	297	296	296	296	296	296	296	296	296						
10	291	293	292	292	293	293	293	292	292	293	292	292						
15	285	285	285	286	285	287	287	286	286	286	285	285						
20	276	276	276	277	277	278	278	278	277	277	277	277						
25	264	265	265	267	266	268	267	268	267	267	265	266						
30	251	251	252	252	252	254	254	254	254	253	252	252						
35	235	236	235	238	237	238	239	239	238	236	236	236						
40	217	218	218	219	219	221	221	220	220	219	219	218						
45	198	198	198	200	200	201	202	201	201	199	200	199						
50	176	177	177	179	179	180	180	180	180	179	179	178						
55	154	154	155	156	157	158	158	157	158	157	157	156						
60	131	132	132	133	134	135	135	134	135	134	135	133						
65	108	108	107	108	109	111	111	110	111	110	110	110						
70	83.7	83.3	81.7	82.3	83.5	86.6	86.8	86.1	85.6	83.9	85.5	85.7						
75	60.5	58.9	56.2	56.2	57.8	61.9	63.2	61.4	59.8	58.0	59.8	61.3						
80	37.8	35.1	31.1	30.3	32.0	36.9	40.4	36.9	34.0	31.9	34.2	37.0						
85	11.1	12.3	6.22	4.66	5.86	12.7	10.1	13.1	8.98	6.71	8.56	12.9						
90	0.04	0.02	0.05	0.00	0.05	0.02	0.07	0.13	0.07	0.10	0.07	0.13						
95	0.03	0.07	0.03	0.05	0.07	0.07	0.15	0.08	0.13	0.07	0.13	0.09						
100	0.10	0.14	0.08	0.13	0.11	0.13	0.23	0.20	0.21	0.14	0.21	0.16						
105	0.17	0.21	0.15	0.20	0.19	0.21	0.32	0.95	0.29	0.24	0.30	0.25						
110	0.25	0.28	0.23	0.28	0.27	0.29	0.43	0.59	0.42	0.34	0.40	0.36						
115	0.33	0.37	0.32	0.37	0.36	0.38	0.54	0.57	0.52	0.43	0.49	0.45						
120	0.42	0.47	0.41	0.45	0.43	0.46	0.65	0.64	0.61	0.50	0.58	0.54						
125	0.49	0.53	0.50	0.54	0.50	0.54	0.75	0.71	0.68	0.59	0.67	0.61						
130	0.56	0.59	0.55	0.62	0.56	0.59	0.81	0.77	0.73	0.67	0.73	0.67						
135	0.58	0.64	0.60	0.67	0.62	0.66	0.85	0.83	0.79	0.71	0.75	0.74						
140	0.63	0.68	0.67	0.73	0.66	0.71	0.86	0.82	0.84	0.78	0.82	0.78						
145	0.68	0.72	0.72	0.78	0.71	0.76	0.87	0.83	0.87	0.82	0.85	0.83						
150	0.74	0.78	0.77	0.82	0.77	0.83	0.92	0.85	0.92	0.86	0.90	0.88						
155	0.79	0.84	0.82	0.88	0.83	0.88	0.94	0.89	0.95	0.90	0.94	0.91						
160	0.83	0.91	0.95	0.93	0.88	0.93	0.98	0.99	0.99	0.93	0.96	0.94						
165	0.89	0.95	1.02	0.98	0.93	1.00	1.01	1.02	1.01	0.97	0.99	0.96						
170	0.98	1.01	1.02	1.03	1.06	1.06	1.05	1.03	1.05	1.00	1.03	0.99						
175	1.02	1.06	1.05	1.05	1.05	1.07	1.07	1.07	1.10	1.04	1.07	1.03						
180	1.07	1.09	1.09	1.08	1.07	1.08	1.08	1.09	1.09	1.07	1.08	1.07						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks: