
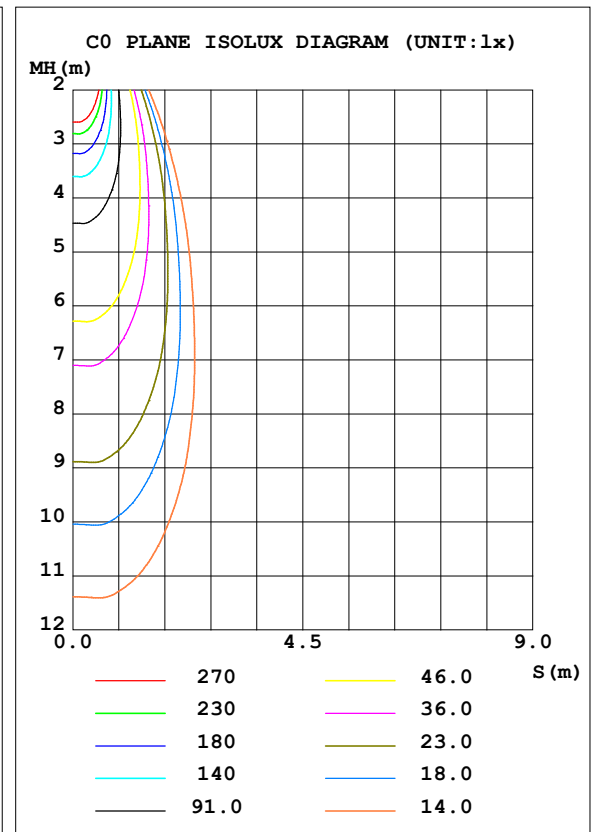


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 63.44 lm/W			
MODEL		I _{max} (cd)	1833	S/MH (C0/180)	0.51
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	750	<input type="checkbox"/> UP, DN (C0-180)	0.0, 44.8
NOMINAL FLUX (lm)	750	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 55.2
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	12	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.55

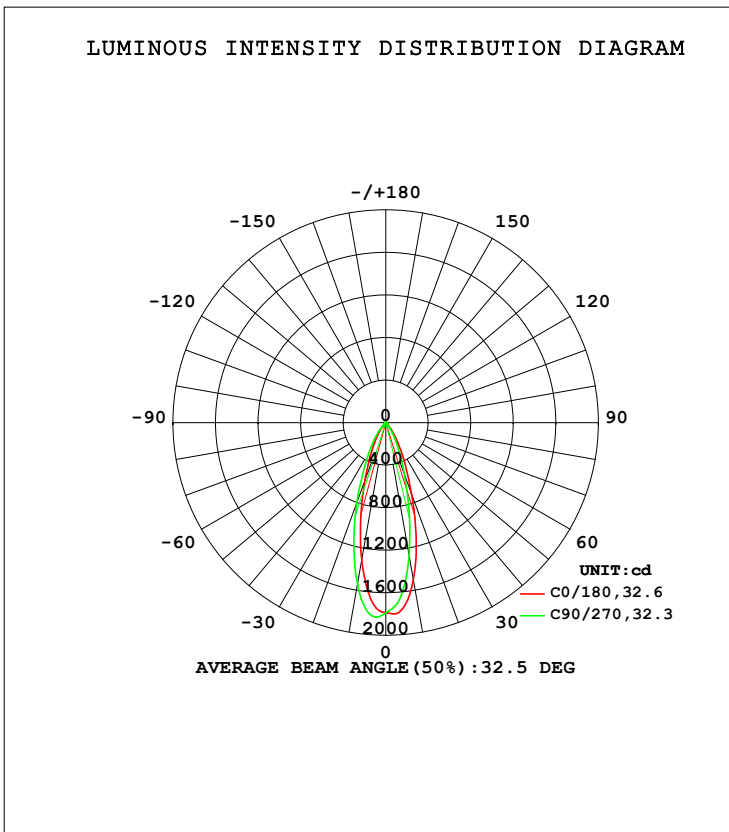

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1500	1385	1265	1211	1308	1431	1541	1592	0- 10	153.4	153.4	21.1,21.1
20	710.2	597.9	515.5	494.3	574.5	671.7	792.2	820.9	10- 20	275.2	428.5	59,59
30	250.1	200.9	163.8	162.5	204.4	259.6	305.0	308.0	20- 30	184.3	612.8	84.4,84.4
40	60.14	45.72	26.63	30.66	46.14	57.71	85.51	81.57	30- 40	79.74	692.5	95.4,95.4
50	12.70	11.26	10.37	10.69	11.23	12.48	14.08	14.86	40- 50	19.33	711.9	98,98
60	7.673	7.131	6.358	6.522	6.901	7.781	7.191	7.868	50- 60	8.491	720.4	99.2,99.2
70	3.259	2.668	1.993	2.210	2.703	2.767	2.509	3.067	60- 70	4.522	724.9	99.8,99.8
80	0.5881	0.4648	0.3769	0.3937	0.5028	0.3938	0.3538	0.4471	70- 80	1.249	726.1	100,100
90	0.0099	0.0047	0.0097	0.0024	0.0132	0.0106	0.0070	0.0034	80- 90	0.1546	726.3	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

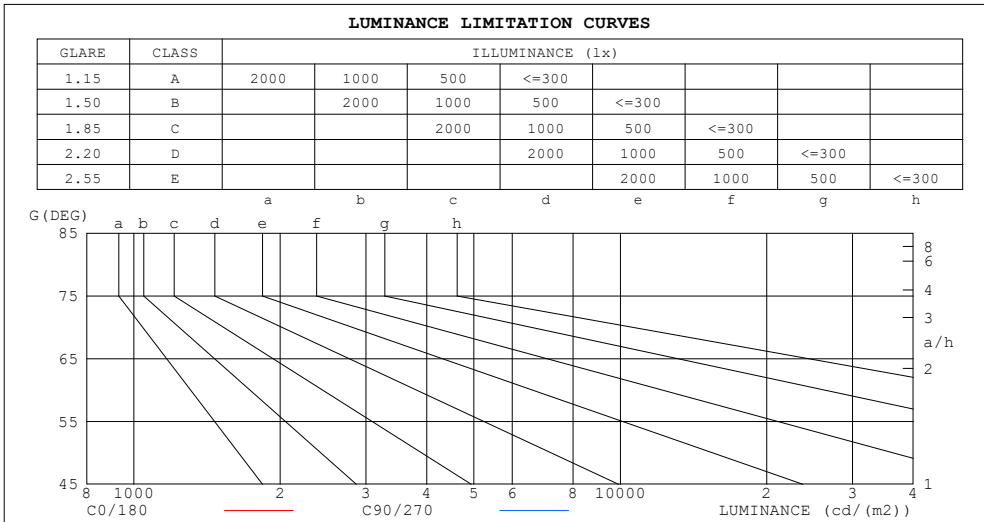

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	12	7
80	31	19
75	49	27
70	87	52
65	109	77
60	140	114
55	155	136
50	180	145
45	300	180


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.98	.98	.97	.95
2.0	1.05	1.02	.99	1.03	1.00	.98	1.00	.98	.95	.97	.95	.93	.95	.93	.91	.90
3.0	.99	.95	.92	.98	.94	.91	.95	.92	.89	.93	.90	.88	.91	.89	.87	.85
4.0	.94	.89	.86	.93	.89	.85	.91	.87	.84	.89	.86	.83	.87	.85	.82	.81
5.0	.89	.84	.81	.88	.84	.80	.87	.83	.80	.85	.82	.79	.84	.81	.78	.77
6.0	.85	.80	.76	.84	.80	.76	.83	.79	.76	.82	.78	.75	.80	.77	.75	.73
7.0	.81	.76	.73	.81	.76	.72	.79	.75	.72	.78	.74	.72	.77	.74	.71	.70
8.0	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.68	.74	.71	.68	.67
9.0	.74	.69	.66	.74	.69	.66	.73	.69	.66	.72	.68	.66	.72	.68	.65	.64
10.0	.72	.67	.63	.71	.66	.63	.70	.66	.63	.70	.66	.63	.69	.65	.63	.62

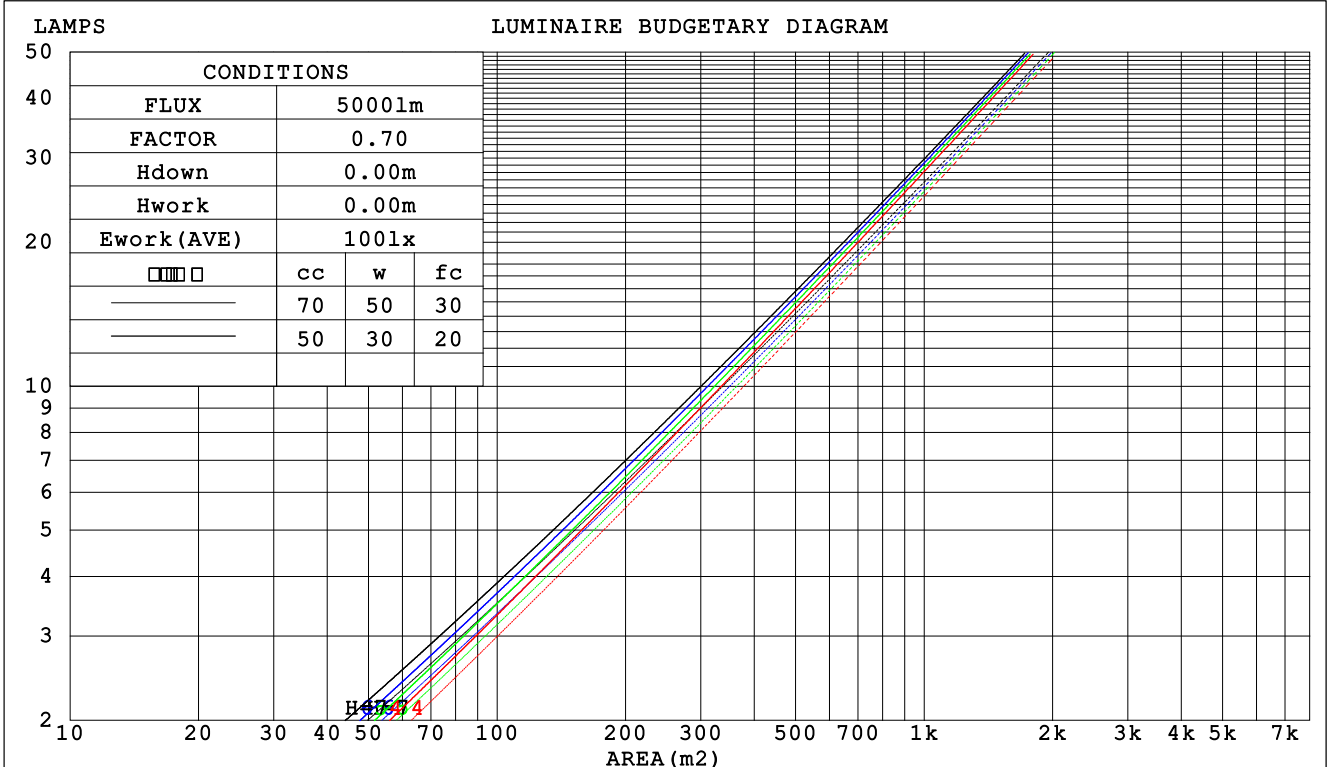

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.159 .091 .029	.153 .087 .028	.140 .080 .026	.129 .074 .024	.118 .068 .022	
2.0	.151 .083 .025	.145 .080 .025	.135 .075 .023	.125 .070 .022	.116 .066 .021	
3.0	.142 .076 .023	.138 .074 .022	.129 .070 .021	.121 .066 .020	.113 .063 .019	
4.0	.135 .070 .021	.131 .068 .020	.123 .065 .019	.116 .062 .019	.110 .060 .018	
5.0	.128 .065 .019	.124 .064 .019	.118 .061 .018	.112 .059 .018	.106 .057 .017	
6.0	.121 .061 .017	.118 .060 .017	.113 .058 .017	.107 .056 .016	.102 .054 .016	
7.0	.116 .057 .016	.113 .056 .016	.108 .055 .016	.103 .053 .015	.099 .051 .015	
8.0	.111 .054 .015	.108 .053 .015	.104 .052 .015	.100 .050 .015	.096 .049 .014	
9.0	.106 .051 .014	.104 .051 .014	.100 .049 .014	.096 .048 .014	.093 .047 .014	
10.0	.101 .049 .014	.100 .048 .013	.096 .047 .013	.093 .046 .013	.090 .045 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.170 .157 .146	.145 .135 .126	.099 .093 .087	.057 .054 .051	.018 .017 .016	
2.0	.153 .133 .115	.131 .114 .099	.090 .079 .069	.052 .046 .041	.017 .015 .013	
3.0	.140 .113 .092	.120 .098 .080	.082 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.129 .098 .075	.110 .085 .065	.076 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.119 .087 .062	.102 .075 .054	.070 .052 .038	.041 .031 .023	.013 .010 .008	
6.0	.111 .077 .052	.095 .067 .046	.066 .047 .032	.038 .027 .019	.012 .009 .006	
7.0	.104 .069 .045	.089 .060 .039	.062 .042 .028	.036 .025 .016	.012 .008 .005	
8.0	.098 .063 .038	.084 .054 .033	.058 .038 .024	.034 .022 .014	.011 .007 .005	
9.0	.093 .057 .033	.080 .050 .029	.055 .035 .021	.032 .021 .012	.010 .007 .004	
10.0	.088 .053 .029	.076 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm										
NAME: ASD-CD-TR-3D12AC-WH					TYPE:			WEIGHT:		
SPEC.:2700K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.2	5.0	4.4	5.2	5.3	1.9	2.7	2.1	2.8	3.0
3H	4.2	5.0	4.5	5.2	5.4	1.9	2.6	2.1	2.8	3.0
4H	4.2	4.9	4.5	5.1	5.3	1.8	2.5	2.1	2.8	3.0
6H	4.1	4.8	4.4	5.0	5.3	1.8	2.4	2.1	2.7	2.9
8H	4.1	4.7	4.4	5.0	5.2	1.7	2.4	2.0	2.6	2.9
12H	4.0	4.6	4.3	4.9	5.2	1.7	2.3	2.0	2.6	2.8
4H 2H	4.1	4.8	4.3	5.0	5.2	1.8	2.6	2.1	2.8	3.0
3H	4.1	4.7	4.4	5.0	5.3	1.9	2.5	2.2	2.8	3.1
4H	4.1	4.7	4.4	5.0	5.3	1.9	2.4	2.2	2.7	3.0
6H	4.0	4.5	4.4	4.9	5.2	1.8	2.3	2.2	2.6	3.0
8H	4.0	4.4	4.4	4.8	5.2	1.7	2.2	2.1	2.5	2.9
12H	3.9	4.4	4.3	4.7	5.1	1.7	2.1	2.1	2.5	2.9
8H 4H	4.0	4.4	4.4	4.8	5.1	1.8	2.2	2.1	2.6	2.9
6H	3.9	4.3	4.3	4.7	5.1	1.7	2.1	2.1	2.5	2.9
8H	3.9	4.2	4.3	4.6	5.0	1.6	2.0	2.1	2.4	2.8
12H	3.8	4.1	4.3	4.5	5.0	1.6	1.9	2.0	2.3	2.8
12H 4H	3.9	4.3	4.3	4.7	5.1	1.7	2.1	2.1	2.5	2.9
6H	3.8	4.2	4.3	4.6	5.0	1.6	2.0	2.1	2.4	2.8
8H	3.8	4.1	4.3	4.5	5.0	1.6	1.9	2.1	2.3	2.8
Variations with the observer position at spacings:										
S = 1.0H	+ 3.1 / - 4.2					+ 1.7 / - 2.7				
1.5H	+ 5.4 / - 3.7					+ 3.4 / - 2.2				
2.0H	+ 2.7 / - 1.4					+ 1.2 / - 1.6				

CIE Pub.117, 726.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.1)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

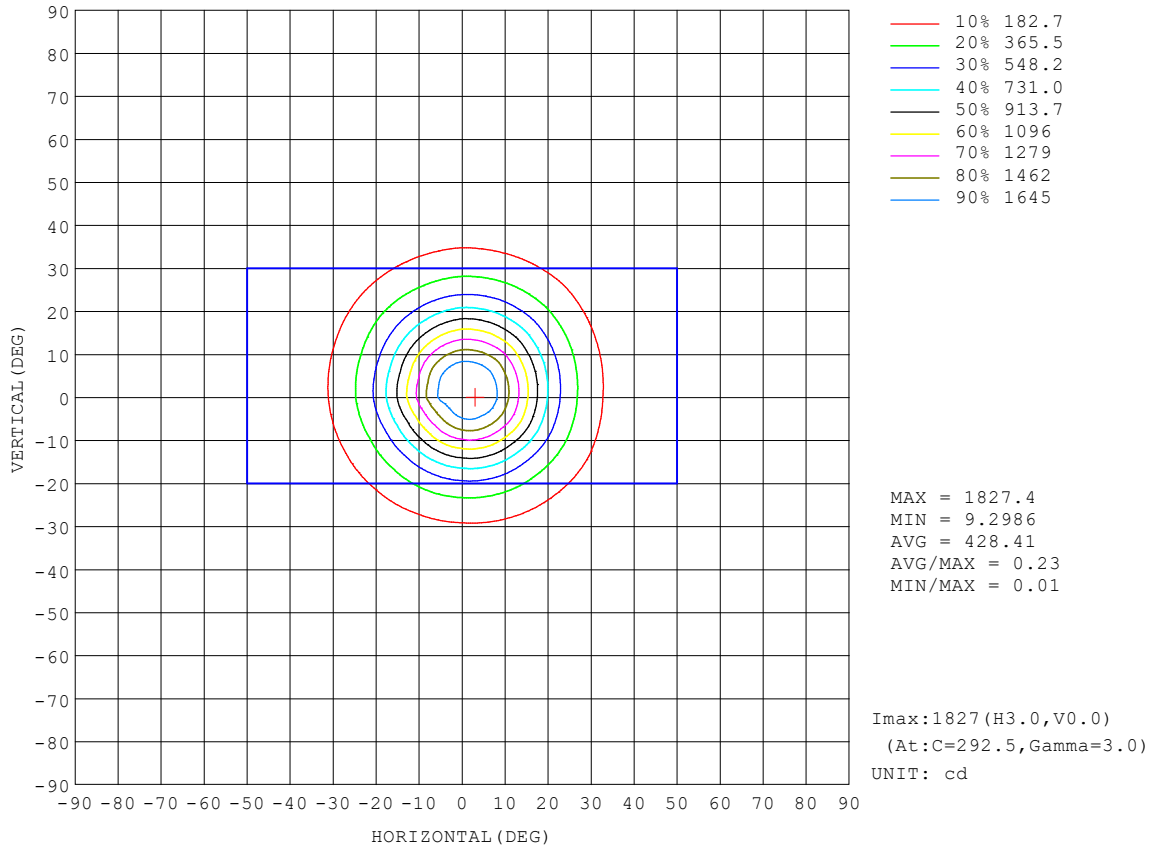


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

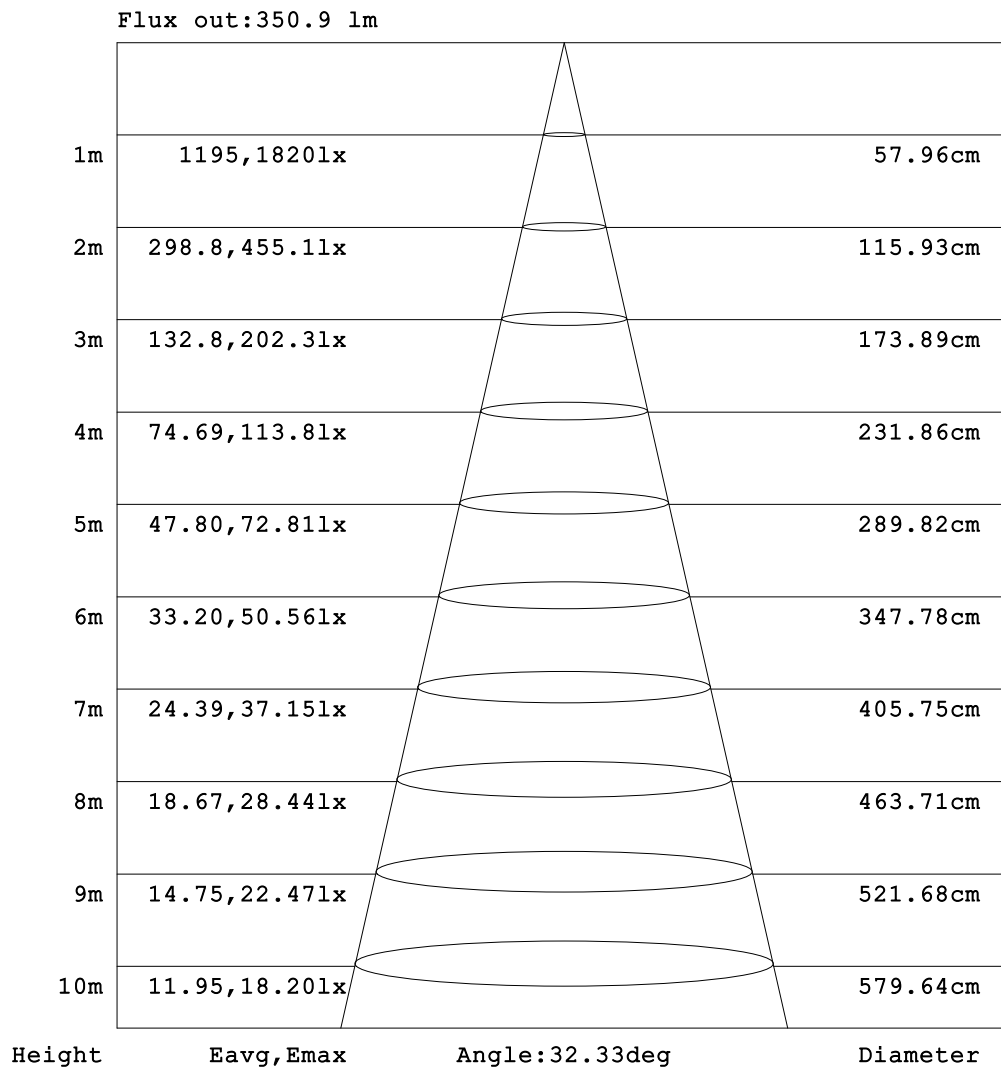


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

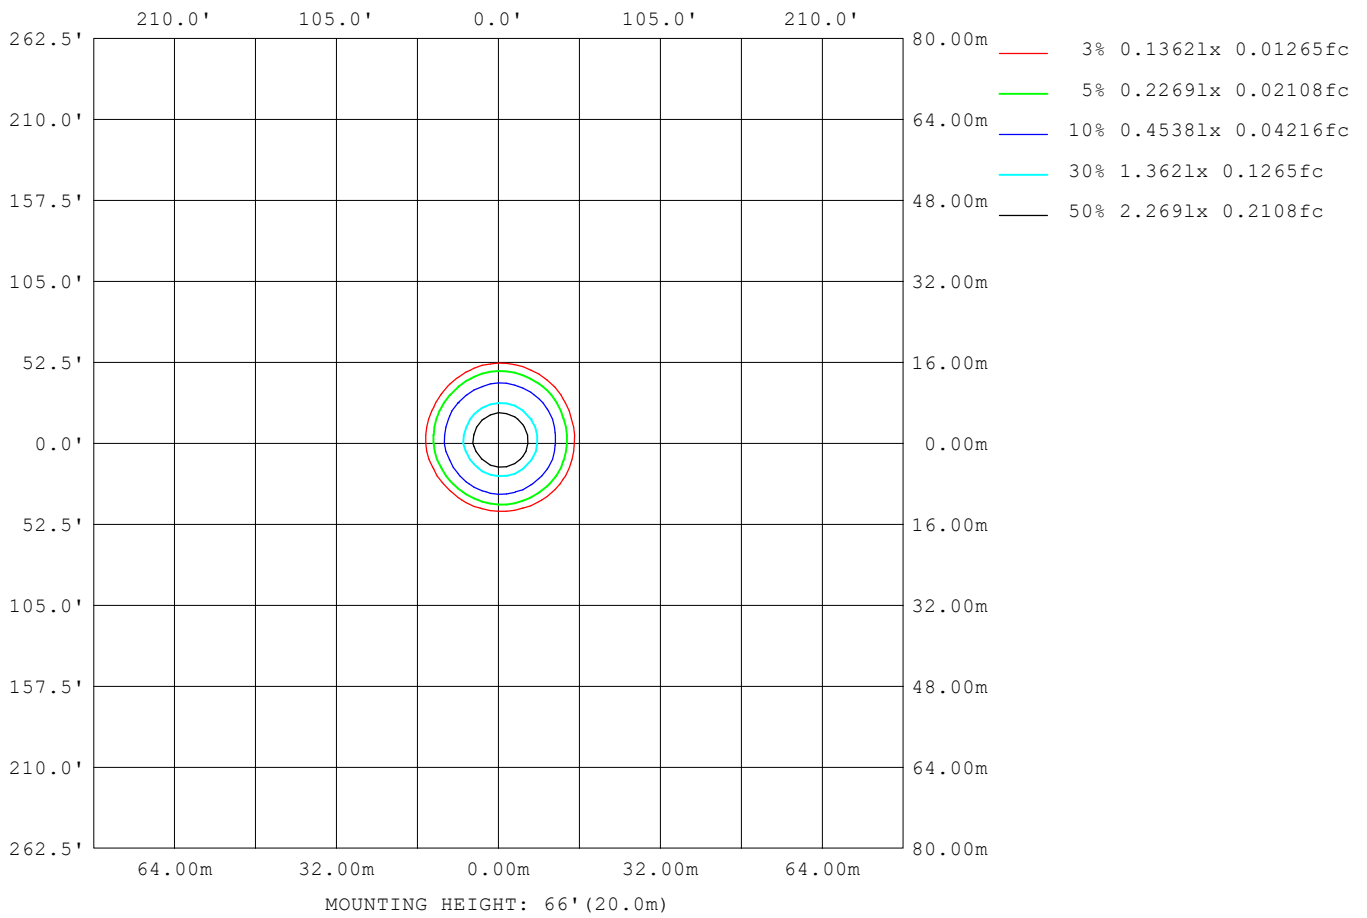

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	99
L_0~180 (75) av	40
L_0~180 (85) av	11
L_90~270 (65) av	85
L_90~270 (75) av	27
L_90~270 (85) av	6
L_45 (65) av	97
L_45 (75) av	30
L_45 (85) av	10

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

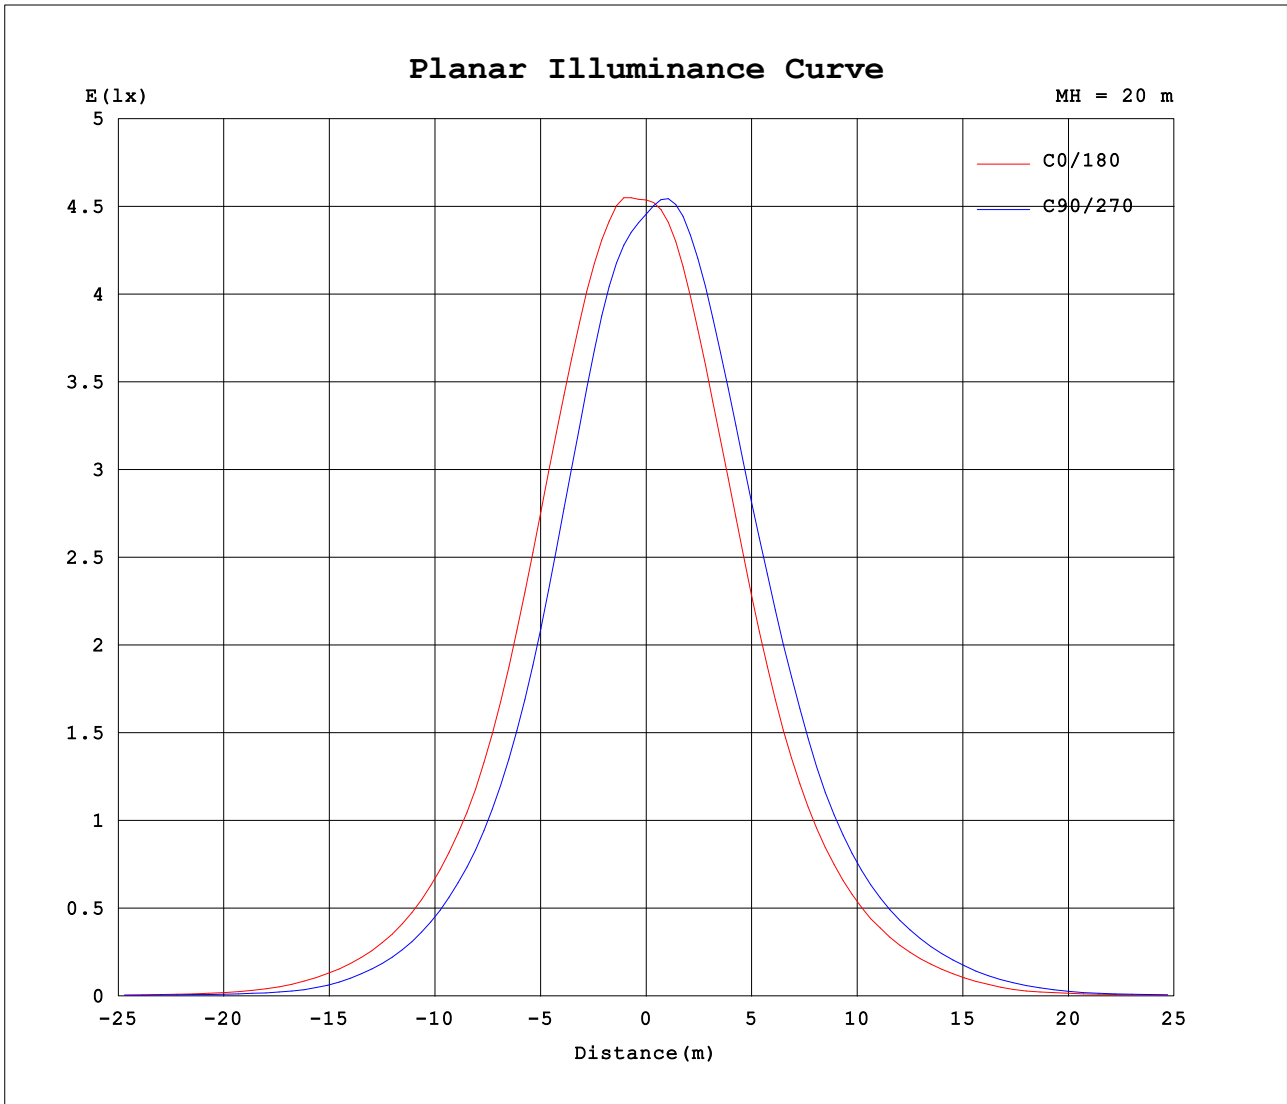

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-08-24

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.05V I:0.1239A P:11.449W PF:0.9238 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME: ASD-CD-TR-3D12AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1789	1789	1789	1789	1789	1789	1789	1789	1789	1789	1789	1789	1789	1789	1789	1789			
5	1760	1733	1695	1672	1641	1614	1595	1615	1658	1683	1739	1776	1804	1814	1821	1799			
10	1500	1459	1385	1319	1265	1232	1211	1247	1308	1345	1431	1489	1541	1569	1592	1572			
15	1106	1063	965	896	840	817	808	840	910	946	1030	1100	1164	1194	1217	1181			
20	710	668	598	551	516	500	494	520	575	607	672	730	792	812	821	779			
25	434	403	355	325	304	295	295	312	349	378	426	460	495	512	515	483			
30	250	234	201	181	164	158	162	181	204	227	260	277	305	310	308	288			
35	134	128	108	88.7	75.3	74.7	76.7	91.0	110	119	139	160	178	178	176	155			
40	60.1	56.9	45.7	35.3	26.6	25.7	30.7	37.0	46.1	47.4	57.7	73.3	85.5	90.1	81.6	67.7			
45	23.2	22.1	18.8	16.0	14.2	14.6	15.3	16.7	18.8	19.6	21.5	24.7	31.7	32.9	29.0	24.5			
50	12.7	12.3	11.3	10.5	10.4	9.98	10.7	11.2	11.2	11.9	12.5	12.8	14.1	14.1	14.9	13.8			
55	9.75	9.90	9.35	8.77	8.68	8.37	8.87	8.98	9.22	9.77	10.2	10.1	10.4	10.3	10.1	9.92			
60	7.67	7.68	7.13	6.36	6.36	6.13	6.52	6.64	6.90	7.39	7.78	6.91	7.19	6.97	7.87	7.79			
65	5.03	4.92	4.49	3.76	3.65	3.52	3.73	3.89	4.28	4.80	4.93	4.32	4.36	4.33	4.99	5.31			
70	3.26	3.11	2.67	2.28	1.99	2.00	2.21	2.42	2.70	2.95	2.77	2.55	2.51	2.69	3.07	3.40			
75	1.39	1.36	0.93	0.84	0.79	0.77	0.78	0.83	0.90	0.87	0.80	0.75	0.75	0.78	0.99	1.53			
80	0.59	0.56	0.46	0.40	0.38	0.37	0.39	0.44	0.50	0.44	0.39	0.36	0.35	0.38	0.45	0.53			
85	0.11	0.19	0.11	0.07	0.06	0.06	0.08	0.13	0.10	0.13	0.08	0.06	0.06	0.07	0.10	0.17			
90	0.01	0.01	0.00	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-08-24

□ Range: 0 - 90DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks: