
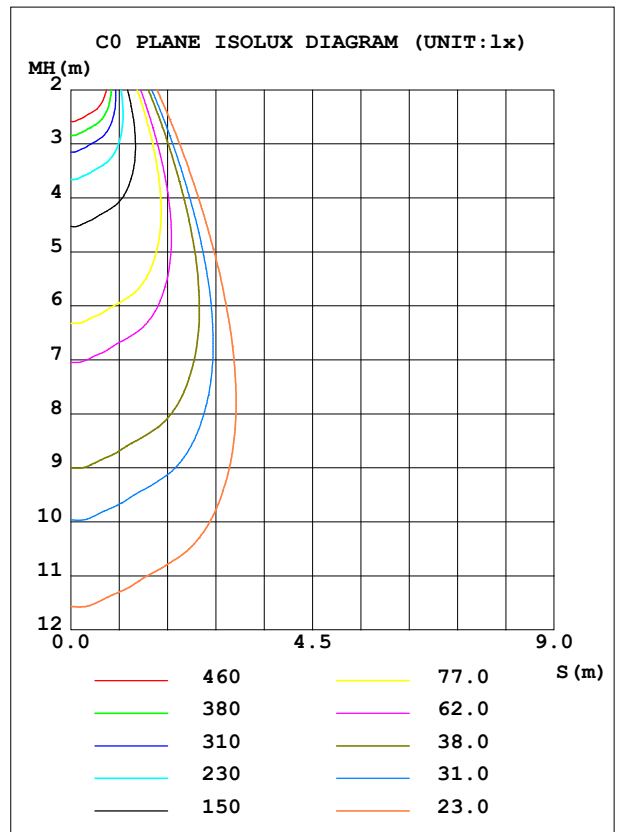


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	3049	S/MH (C0/180)	0.63
NOMINAL POWER (W)	24	LOR (%)	100.0	S/MH (C90/270)	0.69
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1691.6	η UP, DN (C0-180)	0.0,47.4
NOMINAL FLUX (lm)	1691.65	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,52.6
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.70

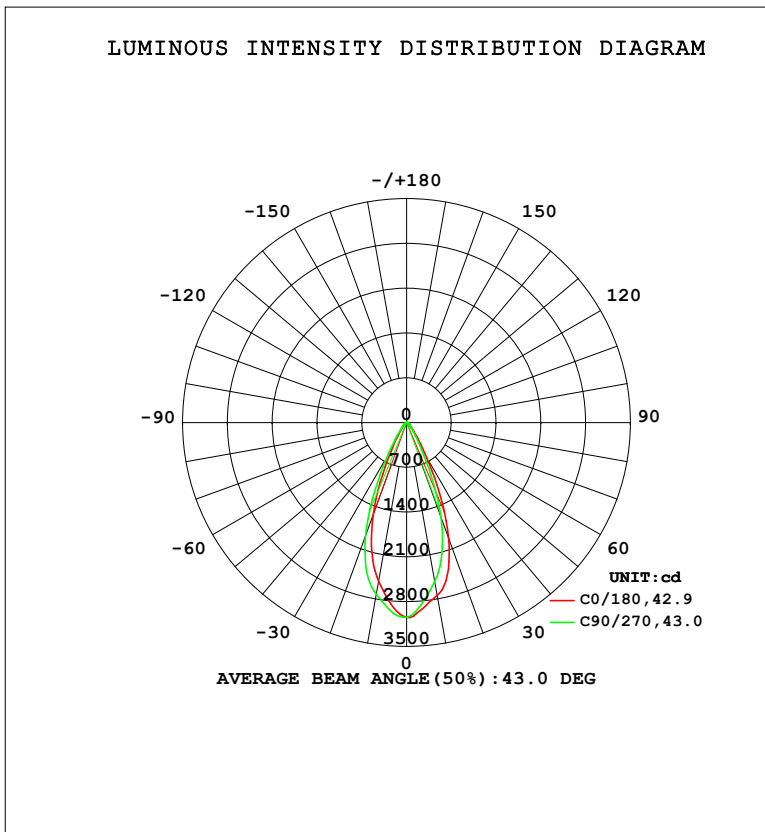

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2742	2723	2528	2436	2524	2700	2729	2873	0- 10	268.8	268.8	15.9,15.9
20	1926	1779	1574	1377	1530	1685	1876	2126	10- 20	623.2	891.9	52.7,52.7
30	635.7	540.0	434.2	377.5	427.7	491.5	598.0	734.6	20- 30	486.8	1379	81.5,81.5
40	164.3	144.2	125.0	106.5	121.1	131.2	152.9	201.2	30- 40	177.3	1556	92,92
50	64.57	60.08	54.75	50.79	53.90	56.79	62.06	72.67	40- 50	70.35	1626	96.1,96.1
60	35.24	32.73	29.86	28.40	30.42	32.34	34.76	38.28	50- 60	40.00	1666	98.5,98.5
70	9.339	8.306	7.255	7.103	7.663	8.022	9.185	9.698	60- 70	19.78	1686	99.7,99.7
80	2.336	2.219	2.068	2.074	2.159	2.167	2.323	2.343	70- 80	4.404	1691	99.9,99.9
90	0.0920	0.0541	0.0701	0.0558	0.0519	0.0478	0.0530	0.0419	80- 90	1.075	1692	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

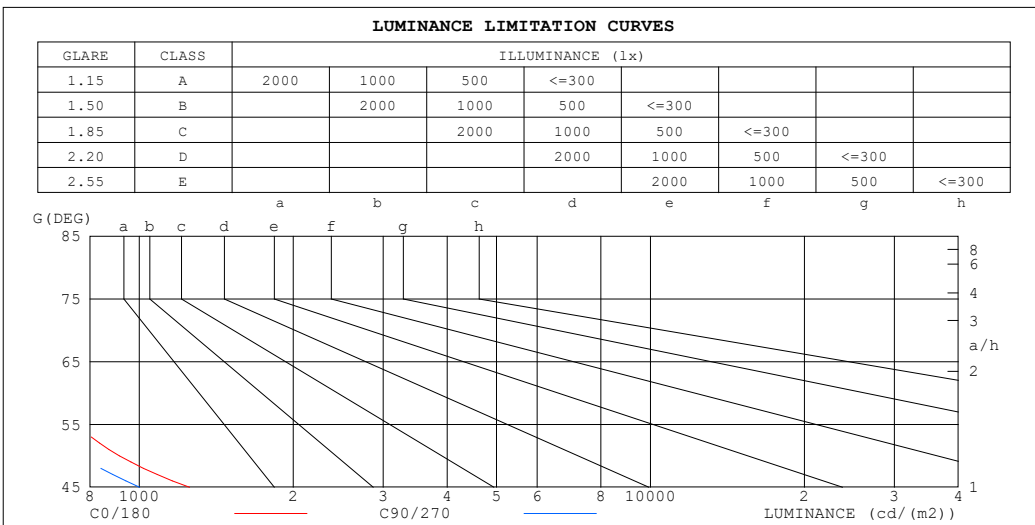

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	112	84
80	122	107
75	133	119
70	248	190
65	478	381
60	641	536
55	753	640
50	914	765
45	1255	1002


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.99	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.89	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.83	.81	.85	.82	.80	.78
5.0	.87	.82	.78	.86	.81	.77	.84	.80	.77	.83	.79	.76	.81	.78	.75	.74
6.0	.82	.77	.73	.82	.76	.73	.80	.76	.72	.79	.75	.72	.78	.74	.71	.70
7.0	.78	.73	.69	.78	.72	.69	.76	.72	.68	.75	.71	.68	.74	.70	.68	.66
8.0	.74	.69	.65	.74	.69	.65	.73	.68	.65	.72	.68	.65	.71	.67	.64	.63
9.0	.71	.66	.62	.71	.65	.62	.70	.65	.62	.69	.65	.62	.68	.64	.61	.60
10.0	.68	.63	.59	.67	.62	.59	.67	.62	.59	.66	.62	.59	.65	.61	.59	.57

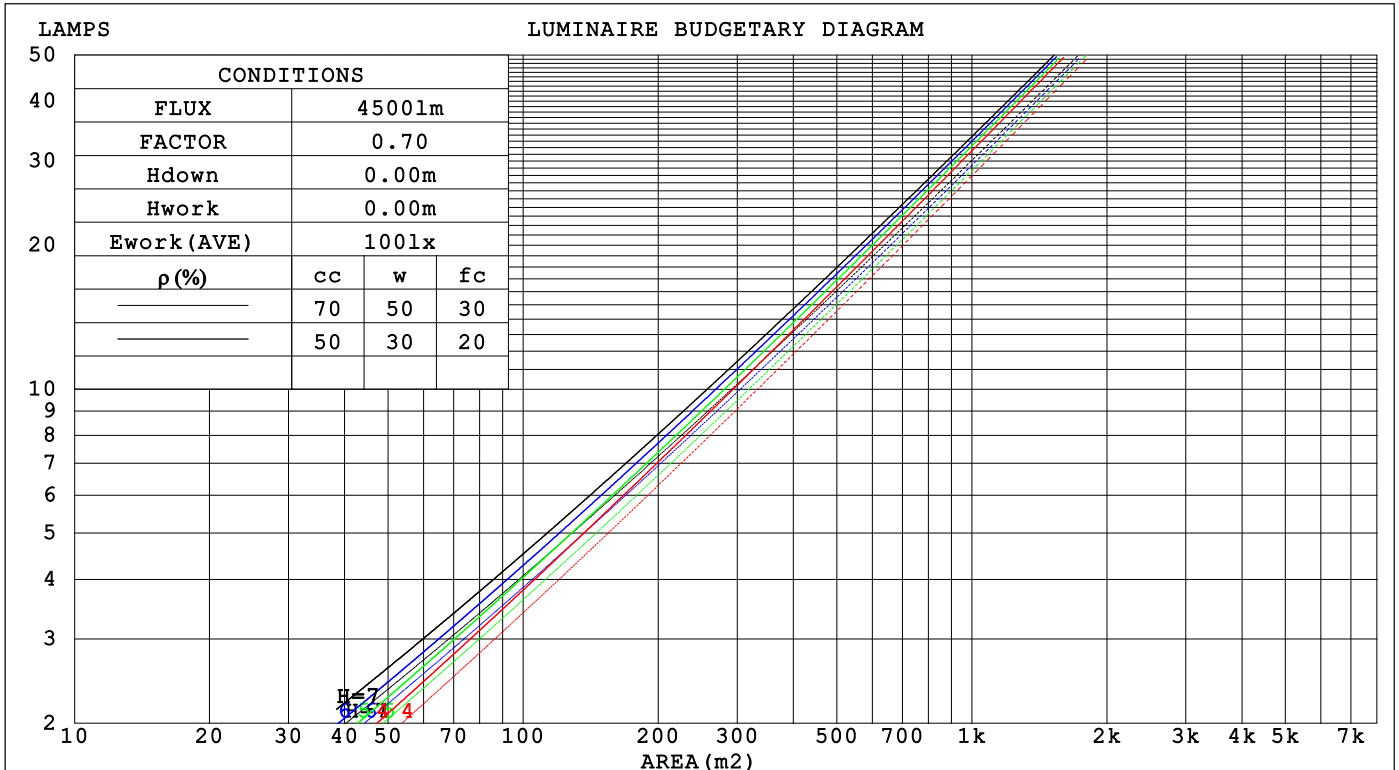

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.170	.096	.031	.163	.093	.030	.150	.086	.028	.139	.080	.026	.128	.074	.024	
2.0	.161	.088	.027	.155	.086	.026	.145	.081	.025	.135	.076	.024	.126	.071	.023	
3.0	.152	.081	.024	.148	.079	.024	.139	.075	.023	.130	.072	.022	.123	.068	.021	
4.0	.144	.075	.022	.140	.073	.022	.133	.070	.021	.125	.067	.020	.119	.065	.020	
5.0	.137	.070	.020	.133	.068	.020	.127	.066	.019	.121	.064	.019	.115	.061	.018	
6.0	.130	.065	.019	.127	.064	.018	.121	.062	.018	.116	.060	.018	.111	.058	.017	
7.0	.124	.061	.017	.121	.060	.017	.116	.059	.017	.111	.057	.017	.107	.056	.016	
8.0	.118	.058	.016	.116	.057	.016	.111	.056	.016	.107	.054	.016	.103	.053	.015	
9.0	.113	.055	.015	.111	.054	.015	.107	.053	.015	.103	.052	.015	.100	.051	.015	
10.0	.109	.052	.014	.107	.051	.014	.103	.050	.014	.100	.049	.014	.096	.048	.014	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.133	.114	.098	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.142	.114	.091	.122	.098	.079	.083	.068	.055	.048	.040	.033	.015	.013	.011	
4.0	.131	.099	.074	.112	.085	.064	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.122	.087	.061	.105	.075	.053	.072	.053	.038	.042	.031	.022	.013	.010	.007	
6.0	.114	.077	.051	.098	.067	.045	.068	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.107	.070	.043	.092	.060	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.101	.063	.037	.087	.055	.033	.060	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.096	.058	.032	.083	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.091	.054	.028	.079	.046	.025	.055	.033	.018	.032	.019	.011	.010	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.8	6.7	6.0	6.8	7.0	5.1	6.0	5.3	6.1	6.3
3H	5.9	6.7	6.2	6.9	7.1	5.2	6.0	5.4	6.2	6.4
4H	5.8	6.6	6.1	6.8	7.0	5.1	5.9	5.4	6.1	6.3
6H	5.8	6.5	6.1	6.7	7.0	5.1	5.8	5.4	6.0	6.3
8H	5.8	6.4	6.1	6.7	7.0	5.0	5.7	5.3	6.0	6.2
12H	5.7	6.4	6.0	6.6	6.9	5.0	5.7	5.3	5.9	6.2
4H 2H	5.8	6.6	6.1	6.8	7.0	5.2	5.9	5.5	6.2	6.4
3H	5.9	6.6	6.2	6.9	7.1	5.3	5.9	5.6	6.2	6.5
4H	5.9	6.5	6.2	6.8	7.1	5.2	5.8	5.6	6.1	6.4
6H	5.8	6.4	6.2	6.7	7.0	5.2	5.7	5.6	6.0	6.4
8H	5.8	6.3	6.2	6.6	7.0	5.1	5.6	5.5	6.0	6.4
12H	5.8	6.2	6.2	6.6	7.0	5.1	5.6	5.5	5.9	6.3
8H 4H	5.8	6.3	6.2	6.6	7.0	5.1	5.6	5.5	6.0	6.3
6H	5.7	6.1	6.2	6.5	6.9	5.1	5.5	5.5	5.9	6.3
8H	5.7	6.1	6.1	6.5	6.9	5.1	5.4	5.5	5.8	6.3
12H	5.7	6.0	6.1	6.4	6.9	5.0	5.3	5.5	5.8	6.2
12H 4H	5.7	6.2	6.1	6.5	6.9	5.1	5.5	5.5	5.9	6.3
6H	5.7	6.0	6.1	6.5	6.9	5.0	5.4	5.5	5.8	6.3
8H	5.7	6.0	6.1	6.4	6.9	5.0	5.3	5.5	5.8	6.2

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 2.1 / - 2.2	+ 1.5 / - 2.2
1.5H	+ 3.5 / - 1.5	+ 2.2 / - 1.6
2.0H	+ 2.3 / - 1.6	+ 1.7 / - 1.4

CIE Pub.117, 1692 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.8)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

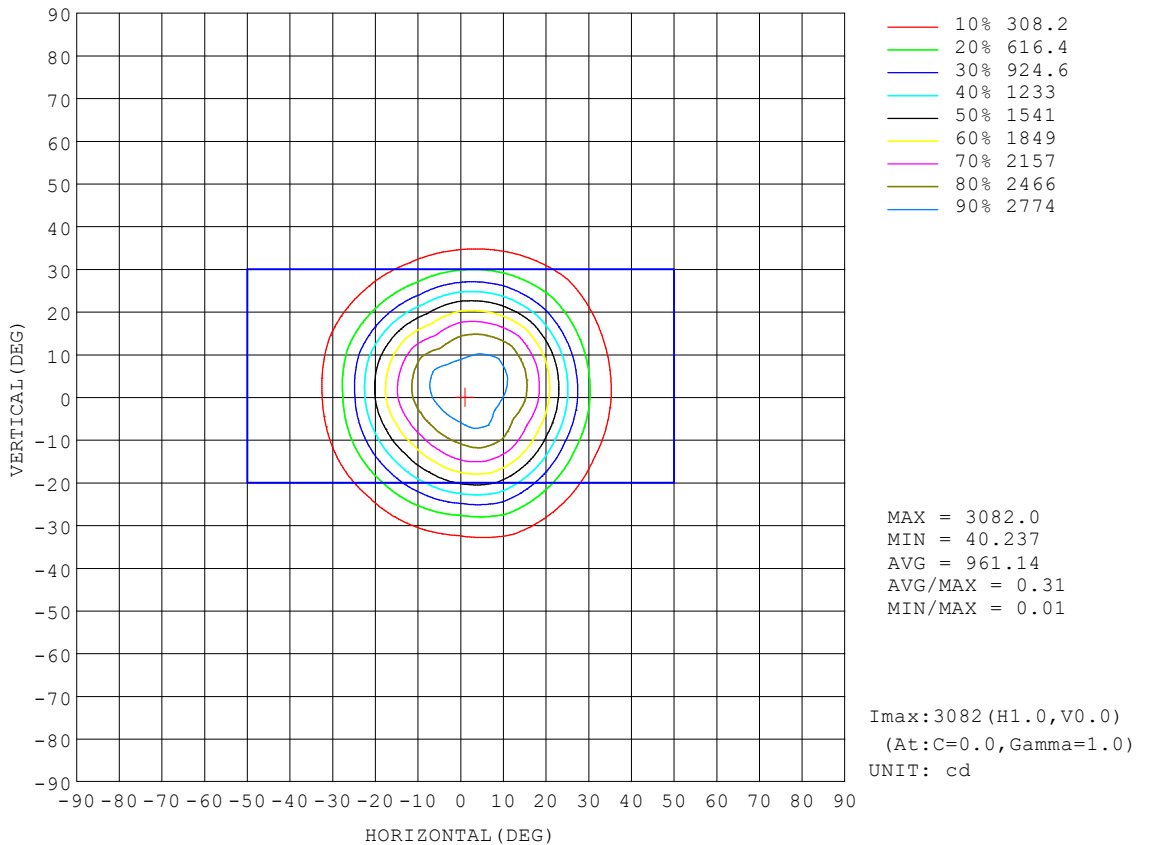


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

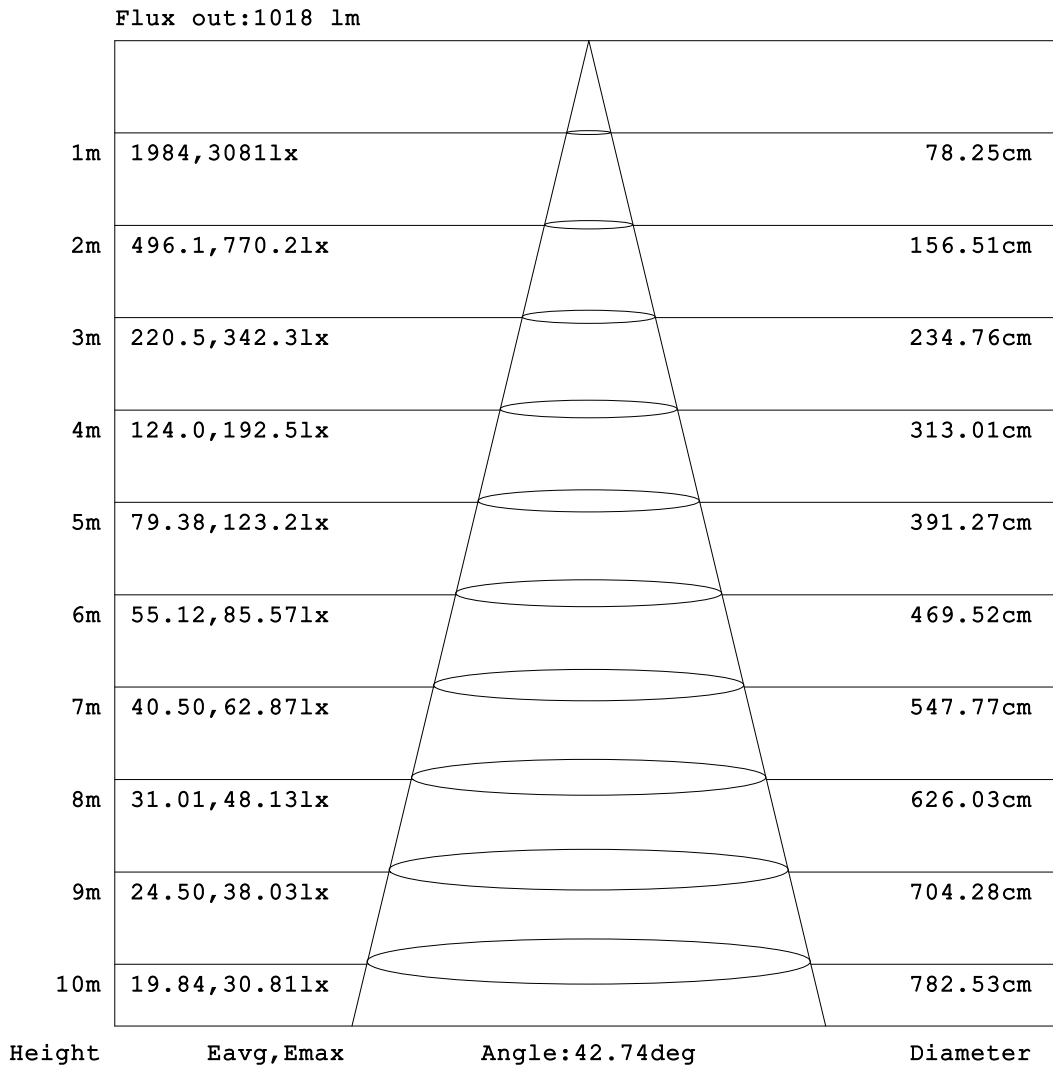


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

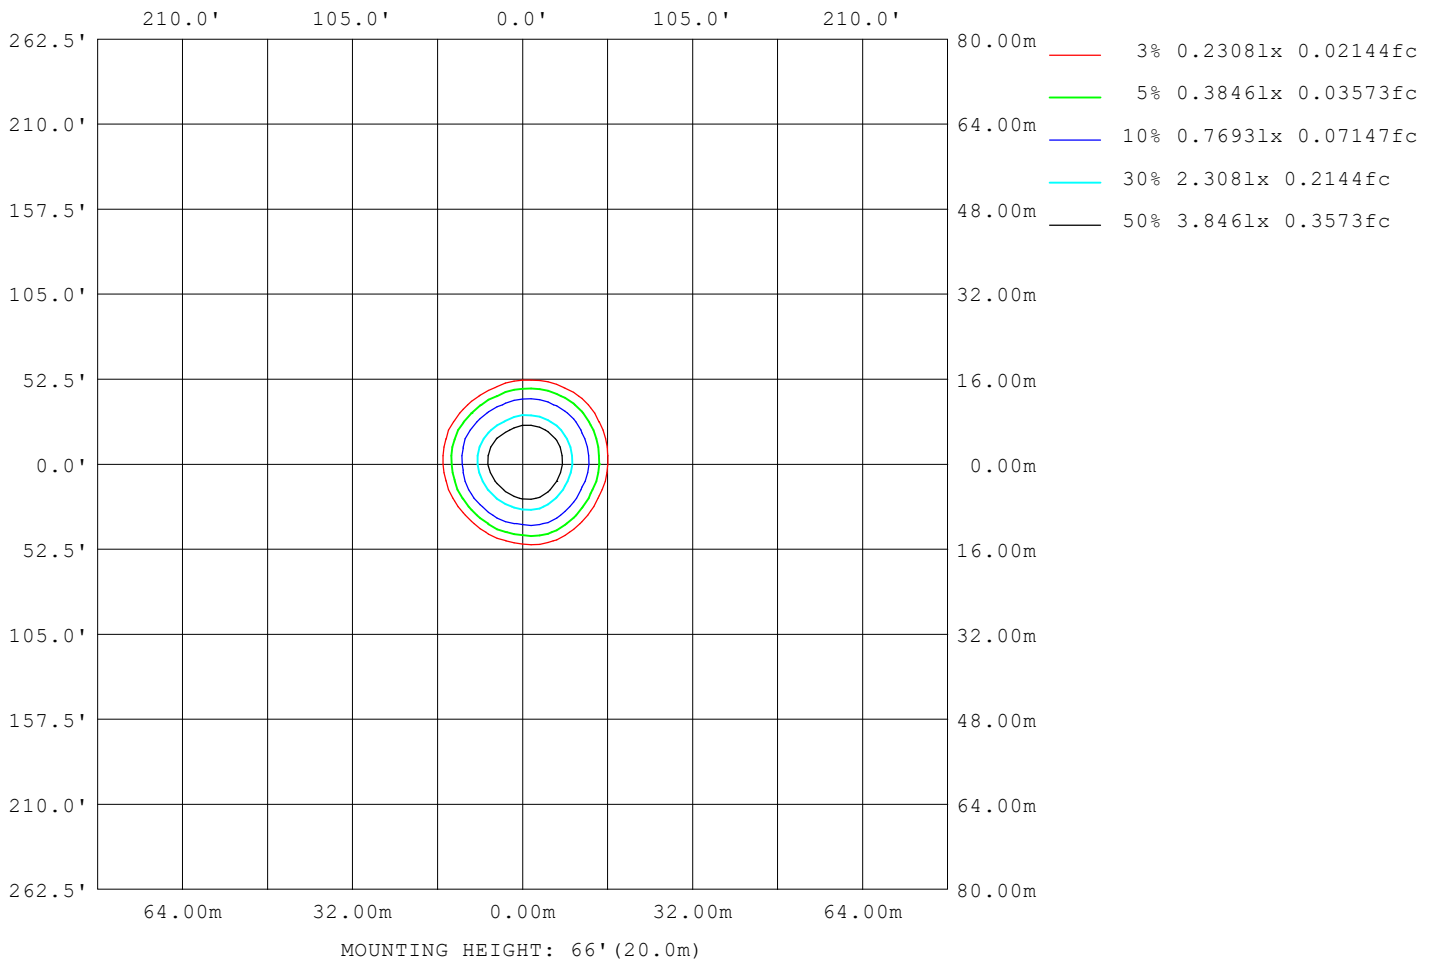

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	439
L_0~180 (75) av	127
L_0~180 (85) av	103
L_90~270 (65) av	427
L_90~270 (75) av	126
L_90~270 (85) av	94
L_45 (65) av	433
L_45 (75) av	126
L_45 (85) av	97

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

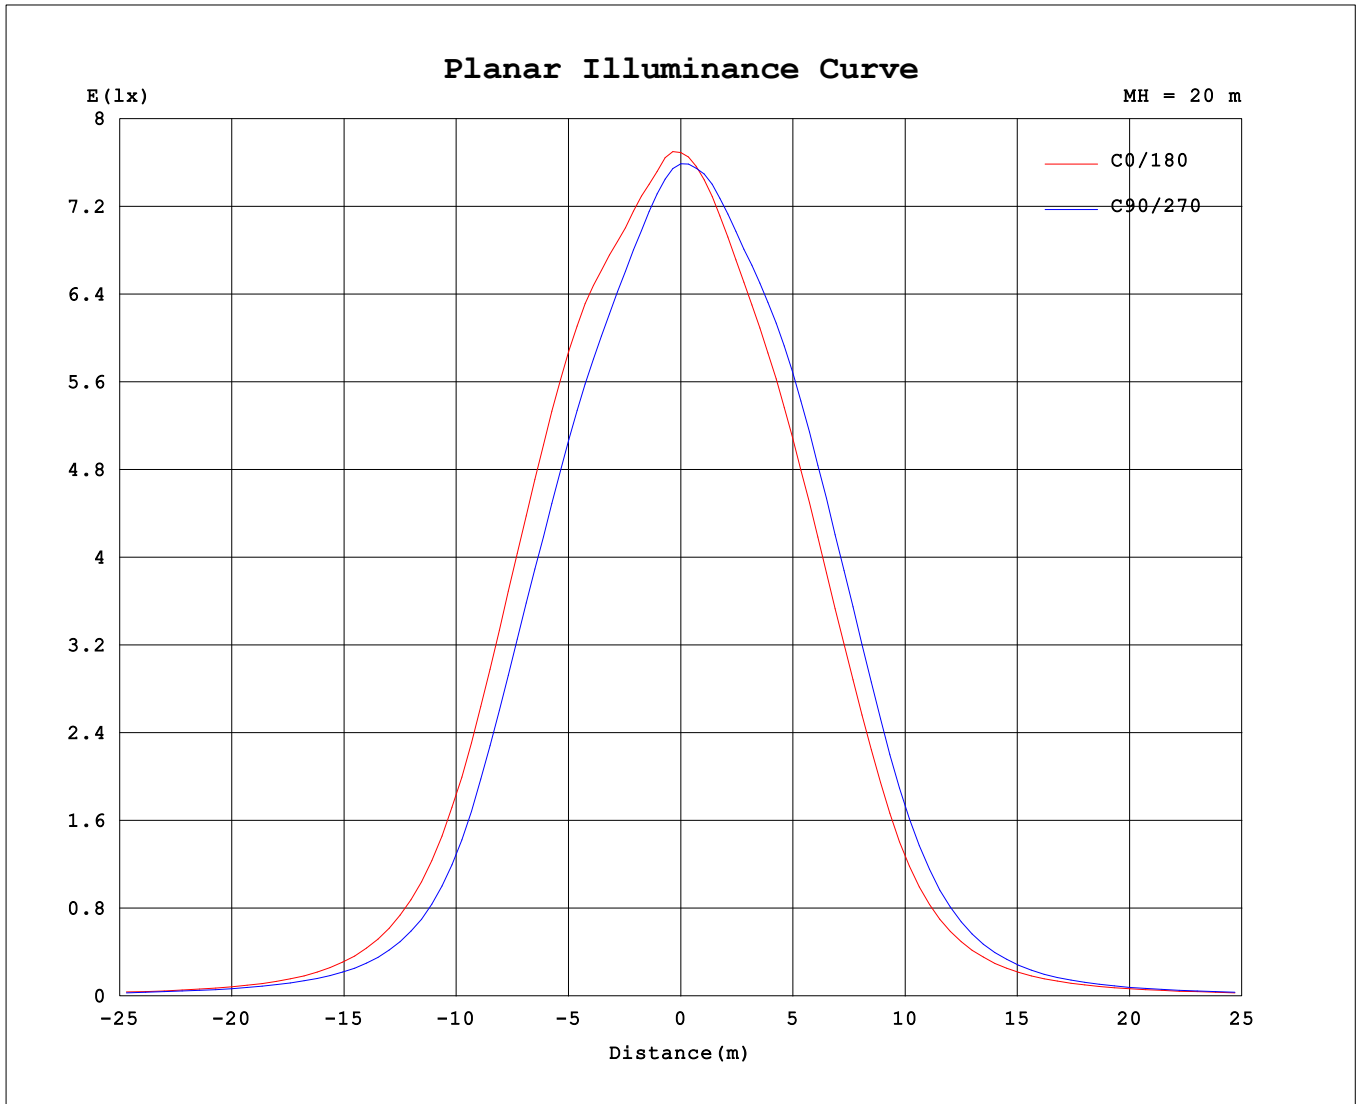

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.73V I:0.1916A P:22.684W PF:0.9890 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1691.65x1 lm		
NAME: ASD-CD-TR-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 2700K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	3044	3044	3044	3044	3044	3044	3044	3044	3044	3044	3044	3044	3044	3044	3044	3044			
5	2920	2917	2938	2917	2832	2799	2796	2828	2847	2913	2953	2942	2950	2952	2947	2938			
10	2742	2669	2723	2657	2528	2464	2436	2487	2524	2610	2700	2660	2729	2823	2873	2857			
15	2467	2301	2344	2264	2132	1999	1934	2012	2106	2183	2276	2217	2415	2541	2644	2608			
20	1926	1795	1779	1739	1574	1431	1377	1434	1530	1637	1685	1668	1876	1997	2126	2083			
25	1228	1103	1086	1089	907	837	807	848	886	1011	1011	1022	1186	1313	1392	1352			
30	636	548	540	550	434	407	377	414	428	504	492	507	598	687	735	696			
35	316	268	266	273	220	203	186	204	216	246	243	247	290	340	383	348			
40	164	144	144	146	125	113	107	113	121	132	131	133	153	177	201	184			
45	97.5	88.7	88.3	88.0	78.9	72.7	69.8	72.9	76.5	81.0	81.9	82.5	92.0	105	116	109			
50	64.6	60.8	60.1	59.4	54.7	52.0	50.8	52.5	53.9	56.0	56.8	57.0	62.1	68.0	72.7	70.4			
55	47.5	45.2	44.4	43.8	40.9	39.3	38.8	40.0	41.1	42.6	43.1	43.1	46.2	49.3	51.7	50.8			
60	35.2	33.4	32.7	32.2	29.9	28.8	28.4	29.3	30.4	31.8	32.3	32.4	34.8	36.7	38.3	37.4			
65	22.2	20.7	20.2	19.8	18.0	17.4	17.2	18.2	19.0	19.9	20.1	20.3	22.2	23.2	23.9	22.9			
70	9.34	8.61	8.31	8.13	7.26	7.14	7.10	7.50	7.66	8.02	8.02	8.08	9.18	9.66	9.70	9.33			
75	3.79	3.67	3.62	3.57	3.44	3.43	3.45	3.56	3.54	3.56	3.56	3.57	3.79	3.86	3.84	3.73			
80	2.34	2.27	2.22	2.18	2.07	2.06	2.07	2.17	2.16	2.17	2.17	2.19	2.32	2.36	2.34	2.28			
85	1.07	1.03	0.98	0.92	0.82	0.82	0.85	0.92	0.92	0.93	0.87	0.90	0.99	1.03	1.05	1.03			
90	0.09	0.07	0.05	0.06	0.07	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.06			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks: