
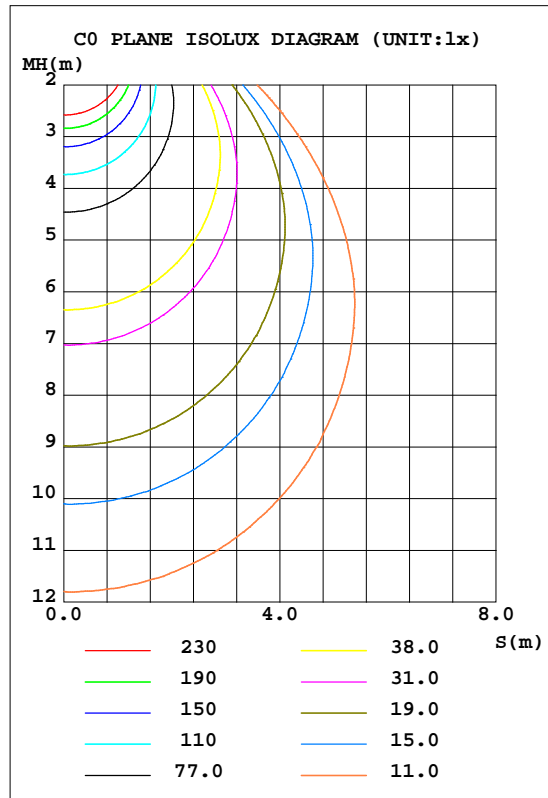


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 83.78 lm/W			
MODEL	DA40AC(40W 3000K)	I _{max} (cd)	1534	S/MH(C0/180)	1.15
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	3292.4	h UP, DN(C0-180)	0.2,50.0
NOMINAL FLUX(lm)	3292.38	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.5
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

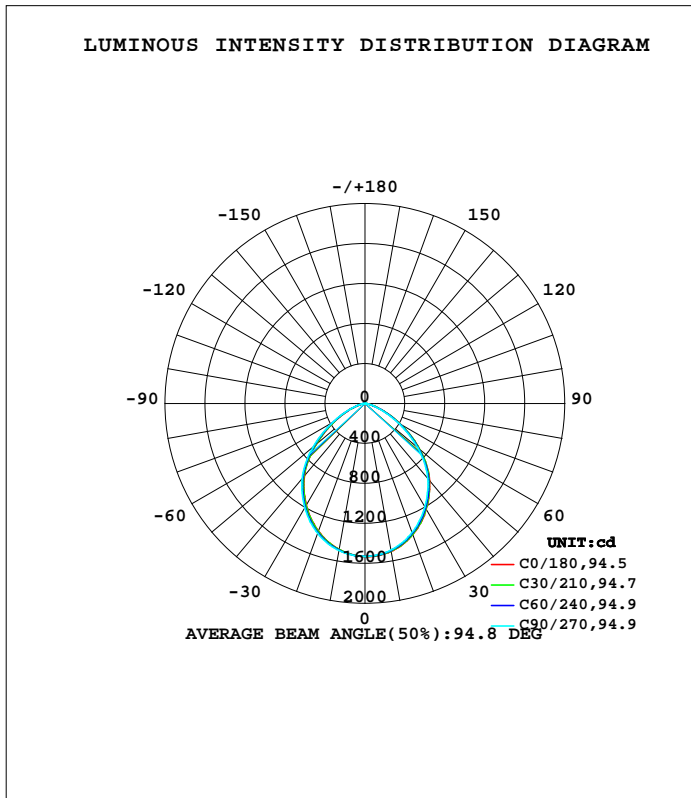

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1402]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1504	1498	1490	1483	1484	1488	1495	1502	0- 10	144.3	144.3	4.38,4.38
20	1398	1390	1375	1360	1362	1369	1383	1397	10- 20	407.1	551.4	16.7,16.7
30	1226	1216	1199	1176	1175	1187	1205	1223	20- 30	596.8	1148	34.9,34.9
40	1007	997.7	980.2	948.2	945.0	960.2	978.9	1001	30- 40	682.9	1831	55.6,55.6
50	718.3	710.7	689.6	649.1	638.8	654.9	680.4	709.9	40- 50	643.2	2474	75.2,75.2
60	402.5	398.3	377.7	344.6	339.1	349.0	366.0	392.1	50- 60	466.0	2940	89.3,89.3
70	160.1	155.2	141.4	126.9	125.7	130.6	139.4	153.3	60- 70	244.2	3185	96.7,96.7
80	35.78	34.47	30.78	29.46	29.34	29.31	31.01	33.91	70- 80	79.00	3264	99.1,99.1
90	0.7193	0.1591	0.1109	0.2218	0.1597	0.1672	0.1593	0.1859	80- 90	14.32	3278	99.6,99.6
100	0.3529	0.4603	0.4782	0.6821	0.6103	0.5747	0.4634	0.4367	90-100	0.3247	3278	99.6,99.6
110	0.9898	1.146	1.136	1.475	1.338	1.288	1.163	1.091	100-110	0.8931	3279	99.6,99.6
120	1.884	2.018	2.022	2.404	2.211	2.208	2.048	1.957	110-120	1.639	3281	99.6,99.6
130	2.750	2.852	2.867	3.304	3.091	3.057	2.942	2.774	120-130	2.271	3283	99.7,99.7
140	3.457	3.610	3.649	4.090	3.784	3.753	3.648	3.515	130-140	2.586	3286	99.8,99.8
150	4.185	4.247	4.314	4.769	4.470	4.497	4.285	4.160	140-150	2.532	3288	99.9,99.9
160	4.856	4.926	4.944	5.393	5.086	5.224	5.019	4.859	150-160	2.174	3290	99.9,99.9
170	5.445	5.604	5.553	5.978	5.675	5.843	5.677	5.400	160-170	1.513	3292	100,100
180	6.084	6.006	5.926	6.161	5.862	6.234	6.037	5.940	170-180	0.5560	3292	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1402]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

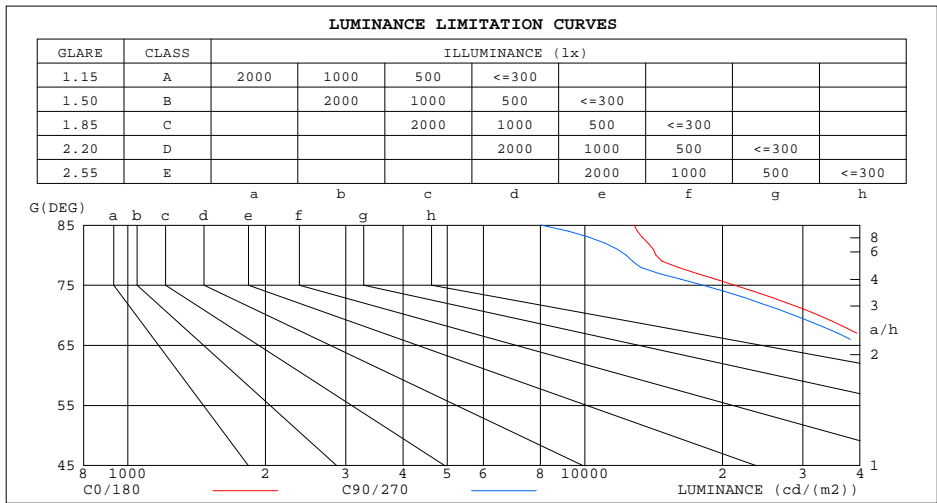


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1402]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.54	.65	.59	.54	.64	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.54	.48	.43	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.35	.31	.30

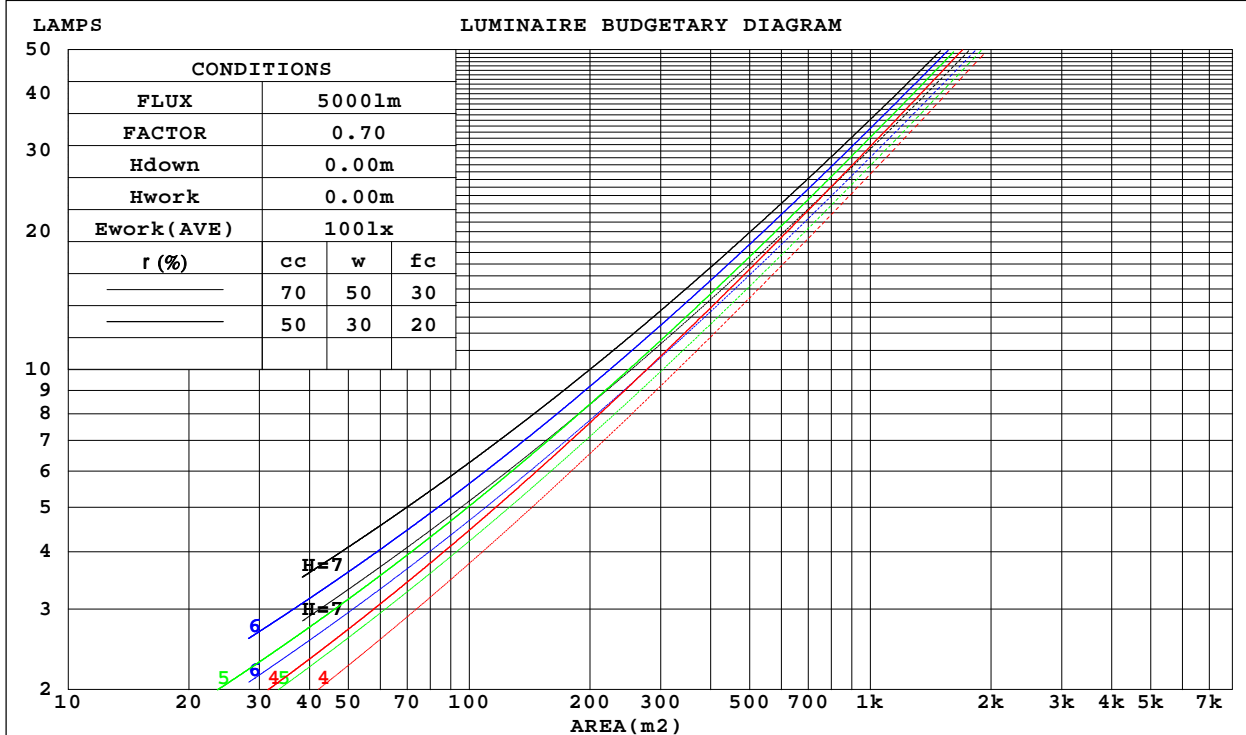

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1402]
 Remarks:

WEC AND CCEC

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.144	.046	.247	.141	.045	.234	.134	.043	.222	.128	.041	.210	.122	.039	
2.0	.247	.135	.042	.241	.133	.041	.229	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.234	.125	.037	.229	.123	.037	.219	.119	.036	.209	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.106	.031	.203	.104	.030	.195	.102	.030	.188	.099	.029	.181	.097	.029	
6.0	.195	.098	.028	.191	.096	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.183	.090	.026	.180	.089	.026	.173	.088	.025	.167	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.145	.074	.021	
10.0	.154	.074	.020	.151	.073	.020	.147	.072	.020	.142	.071	.020	.138	.070	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.136	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.081	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.085	.045	.120	.073	.039	.083	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.078	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.030	.076	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.105	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.063	.027	.100	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1402]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.2	27.7	26.6	28.0	28.4	25.5	27.0	25.9	27.3	27.6
3H	27.0	28.4	27.4	28.7	29.1	26.2	27.5	26.6	27.9	28.3
4H	27.2	28.4	27.6	28.8	29.2	26.3	27.6	26.8	27.9	28.3
6H	27.2	28.3	27.6	28.7	29.1	26.4	27.5	26.8	27.9	28.3
8H	27.2	28.3	27.7	28.7	29.1	26.4	27.4	26.8	27.8	28.2
12H	27.2	28.2	27.6	28.6	29.1	26.3	27.4	26.8	27.8	28.2
4H 2H	26.5	27.8	26.9	28.1	28.5	25.7	27.0	26.1	27.3	27.7
3H	27.5	28.5	27.9	28.9	29.3	26.6	27.6	27.0	28.0	28.4
4H	27.7	28.6	28.1	29.0	29.4	26.7	27.6	27.2	28.1	28.5
6H	27.7	28.5	28.2	29.0	29.4	26.8	27.6	27.3	28.0	28.5
8H	27.7	28.5	28.2	28.9	29.4	26.8	27.5	27.3	28.0	28.4
12H	27.7	28.4	28.2	28.9	29.4	26.8	27.4	27.3	27.9	28.4
8H 4H	27.7	28.4	28.1	28.8	29.3	26.7	27.4	27.2	27.9	28.4
6H	27.8	28.4	28.3	28.9	29.3	26.8	27.4	27.3	27.9	28.4
8H	27.8	28.3	28.3	28.8	29.3	26.8	27.3	27.3	27.9	28.4
12H	27.8	28.3	28.3	28.8	29.4	26.8	27.3	27.3	27.8	28.3
12H 4H	27.6	28.3	28.1	28.8	29.3	26.7	27.3	27.2	27.8	28.3
6H	27.7	28.3	28.3	28.7	29.3	26.8	27.3	27.3	27.8	28.3
8H	27.8	28.3	28.3	28.8	29.3	26.8	27.3	27.3	27.8	28.3
CIE190: 2010										

CIE190: 2010
Area: 0.0144 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1402]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	47	63	53	46	62	52	46	40
0.80	74	64	57	73	63	57	71	62	56	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	93	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.700m [K=1.1402]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

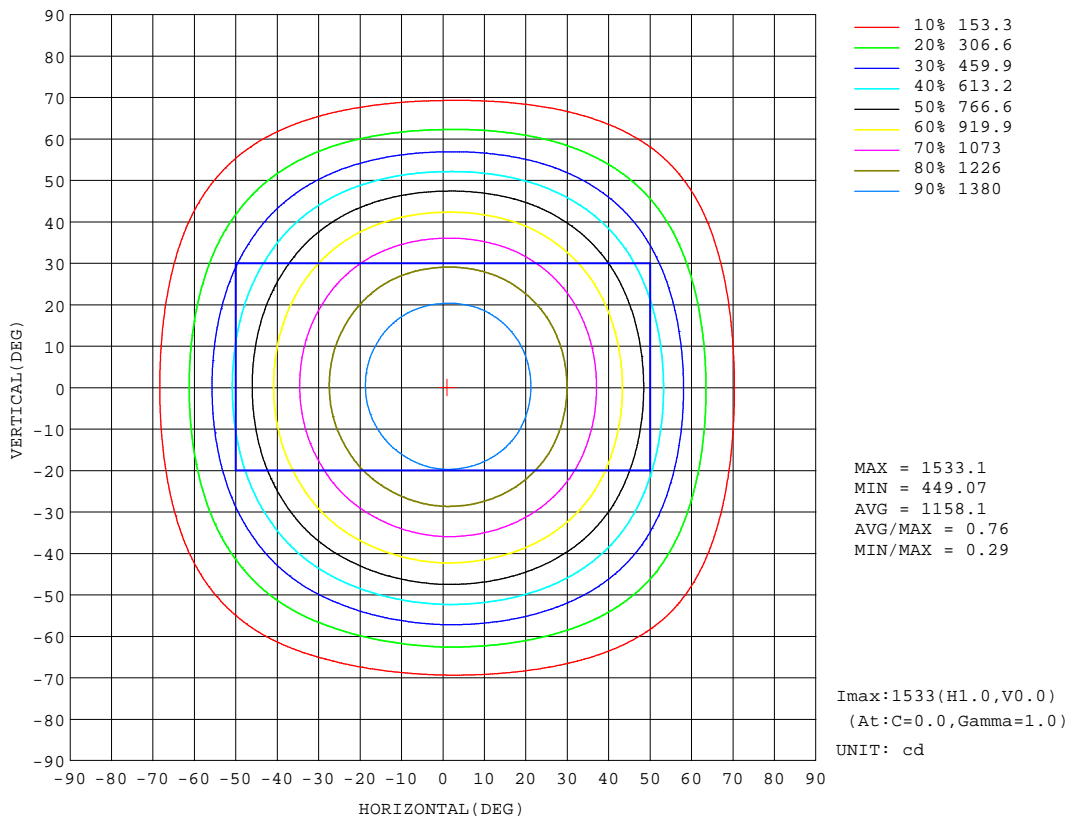


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1402]
 Remarks:

AAI Figure

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:2356 lm

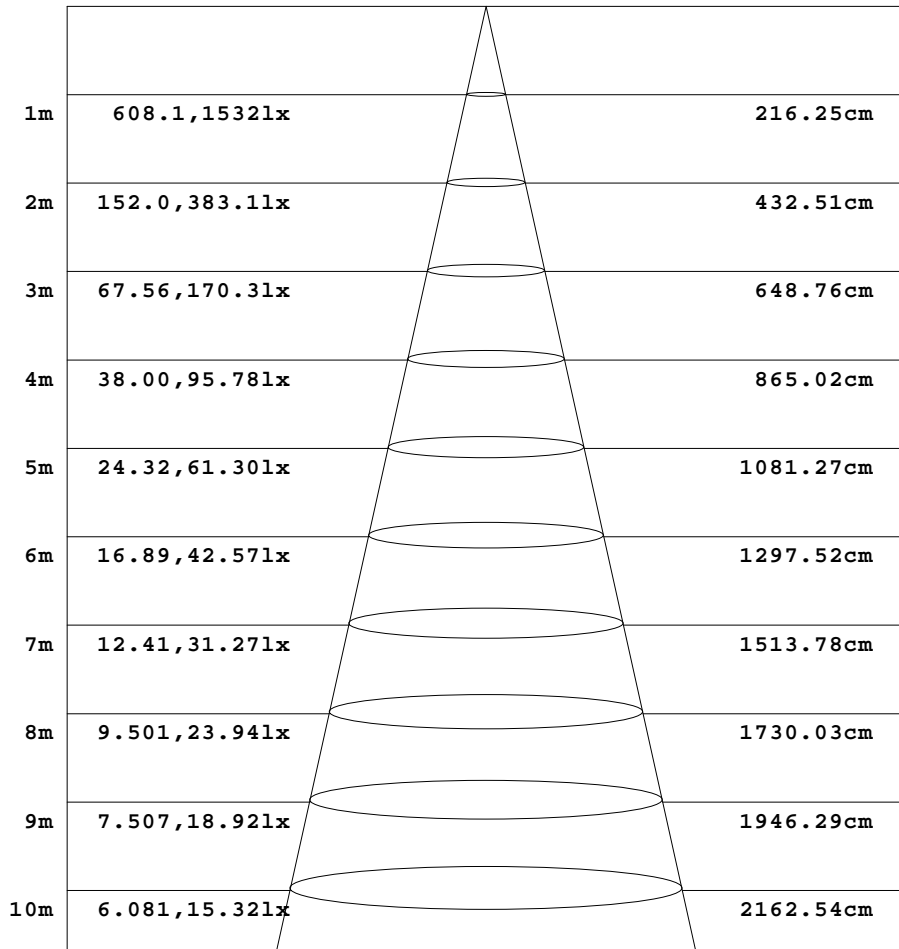

Height Eavg, Emax Angle:94.47deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1402]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

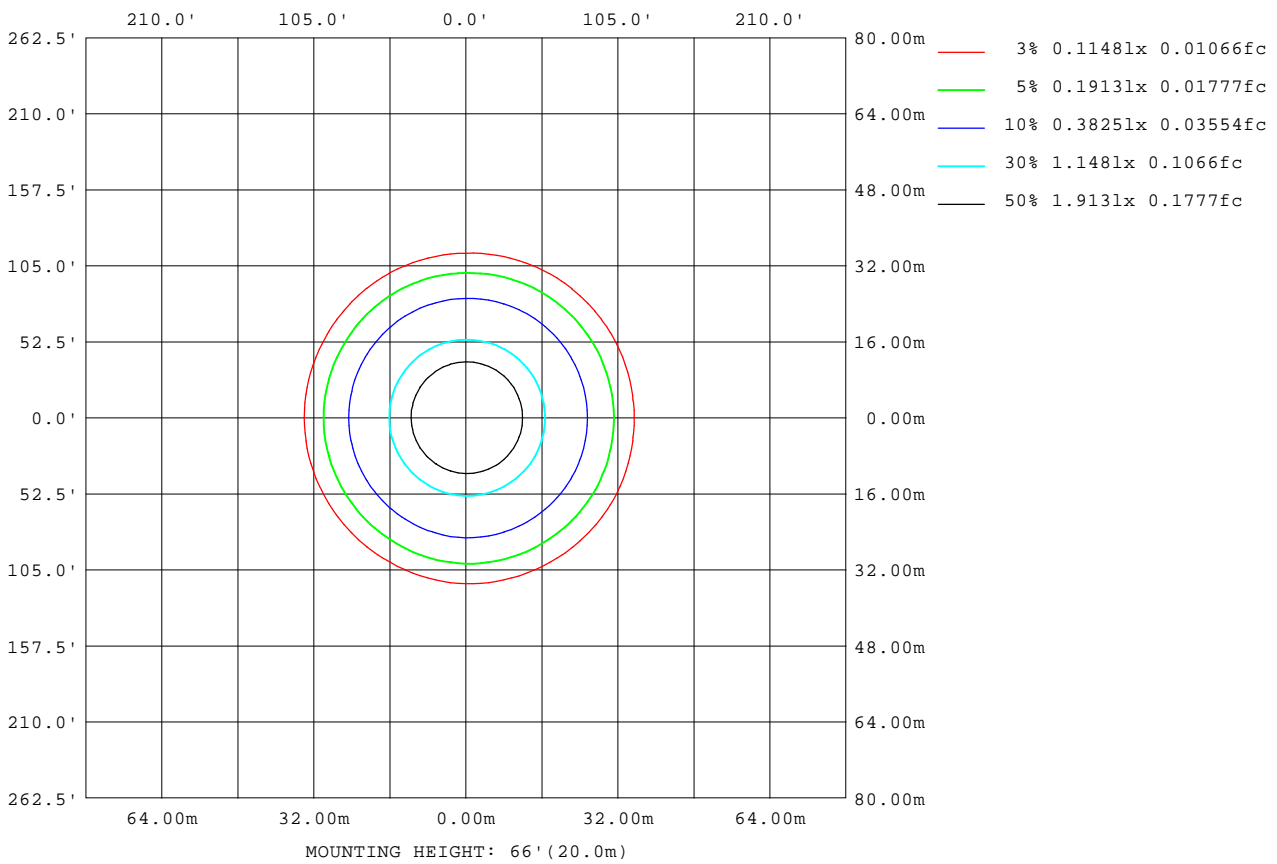

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1402]
 Remarks:

LED Avg.L Report

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	40069
L_0~180(75)av	18847
L_0~180(85)av	11020
L_90~270(65)av	39870
L_90~270(75)av	18327
L_90~270(85)av	8284
L_45(65)av	39916
L_45(75)av	18624
L_45(85)av	9452

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1402]
Remarks:

Planar Illuminance Curve

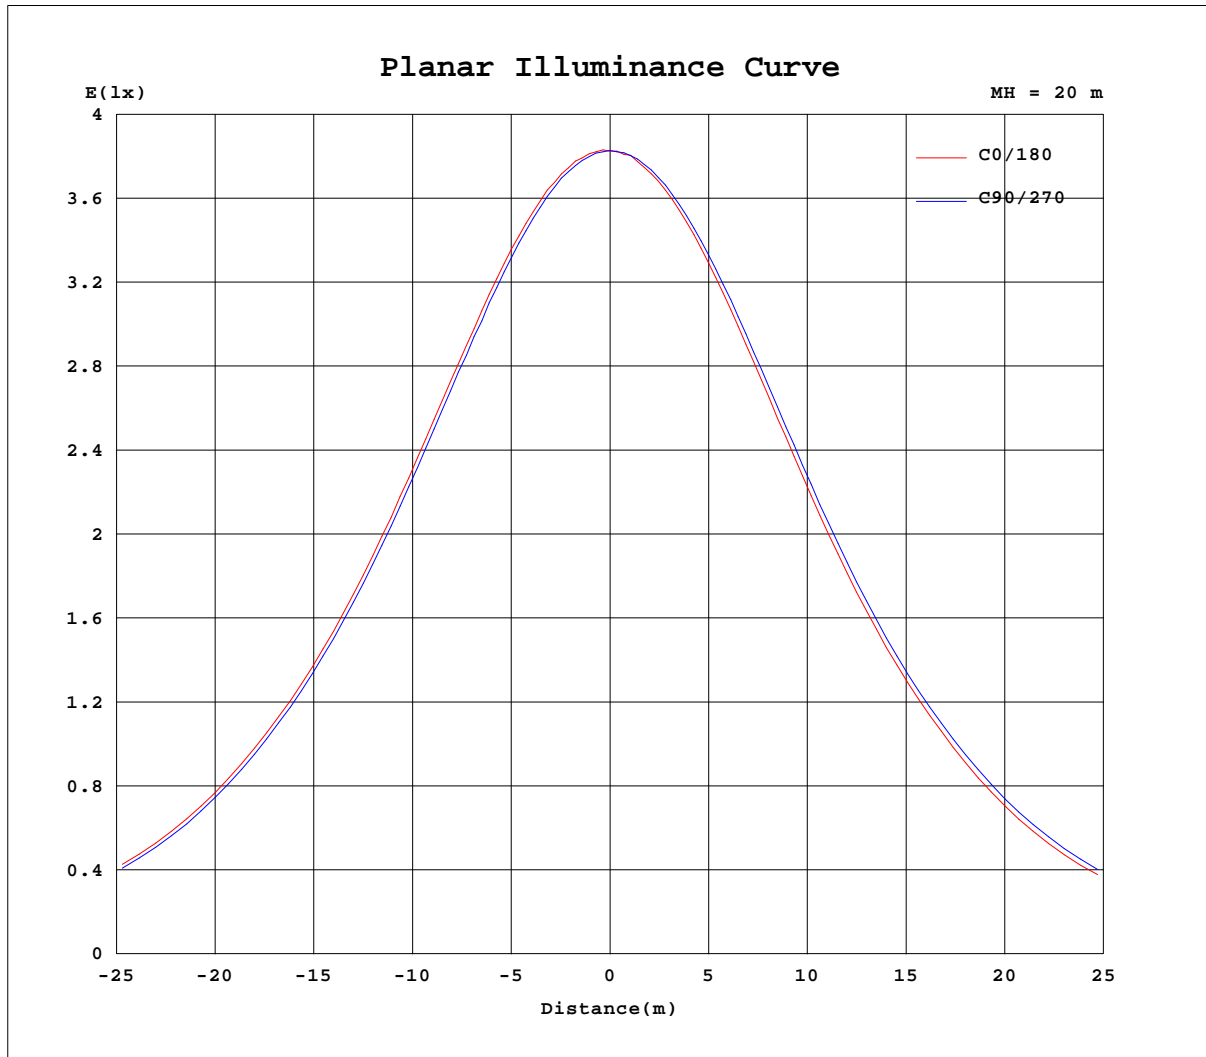

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1402]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.06V I:0.3300A P:39.300W PF:0.9911 Freq:60.00Hz Lamp Flux:3292.38x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1531	1531	1531	1531	1531	1531	1531	1531	1531	1531	1531	1531						
5	1529	1525	1522	1519	1517	1516	1517	1517	1519	1521	1525	1525						
10	1504	1502	1495	1490	1484	1481	1484	1484	1491	1495	1502	1503						
15	1461	1457	1450	1442	1433	1429	1431	1434	1442	1449	1457	1458						
20	1398	1395	1385	1375	1363	1357	1362	1364	1375	1383	1395	1398						
25	1319	1318	1305	1295	1279	1270	1274	1279	1294	1303	1315	1320						
30	1226	1222	1210	1199	1181	1172	1175	1179	1195	1205	1220	1225						
35	1120	1118	1105	1093	1072	1059	1064	1069	1086	1096	1113	1119						
40	1007	1004	992	980	957	940	945	952	968	979	997	1005						
45	872	870	855	844	815	798	800	805	825	838	860	869						
50	718	718	703	690	658	640	639	644	666	680	704	716						
55	557	557	543	528	498	482	482	485	505	517	541	551						
60	403	406	390	378	351	339	339	341	357	366	387	397						
65	269	271	257	246	226	218	219	221	232	239	255	263						
70	160	160	150	141	129	125	126	127	134	139	151	156						
75	79.4	79.3	72.7	67.6	62.2	60.6	61.1	61.7	66.0	69.0	75.0	77.6						
80	35.8	35.9	33.1	30.8	29.3	29.6	29.3	28.1	30.5	31.0	33.8	34.0						
85	16.1	16.0	12.0	10.1	9.57	11.2	11.6	9.05	11.2	10.7	13.2	12.8						
90	0.72	0.21	0.11	0.11	0.26	0.19	0.16	0.17	0.17	0.16	0.12	0.25						
95	0.15	0.26	0.20	0.26	0.44	0.36	0.34	0.26	0.33	0.23	0.25	0.19						
100	0.35	0.49	0.43	0.48	0.75	0.62	0.61	0.55	0.60	0.46	0.47	0.40						
105	0.63	0.79	0.75	0.76	1.14	0.94	0.95	0.88	0.93	0.80	0.78	0.68						
110	0.99	1.15	1.14	1.14	1.61	1.34	1.34	1.25	1.33	1.16	1.14	1.04						
115	1.42	1.56	1.57	1.57	2.13	1.78	1.75	1.67	1.79	1.60	1.55	1.46						
120	1.88	2.01	2.03	2.02	2.58	2.23	2.21	2.13	2.29	2.05	2.01	1.90						
125	2.31	2.42	2.44	2.42	3.03	2.66	2.65	2.57	2.73	2.50	2.39	2.33						
130	2.75	2.80	2.90	2.87	3.52	3.09	3.09	2.99	3.12	2.94	2.79	2.76						
135	3.11	3.16	3.33	3.27	3.96	3.51	3.49	3.36	3.45	3.32	3.13	3.16						
140	3.46	3.49	3.73	3.65	4.32	3.86	3.78	3.67	3.84	3.65	3.49	3.54						
145	3.91	3.84	4.04	3.97	4.63	4.22	4.08	4.00	4.19	3.94	3.83	3.79						
150	4.18	4.13	4.37	4.31	5.02	4.52	4.47	4.33	4.66	4.29	4.17	4.15						
155	4.45	4.45	4.70	4.64	5.33	4.79	4.81	4.64	5.09	4.68	4.50	4.60						
160	4.86	4.85	5.00	4.94	5.60	5.18	5.09	4.86	5.59	5.02	4.79	4.93						
165	5.14	5.19	5.35	5.26	5.85	5.51	5.33	5.12	6.03	5.41	5.02	5.23						
170	5.45	5.48	5.72	5.55	6.17	5.78	5.68	5.43	6.25	5.68	5.43	5.37						
175	5.90	5.74	6.02	5.65	6.17	6.13	5.81	5.63	6.64	5.89	5.74	5.71						
180	6.08	5.91	6.10	5.93	6.19	6.13	5.86	5.73	6.74	6.04	6.04	5.84						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1402]
 Remarks: