
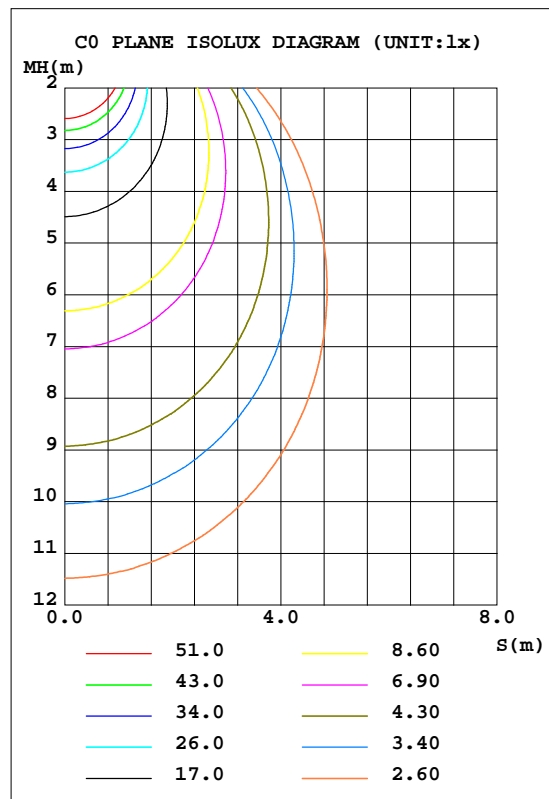


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 82.93 lm/W			
MOBESD-LRKR-4D9AC-WH(2700K)		I _{max} (cd)	336.4	S/MH(C0/180)	1.11
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.09
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	674.25	h UP, DN(C0-180)	0.2,51.3
NOMINAL FLUX(lm)	674.25	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,48.4
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.25

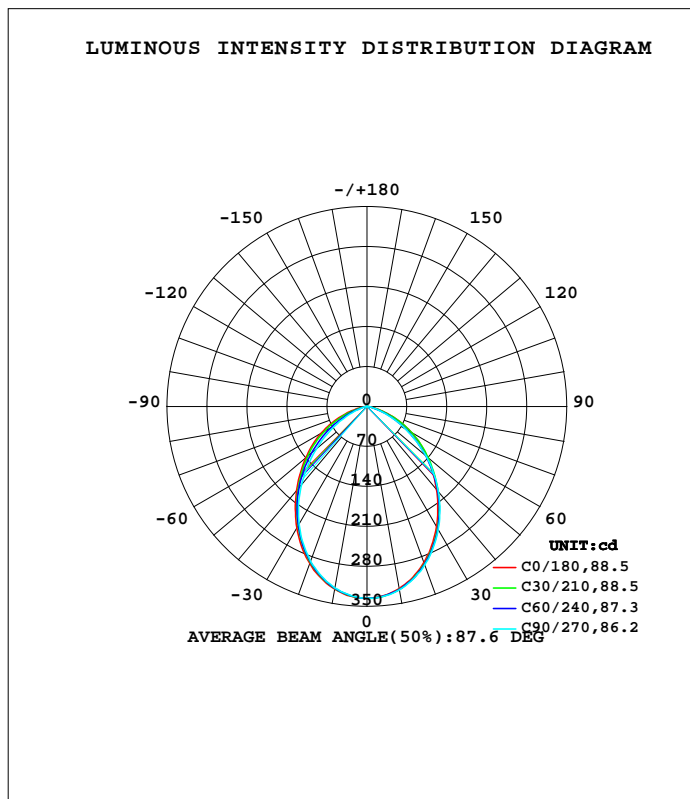

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0632]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	323.6	325.2	326.0	325.7	325.0	323.4	322.8	323.0	0- 10	31.51	31.51	4.67,4.67
20	291.0	293.9	295.3	294.6	292.7	290.1	288.6	289.8	10- 20	87.31	118.8	17.6,17.6
30	243.2	247.3	249.7	248.0	245.6	241.3	238.1	240.6	20- 30	123.9	242.7	36,36
40	189.6	193.4	194.8	194.8	191.8	186.3	178.2	182.5	30- 40	135.6	378.3	56.1,56.1
50	137.9	137.7	135.3	142.1	140.0	131.5	116.0	123.9	40- 50	124.1	502.4	74.5,74.5
60	89.17	83.39	76.74	89.38	91.87	78.54	60.03	70.10	50- 60	95.02	597.4	88.6,88.6
70	41.27	35.08	29.10	39.22	44.64	31.40	18.70	25.89	60- 70	54.97	652.3	96.8,96.8
80	6.164	5.716	4.470	6.684	8.384	4.306	2.407	3.553	70- 80	17.83	670.2	99.4,99.4
90	0.0002	0	0	0	0	0.0000	0	0	80- 90	1.636	671.8	99.6,99.6
100	0.0235	0.0210	0.0061	0.0275	0.0828	0.0090	0	0.0305	90-100	0.0066	671.8	99.6,99.6
110	0.1769	0.0868	0.1333	0.1251	0.2186	0.1497	0.1148	0.1709	100-110	0.0820	671.9	99.7,99.7
120	0.3421	0.2335	0.3270	0.3111	0.4075	0.3383	0.3025	0.3569	110-120	0.2263	672.1	99.7,99.7
130	0.5309	0.3982	0.5389	0.4698	0.5729	0.5269	0.5022	0.5551	120-130	0.3695	672.5	99.7,99.7
140	0.6728	0.5689	0.7567	0.6285	0.7321	0.7037	0.6840	0.7229	130-140	0.4551	673.0	99.8,99.8
150	0.8026	0.7365	0.9081	0.7748	0.8974	0.8654	0.8533	0.8603	140-150	0.4705	673.4	99.9,99.9
160	0.9325	0.8832	1.059	0.9457	1.057	1.021	1.023	1.019	150-160	0.4162	673.8	99.9,99.9
170	1.080	1.042	1.186	1.095	1.198	1.165	1.138	1.135	160-170	0.2984	674.1	100,100
180	1.175	1.216	1.235	1.178	1.269	1.258	1.265	1.229	170-180	0.1110	674.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0632]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

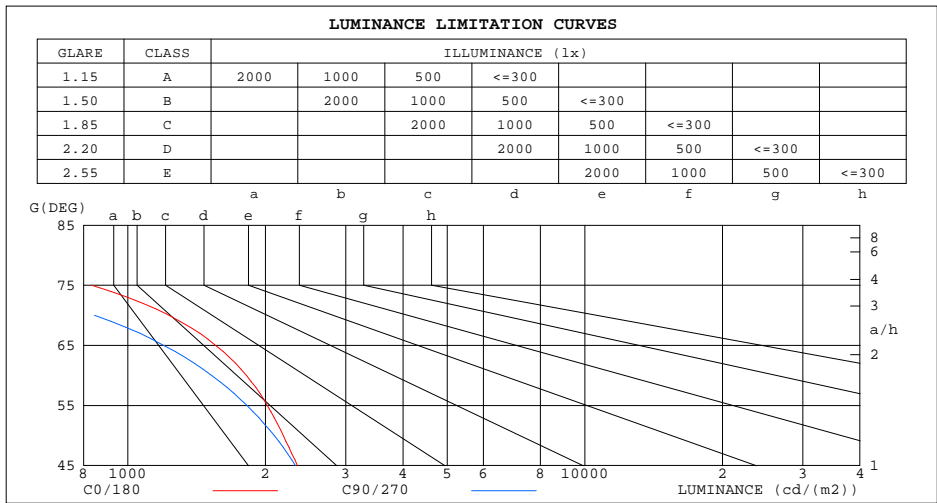

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	111	134
80	362	256
75	833	507
70	1231	846
65	1557	1199
60	1819	1527
55	2021	1825
50	2188	2093
45	2351	2327


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0632]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	1.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.90	.88
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.68	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.54	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.62	.54	.48	.62	.54	.48	.60	.53	.48	.58	.52	.47	.57	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.43	.52	.46	.42	.40
8.0	.52	.44	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.42	.36	.32	.30

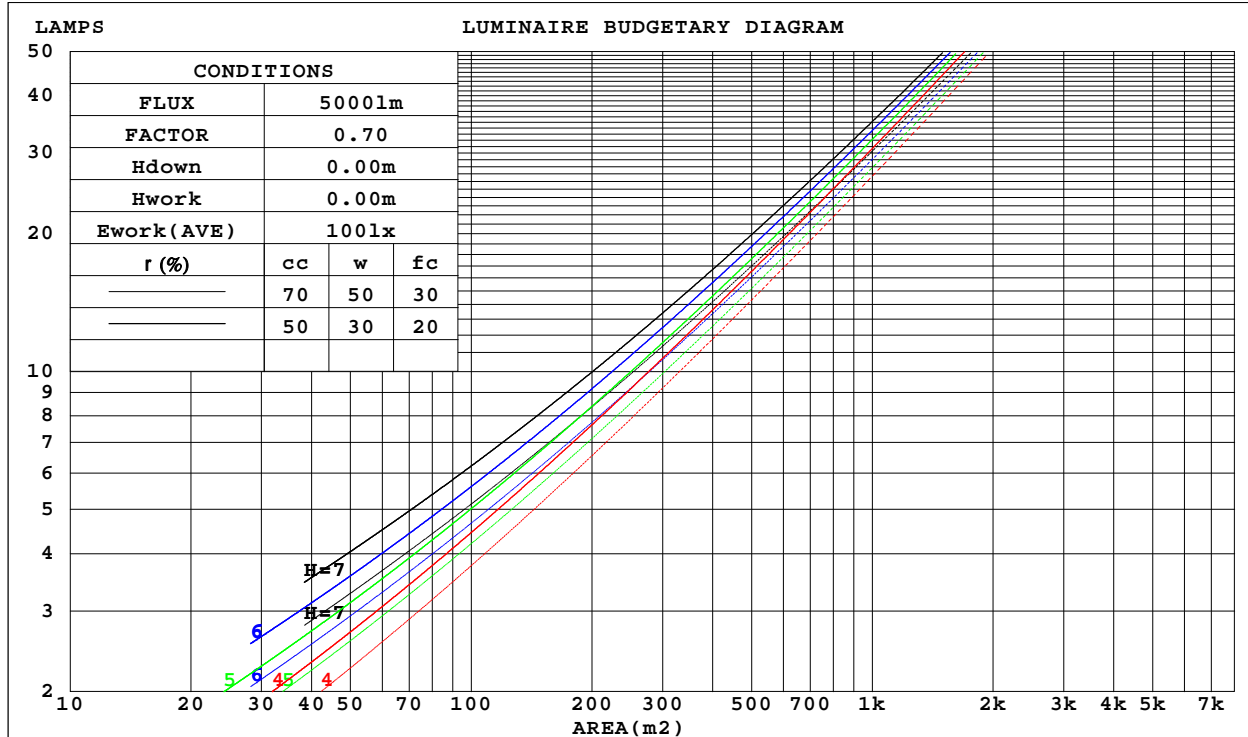

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0632]
 Remarks:

WEC AND CCEC

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.144	.046	.247	.141	.045	.233	.134	.043	.221	.128	.041	.210	.122	.039	
2.0	.247	.135	.042	.241	.133	.041	.229	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.234	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.201	.111	.034	
4.0	.220	.114	.034	.216	.113	.033	.207	.110	.033	.198	.107	.032	.191	.104	.032	
5.0	.207	.105	.031	.203	.104	.030	.195	.101	.030	.187	.099	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	.170	.090	.027	
7.0	.182	.090	.026	.179	.089	.025	.173	.087	.025	.167	.085	.025	.161	.084	.025	
8.0	.172	.084	.024	.169	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.073	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.179	.159	.142	.153	.137	.122	.105	.094	.084	.060	.054	.049	.019	.018	.016	
2.0	.169	.135	.106	.145	.116	.092	.099	.080	.064	.057	.047	.038	.018	.015	.012	
3.0	.160	.117	.082	.138	.101	.071	.094	.070	.050	.055	.041	.029	.018	.013	.010	
4.0	.153	.103	.065	.131	.089	.057	.090	.062	.040	.052	.036	.024	.017	.012	.008	
5.0	.145	.092	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.138	.084	.045	.119	.073	.039	.082	.051	.028	.048	.030	.016	.015	.010	.005	
7.0	.132	.077	.038	.114	.067	.033	.078	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.126	.071	.033	.108	.062	.029	.075	.043	.021	.044	.026	.012	.014	.008	.004	
9.0	.120	.066	.029	.104	.057	.026	.072	.040	.018	.042	.024	.011	.014	.008	.004	
10.0	.115	.062	.026	.099	.054	.023	.069	.038	.016	.040	.022	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0632]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm										
NAME: LED DOWNLIGHT					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.: 0.1*0.1			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.4	15.9	14.8	16.2	16.5	13.7	15.2	14.1	15.5	15.9
3H	15.5	16.8	15.9	17.2	17.6	14.5	15.8	14.9	16.1	16.5
4H	15.8	17.0	16.2	17.3	17.7	14.6	15.8	15.0	16.2	16.6
6H	15.8	16.9	16.2	17.3	17.7	14.6	15.7	15.0	16.1	16.5
8H	15.8	16.8	16.2	17.2	17.7	14.6	15.6	15.0	16.0	16.4
12H	15.7	16.8	16.2	17.2	17.6	14.5	15.5	15.0	15.9	16.4
4H 2H	14.7	16.0	15.1	16.3	16.7	14.2	15.5	14.6	15.8	16.2
3H	16.0	17.0	16.4	17.4	17.8	15.1	16.1	15.5	16.5	16.9
4H	16.3	17.2	16.7	17.6	18.0	15.3	16.2	15.7	16.6	17.0
6H	16.4	17.1	16.8	17.6	18.1	15.3	16.0	15.7	16.5	17.0
8H	16.3	17.0	16.8	17.5	18.0	15.2	16.0	15.7	16.4	16.9
12H	16.3	16.9	16.8	17.4	17.9	15.2	15.8	15.7	16.3	16.8
8H 4H	16.3	17.0	16.7	17.4	17.9	15.3	16.1	15.8	16.5	17.0
6H	16.4	16.9	16.9	17.4	17.9	15.4	15.9	15.9	16.4	16.9
8H	16.3	16.9	16.8	17.4	17.9	15.3	15.9	15.8	16.4	16.9
12H	16.3	16.8	16.8	17.3	17.8	15.3	15.8	15.8	16.3	16.8
12H 4H	16.2	16.9	16.7	17.4	17.8	15.3	16.0	15.8	16.4	16.9
6H	16.3	16.9	16.8	17.3	17.9	15.3	15.9	15.9	16.3	16.9
8H	16.3	16.8	16.8	17.3	17.8	15.3	15.8	15.8	16.3	16.9
CIE190: 2010										

CIE190: 2010
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0632]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	53	47	41
0.80	74	64	57	73	63	57	71	63	57	51
1.00	82	73	66	81	72	66	79	73	66	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	92	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	89	81
3.00	106	100	95	104	98	94	100	96	92	84
4.00	109	104	100	107	103	99	103	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.700m [K=1.0632]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

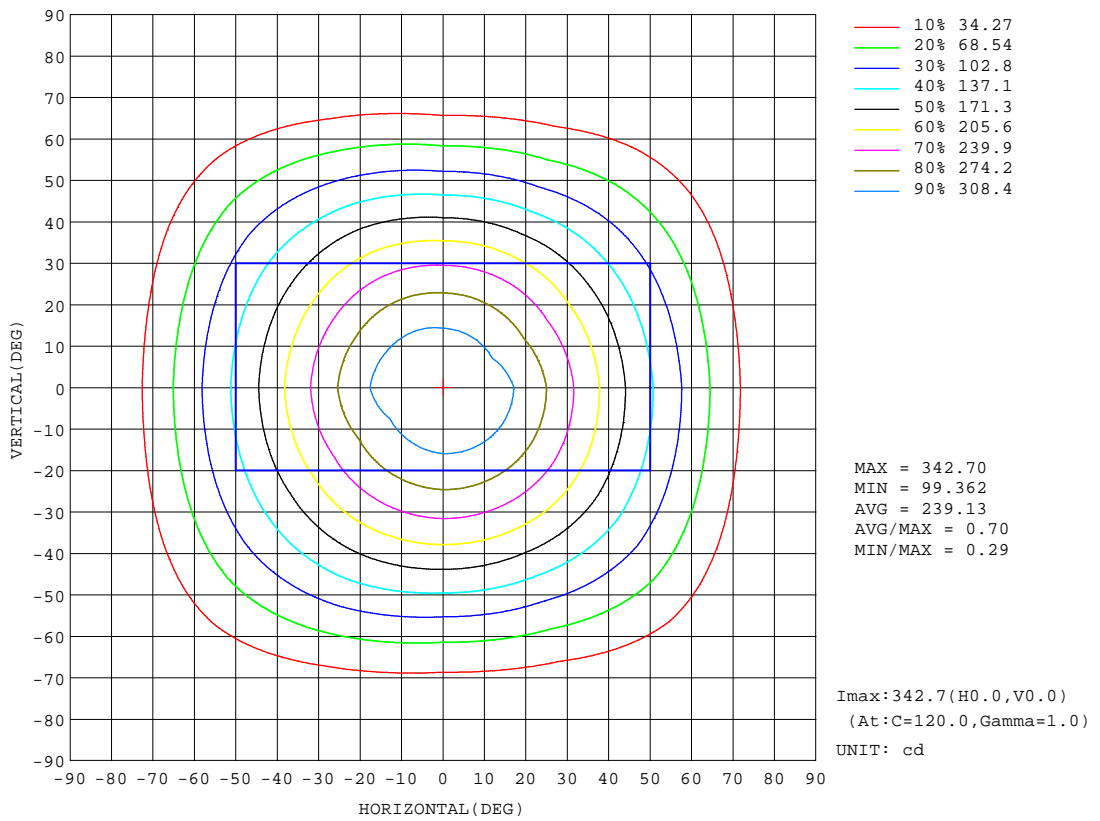


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0632]
 Remarks:

AAI Figure

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Flux out:417.7 lm

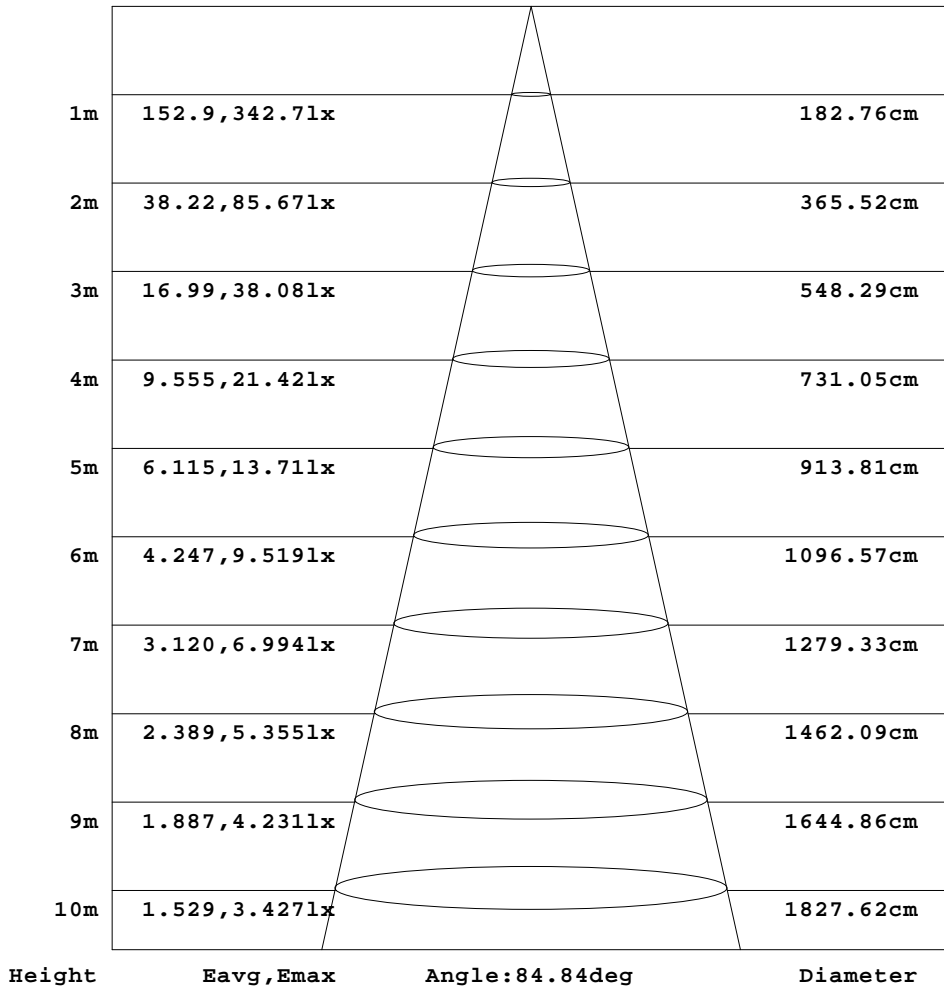


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0632]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

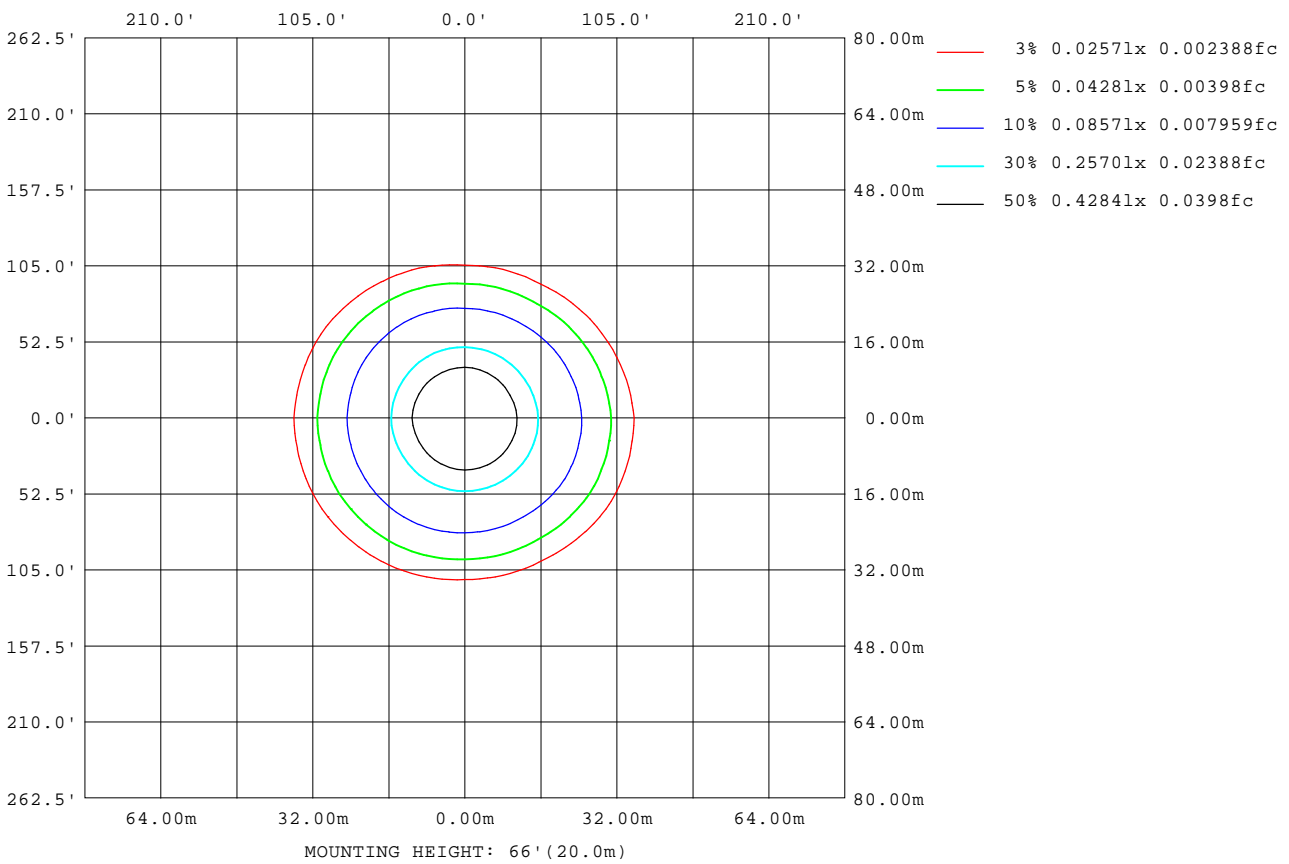

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0632]
 Remarks:

LED Avg.L Report

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1564
L_0~180(75)av	876
L_0~180(85)av	130
L_90~270(65)av	1040
L_90~270(75)av	397
L_90~270(85)av	73
L_45(65)av	1307
L_45(75)av	589
L_45(85)av	128

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0632]
Remarks:

Planar Illuminance Curve

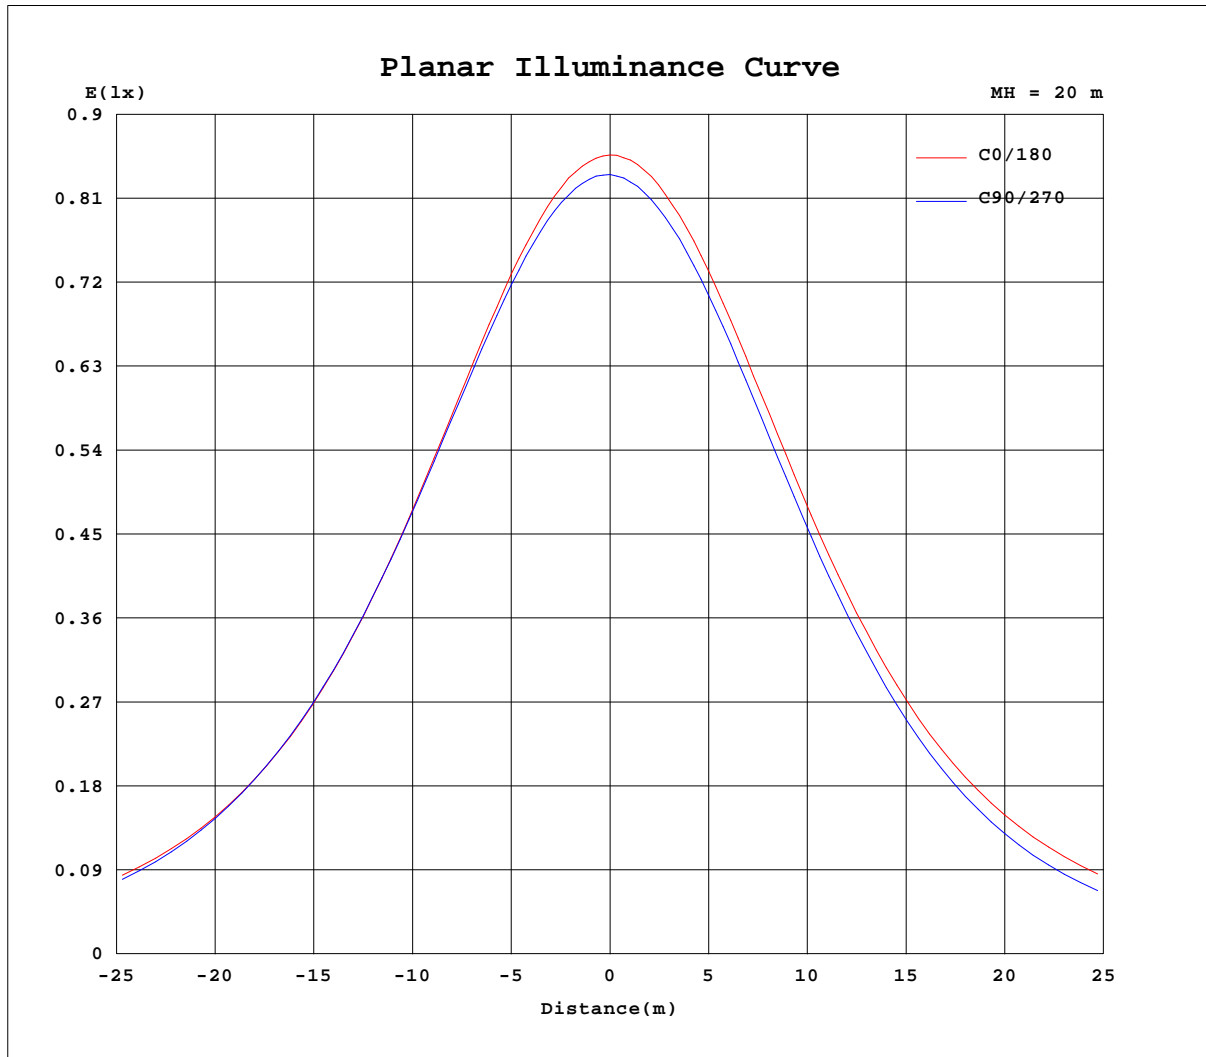

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0632]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.14V I:0.0770A P:8.1300W PF:0.8532 Freq:60.00Hz Lamp Flux:674.25x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	336	336	336	336	336	336	336	336	336	336	336	336						
5	333	334	333	334	334	333	333	333	333	332	332	332						
10	324	325	325	326	326	325	325	324	323	323	323	323						
15	310	312	312	313	313	312	311	310	309	308	309	309						
20	291	293	294	295	295	294	293	290	290	289	289	290						
25	269	272	273	274	273	272	271	267	266	265	267	267						
30	243	247	248	250	249	247	246	242	241	238	240	241						
35	217	221	221	223	223	221	219	215	213	209	211	214						
40	190	194	193	195	195	194	192	188	185	178	180	186						
45	163	167	164	165	169	168	165	161	156	147	148	157						
50	138	141	135	135	142	143	140	136	127	116	118	130						
55	114	115	105	105	114	118	116	111	98.8	86.7	89.1	103						
60	89.2	89.0	77.7	76.7	85.6	93.1	91.9	85.2	71.8	60.0	62.7	77.5						
65	64.5	63.4	52.3	50.9	58.9	67.7	67.7	60.3	46.9	37.0	39.5	52.9						
70	41.3	39.8	30.3	29.1	34.9	43.5	44.6	37.2	25.6	18.7	20.6	31.2						
75	21.1	20.0	13.8	13.2	16.2	22.6	24.2	17.8	10.3	7.33	8.30	14.1						
80	6.16	6.88	4.55	4.47	5.41	7.96	8.38	5.58	3.02	2.41	2.67	4.44						
85	0.95	1.65	1.14	1.18	1.32	1.91	1.33	1.29	0.39	0.11	0.18	0.87						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.01	0.00	0.02	0.00	0.00	0.00	0.00	0.00						
100	0.02	0.04	0.00	0.01	0.00	0.06	0.08	0.00	0.02	0.00	0.05	0.01						
105	0.09	0.10	0.00	0.06	0.00	0.13	0.17	0.05	0.08	0.03	0.13	0.07						
110	0.18	0.16	0.01	0.13	0.05	0.20	0.22	0.13	0.17	0.11	0.20	0.14						
115	0.25	0.23	0.09	0.22	0.13	0.30	0.32	0.21	0.25	0.21	0.30	0.23						
120	0.34	0.30	0.16	0.33	0.21	0.41	0.41	0.32	0.35	0.30	0.40	0.32						
125	0.43	0.39	0.24	0.44	0.30	0.48	0.49	0.41	0.45	0.41	0.49	0.43						
130	0.53	0.47	0.32	0.54	0.40	0.54	0.57	0.51	0.55	0.50	0.59	0.53						
135	0.61	0.55	0.41	0.64	0.49	0.60	0.66	0.58	0.64	0.60	0.67	0.59						
140	0.67	0.64	0.49	0.76	0.59	0.67	0.73	0.67	0.73	0.68	0.77	0.68						
145	0.73	0.75	0.58	0.85	0.68	0.73	0.81	0.76	0.81	0.77	0.84	0.75						
150	0.80	0.81	0.67	0.91	0.75	0.80	0.90	0.85	0.88	0.85	0.90	0.82						
155	0.86	0.87	0.74	0.99	0.85	0.89	0.96	0.91	0.96	0.94	0.97	0.90						
160	0.93	0.94	0.83	1.06	0.93	0.96	1.06	0.99	1.05	1.02	1.07	0.97						
165	1.02	1.02	0.94	1.13	1.01	1.05	1.13	1.07	1.14	1.09	1.15	1.03						
170	1.08	1.09	0.99	1.19	1.07	1.12	1.20	1.14	1.19	1.14	1.19	1.08						
175	1.13	1.15	1.10	1.23	1.15	1.17	1.27	1.17	1.26	1.20	1.25	1.13						
180	1.17	1.24	1.19	1.23	1.18	1.18	1.27	1.25	1.26	1.27	1.27	1.18						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0632]
 Remarks: