
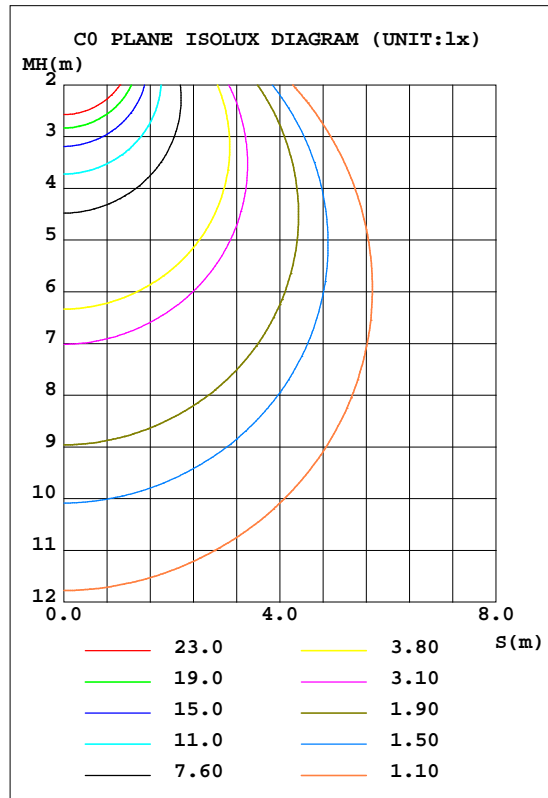


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.26lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 72.86 lm/W			
MODEL	ASD-JBS-3D6AC(3000K)	I _{max} (cd)	152.7	S/MH(C0/180)	1.27
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	442.26	h UP, DN(C0-180)	0.8,47.9
NOMINAL FLUX(lm)	442.261	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.8,50.6
LAMPS INSIDE	1	h up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	98.4	CIBSE SHR MAX	1.35

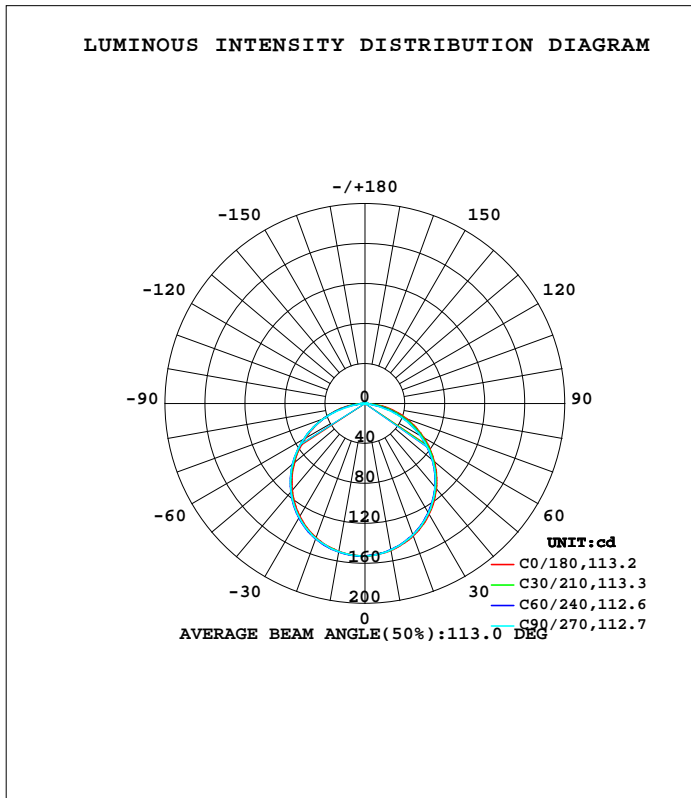

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2151]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	149.3	148.6	148.8	149.6	150.4	150.7	150.7	150.3	0- 10	14.43	14.43	3.26,3.26
20	141.1	140.0	140.0	141.4	143.0	143.9	143.9	143.0	10- 20	41.35	55.78	12.6,12.6
30	128.2	126.7	126.9	128.2	130.5	132.0	131.8	130.9	20- 30	62.83	118.6	26.8,26.8
40	111.2	109.5	109.4	110.9	113.3	115.1	115.2	114.3	30- 40	75.95	194.6	44,44
50	90.76	88.71	88.21	90.12	92.26	94.35	94.68	94.09	40- 50	79.01	273.6	61.9,61.9
60	67.79	64.92	63.81	66.44	68.61	70.34	70.47	71.06	50- 60	71.63	345.2	78.1,78.1
70	43.86	39.39	36.26	39.62	43.85	44.10	43.44	45.55	60- 70	54.62	399.8	90.4,90.4
80	20.87	12.69	6.586	10.93	19.91	16.94	12.63	17.27	70- 80	29.94	429.8	97.2,97.2
90	1.061	1.133	0.9681	1.103	1.138	1.226	1.108	1.501	80- 90	5.633	435.4	98.4,98.4
100	1.076	1.160	1.023	1.138	1.053	1.128	1.022	1.083	90-100	1.320	436.7	98.7,98.7
110	1.030	1.115	0.9559	1.063	1.032	1.045	0.9965	1.040	100-110	1.128	437.8	99,99
120	1.030	1.083	0.9426	1.051	1.034	1.041	0.9980	1.040	110-120	1.031	438.9	99.2,99.2
130	1.030	1.077	0.9624	1.060	1.055	1.051	1.007	1.046	120-130	0.9325	439.8	99.4,99.4
140	1.030	1.089	0.9988	1.072	1.092	1.088	1.016	1.051	130-140	0.8137	440.6	99.6,99.6
150	1.051	1.107	1.045	1.091	1.145	1.111	1.020	1.099	140-150	0.6738	441.3	99.8,99.8
160	1.130	1.167	1.114	1.128	1.192	1.154	1.068	1.169	150-160	0.5166	441.8	99.9,99.9
170	1.185	1.191	1.181	1.179	1.262	1.215	1.112	1.208	160-170	0.3310	442.1	100,100
180	1.191	1.230	1.252	1.245	1.253	1.245	1.198	1.245	170-180	0.1152	442.3	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.2151]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.261x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

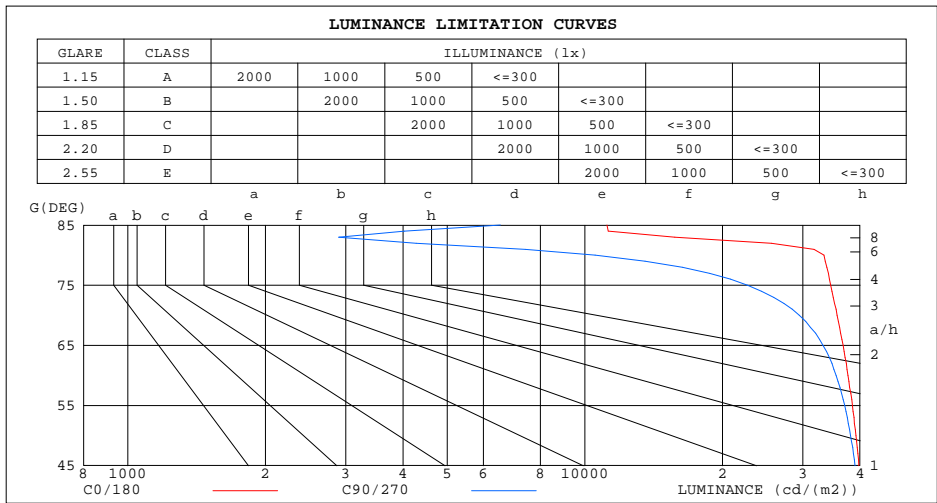

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11172	6538
80	33390	10539
75	34515	22675
70	35617	29458
65	36751	33219
60	37658	35463
55	38515	37060
50	39221	38134
45	39805	39032


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2151]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.26lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.84	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.65	.78	.70	.64	.74	.68	.63	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.57	.52	.61	.56	.52	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

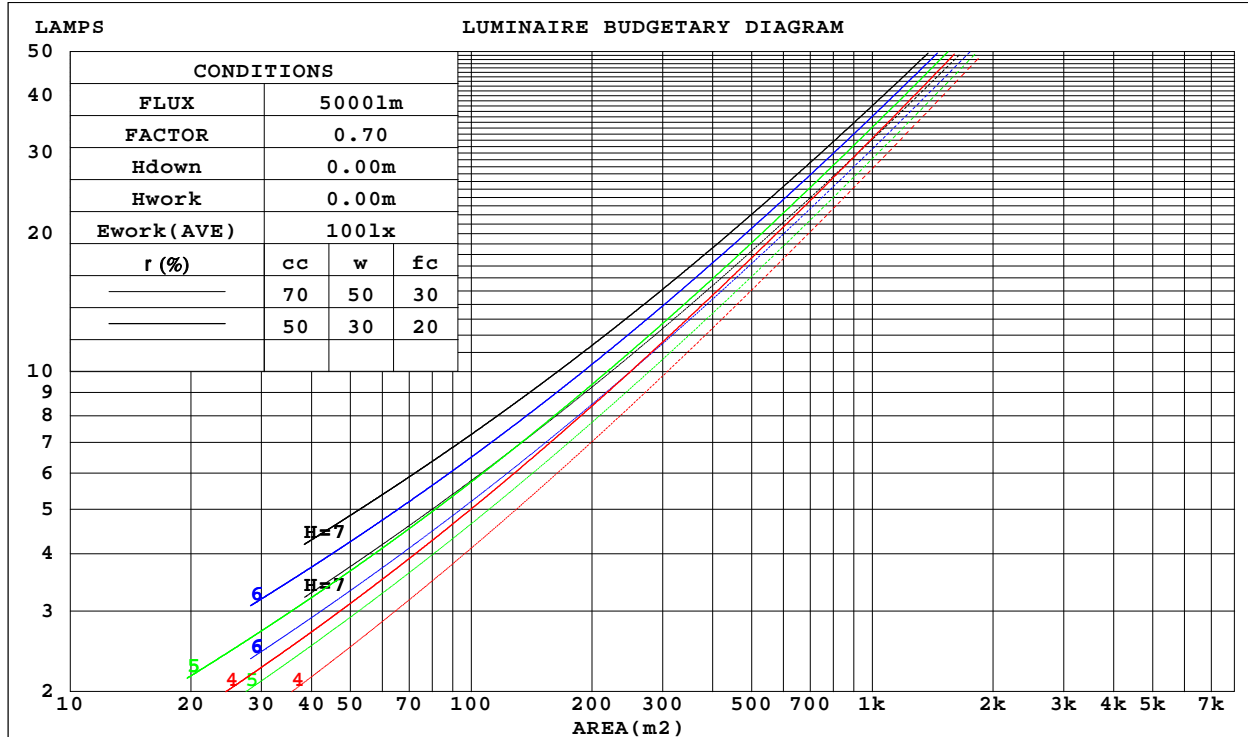

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2151]
 Remarks:

WEC AND CCEC

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.261x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.303	.172	.055	.296	.169	.054	.282	.162	.052	.269	.155	.050	.257	.149	.048	
2.0	.288	.158	.048	.281	.155	.048	.269	.150	.046	.257	.144	.045	.247	.140	.044	
3.0	.268	.142	.043	.262	.140	.042	.251	.136	.041	.240	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.233	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.229	.117	.034	.225	.115	.034	.216	.112	.033	.208	.110	.033	.200	.107	.032	
6.0	.213	.107	.031	.209	.105	.030	.201	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.185	.090	.025	.182	.089	.025	.175	.088	.025	.169	.086	.025	.164	.084	.025	
9.0	.173	.084	.023	.171	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.144	.126	.112	.099	.087	.065	.057	.051	.021	.018	.016	
2.0	.184	.144	.110	.157	.124	.095	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.176	.126	.087	.151	.109	.075	.104	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.071	.145	.098	.061	.099	.068	.043	.058	.040	.026	.019	.013	.008	
5.0	.161	.103	.059	.138	.089	.052	.095	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.154	.094	.051	.132	.082	.045	.091	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.147	.087	.046	.127	.076	.040	.088	.053	.028	.051	.031	.017	.016	.010	.006	
8.0	.141	.082	.041	.121	.071	.036	.084	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.135	.077	.038	.116	.067	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.035	.111	.063	.030	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2151]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.261x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.06*0.06			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.3	25.1	26.7	27.0	24.5	26.1	24.9	26.5	26.9
3H	26.6	28.1	27.0	28.4	28.8	26.1	27.6	26.5	27.9	28.3
4H	27.4	28.7	27.8	29.1	29.5	26.6	27.9	27.0	28.3	28.7
6H	28.0	29.2	28.4	29.6	30.1	26.7	28.0	27.1	28.4	28.8
8H	28.1	29.3	28.6	29.7	30.2	26.7	27.9	27.1	28.3	28.7
12H	28.1	29.3	28.6	29.7	30.2	26.6	27.8	27.1	28.2	28.7
4H 2H	25.3	26.7	25.7	27.0	27.5	25.2	26.6	25.6	26.9	27.4
3H	27.4	28.6	27.8	29.0	29.4	27.0	28.1	27.4	28.5	29.0
4H	28.3	29.3	28.7	29.8	30.2	27.5	28.5	27.9	29.0	29.4
6H	29.0	29.9	29.5	30.4	30.9	27.7	28.6	28.1	29.0	29.5
8H	29.2	30.0	29.7	30.5	31.0	27.6	28.5	28.1	28.9	29.4
12H	29.2	30.0	29.7	30.5	31.0	27.6	28.4	28.1	28.9	29.4
8H 4H	28.5	29.3	29.0	29.8	30.3	27.7	28.6	28.2	29.1	29.6
6H	29.3	30.0	29.8	30.5	31.0	27.9	28.6	28.5	29.2	29.7
8H	29.6	30.2	30.1	30.7	31.2	27.9	28.5	28.5	29.1	29.6
12H	29.6	30.2	30.1	30.7	31.3	27.9	28.5	28.4	29.0	29.6
12H 4H	28.5	29.3	29.0	29.8	30.3	27.8	28.5	28.3	29.0	29.5
6H	29.3	30.0	29.9	30.4	31.0	28.0	28.6	28.5	29.1	29.7
8H	29.6	30.1	30.1	30.6	31.2	28.0	28.5	28.5	29.0	29.6
CIE190: 2010										

CIE190: 2010
Area: 0.0036 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.2151]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.261x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	41
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	80	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	92	87	82	73
3.00	102	95	90	100	93	88	95	90	86	77
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.2151]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.26lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

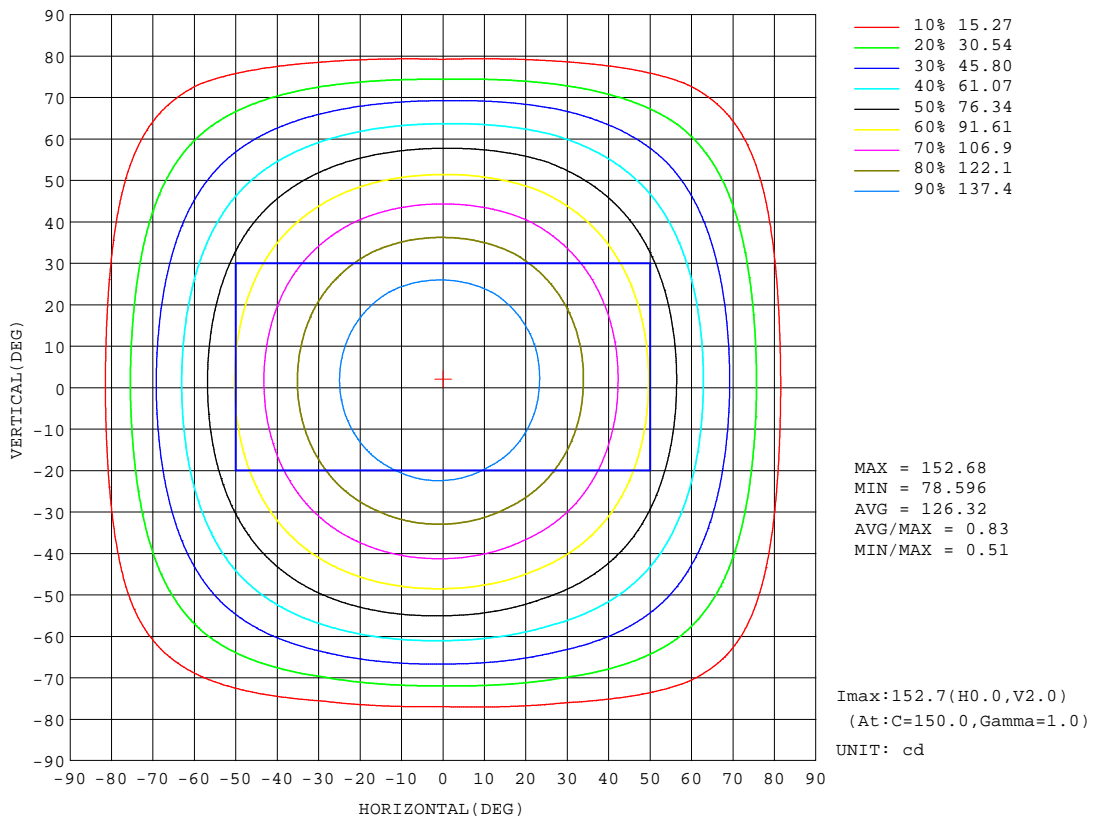


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2151]
 Remarks:

AAI Figure

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.26lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

Flux out:325.1 lm

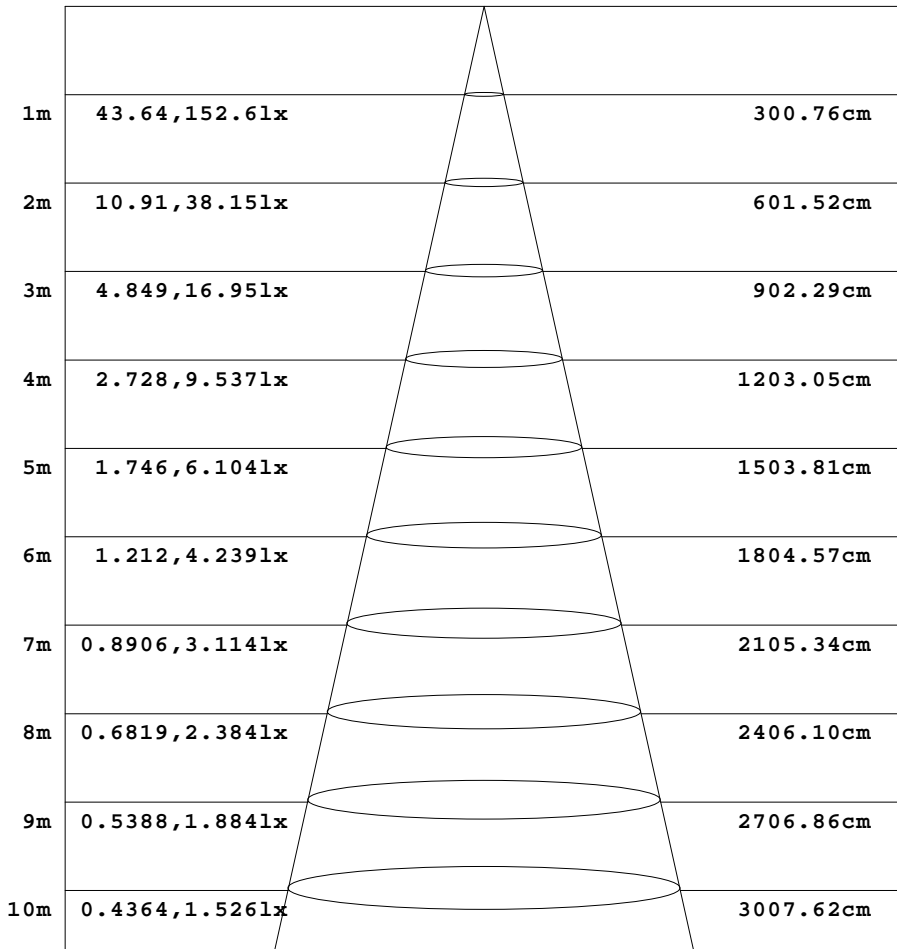

Height Eavg, Emax Angle:112.75deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2151]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.26lx lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

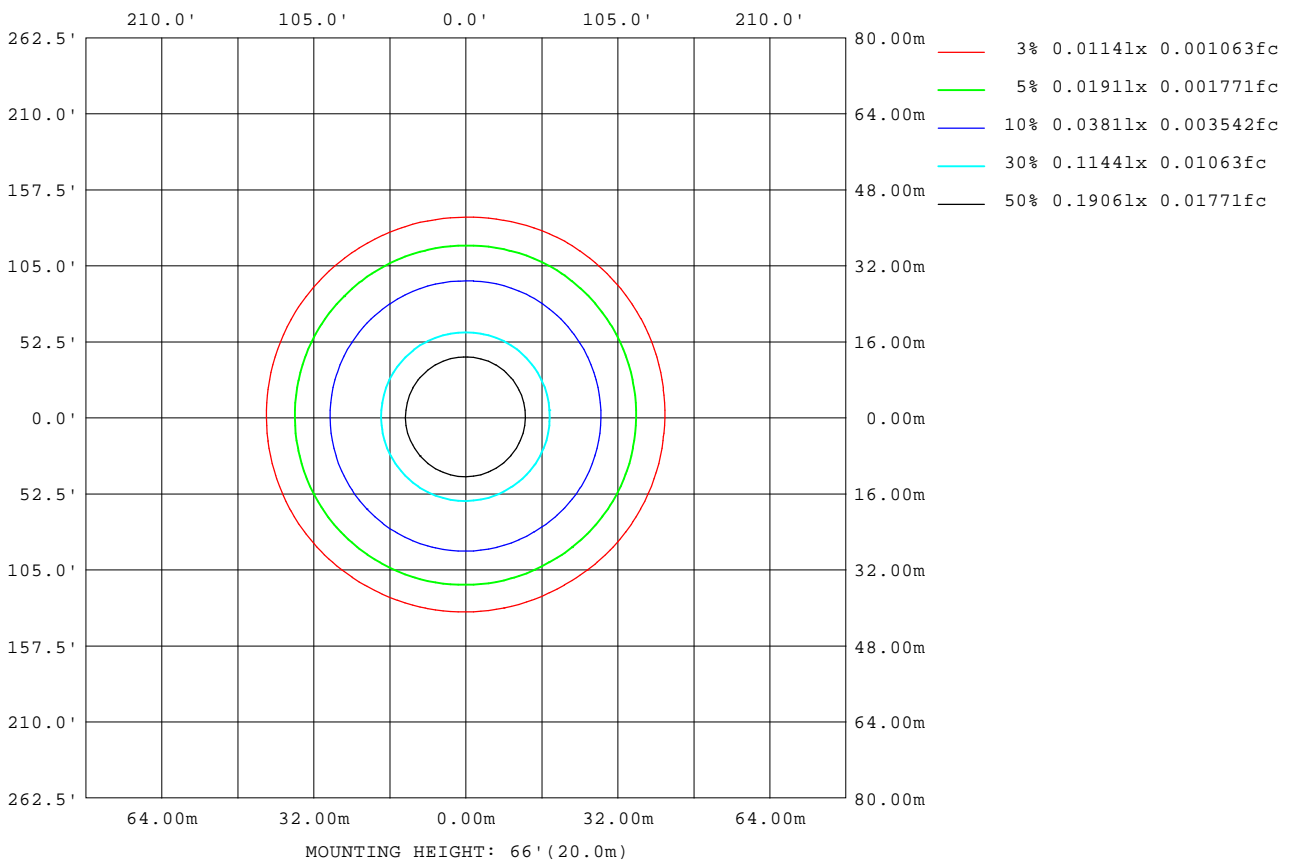

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.2151]
 Remarks:

LED Avg.L Report

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.261x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	36878
L_0~180(75)av	34239
L_0~180(85)av	14466
L_90~270(65)av	35431
L_90~270(75)av	26541
L_90~270(85)av	7239
L_45(65)av	36457
L_45(75)av	30620
L_45(85)av	9987

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.2151]
Remarks:

Planar Illuminance Curve

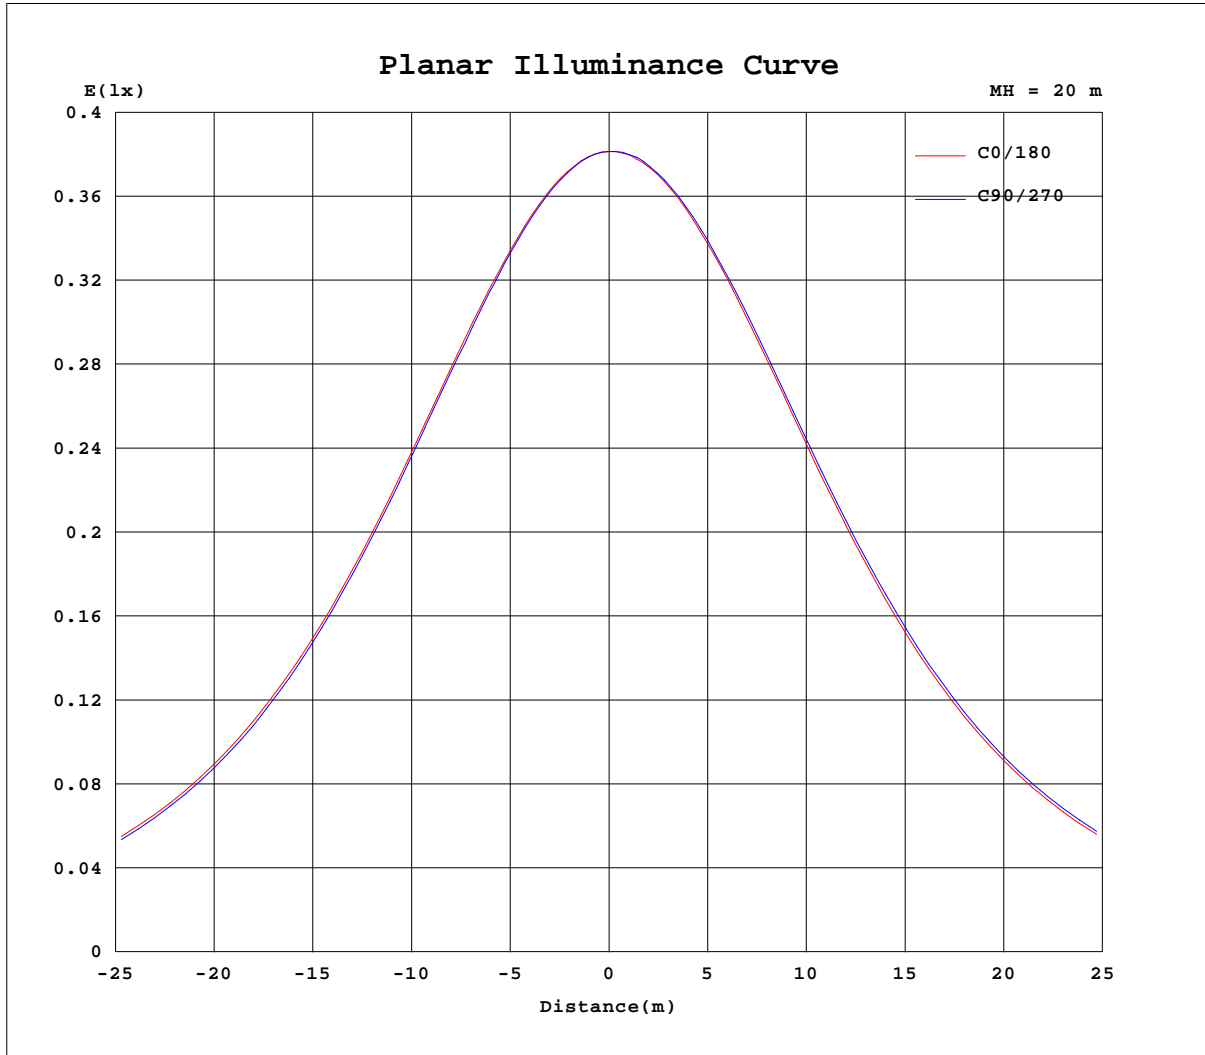

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.2151]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.96V I:0.0535A P:6.0700W PF:0.9387 Freq:60.00Hz Lamp Flux:442.261x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	153	153	153	153	153	153	153	153	153	153	153	153						
5	152	151	151	151	152	152	152	152	152	152	152	152						
10	149	149	148	149	149	150	150	150	151	151	151	150						
15	146	145	145	145	146	147	147	148	148	148	148	147						
20	141	140	140	140	141	142	143	144	144	144	144	142						
25	135	134	134	134	135	136	137	138	139	138	138	137						
30	128	127	126	127	128	129	131	132	132	132	132	130						
35	120	119	118	119	119	121	122	124	124	124	124	122						
40	111	110	109	109	110	112	113	115	116	115	115	113						
45	101	100	99.0	99.3	100	102	103	105	106	105	106	104						
50	90.8	89.5	87.9	88.2	89.5	90.7	92.3	93.9	94.9	94.7	95.1	93.0						
55	79.5	78.2	76.1	76.5	78.0	79.3	80.8	82.3	83.0	83.0	83.9	81.8						
60	67.8	66.2	63.6	63.8	65.4	67.5	68.6	70.2	70.5	70.5	72.0	70.2						
65	55.9	53.8	50.7	50.5	51.9	54.8	56.3	57.4	57.4	57.3	59.1	58.2						
70	43.9	41.3	37.5	36.3	37.7	41.5	43.8	44.3	43.9	43.4	45.4	45.7						
75	32.2	28.7	23.8	21.1	22.7	27.9	31.6	31.3	30.2	28.3	30.9	32.5						
80	20.9	16.1	9.27	6.59	7.92	13.9	19.9	18.6	15.2	12.6	15.5	19.0						
85	3.51	4.10	1.35	2.05	1.81	2.38	5.57	6.19	1.98	2.49	1.91	5.59						
90	1.06	1.13	1.14	0.97	1.01	1.19	1.14	1.31	1.15	1.11	1.17	1.83						
95	1.12	1.17	1.93	1.36	1.85	1.21	1.10	1.27	1.13	1.10	1.24	1.17						
100	1.08	1.14	1.18	1.02	1.10	1.18	1.05	1.17	1.09	1.02	1.09	1.08						
105	1.04	1.13	1.16	0.97	1.08	1.09	1.04	1.08	1.05	1.00	1.07	1.03						
110	1.03	1.12	1.11	0.96	1.06	1.06	1.03	1.06	1.03	1.00	1.06	1.02						
115	1.03	1.11	1.08	0.95	1.06	1.05	1.03	1.05	1.03	1.00	1.05	1.02						
120	1.03	1.10	1.06	0.94	1.05	1.05	1.03	1.04	1.04	1.00	1.06	1.02						
125	1.03	1.09	1.07	0.95	1.06	1.05	1.04	1.03	1.05	1.00	1.06	1.02						
130	1.03	1.08	1.07	0.96	1.06	1.06	1.05	1.04	1.07	1.01	1.07	1.02						
135	1.03	1.08	1.08	0.98	1.07	1.07	1.07	1.04	1.08	1.01	1.07	1.02						
140	1.03	1.10	1.08	1.00	1.07	1.07	1.09	1.05	1.13	1.02	1.08	1.02						
145	1.04	1.11	1.08	1.00	1.07	1.08	1.11	1.05	1.16	1.02	1.09	1.05						
150	1.05	1.13	1.09	1.04	1.11	1.08	1.15	1.06	1.17	1.02	1.11	1.09						
155	1.09	1.16	1.11	1.08	1.13	1.10	1.17	1.08	1.17	1.04	1.16	1.12						
160	1.13	1.21	1.13	1.11	1.15	1.11	1.19	1.12	1.18	1.07	1.19	1.15						
165	1.17	1.22	1.14	1.14	1.14	1.14	1.24	1.14	1.20	1.09	1.21	1.16						
170	1.18	1.23	1.15	1.18	1.16	1.20	1.26	1.20	1.23	1.11	1.24	1.18						
175	1.19	1.23	1.20	1.21	1.21	1.22	1.27	1.23	1.24	1.13	1.25	1.21						
180	1.19	1.24	1.22	1.25	1.25	1.24	1.25	1.25	1.24	1.20	1.25	1.24						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2151]
 Remarks: