



# MINI-PENDANT

► **DESIGN & OPTIONS** - MINI-PENDANT has a sleek, classic design that will help transform any space in your home. It has a steel body and opal glass shades, offering reliable illumination. The height adjustable cord allows you to customize the fixture and give it the desired look. It includes a standard E26 medium base which is compatible with a variety of incandescent or LED bulbs. Comes in a SATIN NICKEL finish.

► **INSTALLATION** - Installation is quick and easy: just attach the mounting bracket to the outlet box with screws, connect the wires, and secure the fixture to the mounting bracket. All mounting hardware is provided. Note that it must be hardwired, there is no switch or plug on the fixture itself. Refer to install instructions for detailed steps.

► **APPLICATION** - MINI-PENDANTS are used to provide lighting in areas such as kitchen tables, bars, living room sitting areas, and workshops. You can hang these pendants one by one or in a group to create a specific style. They can also be used as an additional light to an already existing ceiling light. This fixture is Damp location rated.

► **ENERGY SAVINGS & EFFICIENCY** - This fixture is designed to support all kinds of bulbs with E26 sockets, but we strongly recommend using an LED bulb, not only for the high-quality lighting, but also for the appreciable savings.

► **CERTIFICATION & WARRANTY** - Buy with confidence: ASD provides a 3-year warranty along with ETL certification to guarantee top quality products and safety!

Catalog number	
Notes	
Type	




Model	Bulb type	Finish	Shade	Dimensions (LxH)
ASD-MP44-11-2660-NK	1xE26 60W max	Satin nickel	Opal glass	4-3/4" x 51-3/16"

## PRODUCT SPECIFICATIONS:

Construction & Materials	
Housing	Iron, aluminum
Finish	Satin nickel
Shade	Opal glass
Weight	ASD-MP44-11-2660-NK 1.3 lb (0.6 kg)
Environmental system	
Work environment	Suitable for Damp Locations
Operating temperature	32°F to 104°F (0°C to 40°C)
Electrical system	
Input voltage	120 V
Regular and voluntary certifications	
3-year limited warranty	
cETLus certified 5020848	

## PACKAGE CONTENTS:

Description	Q-ty
Mini-Pendant	1
Mounting bracket (A)	1
Wire connector (B)	3
Mounting screw (C)	2
Box	1



For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)



# MINI-PENDANT

## INSTALLATION GUIDE

### IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

### **⚠ WARNING**

**RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions.**


Keep or give to the owner for future reference.

**Risk of cuts:** Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

ASD® assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

### INSTALLATION STEPS:

1. Remove the Plastic Ring from the E26 socket, attach the Glass Shade and secure it with the Plastic ring.
2. Attach the mounting bracket to the outlet box using two screws. Connect the wires: Black to Black, White to White, Green to Green. Secure the connection with wire nuts. Carefully tuck all wires back into the outlet box.
3. Place the fixture to the outlet box by aligning two holes on the ceiling plate to the mounting bracket. Tighten the ceiling plate to the mounting bracket using two screws. Installation complete.

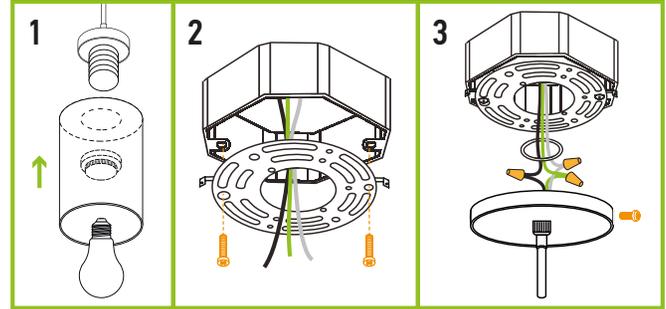

## ORDERING INFORMATION

Model	UPC	Pcs. per carton	Carton size	Carton weight	GTIN 14
ASD-MP44-11-2660-NK	810050732680	10	30.3" x 6.7" x 21.3"	17.9 lbs	10810050732687

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

ASD LIGHTING CORP

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)

