
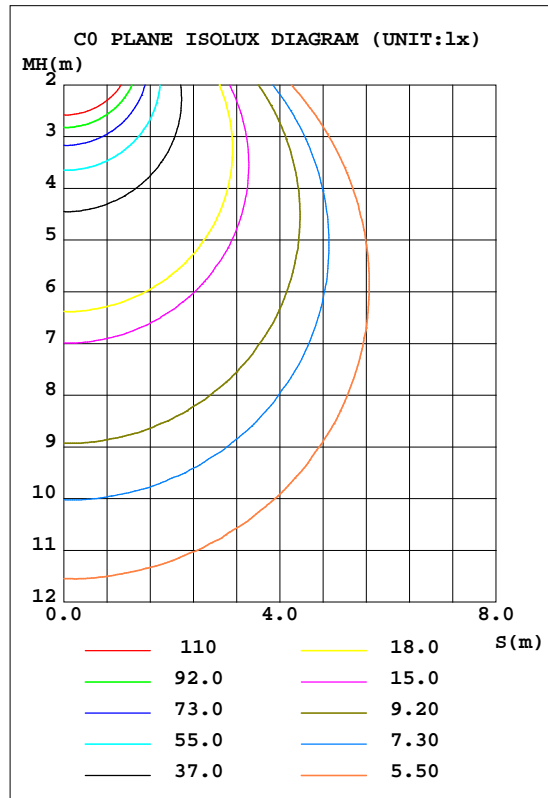


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 90.36 lm/W			
MABELJBR-12D24AC-WH(3500K)		I _{max} (cd)	736.7	S/MH(C0/180)	1.26
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2138.6	h UP, DN(C0-180)	0.2,49.6
NOMINAL FLUX(lm)	2138.64	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.0
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

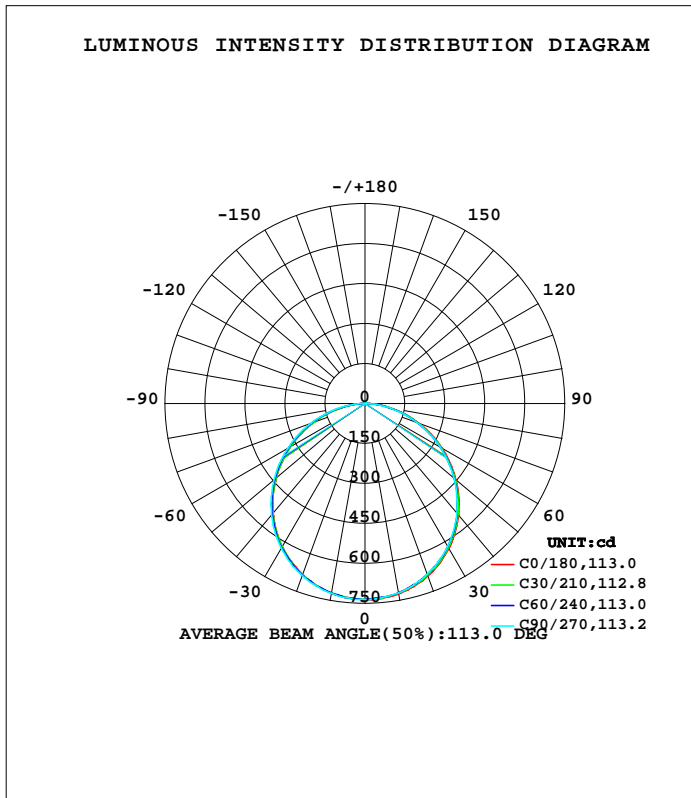

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	725.9	721.6	722.3	719.5	722.8	721.9	723.6	724.2	0- 10	69.55	69.55	3.25,3.25
20	689.0	683.8	682.1	679.8	683.8	683.7	687.4	688.5	10- 20	199.4	269.0	12.6,12.6
30	629.5	623.2	619.5	617.3	620.4	623.4	627.1	628.8	20- 30	302.8	571.7	26.7,26.7
40	547.5	540.7	536.7	533.2	536.0	540.0	545.2	547.8	30- 40	365.6	937.3	43.8,43.8
50	446.0	440.3	436.8	432.7	434.9	438.0	445.8	448.8	40- 50	379.7	1317	61.6,61.6
60	334.1	327.4	325.1	320.3	321.1	324.9	333.7	337.6	50- 60	344.3	1661	77.7,77.7
70	214.8	209.0	207.5	203.1	202.4	206.2	214.6	219.5	60- 70	266.3	1928	90.1,90.1
80	98.61	93.79	89.35	88.07	86.78	87.14	94.73	98.20	70- 80	158.7	2086	97.5,97.5
90	3.444	0.9359	0.3180	0.3423	0.2992	0.3074	0.2734	1.136	80- 90	43.32	2130	99.6,99.6
100	0.5876	0.6080	0.6659	0.6347	0.6581	0.6303	0.9096	0.6295	90-100	0.5359	2130	99.6,99.6
110	1.011	1.037	1.108	1.061	1.052	1.013	0.9731	0.9744	100-110	0.8699	2131	99.6,99.6
120	1.420	1.459	1.525	1.468	1.480	1.400	1.395	1.381	110-120	1.223	2132	99.7,99.7
130	1.798	1.792	1.888	1.802	1.799	1.715	1.723	1.691	120-130	1.439	2134	99.8,99.8
140	2.107	2.077	2.151	2.115	2.053	1.993	2.016	1.946	130-140	1.475	2135	99.8,99.8
150	2.352	2.338	2.409	2.375	2.317	2.268	2.265	2.217	140-150	1.366	2136	99.9,99.9
160	2.571	2.608	2.633	2.628	2.651	2.613	2.563	2.539	150-160	1.130	2138	100,100
170	2.870	2.854	2.916	2.876	2.940	2.921	2.916	2.869	160-170	0.7763	2138	100,100
180	3.054	3.055	3.050	3.025	3.025	3.053	3.040	3.025	170-180	0.2826	2139	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

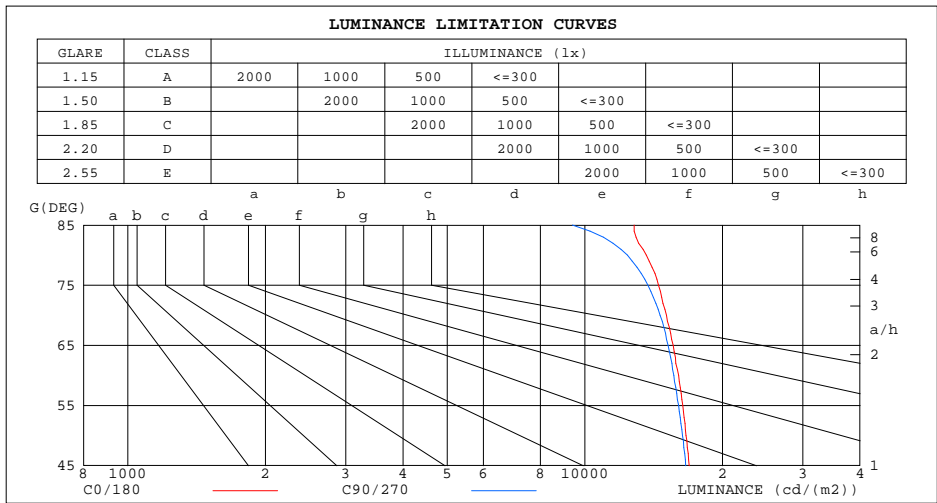

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12818	9393
80	13638	12396
75	14483	13743
70	15081	14616
65	15618	15215
60	16048	15665
55	16373	16039
50	16662	16370
45	16918	16634


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

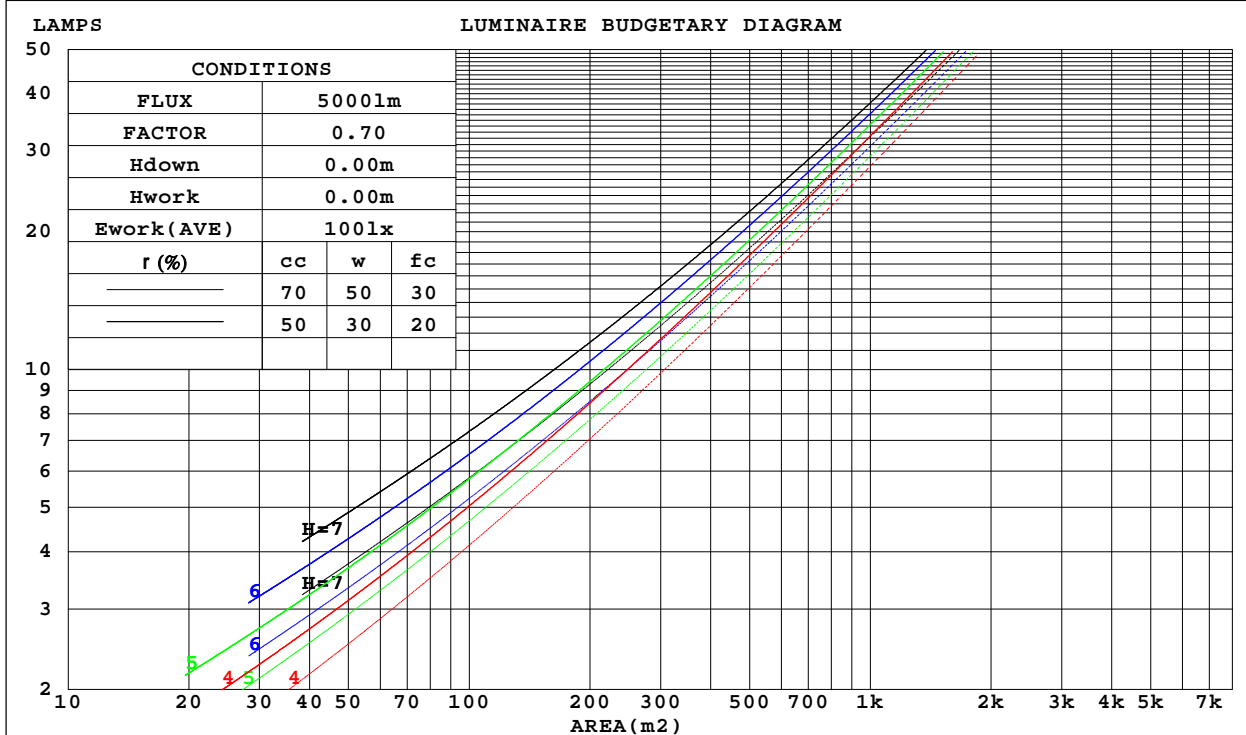

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

WEC AND CCEC

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.46	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.314	.179	.057	.307	.175	.056	.293	.168	.054	.281	.162	.052	.269	.156	.050	
2.0	.295	.161	.050	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.046	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.166	.085	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.101	.067	.099	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.125	.074	.037	.087	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.036	.120	.068	.032	.083	.048	.023	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.028	.109	.059	.025	.075	.041	.018	.044	.024	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.022	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: φ0.46			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.9	23.5	22.2	23.8	24.2	21.7	23.3	22.1	23.7	24.0
3H	23.8	25.3	24.2	25.6	26.0	23.6	25.1	24.0	25.4	25.8
4H	24.5	25.9	24.9	26.3	26.7	24.3	25.7	24.7	26.1	26.4
6H	25.1	26.4	25.5	26.8	27.2	24.8	26.1	25.2	26.5	26.9
8H	25.3	26.6	25.7	27.0	27.4	25.0	26.2	25.4	26.6	27.0
12H	25.5	26.7	25.9	27.0	27.5	25.1	26.3	25.5	26.7	27.1
4H 2H	22.5	23.9	22.9	24.3	24.7	22.3	23.7	22.7	24.1	24.5
3H	24.6	25.8	25.1	26.2	26.6	24.4	25.6	24.9	26.0	26.4
4H	25.5	26.6	26.0	27.0	27.5	25.3	26.4	25.7	26.8	27.2
6H	26.3	27.2	26.7	27.6	28.1	26.0	26.9	26.4	27.3	27.8
8H	26.5	27.4	27.0	27.8	28.3	26.2	27.0	26.6	27.5	28.0
12H	26.7	27.5	27.2	28.0	28.5	26.3	27.1	26.8	27.6	28.0
8H 4H	25.9	26.7	26.3	27.2	27.7	25.6	26.5	26.1	26.9	27.4
6H	26.7	27.5	27.2	27.9	28.4	26.4	27.1	26.9	27.6	28.1
8H	27.1	27.7	27.6	28.2	28.7	26.7	27.3	27.2	27.8	28.3
12H	27.4	27.9	27.9	28.4	29.0	26.9	27.5	27.4	28.0	28.5
12H 4H	25.9	26.7	26.4	27.2	27.6	25.7	26.4	26.1	26.9	27.4
6H	26.8	27.5	27.3	27.9	28.5	26.5	27.1	27.0	27.6	28.1
8H	27.2	27.8	27.7	28.3	28.8	26.8	27.4	27.3	27.9	28.4
CIE190: 2010										

CIE190: 2010
Area: 0.0415 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

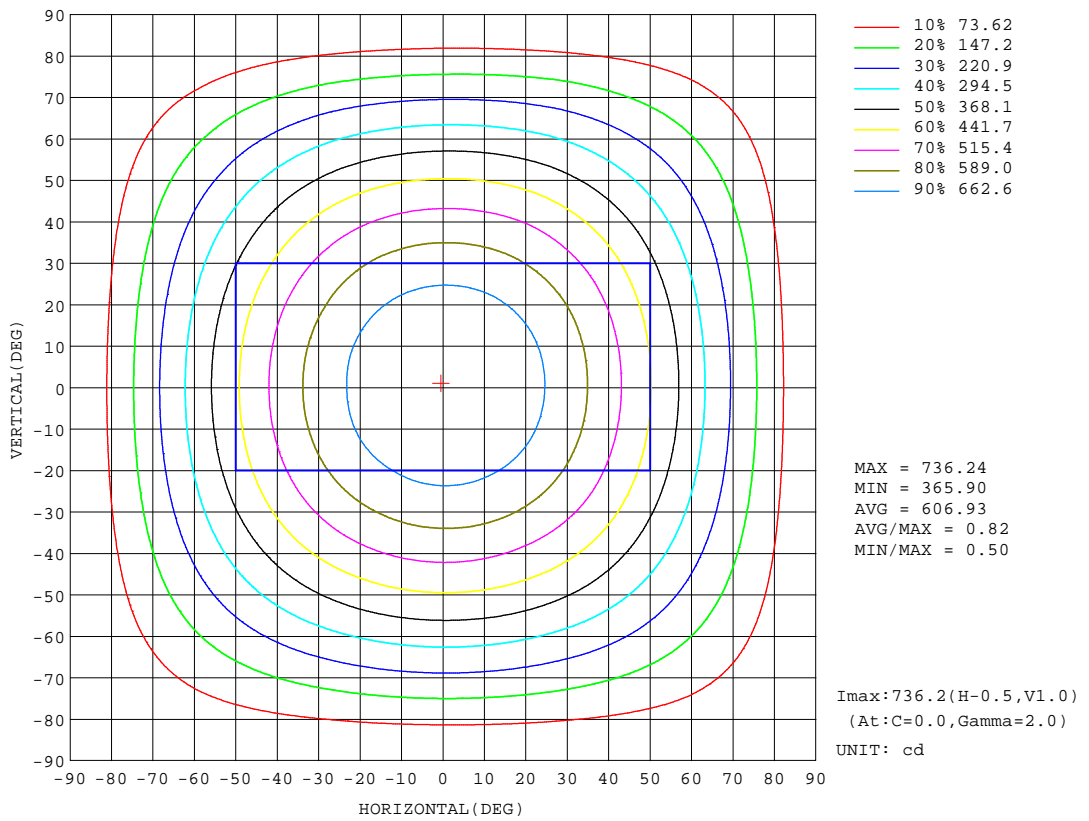


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

AAI Figure

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

Flux out:1564 lm

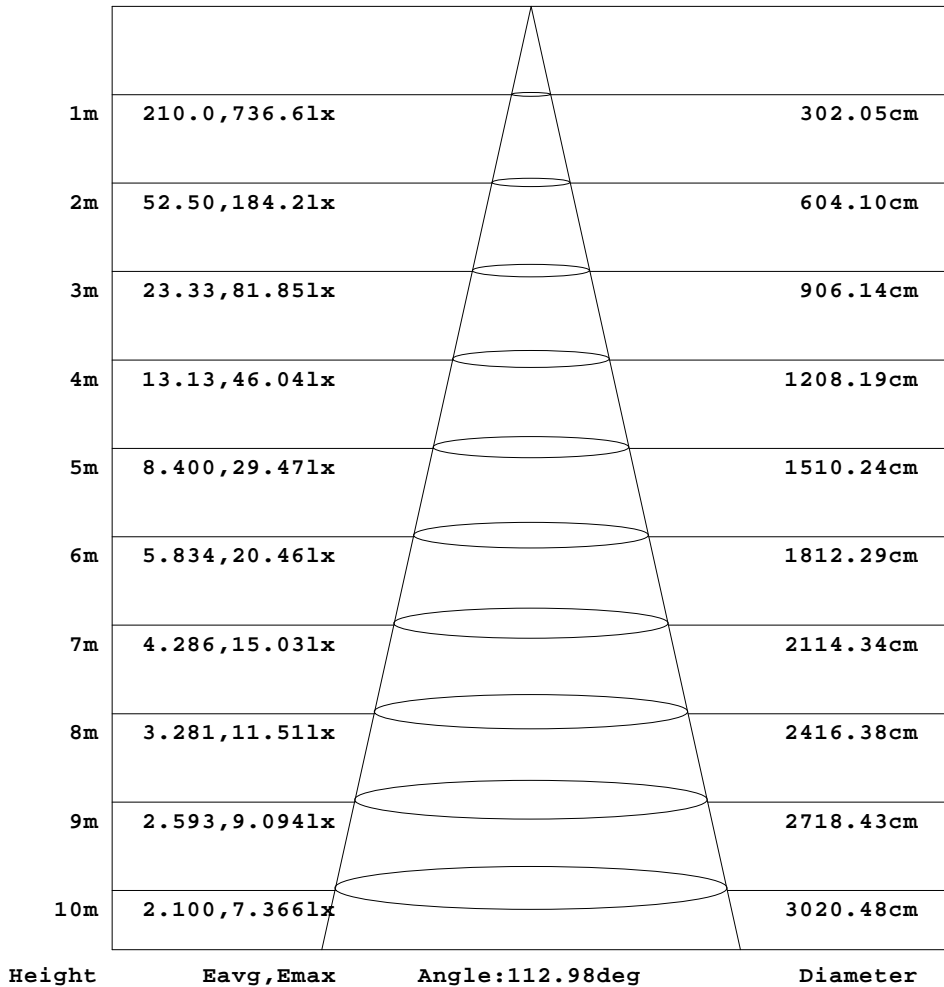


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

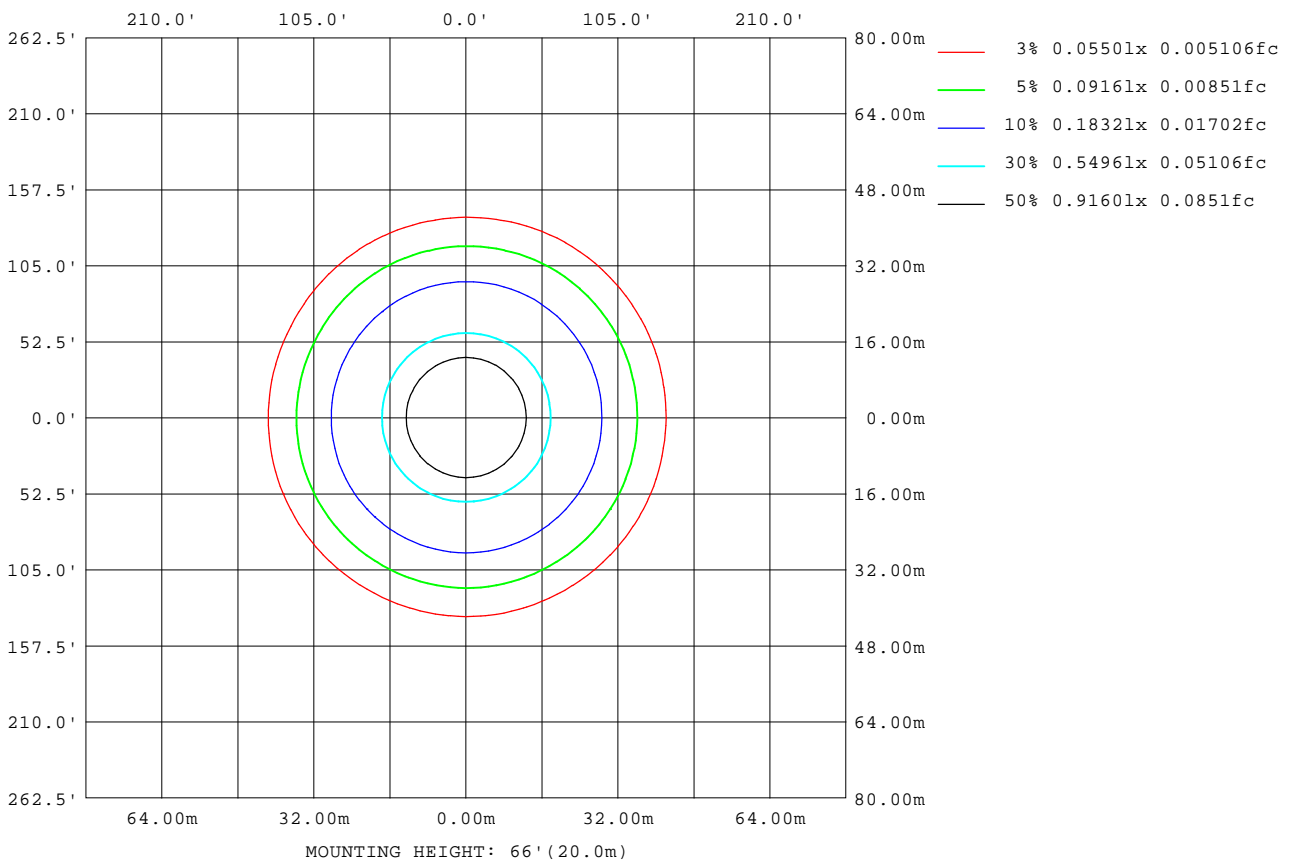

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

LED Avg.L Report

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	15308
L_0~180(75)av	13959
L_0~180(85)av	11225
L_90~270(65)av	15460
L_90~270(75)av	14020
L_90~270(85)av	10030
L_45(65)av	15339
L_45(75)av	13983
L_45(85)av	10195

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks:

Planar Illuminance Curve

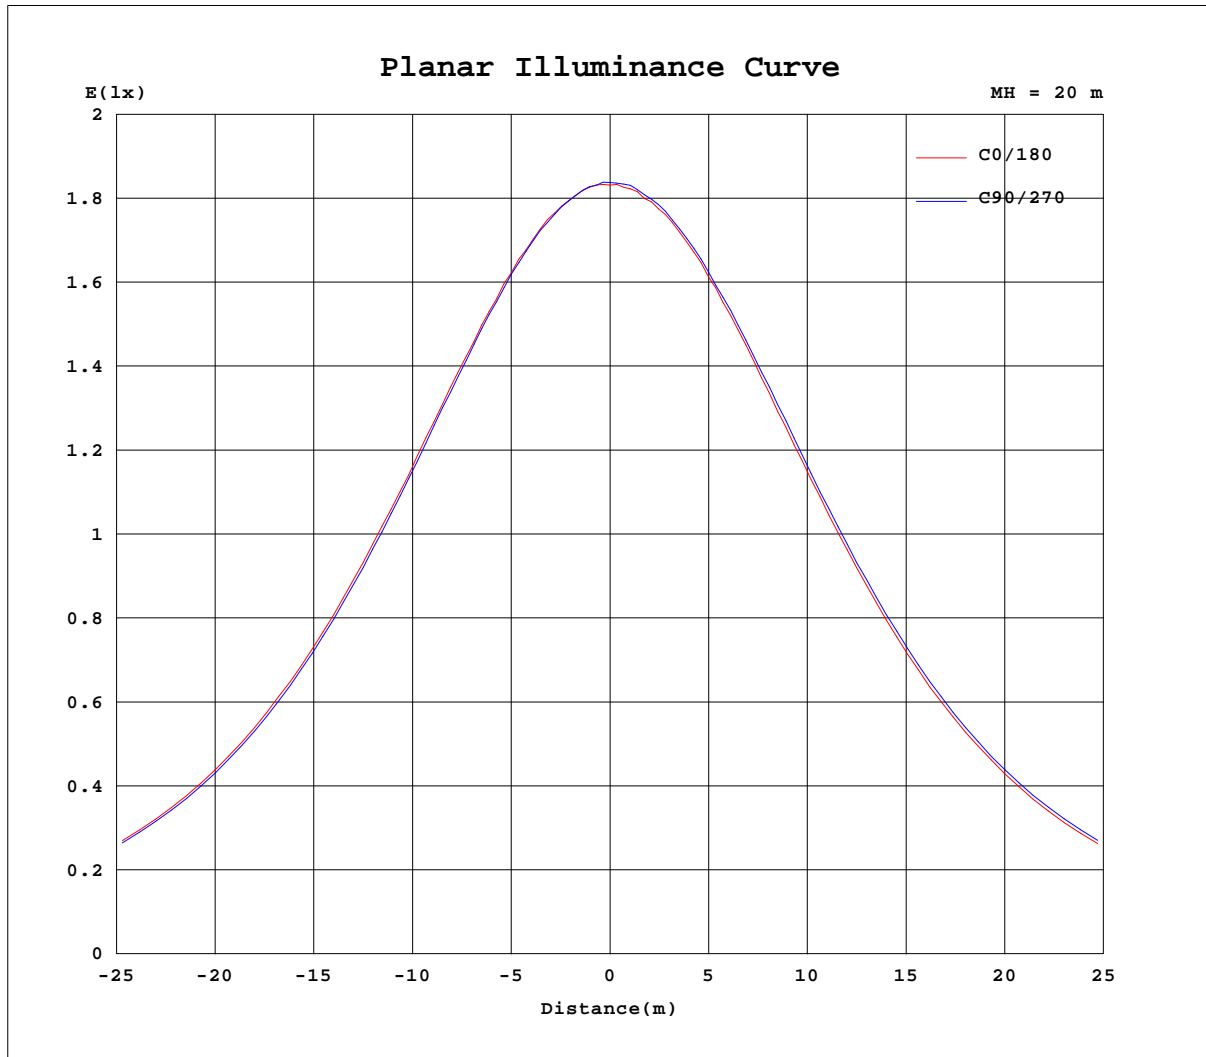

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.20V I:0.1999A P:23.667W PF:0.9849 Freq:59.98Hz Lamp Flux:2138.64x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.46	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	735	735	735	735	735	735	735	735	735	735	735	735						
5	734	733	730	731	730	731	731	732	732	732	732	732						
10	726	723	721	722	719	720	723	722	722	724	724	725						
15	711	707	704	705	702	704	707	707	707	707	710	710						
20	689	686	682	682	679	680	684	683	685	687	689	688						
25	663	659	654	654	651	652	654	655	657	661	661	662						
30	630	625	621	619	617	618	620	621	626	627	629	629						
35	590	587	582	580	578	578	581	582	585	589	590	591						
40	548	543	538	537	533	534	536	537	543	545	548	547						
45	498	495	490	488	484	485	487	488	493	498	501	500						
50	446	443	438	437	432	433	435	435	441	446	450	448						
55	391	388	383	382	378	378	379	380	387	391	394	394						
60	334	330	325	325	320	321	321	321	328	334	338	337						
65	275	271	267	267	262	262	262	262	270	275	280	278						
70	215	211	207	208	203	203	202	202	210	215	220	219						
75	156	153	149	148	145	145	144	142	150	154	160	157						
80	98.6	96.4	91.2	89.4	87.3	88.8	86.8	83.7	90.5	94.7	98.1	98.3						
85	46.5	44.2	37.1	34.0	32.4	35.8	34.7	30.3	34.3	38.6	40.7	41.7						
90	3.44	1.54	0.33	0.32	0.33	0.35	0.30	0.34	0.28	0.27	0.26	2.01						
95	0.39	0.42	0.42	0.46	0.43	0.46	0.45	0.45	0.50	0.39	0.50	0.43						
100	0.59	0.60	0.61	0.67	0.61	0.66	0.66	0.61	0.65	0.91	0.68	0.58						
105	0.79	0.80	0.84	0.89	0.82	0.87	0.85	0.80	0.83	0.76	0.78	0.76						
110	1.01	1.02	1.06	1.11	1.05	1.08	1.05	1.00	1.03	0.97	0.98	0.97						
115	1.21	1.22	1.28	1.34	1.28	1.26	1.27	1.21	1.23	1.18	1.19	1.18						
120	1.42	1.44	1.48	1.53	1.47	1.47	1.48	1.41	1.39	1.40	1.38	1.38						
125	1.62	1.59	1.65	1.70	1.64	1.66	1.63	1.59	1.57	1.57	1.55	1.56						
130	1.80	1.76	1.82	1.89	1.80	1.80	1.80	1.73	1.70	1.72	1.70	1.69						
135	1.95	1.90	1.94	2.03	1.97	1.94	1.92	1.88	1.83	1.89	1.81	1.83						
140	2.11	2.06	2.09	2.15	2.11	2.12	2.05	2.03	1.95	2.02	1.93	1.96						
145	2.25	2.17	2.21	2.28	2.24	2.24	2.20	2.16	2.09	2.14	2.08	2.10						
150	2.35	2.32	2.36	2.41	2.36	2.39	2.32	2.31	2.23	2.26	2.22	2.21						
155	2.47	2.44	2.45	2.51	2.46	2.52	2.48	2.47	2.39	2.39	2.37	2.37						
160	2.57	2.59	2.63	2.63	2.60	2.65	2.65	2.64	2.58	2.56	2.54	2.53						
165	2.74	2.71	2.77	2.77	2.74	2.76	2.82	2.82	2.73	2.77	2.74	2.73						
170	2.87	2.81	2.90	2.92	2.85	2.90	2.94	2.96	2.89	2.92	2.88	2.86						
175	2.94	2.97	3.04	2.98	3.04	3.01	2.99	3.07	3.02	2.95	2.98	2.97						
180	3.05	3.05	3.06	3.05	3.02	3.03	3.02	3.06	3.05	3.04	3.03	3.02						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks: