
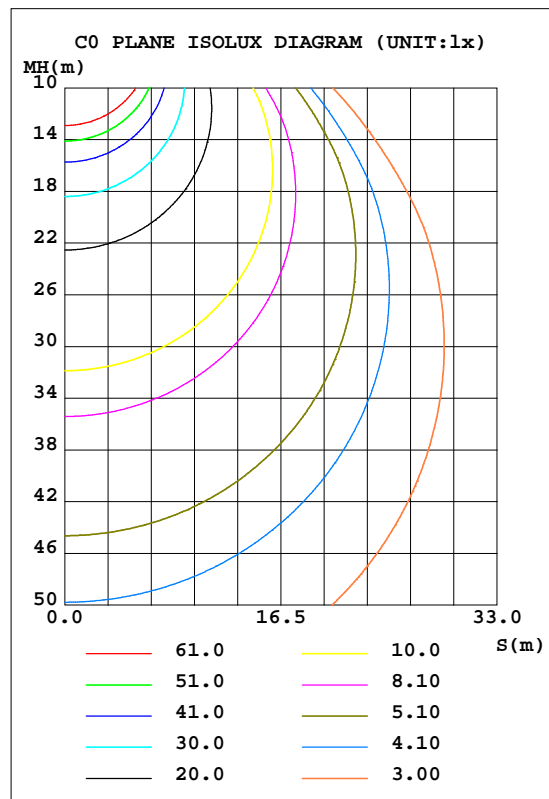


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 151.04 lm/W			
MODEL	ASD-UHB2HV-FS-200D50	I _{max} (cd)	10159	S/MH(C0/180)	1.29
NOMINAL POWER(W)	200	LOR(%)	100.0	S/MH(C90/270)	1.30
RATED VOLTAGE(V)	277	TOTAL FLUX(lm)	29200	h UP, DN(C0-180)	0.7,49.2
NOMINAL FLUX(lm)	29200	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.5,49.6
LAMPS INSIDE	1	h up(%)	1.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	277	h down(%)	98.7	CIBSE SHR MAX	1.35

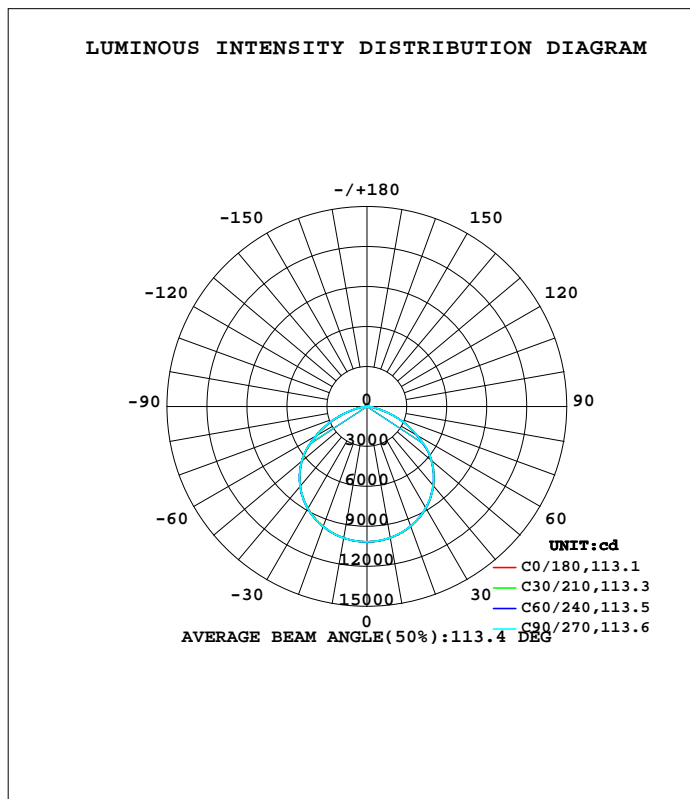

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1002	1001	999.9	999.8	1002	1002	1003	1002	0- 10	962.5	962.5	3.35,3.35
20	958.3	956.4	955.9	956.1	958.7	959.9	960.2	959.5	10- 20	2778	3740	13,13
30	884.4	881.8	881.1	881.9	885.2	887.1	887.5	886.3	20- 30	4266	8006	27.8,27.8
40	777.3	774.4	774.0	774.9	779.3	781.0	781.3	779.6	30- 40	5224	13230	46,46
50	635.3	632.8	632.1	633.1	637.8	640.1	640.2	638.1	40- 50	5482	18712	65,65
60	433.9	434.0	435.4	437.4	438.0	442.9	443.7	437.4	50- 60	4841	23553	81.9,81.9
70	225.6	225.7	226.5	224.8	226.9	231.2	230.7	229.8	60- 70	3307	26860	93.4,93.4
80	48.24	48.17	48.90	48.90	48.20	48.67	49.09	49.58	70- 80	1382	28242	98.2,98.2
90	1.411	1.426	1.428	1.415	1.298	1.295	1.295	1.299	80- 90	165.4	28408	98.7,98.7
100	2.850	2.878	2.882	2.858	2.102	2.097	2.102	2.103	90-100	20.62	28428	98.8,98.8
110	4.518	4.547	4.556	4.522	3.128	3.117	3.110	3.120	100-110	33.21	28462	98.9,98.9
120	6.160	6.179	6.191	6.174	4.306	4.298	4.301	4.306	110-120	44.89	28507	99.1,99.1
130	7.827	7.849	7.863	7.848	5.645	5.639	5.653	5.662	120-130	53.57	28560	99.3,99.3
140	9.473	9.496	9.507	9.490	7.194	7.182	7.193	7.210	130-140	58.34	28618	99.5,99.5
150	10.85	10.87	10.88	10.86	8.702	8.686	8.697	8.714	140-150	56.82	28675	99.7,99.7
160	11.86	11.86	11.86	11.86	10.12	10.10	10.11	10.13	150-160	48.08	28723	99.8,99.8
170	12.49	12.48	12.48	12.48	12.35	12.28	12.23	12.32	160-170	33.04	28756	100,100
180	12.67	12.64	12.63	12.65	12.67	12.64	12.63	12.64	170-180	11.97	28768	100,100
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 15988 lm

%lum = 55.6%

%lamp = 55.6%

Conical surface Flux(120deg): 23553 lm

%lum = 81.9%


%lamp = 81.9%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Richard
Test Date:2022-03-22

g Range: 0 - 180DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
Humidity:65.0%
Test Distance:8.930m [K=1.0414]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

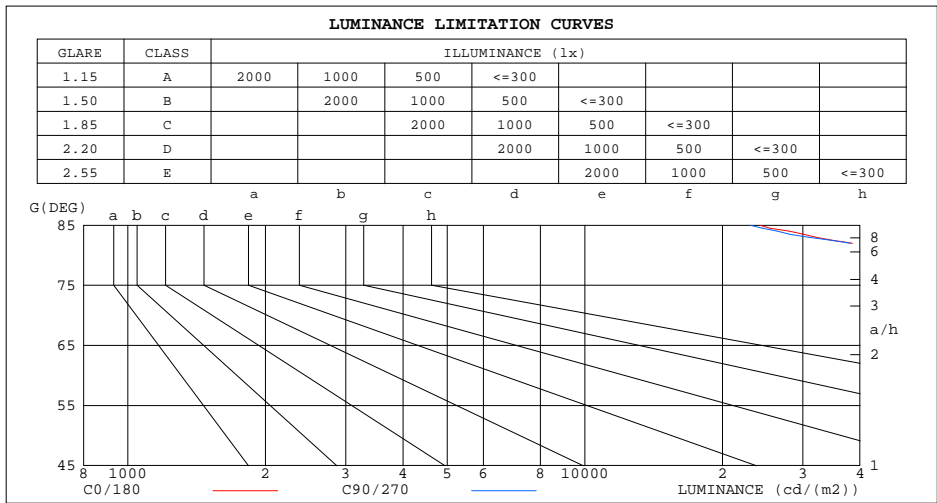

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	24191	23059
80	54470	55221
75	95136	96008
70	129339	129831
65	154612	153914
60	170163	170760
55	184842	186012
50	193784	192824
45	197164	196185


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Richard
 Test Date: 2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity: 65.0%
 Test Distance: 8.930m [K=1.0414]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.05	1.01	.97	1.03	.99	.96	.98	.95	.92	.94	.92	.89	.90	.88	.87	.84
2.0	.92	.85	.80	.90	.84	.79	.86	.81	.77	.83	.79	.75	.80	.76	.73	.71
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.73	.68	.63	.71	.66	.62	.60
4.0	.72	.63	.57	.70	.62	.56	.68	.61	.55	.65	.59	.54	.63	.58	.54	.51
5.0	.64	.55	.49	.63	.55	.48	.61	.53	.48	.59	.52	.47	.57	.51	.47	.44
6.0	.58	.49	.43	.57	.48	.42	.55	.47	.42	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.44	.37	.51	.43	.37	.50	.42	.37	.48	.42	.37	.47	.41	.36	.34
8.0	.48	.39	.33	.47	.39	.33	.45	.38	.33	.44	.38	.33	.43	.37	.32	.31
9.0	.44	.35	.30	.43	.35	.30	.42	.35	.30	.41	.34	.29	.39	.34	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

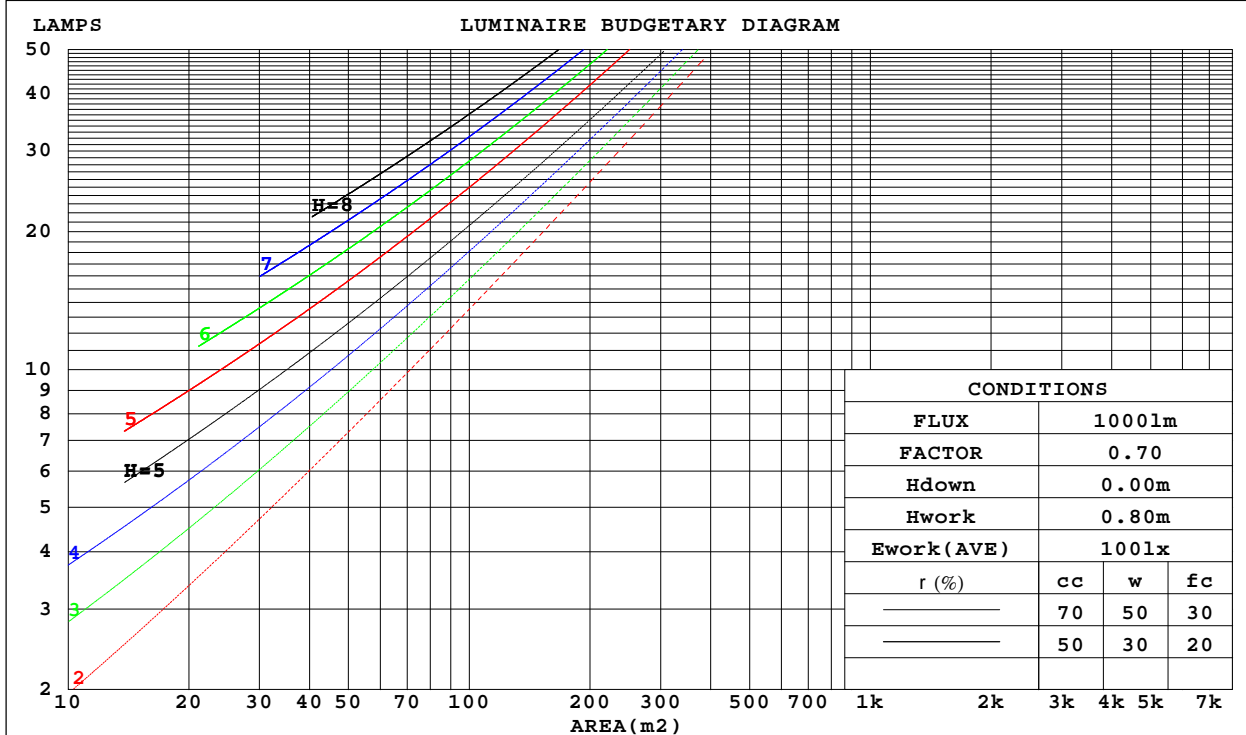

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

WEC AND CCEC

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.285	.162	.051	.277	.158	.050	.263	.151	.048	.251	.145	.046	.239	.138	.045	
2.0	.275	.151	.046	.268	.148	.046	.256	.143	.044	.245	.137	.043	.235	.133	.042	
3.0	.258	.137	.041	.253	.135	.041	.242	.131	.040	.232	.127	.039	.222	.123	.038	
4.0	.241	.125	.037	.236	.123	.036	.226	.120	.036	.217	.117	.035	.209	.113	.035	
5.0	.224	.114	.033	.220	.113	.033	.211	.110	.032	.203	.107	.032	.196	.104	.031	
6.0	.209	.105	.030	.205	.103	.030	.197	.101	.029	.190	.099	.029	.183	.096	.029	
7.0	.195	.096	.027	.192	.095	.027	.185	.093	.027	.178	.091	.027	.172	.089	.026	
8.0	.183	.089	.025	.180	.088	.025	.173	.087	.025	.168	.085	.024	.162	.083	.024	
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.117	.117	.117	.067	.067	.067	.021	.021	.021	
1.0	.188	.166	.146	.161	.142	.126	.110	.098	.087	.063	.057	.051	.020	.018	.016	
2.0	.180	.142	.110	.154	.122	.095	.105	.084	.066	.061	.049	.039	.020	.016	.013	
3.0	.172	.124	.086	.147	.107	.074	.101	.074	.052	.058	.043	.031	.019	.014	.010	
4.0	.165	.111	.069	.141	.096	.060	.097	.067	.042	.056	.039	.025	.018	.013	.008	
5.0	.157	.100	.058	.135	.087	.050	.093	.061	.036	.054	.036	.021	.017	.012	.007	
6.0	.150	.092	.050	.129	.079	.043	.089	.056	.031	.052	.033	.018	.017	.011	.006	
7.0	.144	.085	.044	.124	.074	.038	.086	.052	.027	.050	.030	.016	.016	.010	.005	
8.0	.138	.079	.039	.118	.069	.034	.082	.048	.024	.048	.028	.014	.015	.009	.005	
9.0	.132	.074	.035	.113	.064	.031	.079	.045	.022	.046	.027	.013	.015	.009	.004	
10.0	.126	.070	.033	.109	.061	.028	.075	.043	.020	.044	.025	.012	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm										
NAME:					TYPE: 120°			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.: 1		
MFR.: ASD Lighting corp.					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.3	20.8	19.6	21.0	21.2	19.3	20.8	19.6	21.0	21.2
3H	20.4	21.8	20.7	22.0	22.3	20.4	21.8	20.7	22.0	22.3
4H	20.7	22.0	21.0	22.3	22.5	20.7	22.0	21.0	22.2	22.5
6H	20.8	22.0	21.1	22.3	22.6	20.8	22.0	21.1	22.3	22.6
8H	20.7	21.9	21.1	22.2	22.5	20.7	21.9	21.1	22.2	22.5
12H	20.7	21.8	21.1	22.1	22.5	20.7	21.8	21.1	22.1	22.4
4H 2H	19.8	21.1	20.1	21.4	21.6	19.8	21.1	20.1	21.3	21.6
3H	21.1	22.2	21.4	22.5	22.8	21.0	22.2	21.4	22.5	22.8
4H	21.4	22.4	21.8	22.8	23.1	21.4	22.4	21.8	22.7	23.1
6H	21.5	22.4	21.9	22.8	23.2	21.5	22.4	21.9	22.8	23.2
8H	21.5	22.3	22.0	22.7	23.1	21.5	22.3	21.9	22.7	23.1
12H	21.5	22.2	21.9	22.7	23.1	21.5	22.2	21.9	22.6	23.1
8H 4H	21.5	22.3	21.9	22.7	23.1	21.5	22.3	21.9	22.7	23.1
6H	21.7	22.4	22.1	22.8	23.2	21.7	22.3	22.1	22.8	23.2
8H	21.7	22.3	22.2	22.7	23.2	21.7	22.3	22.1	22.7	23.2
12H	21.7	22.2	22.2	22.6	23.1	21.6	22.2	22.1	22.6	23.1
12H 4H	21.5	22.2	21.9	22.6	23.1	21.4	22.2	21.9	22.6	23.0
6H	21.6	22.2	22.1	22.7	23.2	21.6	22.2	22.1	22.7	23.2
8H	21.7	22.2	22.2	22.6	23.1	21.6	22.2	22.1	22.6	23.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.5					+ 0.3 / - 0.5				
2.0H	+ 0.5 / - 0.4					+ 0.5 / - 0.4				

CIE Pub.117, 28768 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 11.7)
Area: 0.051 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Richard
Test Date:2022-03-22

g Range: 0 - 180DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
Humidity:65.0%
Test Distance:8.930m [K=1.0414]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	40	57	46	39	56	46	39	33
0.80	68	57	50	67	56	50	65	56	49	42
1.00	77	66	59	76	66	59	73	67	58	51
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	80	73	88	79	73	84	77	71	64
2.00	96	88	82	94	87	81	91	84	79	72
2.50	100	93	87	98	91	86	94	88	84	76
3.00	103	97	92	101	95	90	97	92	88	79
4.00	107	102	97	105	100	96	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

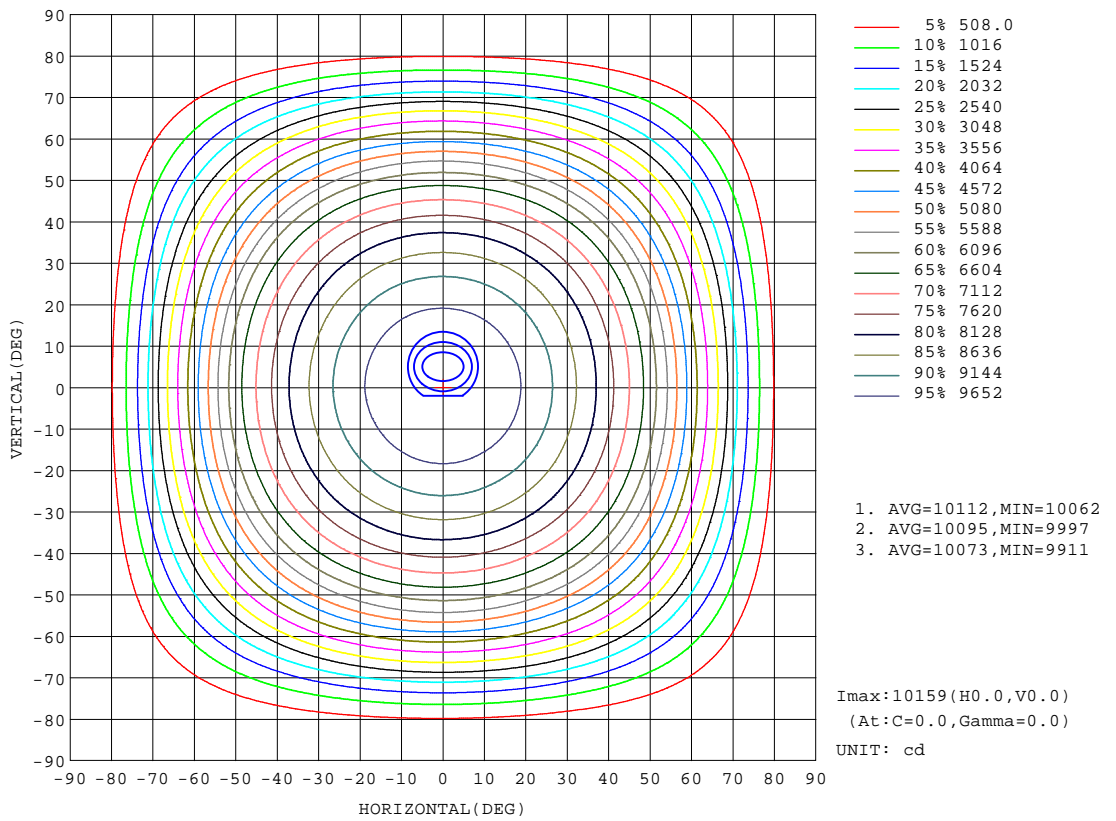


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

AAI Figure

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

Flux out:22238 lm

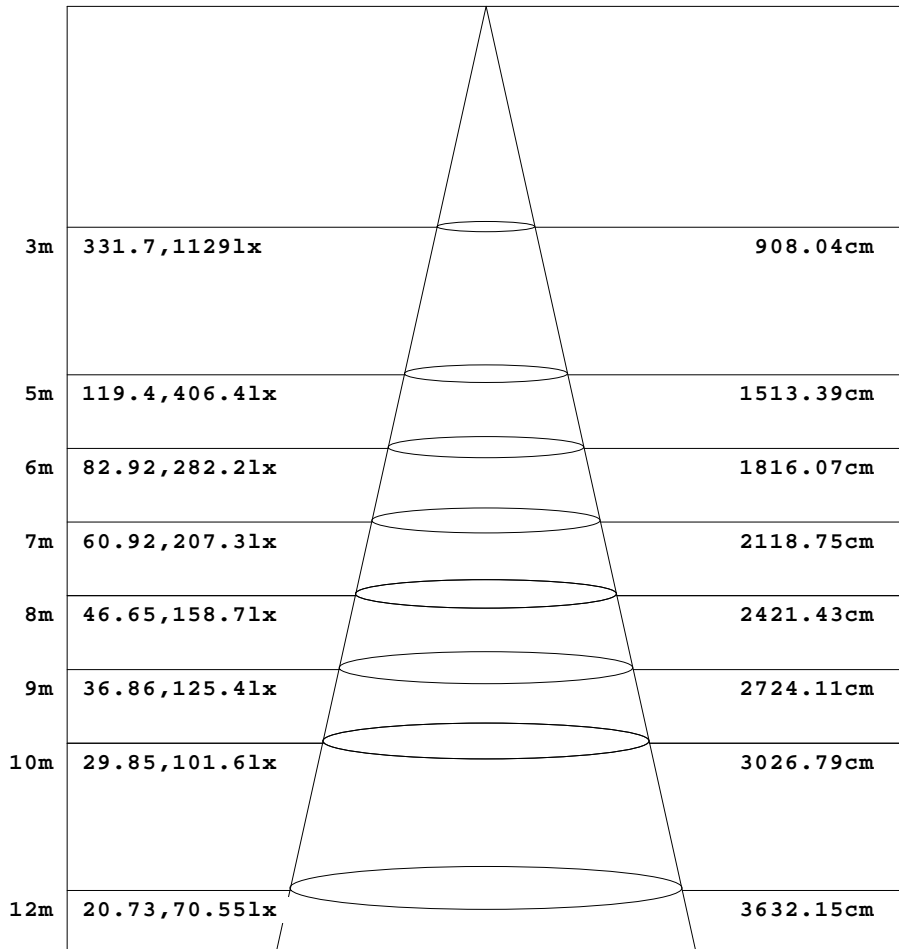

Height Eavg, Emax Angle:113.09deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks:

ISOLUX DIAGRAM

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

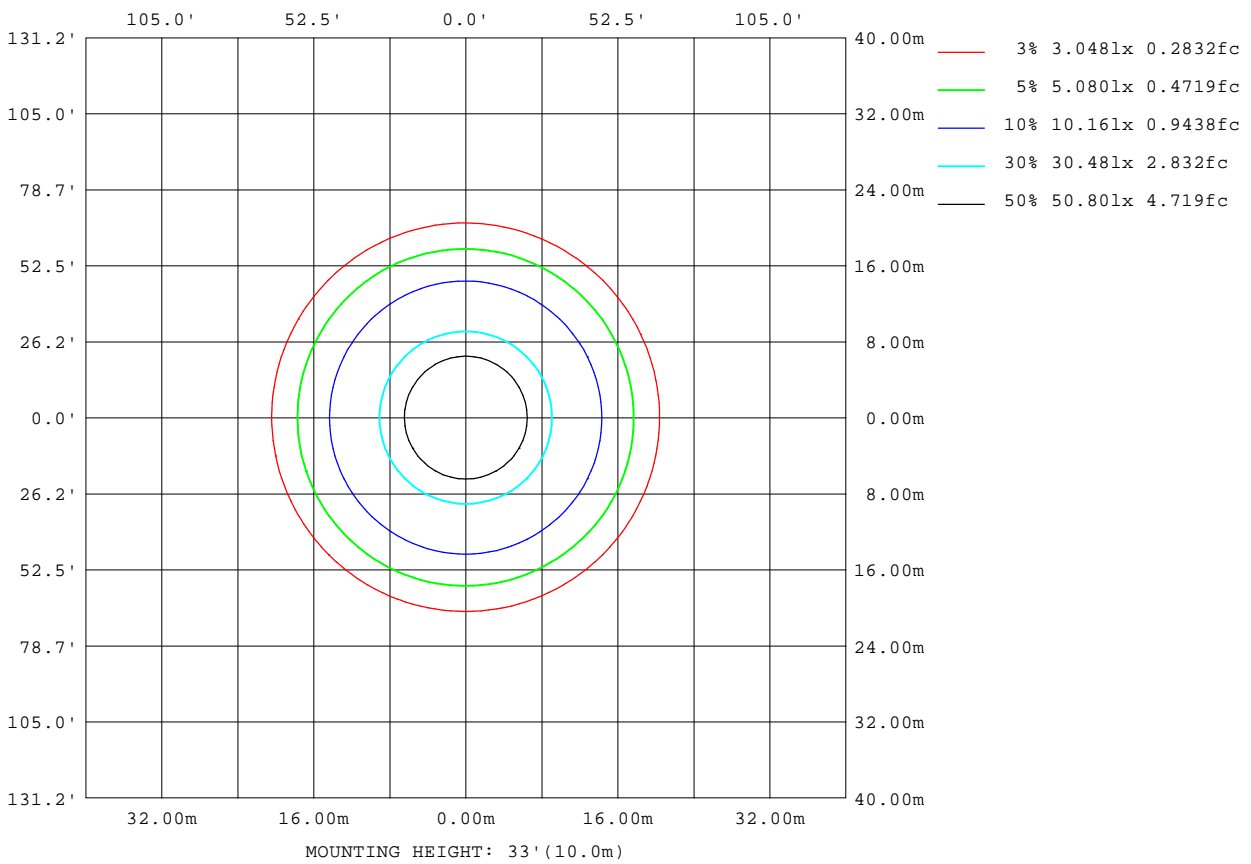

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Richard
 Test Date: 2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity: 65.0%
 Test Distance: 8.930m [K=1.0414]
 Remarks:

LED Avg.L Report

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	155154
L_0~180(75)av	95428
L_0~180(85)av	23276
L_90~270(65)av	156086
L_90~270(75)av	96945
L_90~270(85)av	21705
L_45(65)av	155602
L_45(75)av	96247
L_45(85)av	22389

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Richard
Test Date:2022-03-22

g Range: 0 - 180DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
Humidity:65.0%
Test Distance:8.930m [K=1.0414]
Remarks:

Planar Illuminance Curve

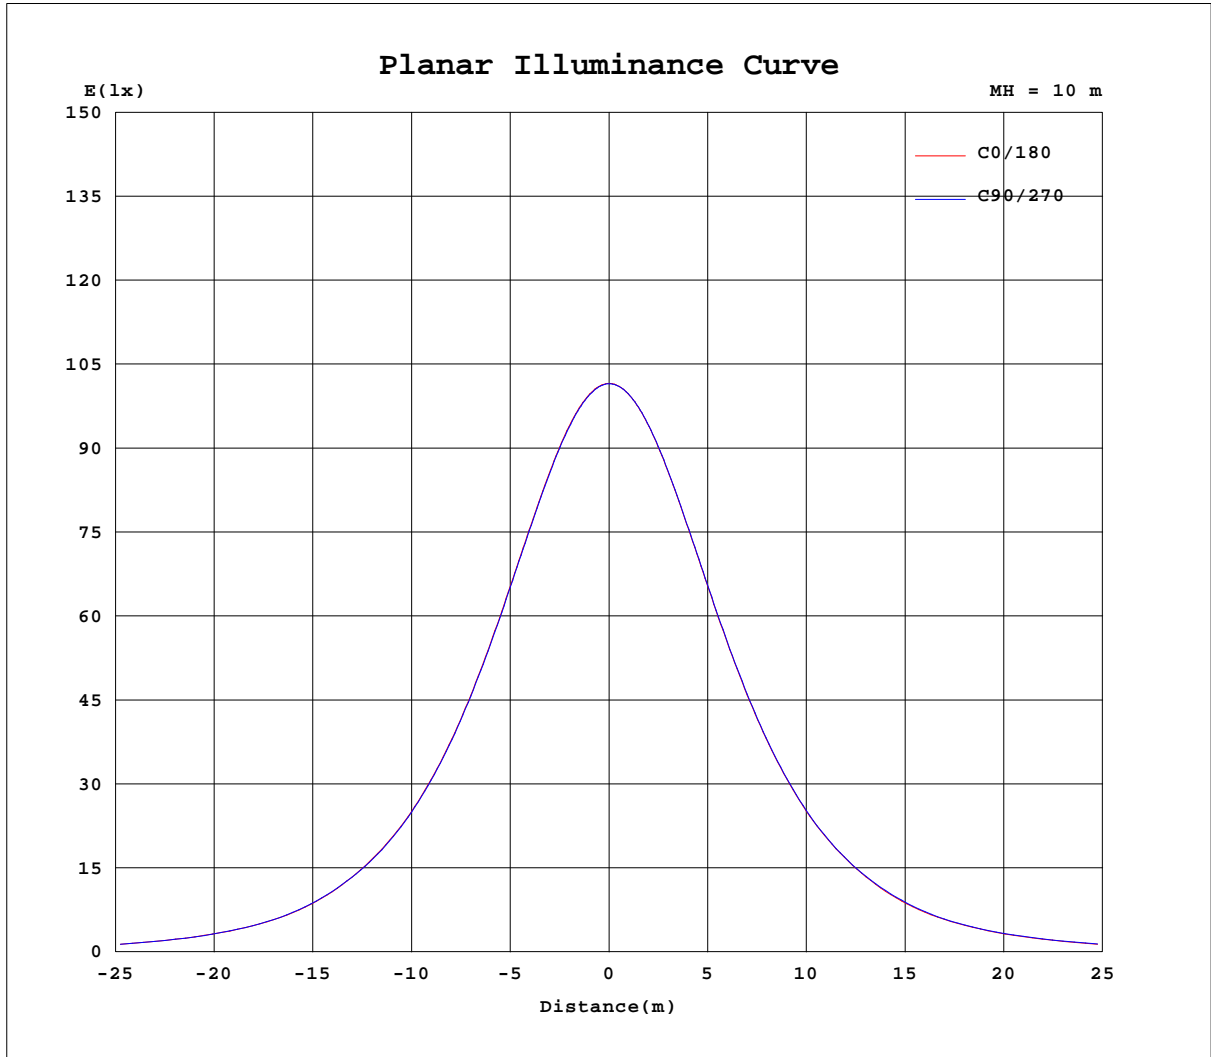

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Richard
 Test Date: 2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity: 65.0%
 Test Distance: 8.930m [K=1.0414]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:275.80V I:0.6954A P:190.46W PF:0.9930 Freq:49.99Hz Lamp Flux:29200x1 lm		
NAME:	TYPE: 120°	WEIGHT:
SPEC.:	DIM.:	SERIAL No.: 1
MFR.: ASD Lighting corp.	SUR.:	Shielding Angle:

Table--1

UNIT: x10cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1016	1016	1015	1015	1015	1015	1016	1016	1015	1015	1015	1015						
5	1012	1012	1011	1011	1011	1011	1012	1013	1013	1012	1012	1012						
10	1002	1001	1000	1000	1000	1000	1002	1002	1003	1003	1002	1001						
15	984	983	982	982	982	982	984	984	985	985	985	984						
20	958	957	956	956	956	956	959	959	961	960	960	959						
25	925	924	922	923	922	923	926	927	928	928	927	926						
30	884	883	881	881	881	883	885	886	888	888	887	885						
35	835	834	831	832	832	833	836	837	839	839	838	836						
40	777	776	773	774	774	776	779	780	782	781	781	779						
45	711	710	706	707	708	710	713	714	716	715	714	713						
50	635	635	631	632	632	634	638	638	642	640	639	637						
55	541	543	541	544	544	544	544	545	552	551	546	541						
60	434	436	432	435	437	438	438	440	446	444	440	435						
65	333	332	331	332	333	333	336	338	342	341	337	336						
70	226	225	226	226	225	225	227	229	233	231	231	228						
75	126	126	124	127	126	126	126	127	131	129	129	128						
80	48.2	49.0	47.3	48.9	49.3	48.5	48.2	47.6	49.7	49.1	49.7	49.4						
85	10.8	10.8	10.0	10.2	10.1	10.1	9.94	9.00	9.07	9.05	9.93	10.6						
90	1.41	1.41	1.44	1.43	1.42	1.41	1.30	1.30	1.29	1.29	1.30	1.30						
95	2.07	2.08	2.11	2.10	2.09	2.07	1.67	1.67	1.66	1.67	1.67	1.67						
100	2.85	2.86	2.90	2.88	2.87	2.85	2.10	2.11	2.09	2.10	2.10	2.11						
105	3.68	3.70	3.73	3.72	3.70	3.67	2.57	2.58	2.55	2.57	2.57	2.57						
110	4.52	4.53	4.57	4.56	4.54	4.51	3.13	3.13	3.11	3.11	3.12	3.12						
115	5.36	5.36	5.40	5.39	5.38	5.36	3.70	3.69	3.68	3.69	3.69	3.70						
120	6.16	6.16	6.19	6.19	6.18	6.16	4.31	4.30	4.29	4.30	4.30	4.31						
125	6.97	6.97	7.01	7.00	7.00	6.98	4.98	4.98	4.96	4.99	4.98	4.99						
130	7.83	7.83	7.87	7.86	7.86	7.84	5.64	5.65	5.63	5.65	5.66	5.67						
135	8.68	8.68	8.72	8.71	8.71	8.69	6.43	6.43	6.42	6.44	6.45	6.46						
140	9.47	9.48	9.52	9.51	9.50	9.48	7.19	7.19	7.17	7.19	7.20	7.22						
145	10.2	10.2	10.2	10.2	10.2	10.2	7.95	7.95	7.92	7.94	7.96	7.97						
150	10.9	10.9	10.9	10.9	10.9	10.9	8.70	8.70	8.67	8.70	8.70	8.73						
155	11.4	11.4	11.4	11.4	11.4	11.4	9.47	9.47	9.44	9.46	9.47	9.49						
160	11.9	11.9	11.9	11.9	11.9	11.9	10.1	10.1	10.1	10.1	10.1	10.1						
165	12.2	12.2	12.2	12.2	12.2	12.2	11.2	11.3	11.2	11.3	11.2	11.3						
170	12.5	12.5	12.5	12.5	12.5	12.5	12.3	12.3	12.2	12.2	12.3	12.3						
175	12.7	12.7	12.7	12.7	12.7	12.7	12.6	12.6	12.5	12.5	12.6	12.6						
180	12.7	12.6	12.6	12.6	12.6	12.7	12.7	12.6	12.6	12.6	12.6	12.6						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Richard
 Test Date:2022-03-22

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.442
 Humidity:65.0%
 Test Distance:8.930m [K=1.0414]
 Remarks: