
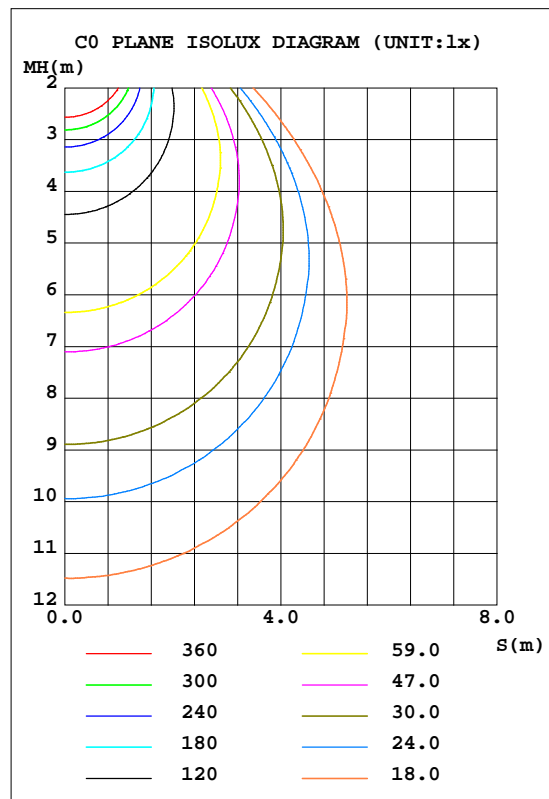


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 89.50 lm/W			
MODEL	7-10DA60AC(60W 3500K)	I <sub>max</sub> (cd)	2377	S/MH(C0/180)	1.18
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	5154.9	h UP, DN(C0-180)	0.2,50.4
NOMINAL FLUX(lm)	5154.94	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

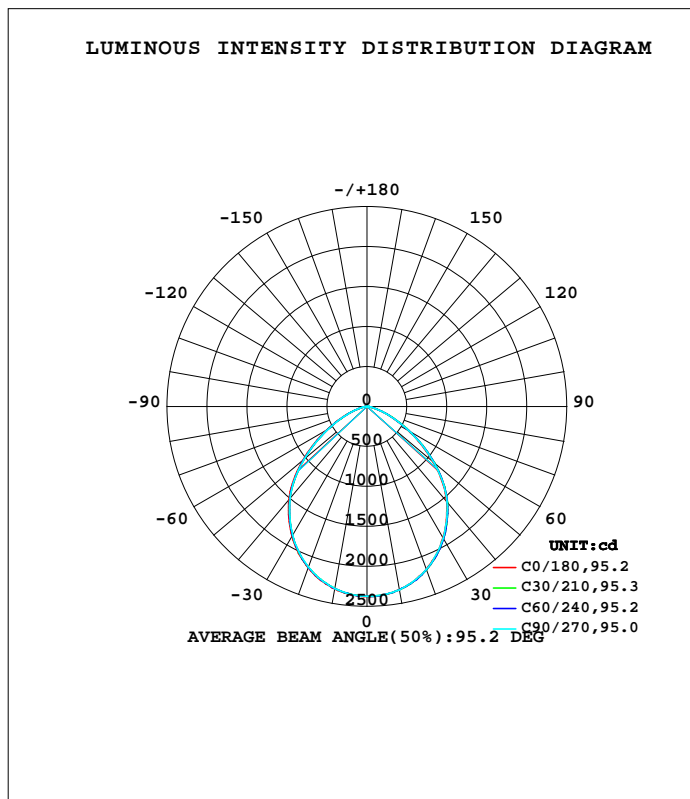

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2874]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	2327	2330	2328	2320	2316	2313	2313	2321	0- 10	224.1	224.1	4.35,4.35
20	2167	2176	2169	2153	2150	2142	2141	2153	10- 20	634.5	858.6	16.7,16.7
30	1901	1915	1906	1880	1874	1865	1860	1882	20- 30	935.2	1794	34.8,34.8
40	1552	1569	1559	1530	1523	1501	1498	1525	30- 40	1071	2865	55.6,55.6
50	1083	1106	1099	1065	1049	1029	1026	1060	40- 50	1007	3872	75.1,75.1
60	593.0	608.5	604.7	578.7	570.7	554.5	552.6	577.7	50- 60	727.3	4599	89.2,89.2
70	235.2	239.0	235.0	220.5	216.1	211.0	213.5	226.1	60- 70	383.5	4983	96.7,96.7
80	55.59	54.62	50.95	50.61	51.85	50.74	51.70	53.67	70- 80	126.4	5109	99.1,99.1
90	0.5568	0.3534	0.2563	0.2694	0.2392	0.2714	0.2648	0.3216	80- 90	23.26	5133	99.6,99.6
100	0.7596	0.7988	0.8564	0.8293	0.8319	0.8082	0.8020	0.8032	90-100	0.5302	5133	99.6,99.6
110	1.802	1.841	1.942	1.892	1.893	1.894	1.896	1.835	100-110	1.383	5135	99.6,99.6
120	3.146	3.094	3.336	3.234	3.220	3.271	3.236	3.141	110-120	2.504	5137	99.7,99.7
130	4.561	4.480	4.703	4.575	4.670	4.600	4.683	4.531	120-130	3.488	5141	99.7,99.7
140	5.631	5.606	5.964	5.674	5.766	5.739	5.848	5.590	130-140	3.983	5145	99.8,99.8
150	6.506	6.560	6.819	6.715	6.711	6.776	6.827	6.605	140-150	3.887	5148	99.9,99.9
160	7.443	7.584	7.667	7.743	7.702	7.822	7.859	7.589	150-160	3.305	5152	99.9,99.9
170	8.398	8.577	8.593	8.603	8.550	8.785	8.813	8.595	160-170	2.304	5154	100,100
180	9.062	9.283	9.192	9.106	9.018	9.380	9.281	9.106	170-180	0.8462	5155	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2874]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

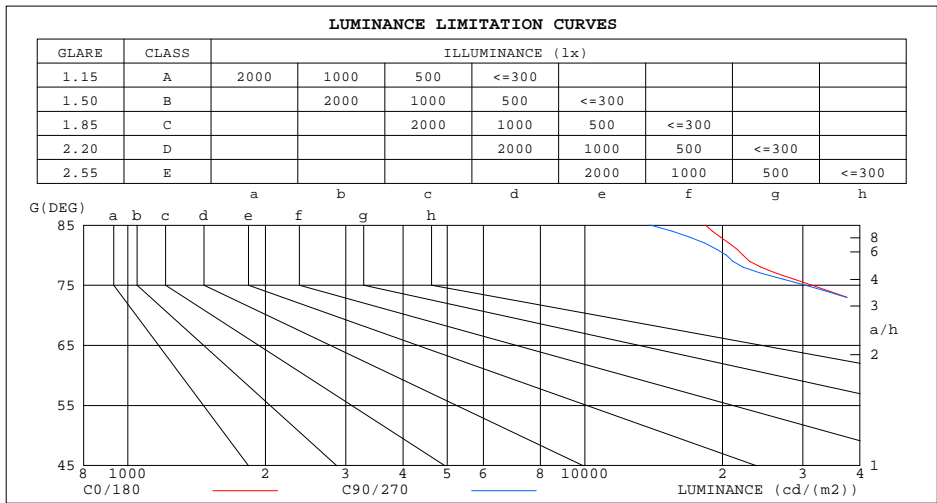

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	18384	13905
80	22196	20388
75	31394	30396
70	47676	47755
65	64333	65790
60	82231	84048
55	100381	101998
50	116851	118800
45	130712	132134


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2874]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.60	.54	.68	.60	.54	.65	.59	.54	.63	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.54	.48	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.38	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.35	.31	.30

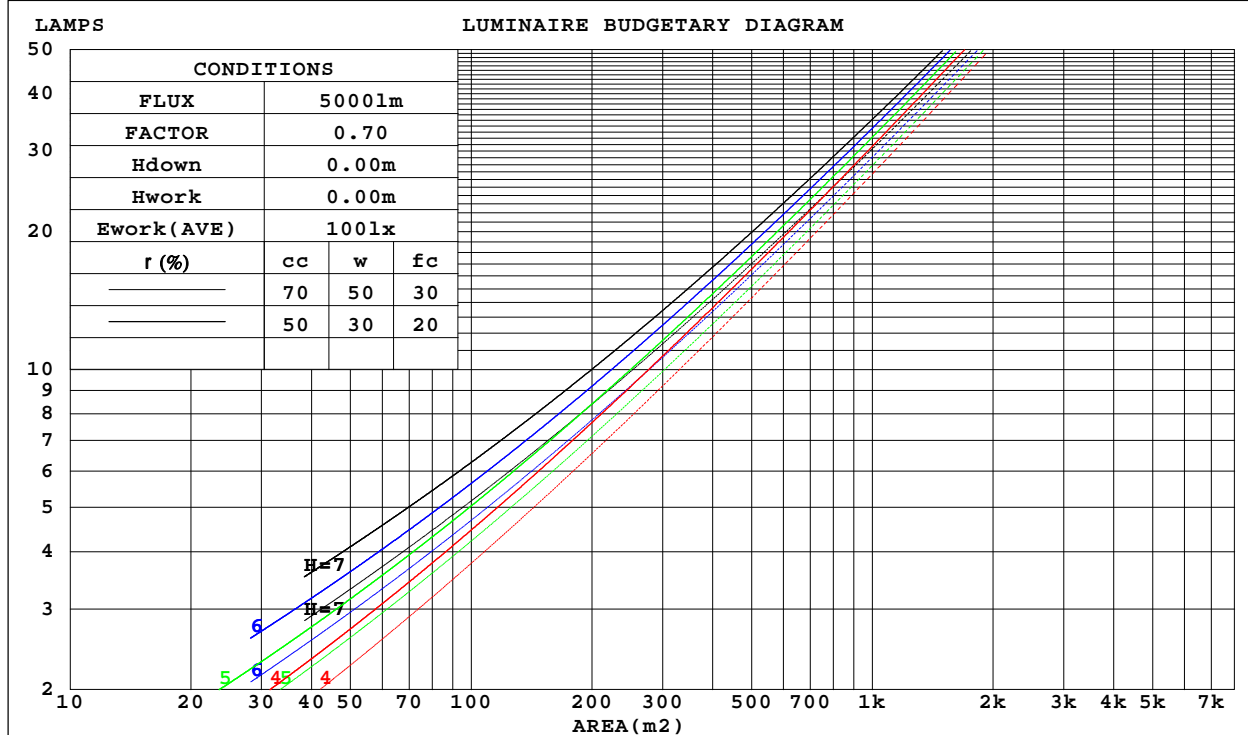

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2874]  
 Remarks:

WEC AND CCEC

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.255	.145	.046	.248	.141	.045	.234	.134	.043	.222	.128	.041	.211	.122	.039	
2.0	.247	.136	.042	.241	.133	.041	.230	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.106	.031	.203	.104	.030	.195	.102	.030	.188	.099	.029	.181	.097	.029	
6.0	.195	.098	.028	.191	.096	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.183	.091	.026	.180	.090	.026	.173	.088	.025	.167	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.146	.074	.021	
10.0	.154	.074	.020	.152	.073	.020	.147	.072	.020	.143	.071	.020	.138	.070	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.135	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.081	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.085	.045	.120	.073	.039	.083	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.078	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.029	.076	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.105	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.063	.027	.100	.054	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2874]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.5	29.0	27.9	29.3	29.6	27.3	28.8	27.7	29.1	29.4
3H	28.3	29.6	28.6	29.9	30.3	28.1	29.4	28.5	29.8	30.1
4H	28.4	29.6	28.8	30.0	30.4	28.2	29.5	28.6	29.8	30.2
6H	28.4	29.6	28.9	29.9	30.3	28.3	29.4	28.7	29.8	30.2
8H	28.4	29.5	28.9	29.9	30.3	28.2	29.3	28.7	29.7	30.1
12H	28.4	29.5	28.9	29.8	30.3	28.2	29.3	28.7	29.6	30.1
4H 2H	27.8	29.0	28.2	29.4	29.8	27.6	28.8	28.0	29.2	29.6
3H	28.7	29.7	29.1	30.1	30.5	28.5	29.5	28.9	29.9	30.3
4H	28.9	29.8	29.3	30.2	30.7	28.7	29.6	29.1	30.0	30.4
6H	29.0	29.8	29.4	30.2	30.7	28.7	29.5	29.2	30.0	30.4
8H	29.0	29.7	29.5	30.2	30.6	28.7	29.4	29.2	29.9	30.4
12H	29.0	29.6	29.5	30.1	30.6	28.7	29.4	29.2	29.8	30.3
8H 4H	28.9	29.6	29.4	30.1	30.6	28.7	29.4	29.1	29.8	30.3
6H	29.0	29.6	29.5	30.1	30.6	28.7	29.3	29.2	29.8	30.3
8H	29.0	29.6	29.6	30.1	30.6	28.8	29.3	29.3	29.8	30.3
12H	29.1	29.5	29.6	30.0	30.6	28.8	29.2	29.3	29.7	30.3
12H 4H	28.9	29.5	29.4	30.0	30.5	28.6	29.3	29.1	29.8	30.3
6H	29.0	29.5	29.5	30.0	30.6	28.7	29.3	29.2	29.7	30.3
8H	29.0	29.5	29.6	30.0	30.6	28.7	29.2	29.3	29.7	30.3
CIE190: 2010										

CIE190: 2010  
Area: 0.0144 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-12-08

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.2874]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	47	63	53	46	62	52	46	40
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	92	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.2874]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

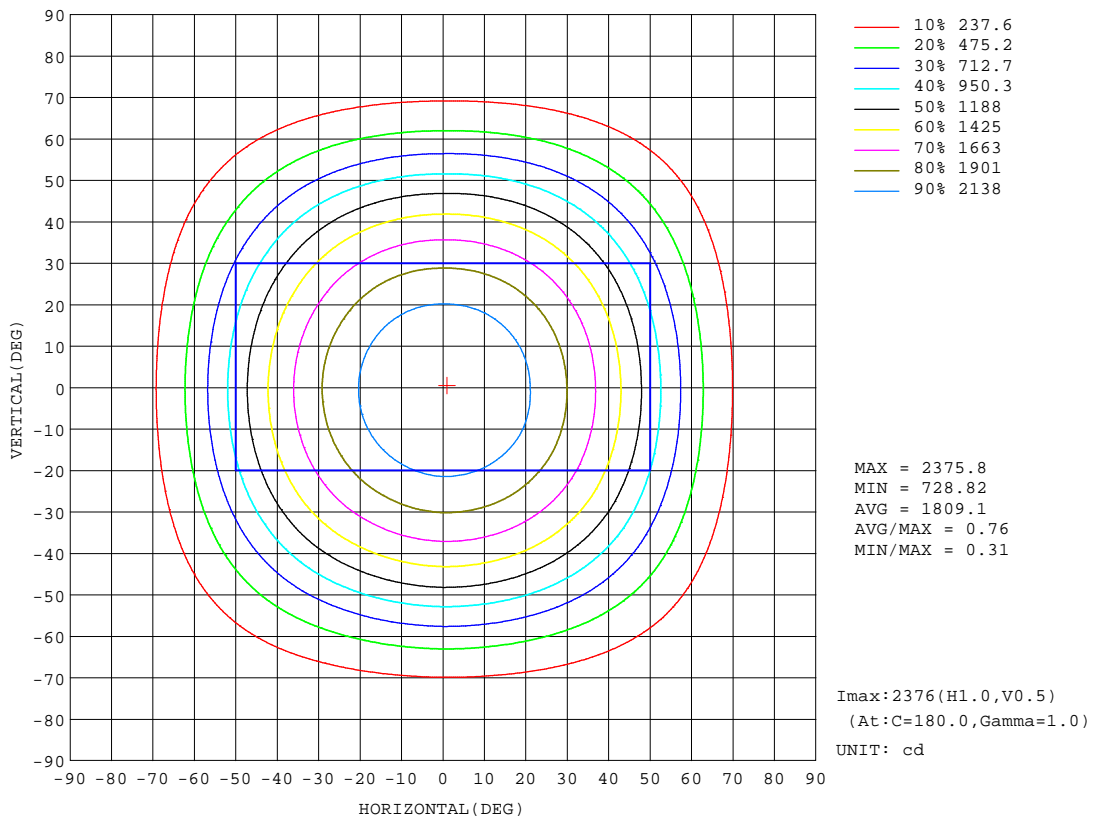

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2874]  
 Remarks:



AAI Figure

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:3688 lm

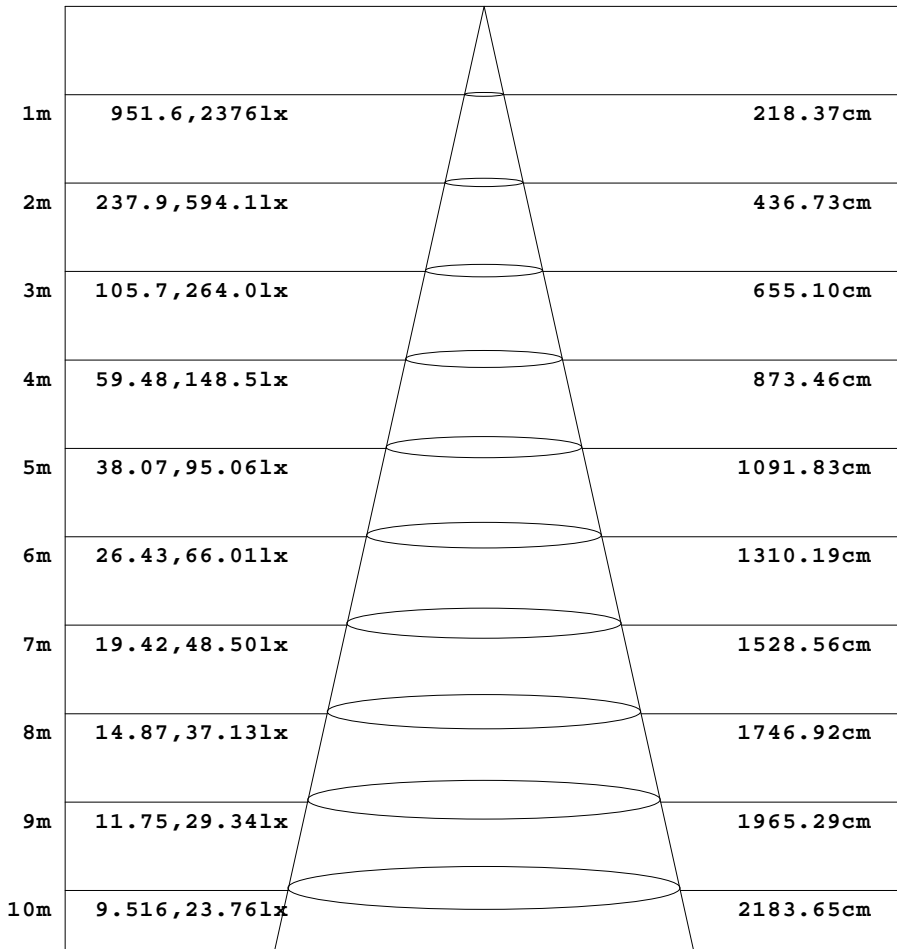

Height Eavg, Emax Angle:95.03deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2874]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

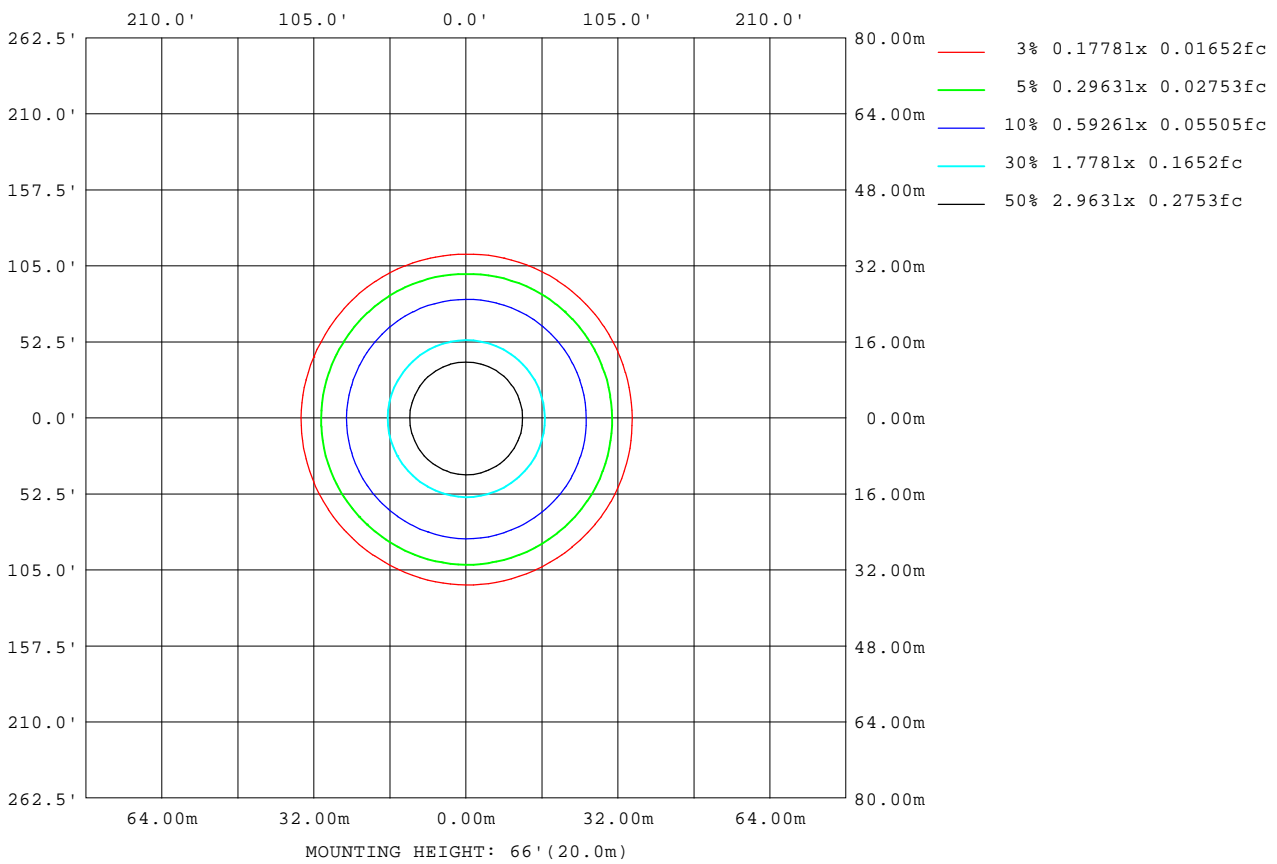

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2874]  
 Remarks:

## LED Avg.L Report

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	62936
L_0~180(75)av	29830
L_0~180(85)av	17141
L_90~270(65)av	62703
L_90~270(75)av	29462
L_90~270(85)av	13846
L_45(65)av	62668
L_45(75)av	29712
L_45(85)av	15237

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-12-08

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.2874]  
Remarks:

Planar Illuminance Curve

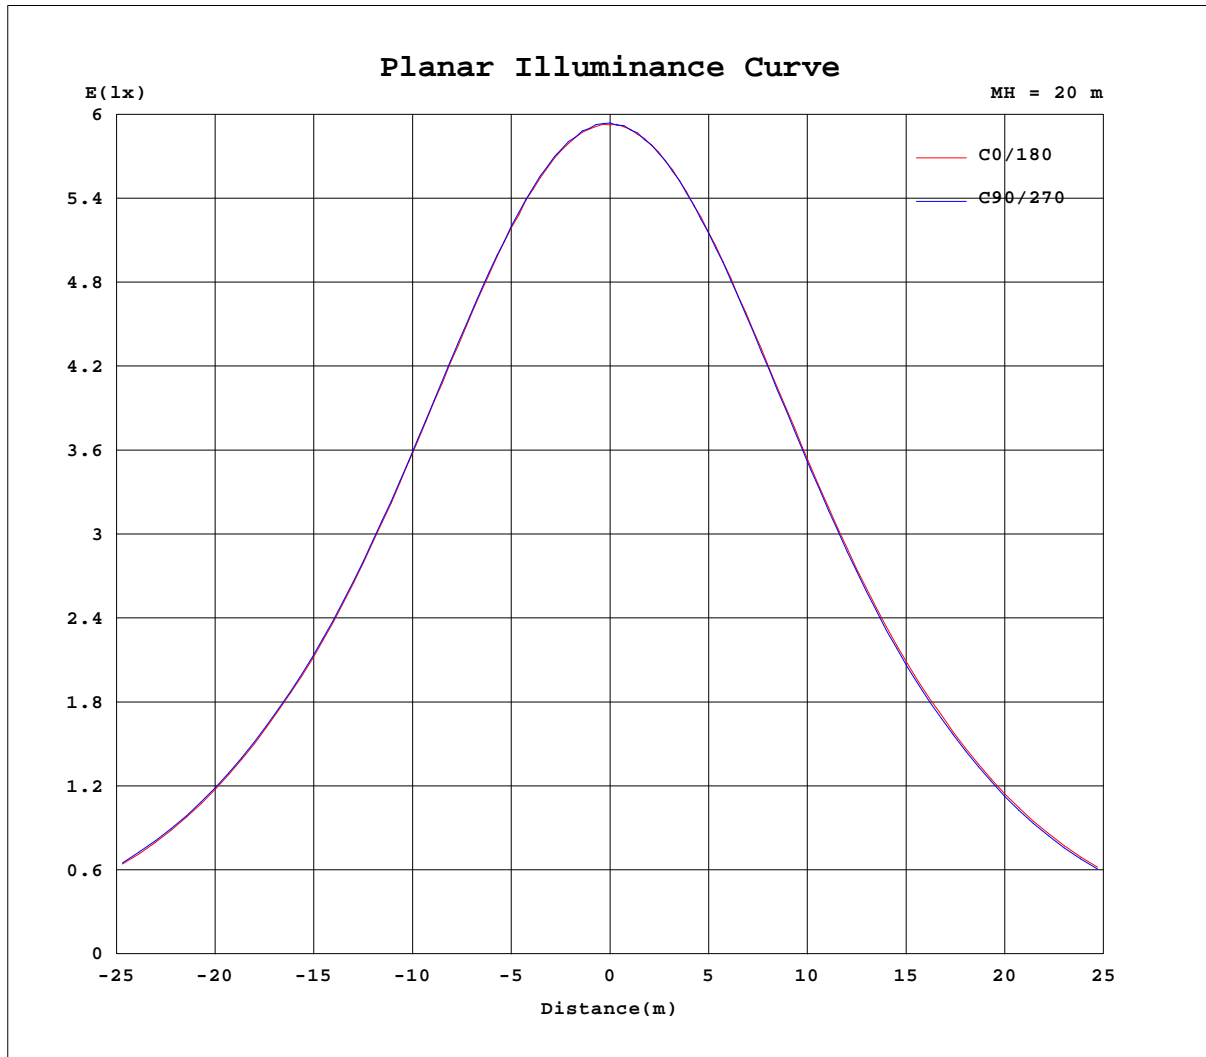

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.2874]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.02V I:0.4870A P:57.600W PF:0.9851 Freq:60.00Hz Lamp Flux:5154.94x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2374	2374	2374	2374	2374	2374	2374	2374	2374	2374	2374	2374						
5	2365	2364	2365	2361	2360	2363	2362	2356	2358	2353	2357	2363						
10	2327	2330	2330	2328	2321	2320	2316	2314	2312	2313	2320	2321						
15	2261	2265	2264	2259	2248	2251	2249	2238	2243	2237	2246	2254						
20	2167	2177	2175	2169	2154	2151	2150	2142	2142	2141	2148	2158						
25	2046	2056	2060	2047	2031	2028	2027	2018	2015	2011	2022	2036						
30	1901	1915	1915	1906	1882	1877	1874	1865	1864	1860	1876	1889						
35	1732	1747	1747	1738	1714	1707	1704	1687	1689	1682	1700	1716						
40	1552	1570	1568	1559	1533	1527	1523	1500	1501	1498	1517	1534						
45	1333	1351	1349	1345	1317	1308	1297	1277	1277	1275	1298	1315						
50	1083	1108	1104	1099	1068	1062	1049	1028	1029	1026	1052	1069						
55	830	850	846	842	816	807	800	780	782	778	805	815						
60	593	610	607	605	581	576	571	552	557	553	573	583						
65	392	405	400	400	381	377	374	360	365	363	379	385						
70	235	240	238	235	222	219	216	209	213	213	224	229						
75	117	120	116	113	107	106	105	103	106	106	112	115						
80	55.6	56.4	52.8	50.9	49.7	51.5	51.9	49.0	52.5	51.7	54.4	52.9						
85	23.1	23.7	19.3	17.4	16.8	19.4	19.9	15.9	18.5	17.3	20.5	19.2						
90	0.56	0.43	0.28	0.26	0.34	0.20	0.24	0.29	0.26	0.26	0.28	0.36						
95	0.41	0.47	0.43	0.51	0.53	0.42	0.48	0.42	0.50	0.43	0.50	0.41						
100	0.76	0.80	0.79	0.86	0.93	0.72	0.83	0.77	0.85	0.80	0.85	0.76						
105	1.22	1.27	1.28	1.35	1.45	1.17	1.32	1.26	1.36	1.30	1.36	1.20						
110	1.80	1.81	1.87	1.94	2.05	1.73	1.89	1.84	1.95	1.90	1.92	1.76						
115	2.47	2.40	2.51	2.62	2.75	2.38	2.55	2.52	2.65	2.57	2.55	2.41						
120	3.15	3.05	3.14	3.34	3.39	3.07	3.22	3.23	3.31	3.24	3.19	3.09						
125	3.90	3.74	3.87	4.01	4.08	3.79	3.95	3.91	3.99	3.94	3.88	3.87						
130	4.56	4.42	4.55	4.70	4.76	4.39	4.67	4.53	4.67	4.68	4.53	4.54						
135	5.17	4.98	5.16	5.33	5.36	4.98	5.23	5.08	5.27	5.29	5.10	5.01						
140	5.63	5.48	5.73	5.96	5.86	5.48	5.77	5.70	5.78	5.85	5.65	5.53						
145	6.12	6.03	6.25	6.43	6.35	6.03	6.23	6.30	6.29	6.34	6.18	6.07						
150	6.51	6.40	6.72	6.82	6.86	6.57	6.71	6.81	6.75	6.83	6.69	6.51						
155	6.90	6.89	7.24	7.25	7.38	7.11	7.23	7.33	7.30	7.36	7.27	7.00						
160	7.44	7.36	7.80	7.67	7.87	7.62	7.70	7.76	7.89	7.86	7.78	7.40						
165	7.98	7.87	8.32	8.16	8.41	8.08	8.25	8.33	8.37	8.35	8.33	7.86						
170	8.40	8.32	8.83	8.59	8.68	8.53	8.55	8.74	8.83	8.81	8.82	8.37						
175	8.74	8.81	9.27	8.88	9.15	8.95	8.89	9.13	9.17	9.09	9.14	8.69						
180	9.06	9.23	9.33	9.19	9.16	9.05	9.02	9.35	9.41	9.28	9.31	8.90						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2874]  
 Remarks: