
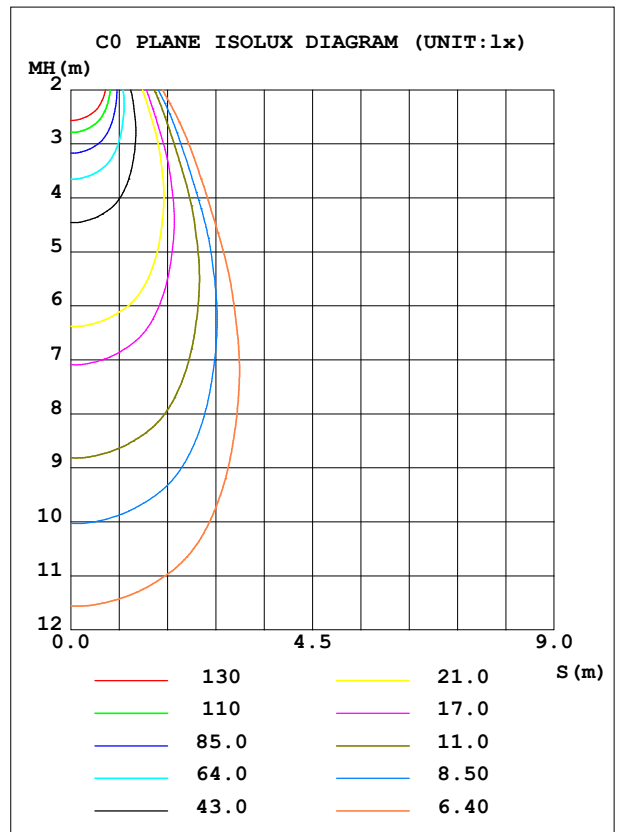


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	858.1	S/MH (C0/180)	0.71
NOMINAL POWER (W)	7	LOR (%)	100.0	S/MH (C90/270)	0.70
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	550.71	η UP, DN (C0-180)	0.0, 52.0
NOMINAL FLUX (lm)	550.714	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 48.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.75

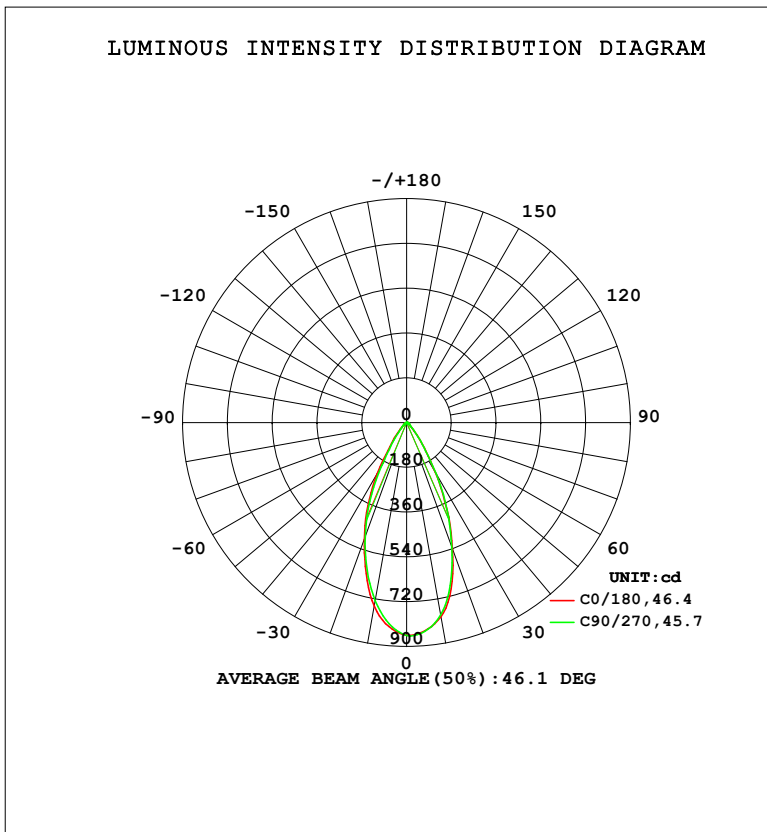

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	793.4	786.3	785.6	779.3	749.2	717.6	728.3	771.3	0- 10	77.12	77.12	14,14
20	540.6	544.0	532.6	522.6	499.6	479.3	487.7	517.9	10- 20	180.2	257.3	46.7,46.7
30	232.7	241.5	239.2	246.0	237.5	217.8	204.1	218.7	20- 30	169.0	426.4	77.4,77.4
40	62.96	63.15	63.23	66.40	62.41	53.11	49.87	57.43	30- 40	77.50	503.9	91.5,91.5
50	18.39	18.02	18.67	19.46	18.99	17.67	17.41	18.05	40- 50	25.29	529.2	96.1,96.1
60	8.875	9.146	9.460	9.503	9.194	8.684	8.541	8.637	50- 60	11.58	540.7	98.2,98.2
70	3.866	4.036	4.241	4.436	4.461	4.201	3.985	3.843	60- 70	6.311	547.1	99.3,99.3
80	1.450	1.554	1.683	1.766	1.742	1.583	1.469	1.419	70- 80	2.940	550.0	99.9,99.9
90	0.0372	0.0309	0.0350	0.0298	0.0231	0.0246	0.0287	0.0246	80- 90	0.7232	550.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

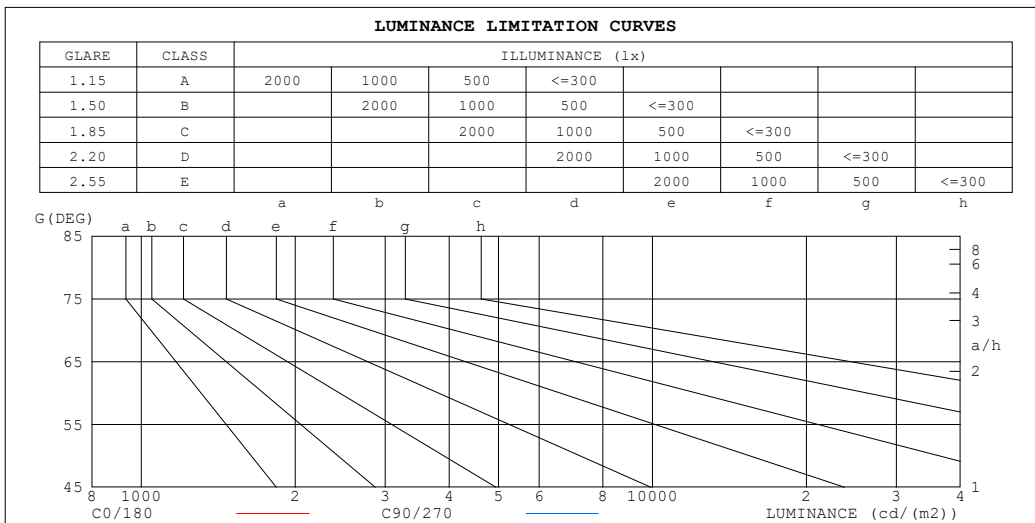

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	57	75
80	75	87
75	89	99
70	102	112
65	130	144
60	160	170
55	199	205
50	258	261
45	396	404


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.00	.98	.97	.96	.95	.94
2.0	1.03	.99	.96	1.02	.98	.95	.98	.96	.93	.95	.93	.91	.93	.91	.89	.87
3.0	.97	.92	.88	.95	.91	.87	.93	.89	.86	.90	.87	.85	.88	.86	.83	.82
4.0	.91	.85	.81	.90	.85	.81	.88	.83	.80	.86	.82	.79	.84	.81	.78	.77
5.0	.86	.80	.76	.85	.79	.75	.83	.78	.75	.81	.77	.74	.80	.76	.73	.72
6.0	.81	.75	.71	.80	.75	.71	.78	.74	.70	.77	.73	.70	.76	.72	.69	.68
7.0	.76	.71	.67	.76	.70	.66	.74	.70	.66	.73	.69	.66	.72	.68	.65	.64
8.0	.72	.67	.63	.72	.66	.63	.71	.66	.62	.70	.65	.62	.69	.65	.62	.61
9.0	.69	.63	.59	.68	.63	.59	.67	.63	.59	.67	.62	.59	.66	.62	.59	.57
10.0	.66	.60	.56	.65	.60	.56	.64	.59	.56	.64	.59	.56	.63	.59	.56	.55

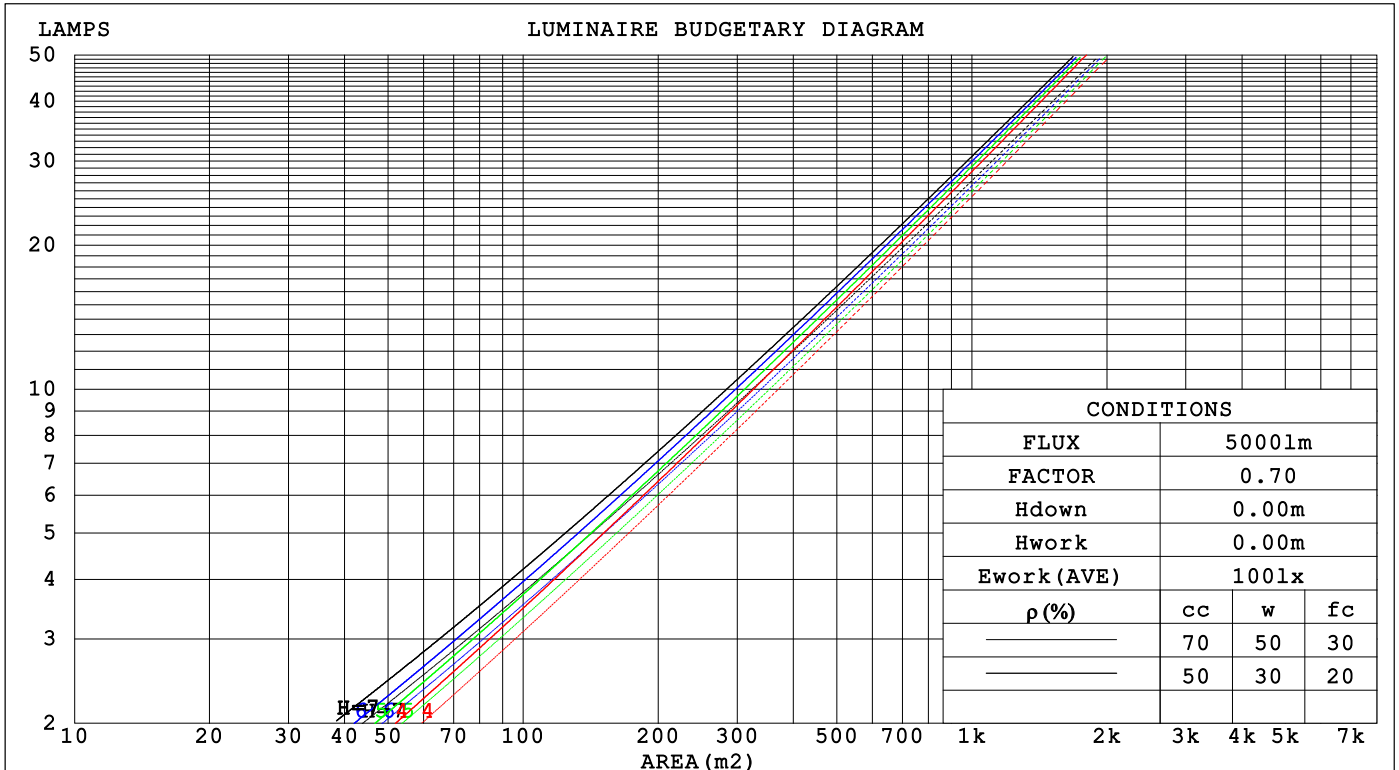

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3 °C
 Operators:
 Test Date:2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.176	.100	.032	.170	.097	.031	.157	.090	.029	.145	.084	.027	.135	.078	.025	
2.0	.168	.092	.028	.162	.089	.027	.151	.084	.026	.142	.079	.025	.133	.075	.024	
3.0	.159	.084	.025	.154	.082	.025	.145	.078	.024	.136	.075	.023	.129	.071	.022	
4.0	.150	.078	.023	.146	.076	.023	.138	.073	.022	.131	.070	.021	.124	.068	.021	
5.0	.143	.073	.021	.139	.071	.021	.132	.069	.020	.126	.066	.020	.120	.064	.019	
6.0	.136	.068	.019	.132	.067	.019	.127	.065	.019	.121	.063	.018	.116	.061	.018	
7.0	.129	.064	.018	.126	.063	.018	.121	.061	.018	.116	.060	.017	.112	.058	.017	
8.0	.123	.060	.017	.121	.060	.017	.116	.058	.017	.112	.057	.016	.108	.055	.016	
9.0	.118	.057	.016	.116	.056	.016	.112	.055	.016	.108	.054	.015	.104	.053	.015	
10.0	.113	.054	.015	.111	.054	.015	.107	.053	.015	.104	.052	.015	.101	.051	.015	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.133	.113	.133	.114	.098	.091	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.143	.114	.090	.123	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011	
4.0	.132	.099	.073	.114	.085	.063	.078	.059	.045	.045	.035	.026	.015	.011	.009	
5.0	.124	.087	.060	.106	.075	.052	.073	.053	.037	.042	.031	.022	.014	.010	.007	
6.0	.116	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.109	.070	.043	.094	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.103	.064	.037	.089	.055	.032	.062	.039	.023	.036	.023	.014	.012	.008	.004	
9.0	.098	.059	.032	.084	.051	.028	.059	.036	.020	.034	.021	.012	.011	.007	.004	
10.0	.093	.054	.028	.081	.047	.024	.056	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.6	7.6	6.9	7.7	7.9	6.6	7.5	6.8	7.7	7.8
3H	6.7	7.5	7.0	7.7	7.9	6.7	7.5	7.0	7.7	7.9
4H	6.7	7.5	7.0	7.7	8.0	6.7	7.5	7.0	7.8	8.0
6H	6.7	7.5	7.0	7.7	8.0	6.8	7.5	7.1	7.8	8.0
8H	6.7	7.4	7.0	7.7	7.9	6.8	7.5	7.1	7.7	8.0
12H	6.7	7.4	7.0	7.6	7.9	6.7	7.4	7.1	7.7	8.0
4H 2H	6.6	7.4	6.8	7.6	7.8	6.5	7.3	6.8	7.5	7.8
3H	6.7	7.4	7.0	7.7	7.9	6.7	7.4	7.0	7.7	7.9
4H	6.8	7.4	7.1	7.7	8.0	6.8	7.4	7.2	7.7	8.0
6H	6.8	7.4	7.2	7.7	8.0	6.9	7.4	7.2	7.8	8.1
8H	6.8	7.3	7.2	7.7	8.0	6.9	7.4	7.3	7.8	8.1
12H	6.8	7.3	7.2	7.6	8.0	6.9	7.4	7.3	7.7	8.1
8H 4H	6.7	7.2	7.1	7.6	8.0	6.8	7.3	7.1	7.6	8.0
6H	6.8	7.2	7.2	7.6	8.0	6.9	7.3	7.3	7.7	8.1
8H	6.8	7.2	7.3	7.6	8.1	6.9	7.3	7.4	7.7	8.1
12H	6.8	7.1	7.3	7.6	8.1	6.9	7.2	7.4	7.7	8.2
12H 4H	6.7	7.2	7.1	7.5	7.9	6.7	7.2	7.1	7.6	7.9
6H	6.8	7.1	7.2	7.6	8.0	6.8	7.2	7.3	7.6	8.1
8H	6.8	7.1	7.3	7.6	8.0	6.9	7.2	7.4	7.7	8.1

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 2.2 / - 2.9	+ 2.1 / - 2.6
1.5H	+ 3.9 / - 2.3	+ 3.7 / - 2.1
2.0H	+ 2.4 / - 1.3	+ 2.3 / - 1.0

CIE Pub.117, 550.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.1)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	87	84	92	87	83	80
1.00	98	93	89	97	92	89	96	92	88	84
1.25	102	97	93	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

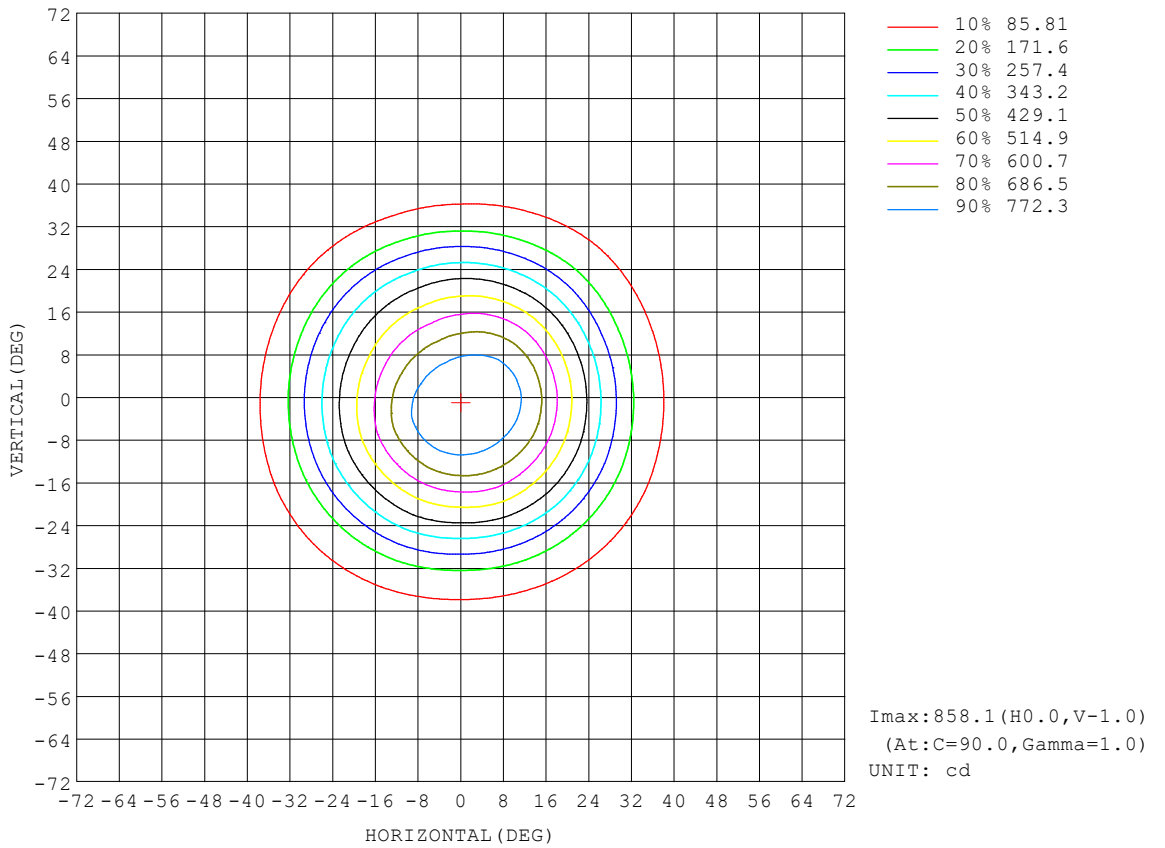


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

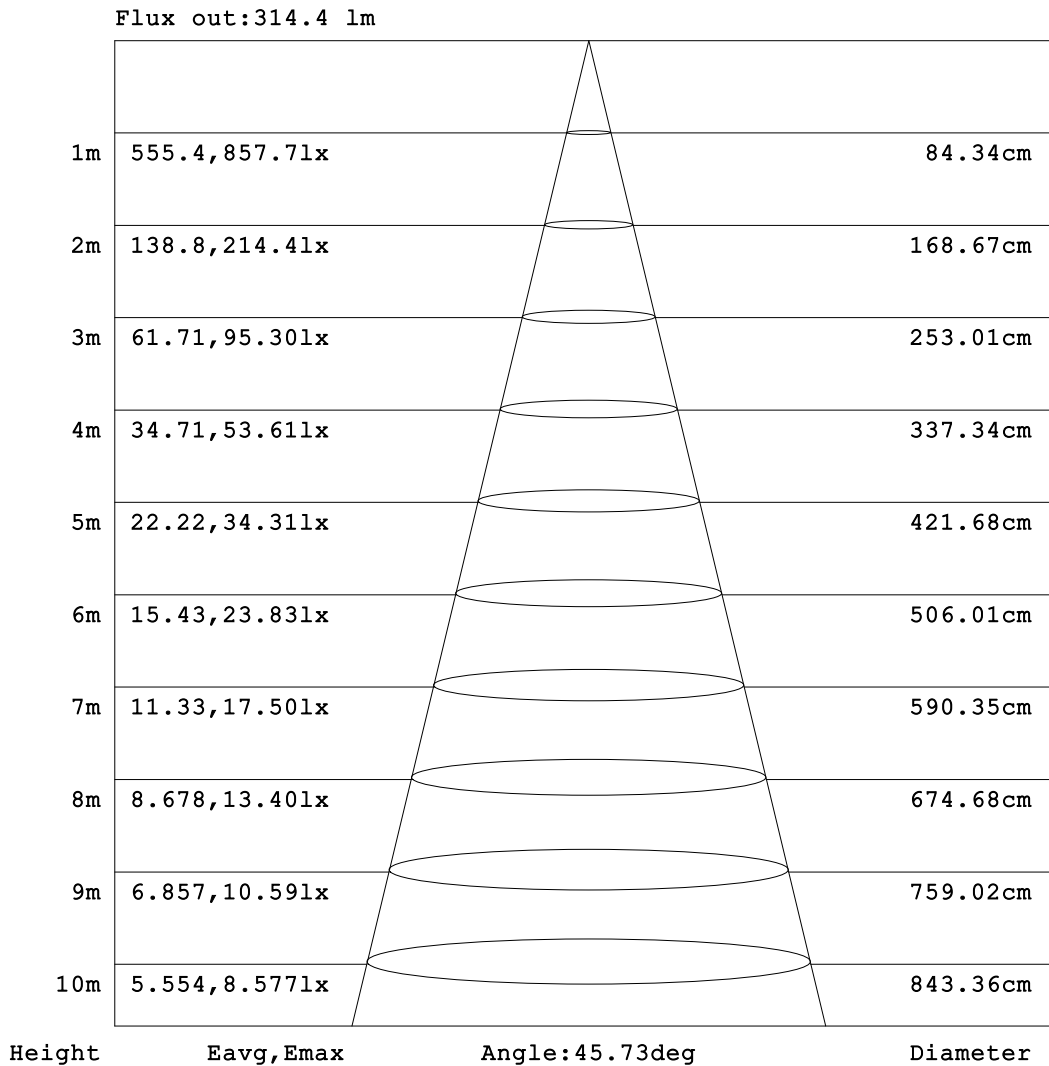


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:
Test Date:2023-04-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

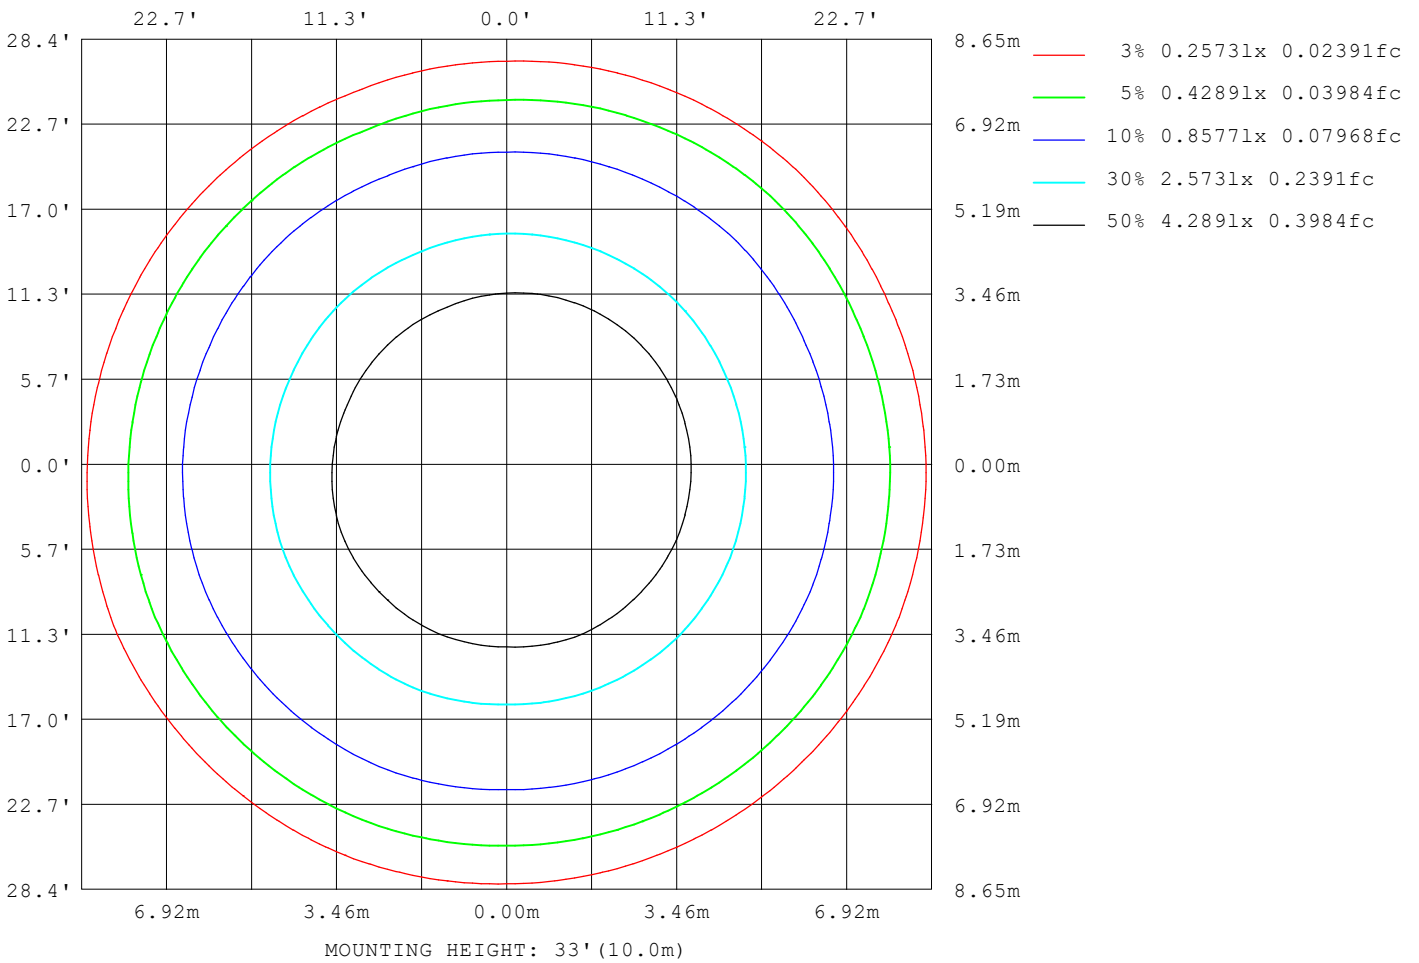

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	136
L_0~180 (75) av	96
L_0~180 (85) av	65
L_90~270 (65) av	136
L_90~270 (75) av	95
L_90~270 (85) av	64
L_45 (65) av	136
L_45 (75) av	96
L_45 (85) av	64

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

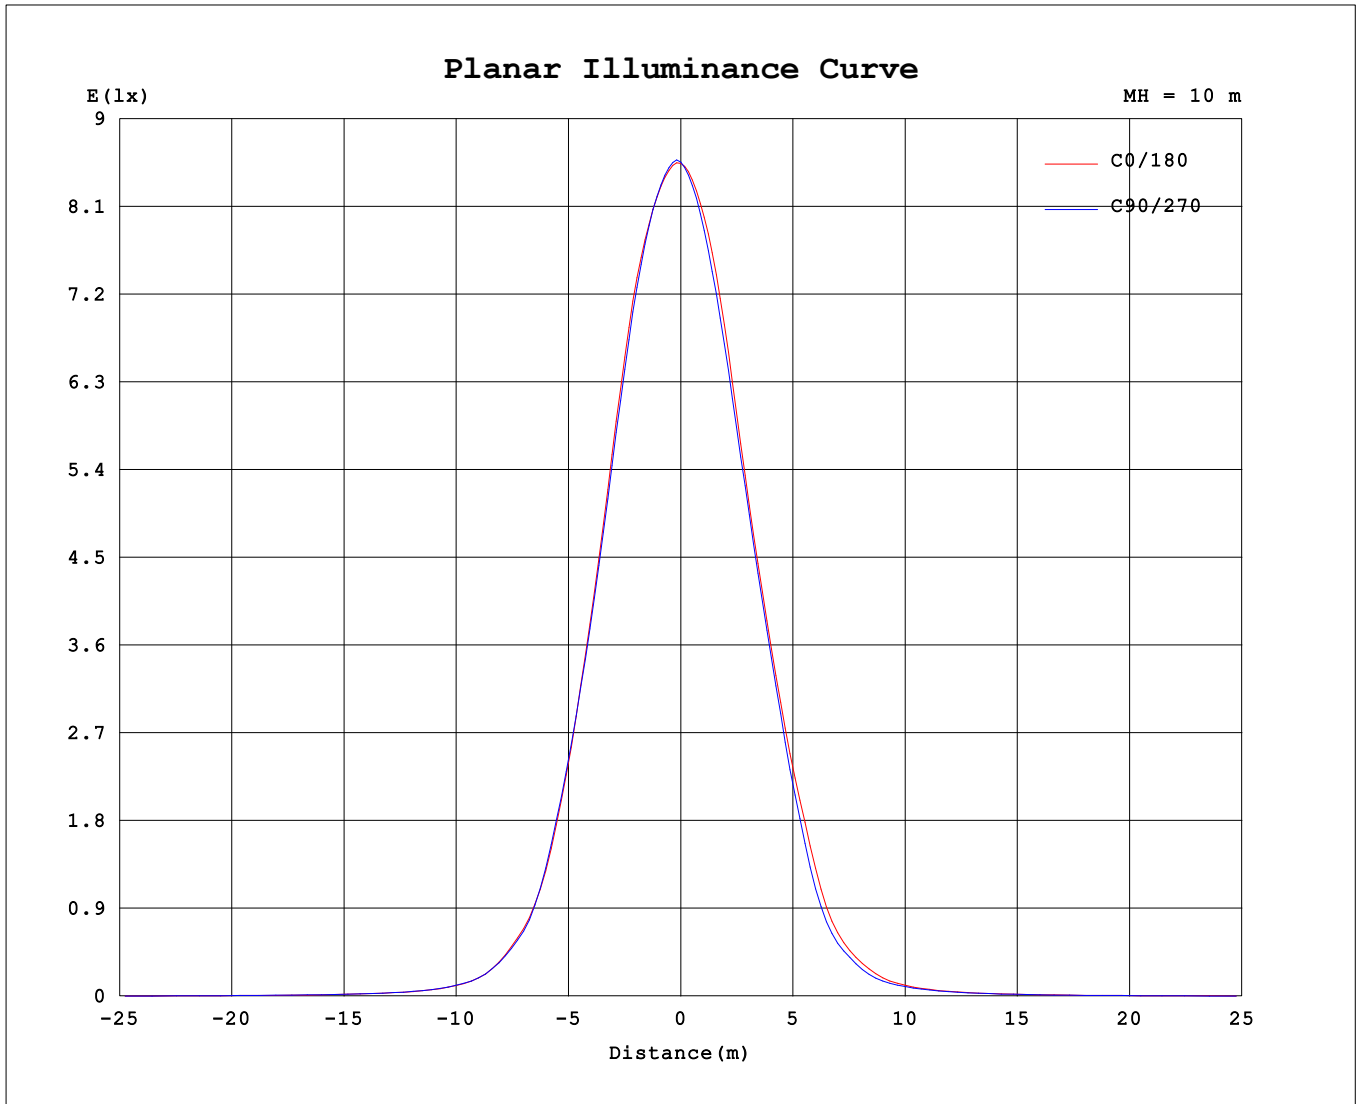

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.80V I:0.0610A P:6.9848W PF:0.9560 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:550.714x1 lm		
NAME: ASD-CD-PR-1D7AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	854	854	854	855	856	856	856	857	854	854	854	855	856	856	856	857			
5	840	843	842	843	842	842	839	835	823	813	807	807	812	820	830	836			
10	793	792	786	786	786	786	779	771	749	730	718	716	728	748	771	786			
15	692	696	689	685	678	673	663	654	629	610	602	598	614	639	664	680			
20	541	545	544	546	533	531	523	517	500	484	479	477	488	502	518	529			
25	385	397	400	394	386	393	387	382	369	358	352	345	350	357	367	374			
30	233	242	242	243	239	247	246	245	238	227	218	206	204	209	219	218			
35	126	130	127	125	122	125	125	124	119	110	104	99.2	98.8	107	115	120			
40	63.0	64.8	63.1	62.6	63.2	65.9	66.4	66.2	62.4	57.3	53.1	49.4	49.9	53.8	57.4	58.8			
45	31.1	31.1	30.5	31.0	31.7	32.7	32.9	33.4	31.6	30.0	28.7	27.5	27.9	28.9	29.7	30.1			
50	18.4	18.2	18.0	18.4	18.7	19.2	19.5	19.6	19.0	18.2	17.7	17.3	17.4	17.7	18.0	18.1			
55	12.7	12.7	12.7	12.8	13.1	13.3	13.5	13.5	13.1	12.7	12.3	12.1	12.1	12.3	12.4	12.4			
60	8.87	9.03	9.15	9.36	9.46	9.54	9.50	9.50	9.19	8.88	8.68	8.51	8.54	8.58	8.64	8.65			
65	6.08	6.34	6.46	6.65	6.76	6.87	6.86	6.88	6.67	6.43	6.22	6.01	5.96	5.91	5.91	5.84			
70	3.87	3.96	4.04	4.15	4.24	4.35	4.44	4.53	4.46	4.33	4.20	4.06	3.99	3.90	3.84	3.79			
75	2.55	2.62	2.68	2.78	2.85	2.93	3.00	3.06	2.99	2.89	2.79	2.67	2.62	2.56	2.53	2.48			
80	1.45	1.51	1.55	1.64	1.68	1.73	1.77	1.81	1.74	1.65	1.58	1.50	1.47	1.43	1.42	1.39			
85	0.56	0.60	0.64	0.69	0.72	0.74	0.75	0.76	0.71	0.63	0.59	0.53	0.52	0.51	0.51	0.50			
90	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.03			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks: