
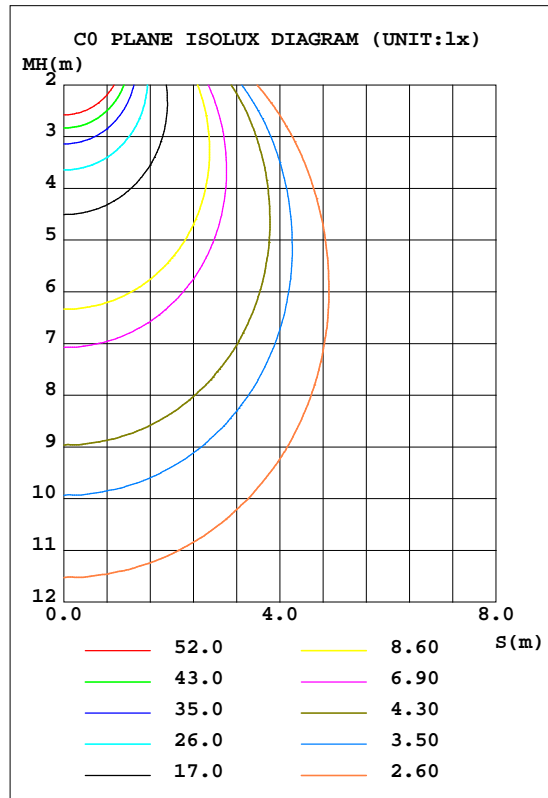


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 85.87 lm/W			
MOBESD-LRKR-4D9AC-WH(5000K)		I _{max} (cd)	345.8	S/MH(C0/180)	1.10
NOMINAL POWER(W)	8.6	LOR(%)	100.0	S/MH(C90/270)	1.11
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	695.58	h UP, DN(C0-180)	0.2,49.5
NOMINAL FLUX(lm)	695.575	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.25

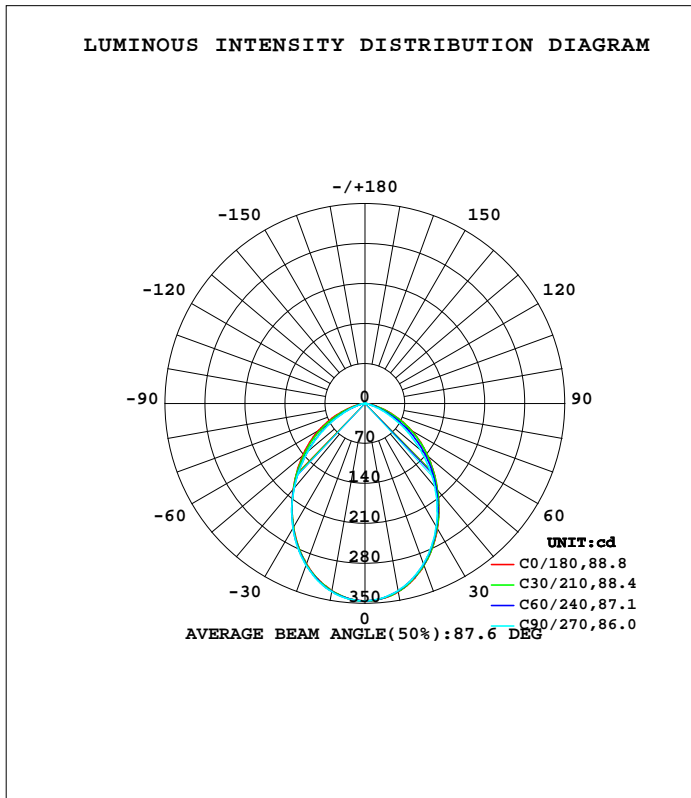

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0977]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	335.0	333.7	333.0	332.1	332.9	333.7	334.8	335.2	0- 10	32.42	32.42	4.66,4.66
20	301.9	301.0	299.1	297.8	299.3	300.6	301.9	302.8	10- 20	89.83	122.3	17.6,17.6
30	253.5	251.7	249.3	248.5	250.1	251.6	252.4	254.0	20- 30	127.5	249.7	35.9,35.9
40	197.7	195.9	190.1	191.3	195.6	194.1	192.8	198.2	30- 40	139.6	389.3	56,56
50	144.4	140.4	127.5	133.2	142.8	135.7	130.5	142.9	40- 50	127.8	517.1	74.3,74.3
60	93.73	85.78	69.16	78.00	93.17	80.37	72.07	88.67	50- 60	98.12	615.3	88.5,88.5
70	44.79	35.77	23.99	30.82	44.09	32.68	25.80	37.94	60- 70	56.95	672.2	96.6,96.6
80	8.747	5.515	3.344	4.629	6.255	5.240	3.684	5.703	70- 80	18.57	690.8	99.3,99.3
90	0.0594	0.0419	0.0321	0.0450	0.0322	0.0452	0.0132	0.0323	80- 90	1.790	692.6	99.6,99.6
100	0.1089	0.0963	0.1156	0.1058	0.1287	0.0900	0.0128	0.0609	90-100	0.0607	692.6	99.6,99.6
110	0.2247	0.2440	0.2695	0.2565	0.2763	0.2441	0.1345	0.1828	100-110	0.1645	692.8	99.6,99.6
120	0.4173	0.4431	0.4685	0.4521	0.4370	0.4176	0.3141	0.3591	110-120	0.3155	693.1	99.6,99.6
130	0.6165	0.6327	0.6930	0.6477	0.6425	0.6263	0.5129	0.5356	120-130	0.4596	693.6	99.7,99.7
140	0.7835	0.8287	0.8918	0.8336	0.8095	0.7902	0.6798	0.7248	130-140	0.5441	694.1	99.8,99.8
150	0.9249	0.9860	1.046	1.000	0.9637	0.9635	0.8531	0.8946	140-150	0.5489	694.7	99.9,99.9
160	1.060	1.095	1.155	1.109	1.124	1.108	1.026	1.058	150-160	0.4725	695.1	99.9,99.9
170	1.169	1.195	1.251	1.212	1.253	1.231	1.142	1.190	160-170	0.3254	695.5	100,100
180	1.291	1.291	1.289	1.286	1.304	1.333	1.277	1.286	170-180	0.1190	695.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0977]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

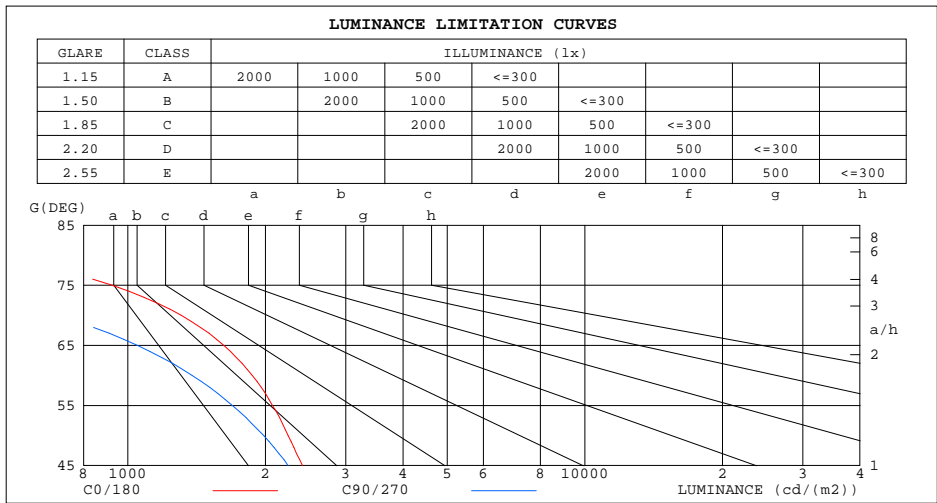

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	148	73
80	503	193
75	924	396
70	1309	702
65	1621	1049
60	1873	1384
55	2074	1696
50	2245	1984
45	2412	2244


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0977]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.54	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.45	.39	.35	.44	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

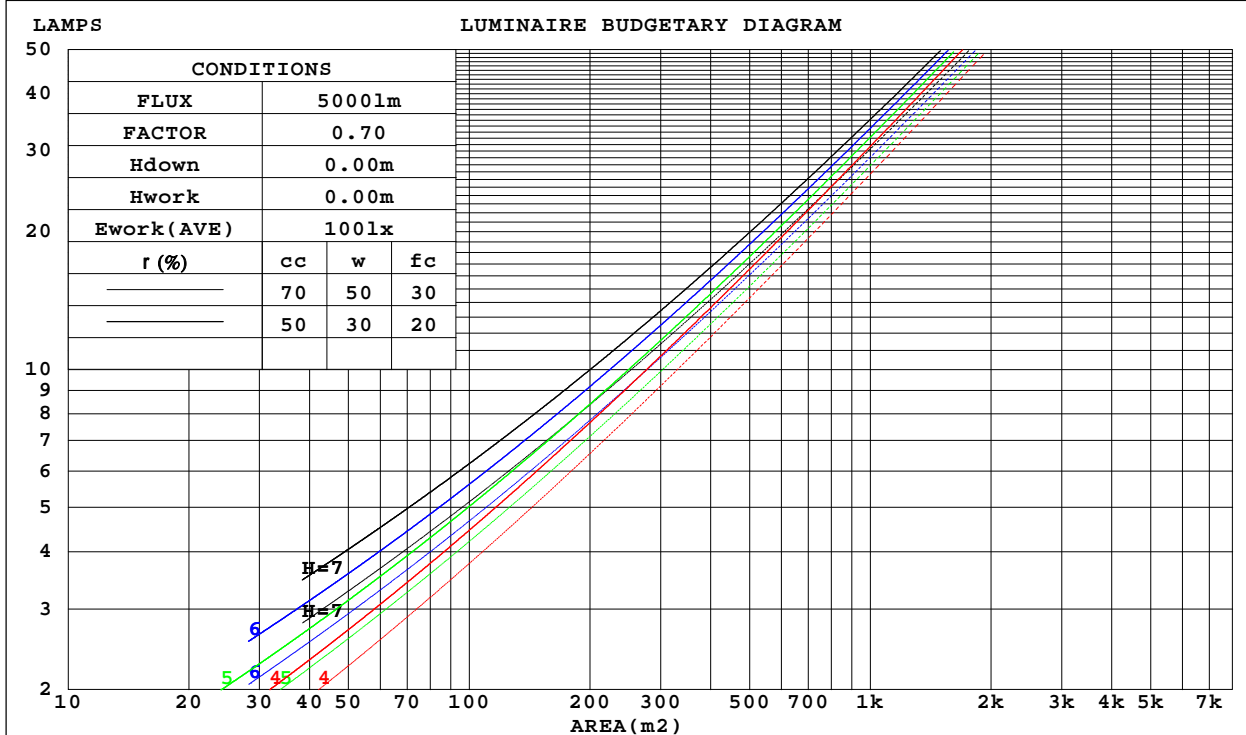

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0977]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.144	.046	.247	.141	.045	.234	.134	.043	.222	.128	.041	.210	.122	.039	
2.0	.247	.136	.042	.241	.133	.041	.230	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.105	.031	.203	.104	.030	.195	.101	.030	.187	.099	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	.170	.090	.027	
7.0	.182	.090	.026	.179	.089	.025	.173	.087	.025	.167	.086	.025	.161	.084	.025	
8.0	.172	.084	.024	.169	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.073	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.135	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.081	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.120	.073	.039	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.030	.075	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0977]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm										
NAME: LED DOWNLIGHT					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.: 0.1*0.1			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.5	15.9	14.8	16.3	16.6	12.6	14.1	13.0	14.4	14.7
3H	15.6	16.9	16.0	17.3	17.6	13.2	14.5	13.6	14.9	15.2
4H	15.9	17.1	16.3	17.5	17.8	13.3	14.5	13.7	14.9	15.3
6H	15.9	17.1	16.4	17.4	17.8	13.2	14.4	13.7	14.8	15.2
8H	15.9	17.0	16.3	17.4	17.8	13.2	14.3	13.7	14.7	15.1
12H	15.9	16.9	16.3	17.3	17.7	13.2	14.2	13.6	14.6	15.0
4H 2H	14.8	16.0	15.2	16.4	16.7	13.1	14.3	13.5	14.6	15.0
3H	16.1	17.1	16.5	17.5	17.9	13.8	14.8	14.2	15.2	15.6
4H	16.4	17.3	16.8	17.7	18.2	13.8	14.7	14.3	15.2	15.6
6H	16.5	17.3	16.9	17.7	18.2	13.8	14.6	14.3	15.1	15.5
8H	16.5	17.2	16.9	17.6	18.1	13.8	14.5	14.3	15.0	15.4
12H	16.4	17.1	16.9	17.6	18.0	13.8	14.4	14.2	14.9	15.4
8H 4H	16.4	17.1	16.8	17.5	18.0	13.9	14.6	14.4	15.1	15.5
6H	16.5	17.1	17.0	17.6	18.1	13.9	14.5	14.4	15.0	15.5
8H	16.5	17.0	17.0	17.5	18.0	13.8	14.4	14.4	14.9	15.4
12H	16.4	16.9	16.9	17.4	18.0	13.8	14.3	14.3	14.8	15.4
12H 4H	16.3	17.0	16.8	17.5	17.9	13.9	14.5	14.4	15.0	15.5
6H	16.4	17.0	17.0	17.4	18.0	13.8	14.4	14.4	14.9	15.4
8H	16.4	16.9	16.9	17.4	18.0	13.8	14.3	14.3	14.8	15.4
CIE190: 2010										

CIE190: 2010
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0977]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	53	47	41
0.80	74	64	57	73	63	57	71	63	57	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	93	85	79	92	84	79	89	83	78	71
2.00	99	92	87	98	91	86	94	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	107	102	99	102	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0977]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

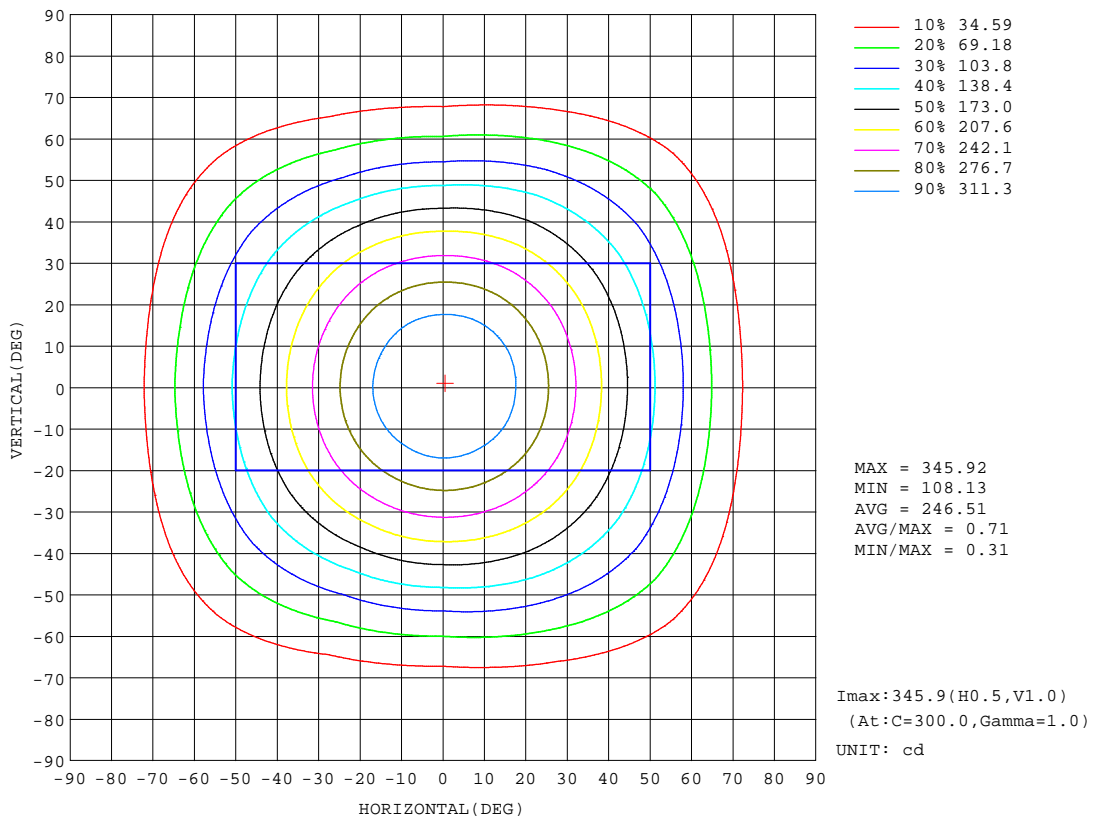


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0977]
 Remarks:

AAI Figure

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Flux out:429.8 lm

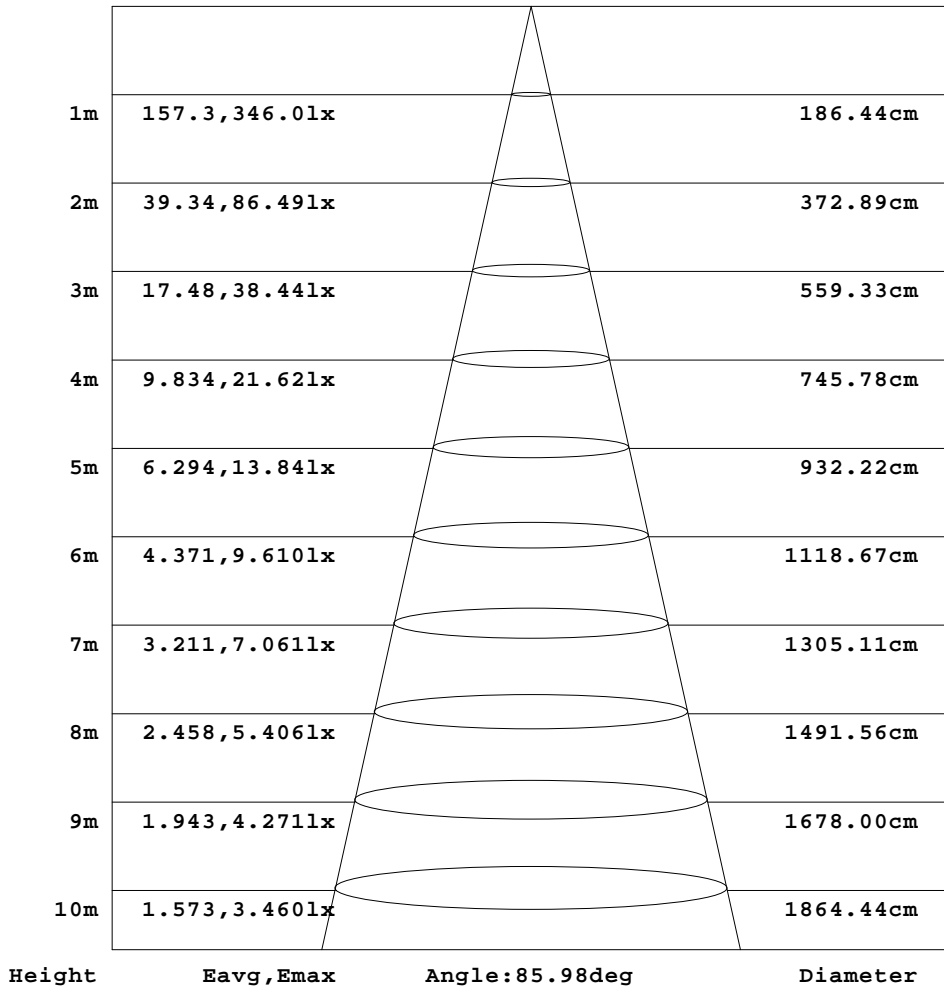


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0977]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

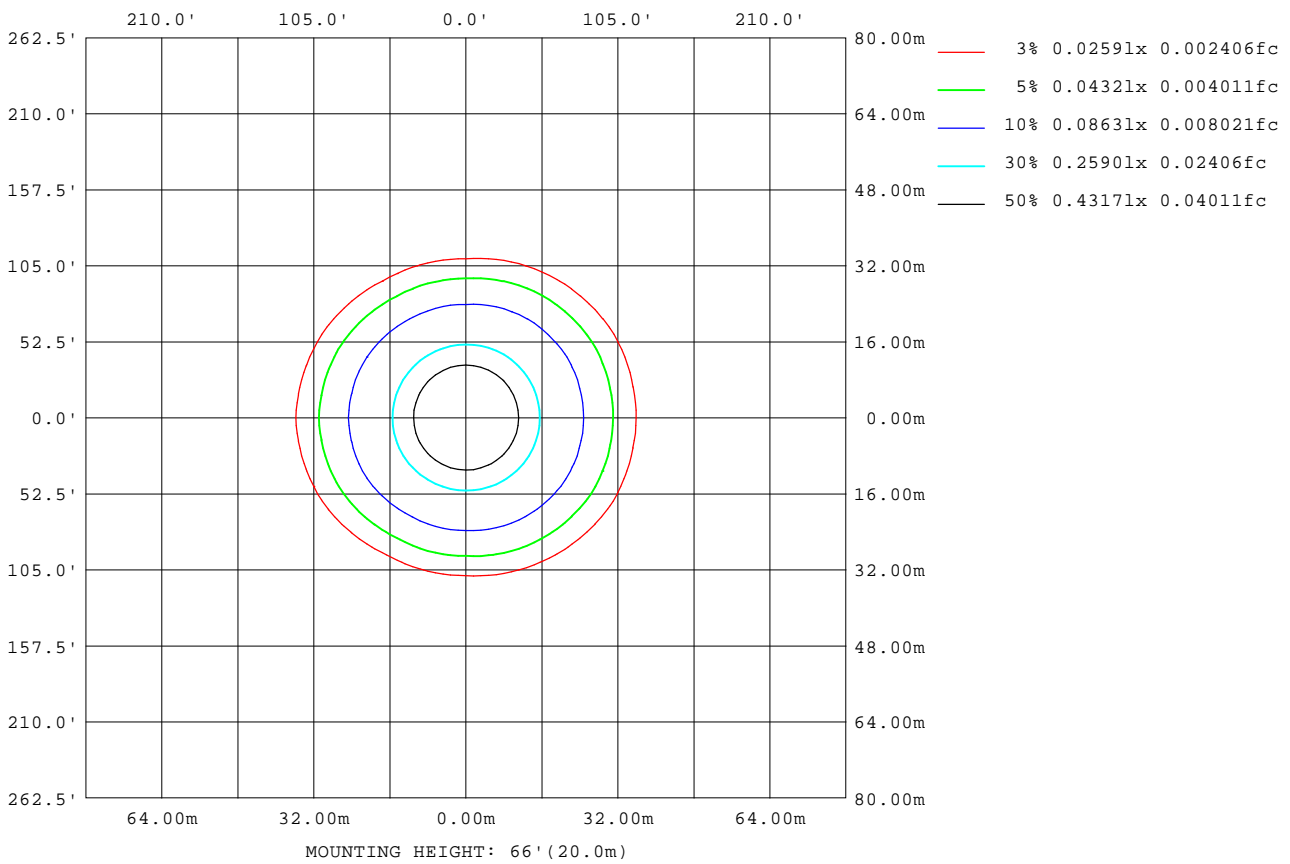

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0977]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1614
L_0~180(75)av	911
L_0~180(85)av	155
L_90~270(65)av	1079
L_90~270(75)av	413
L_90~270(85)av	85
L_45(65)av	1359
L_45(75)av	620
L_45(85)av	147

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0977]
Remarks:

Planar Illuminance Curve

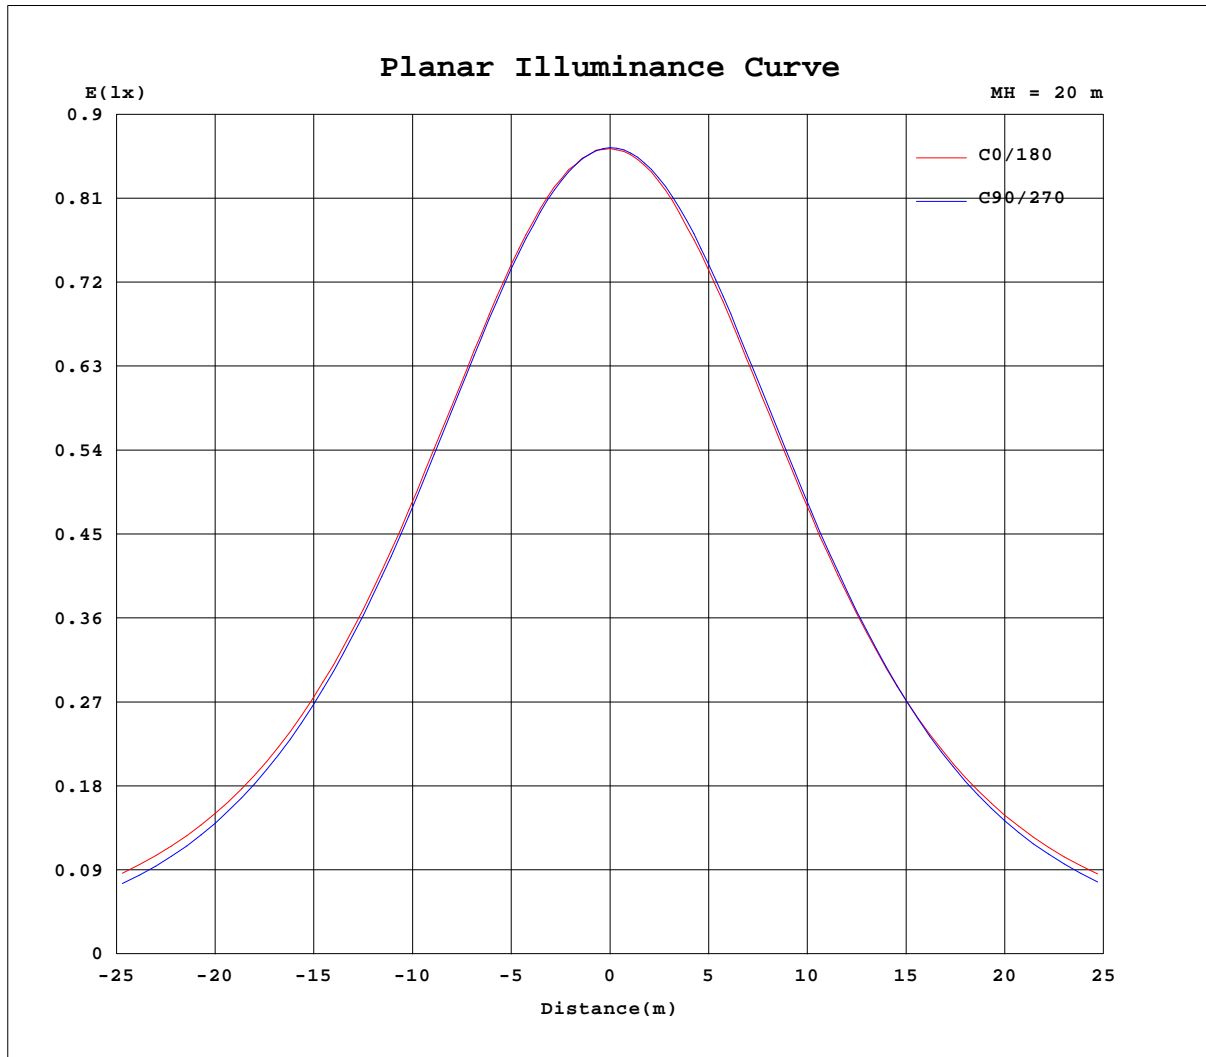

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0977]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0767A P:8.1000W PF:0.8541 Freq:60.00Hz Lamp Flux:695.575x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	346	346	346	346	346	346	346	346	346	346	346	346						
5	343	343	342	342	342	342	342	343	343	343	343	343						
10	335	334	333	333	332	332	333	333	334	335	335	335						
15	321	320	318	318	317	318	318	319	320	321	322	321						
20	302	302	300	299	298	298	299	300	301	302	303	303						
25	280	279	277	276	274	275	276	276	278	279	280	280						
30	254	253	251	249	248	249	250	251	252	252	254	254						
35	226	225	223	221	220	222	223	223	224	224	226	227						
40	198	197	194	190	189	194	196	195	193	193	198	199						
45	171	170	166	159	158	166	168	167	162	162	169	171						
50	144	144	137	127	127	139	143	140	131	130	141	145						
55	119	118	108	97.2	97.9	112	118	113	102	100	112	120						
60	93.7	91.9	79.7	69.2	70.3	85.7	93.2	86.6	74.2	72.1	83.8	93.5						
65	68.6	65.8	53.3	44.3	45.5	59.9	67.9	61.0	49.1	46.9	57.2	67.3						
70	44.8	41.3	30.2	24.0	25.0	36.7	44.1	37.6	27.8	25.8	33.2	42.7						
75	23.9	20.7	13.2	10.2	10.7	17.8	23.2	18.5	12.5	11.1	14.6	21.3						
80	8.75	6.97	4.06	3.34	3.35	5.91	6.26	6.38	4.10	3.68	4.61	6.79						
85	1.29	1.79	0.90	0.64	0.63	1.41	1.41	1.60	1.00	0.84	1.08	1.63						
90	0.06	0.04	0.04	0.03	0.04	0.05	0.03	0.06	0.03	0.01	0.01	0.05						
95	0.06	0.08	0.04	0.07	0.04	0.08	0.08	0.04	0.06	0.01	0.04	0.03						
100	0.11	0.14	0.06	0.12	0.07	0.14	0.13	0.06	0.12	0.01	0.08	0.04						
105	0.17	0.21	0.12	0.19	0.13	0.21	0.21	0.13	0.20	0.06	0.13	0.10						
110	0.22	0.28	0.21	0.27	0.22	0.30	0.28	0.21	0.28	0.13	0.21	0.16						
115	0.32	0.37	0.30	0.37	0.31	0.38	0.35	0.28	0.37	0.21	0.29	0.24						
120	0.42	0.48	0.40	0.47	0.42	0.49	0.44	0.36	0.48	0.31	0.38	0.34						
125	0.52	0.57	0.51	0.58	0.52	0.58	0.55	0.47	0.58	0.41	0.47	0.42						
130	0.62	0.66	0.60	0.69	0.61	0.69	0.64	0.58	0.67	0.51	0.56	0.51						
135	0.71	0.77	0.72	0.79	0.72	0.78	0.73	0.66	0.77	0.60	0.66	0.62						
140	0.78	0.84	0.82	0.89	0.81	0.85	0.81	0.73	0.85	0.68	0.76	0.69						
145	0.86	0.93	0.89	0.98	0.90	0.94	0.88	0.82	0.94	0.77	0.84	0.78						
150	0.92	1.01	0.96	1.05	0.97	1.03	0.96	0.90	1.03	0.85	0.93	0.86						
155	1.01	1.07	1.04	1.10	1.03	1.08	1.04	0.98	1.07	0.93	1.00	0.93						
160	1.06	1.11	1.08	1.15	1.08	1.14	1.12	1.06	1.16	1.03	1.09	1.03						
165	1.11	1.16	1.14	1.21	1.14	1.20	1.22	1.14	1.25	1.08	1.16	1.09						
170	1.17	1.22	1.17	1.25	1.18	1.24	1.25	1.19	1.27	1.14	1.22	1.16						
175	1.23	1.29	1.25	1.28	1.24	1.28	1.30	1.27	1.35	1.23	1.30	1.23						
180	1.29	1.30	1.28	1.29	1.28	1.30	1.30	1.32	1.35	1.28	1.30	1.28						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0977]
 Remarks: