
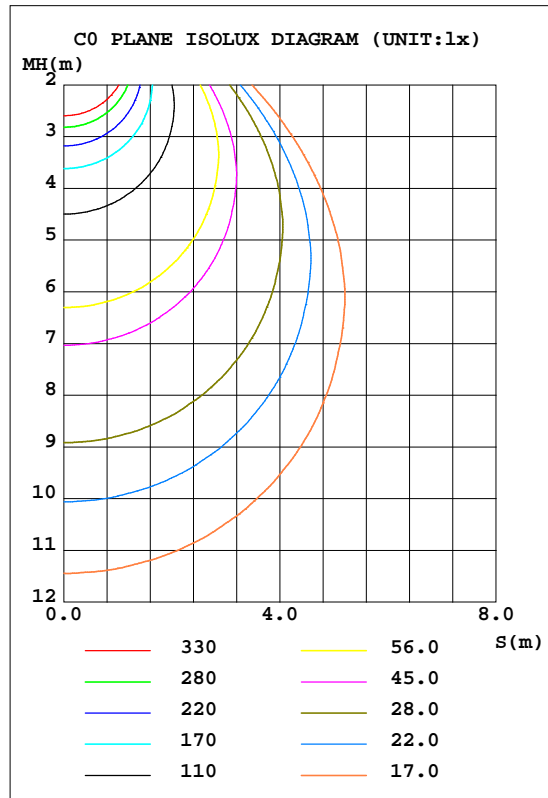


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.19 lm/W			
ASMODEL7-10DA60AC(60W 2700K)		I _{max} (cd)	2230	S/MH(C0/180)	1.18
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	4835.2	h UP, DN(C0-180)	0.2,50.4
NOMINAL FLUX(lm)	4835.24	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

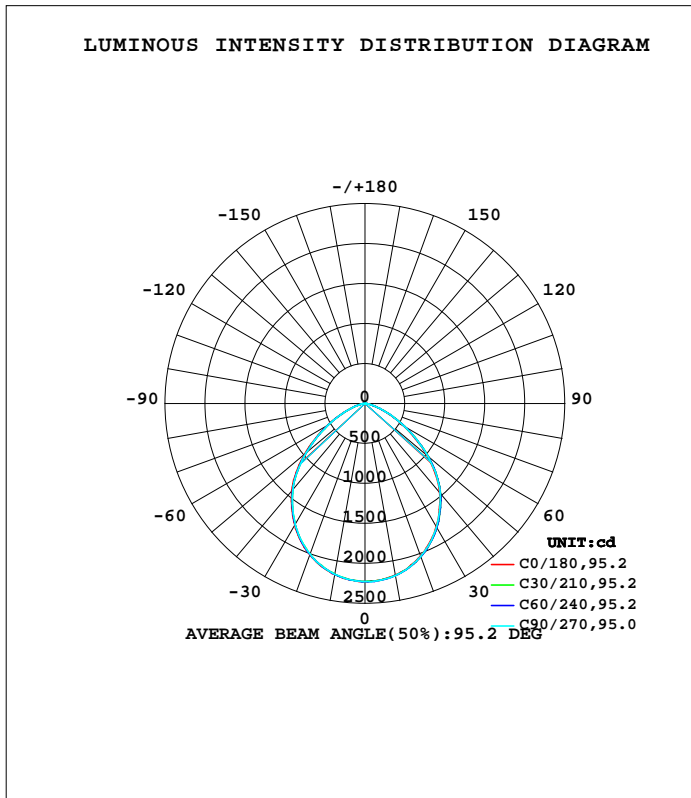

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2471]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	2181	2184	2186	2175	2172	2169	2171	2175	0- 10	210.2	210.2	4.35,4.35
20	2030	2041	2037	2021	2015	2010	2008	2019	10- 20	595.2	805.4	16.7,16.7
30	1781	1796	1789	1764	1758	1749	1747	1764	20- 30	877.3	1683	34.8,34.8
40	1455	1473	1467	1436	1425	1408	1406	1430	30- 40	1005	2687	55.6,55.6
50	1016	1037	1032	999.4	982.3	965.2	963.4	993.8	40- 50	944.9	3632	75.1,75.1
60	556.4	571.2	568.4	542.8	533.9	519.8	518.6	541.5	50- 60	682.3	4314	89.2,89.2
70	220.5	224.4	220.8	206.9	202.5	198.0	200.4	211.8	60- 70	359.8	4674	96.7,96.7
80	52.16	51.23	47.84	47.50	48.52	47.61	48.53	50.29	70- 80	118.6	4793	99.1,99.1
90	0.5303	0.3994	0.1824	0.2113	0.2326	0.2588	0.2571	0.3016	80- 90	21.81	4815	99.6,99.6
100	0.7455	0.7499	0.6387	0.6870	0.7969	0.7916	0.7452	0.7823	90-100	0.4841	4815	99.6,99.6
110	1.748	1.724	1.559	1.647	1.801	1.819	1.756	1.751	100-110	1.272	4816	99.6,99.6
120	3.050	2.938	2.735	2.856	3.078	3.070	3.065	2.980	110-120	2.321	4819	99.7,99.7
130	4.377	4.251	3.954	4.147	4.380	4.376	4.341	4.242	120-130	3.237	4822	99.7,99.7
140	5.472	5.354	5.114	5.177	5.449	5.436	5.460	5.219	130-140	3.720	4826	99.8,99.8
150	6.318	6.282	6.083	6.125	6.311	6.266	6.330	6.125	140-150	3.619	4829	99.9,99.9
160	7.197	7.202	7.028	7.027	7.282	7.401	7.167	6.966	150-160	3.079	4832	99.9,99.9
170	8.067	8.105	7.856	7.900	8.259	8.279	8.087	7.802	160-170	2.145	4834	100,100
180	8.657	8.801	8.527	8.327	8.773	8.764	8.560	8.282	170-180	0.7873	4835	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-08

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2471]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

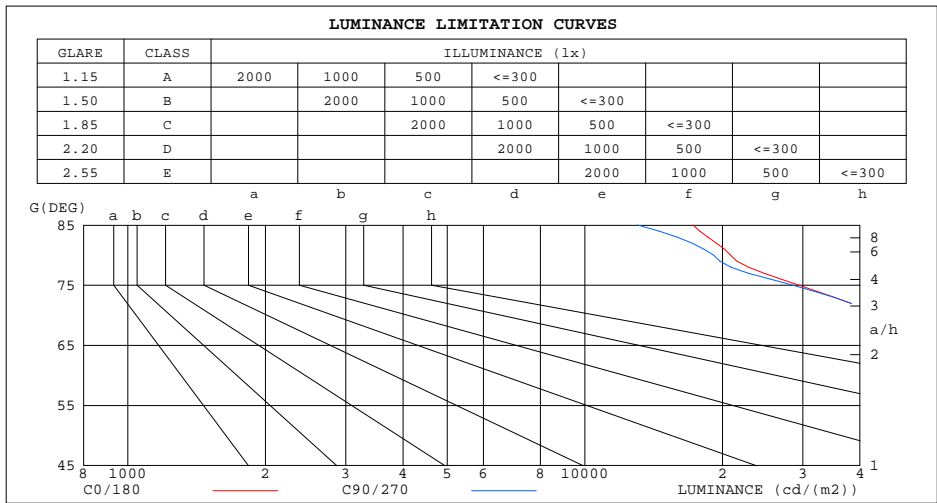

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	17253	13050
80	20840	19127
75	29434	28521
70	44726	44825
65	60552	61781
60	77207	78928
55	93871	95864
50	109718	111471
45	122643	123934


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2471]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.60	.54	.68	.60	.54	.65	.59	.54	.63	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.54	.48	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.38	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.35	.31	.30

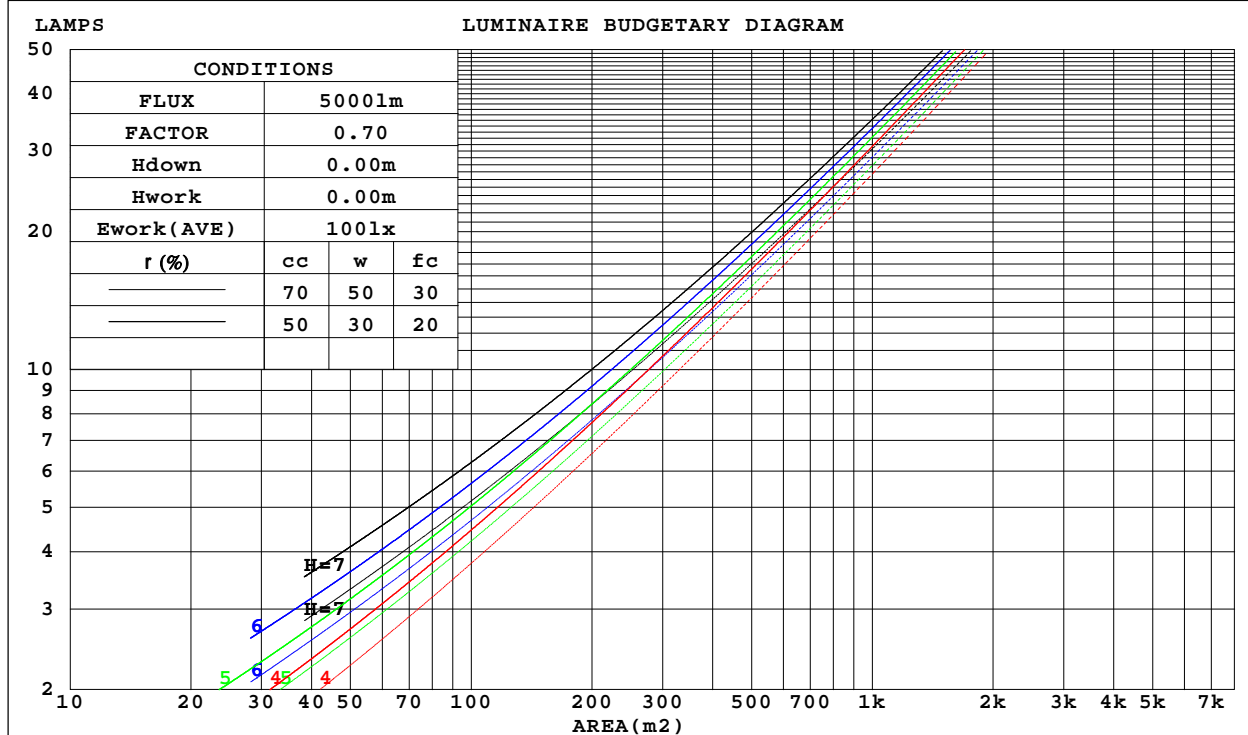

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2471]
 Remarks:

WEC AND CCEC

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.255	.145	.046	.248	.141	.045	.234	.134	.043	.222	.128	.041	.211	.122	.039	
2.0	.247	.136	.042	.241	.133	.041	.230	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.106	.031	.203	.104	.030	.195	.102	.030	.188	.099	.029	.181	.097	.029	
6.0	.195	.098	.028	.191	.096	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.183	.091	.026	.180	.090	.026	.173	.088	.025	.167	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.146	.074	.021	
10.0	.154	.074	.020	.152	.073	.020	.147	.072	.020	.143	.071	.020	.138	.070	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.135	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.120	.073	.039	.083	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.029	.076	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2471]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.3	28.7	27.6	29.1	29.4	27.1	28.6	27.5	28.9	29.2
3H	28.0	29.4	28.4	29.7	30.1	27.9	29.2	28.3	29.5	29.9
4H	28.2	29.4	28.6	29.8	30.2	28.0	29.2	28.4	29.6	30.0
6H	28.2	29.3	28.6	29.7	30.1	28.0	29.2	28.5	29.5	29.9
8H	28.2	29.3	28.7	29.7	30.1	28.0	29.1	28.5	29.5	29.9
12H	28.2	29.2	28.6	29.6	30.1	28.0	29.0	28.5	29.4	29.9
4H 2H	27.6	28.8	28.0	29.2	29.6	27.4	28.6	27.8	29.0	29.4
3H	28.5	29.5	28.9	29.9	30.3	28.3	29.3	28.7	29.7	30.1
4H	28.7	29.6	29.1	30.0	30.5	28.4	29.3	28.9	29.8	30.2
6H	28.8	29.5	29.2	30.0	30.5	28.5	29.3	29.0	29.7	30.2
8H	28.8	29.5	29.2	29.9	30.4	28.5	29.2	29.0	29.7	30.2
12H	28.8	29.4	29.3	29.9	30.4	28.5	29.1	29.0	29.6	30.1
8H 4H	28.7	29.4	29.2	29.9	30.4	28.4	29.2	28.9	29.6	30.1
6H	28.8	29.4	29.3	29.9	30.4	28.5	29.1	29.0	29.6	30.1
8H	28.8	29.4	29.4	29.9	30.4	28.5	29.1	29.1	29.6	30.1
12H	28.9	29.3	29.4	29.8	30.4	28.5	29.0	29.1	29.5	30.1
12H 4H	28.7	29.3	29.2	29.8	30.3	28.4	29.1	28.9	29.6	30.0
6H	28.8	29.3	29.3	29.8	30.3	28.5	29.0	29.0	29.5	30.1
8H	28.8	29.3	29.3	29.8	30.4	28.5	29.0	29.0	29.5	30.1
CIE190: 2010										

CIE190: 2010
Area: 0.0144 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-08

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2471]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	47	63	53	46	62	52	46	40
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	92	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2471]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

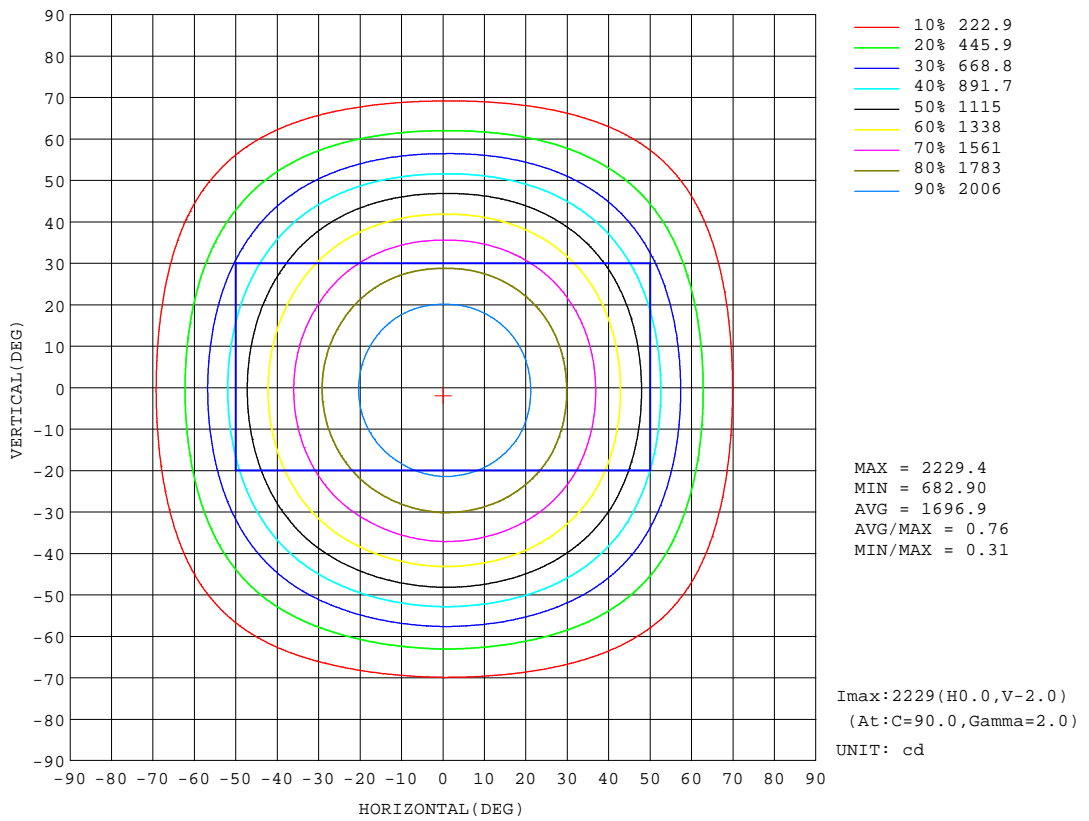


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2471]
 Remarks:

AAI Figure

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:3459 lm

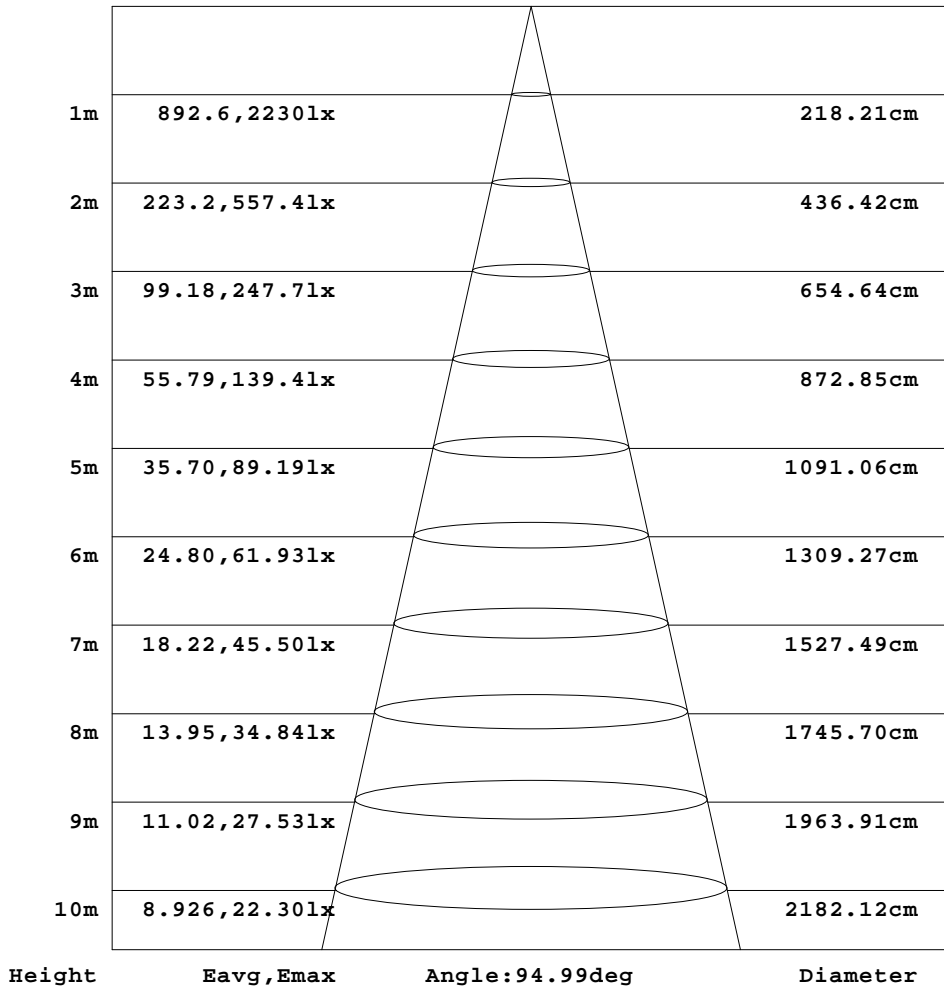


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2471]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

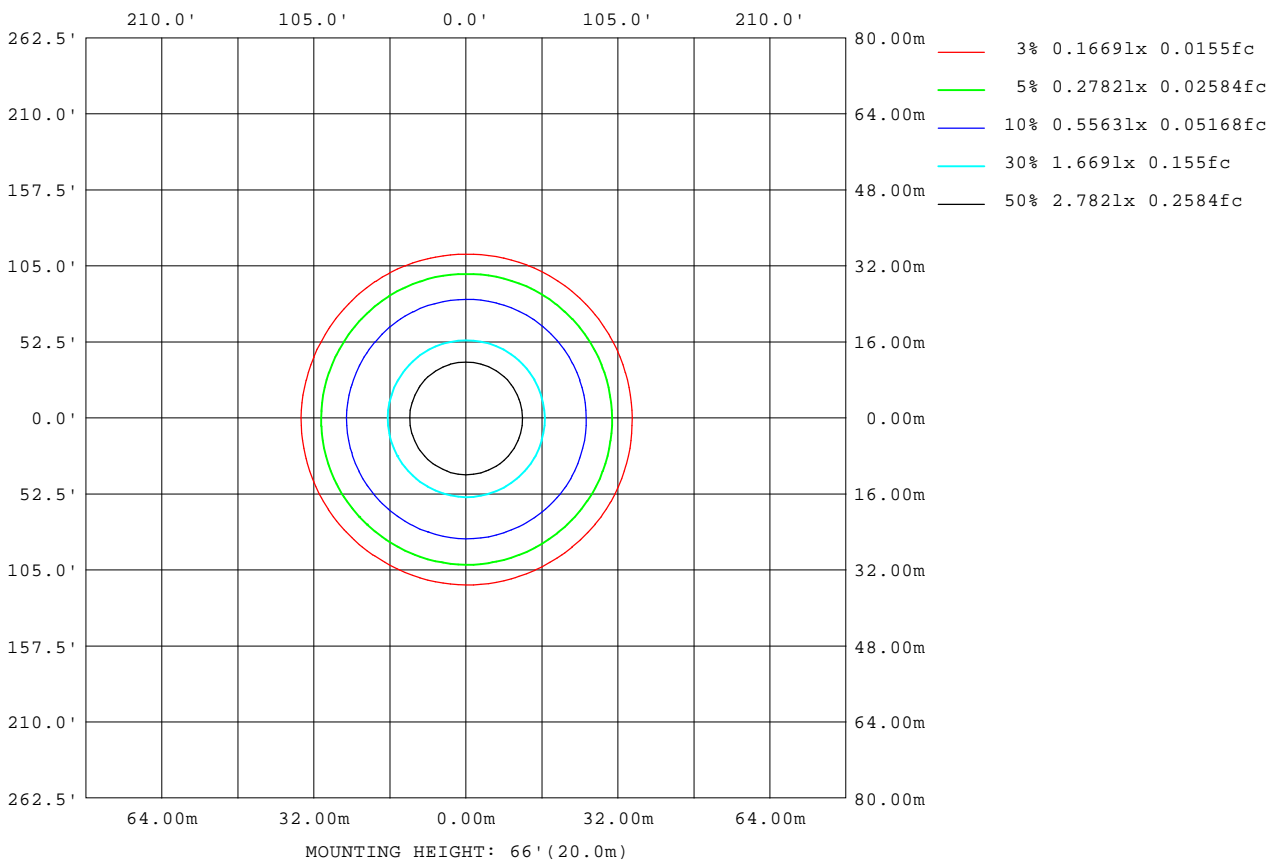

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2471]
 Remarks:

LED Avg.L Report

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	59124
L_0~180(75)av	27968
L_0~180(85)av	16077
L_90~270(65)av	58903
L_90~270(75)av	27639
L_90~270(85)av	13032
L_45(65)av	58792
L_45(75)av	27894
L_45(85)av	14268

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-08

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2471]
Remarks:

Planar Illuminance Curve

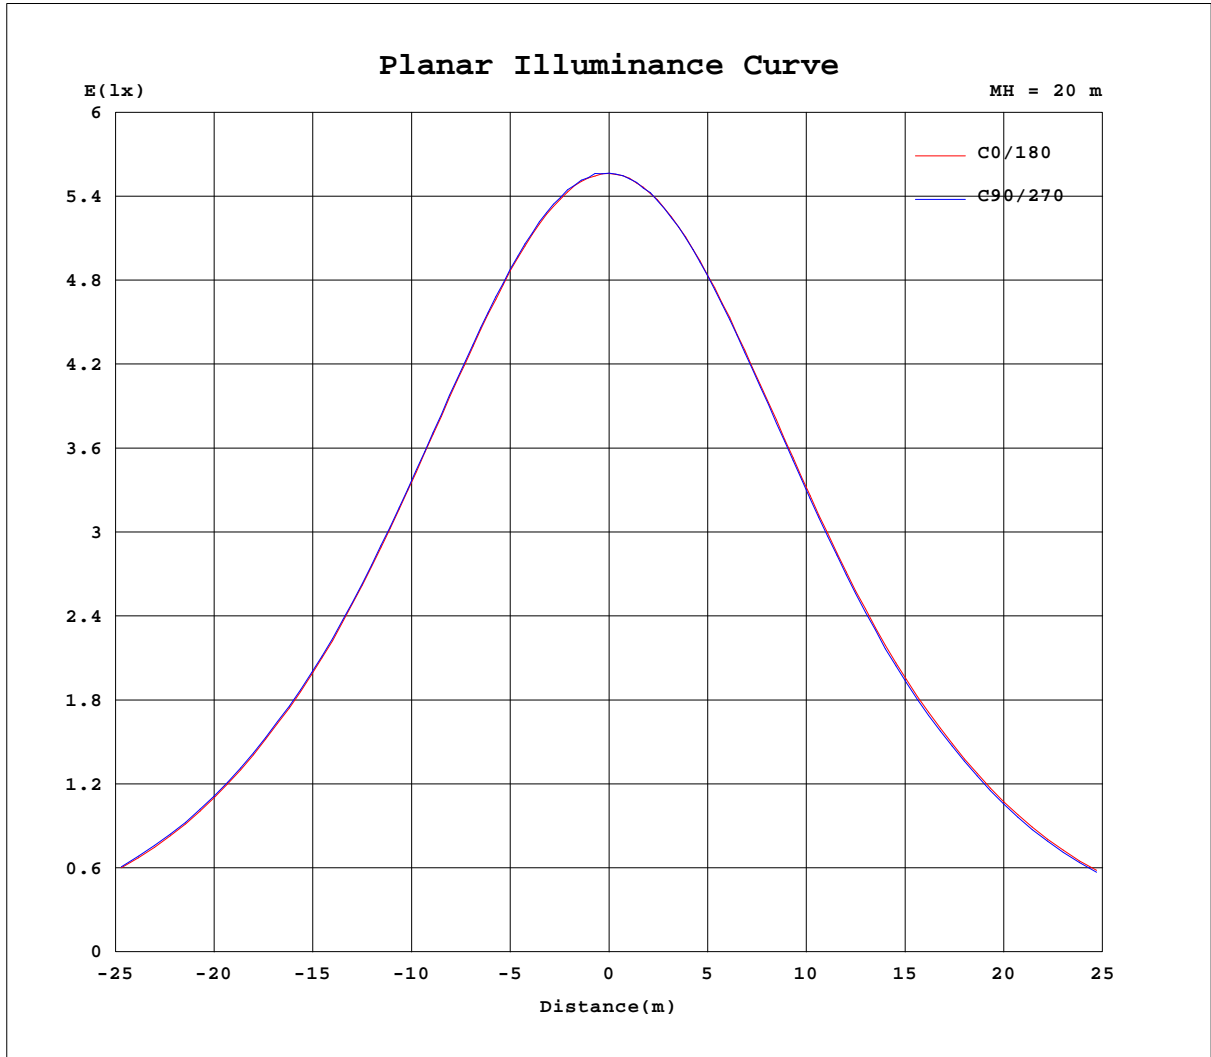

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2471]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.05V I:0.5100A P:60.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4835.24x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2227	2227	2227	2227	2227	2227	2227	2227	2227	2227	2227	2227						
5	2218	2217	2220	2217	2216	2214	2214	2210	2214	2210	2212	2213						
10	2181	2184	2185	2186	2178	2173	2172	2168	2170	2171	2174	2177						
15	2119	2124	2127	2122	2113	2108	2110	2098	2104	2101	2107	2109						
20	2030	2041	2041	2037	2022	2019	2015	2009	2011	2008	2015	2023						
25	1920	1930	1931	1922	1907	1900	1900	1889	1894	1888	1899	1906						
30	1781	1796	1797	1789	1769	1759	1758	1747	1751	1747	1757	1770						
35	1621	1639	1638	1632	1607	1599	1597	1580	1583	1578	1595	1606						
40	1455	1472	1473	1467	1440	1431	1425	1407	1410	1406	1423	1438						
45	1250	1269	1267	1262	1236	1226	1217	1196	1199	1198	1218	1233						
50	1016	1039	1036	1032	1004	995	982	965	966	963	986	1001						
55	776	798	795	792	766	757	751	731	734	730	754	764						
60	556	573	570	568	546	540	534	517	522	519	537	546						
65	369	380	376	376	358	353	351	337	343	341	355	361						
70	220	225	224	221	209	205	202	196	200	200	210	214						
75	110	113	109	106	100	99.4	98.7	96.5	99.9	99.7	105	107						
80	52.2	52.9	49.6	47.8	46.7	48.3	48.5	46.0	49.3	48.5	51.0	49.6						
85	21.7	22.2	18.1	16.4	15.8	18.2	18.7	14.8	17.3	16.3	19.2	18.0						
90	0.53	0.40	0.40	0.18	0.22	0.21	0.23	0.27	0.25	0.26	0.26	0.35						
95	0.41	0.46	0.38	0.37	0.36	0.41	0.47	0.42	0.47	0.41	0.46	0.41						
100	0.75	0.79	0.71	0.64	0.67	0.70	0.80	0.76	0.82	0.75	0.80	0.76						
105	1.19	1.23	1.15	1.05	1.10	1.13	1.24	1.24	1.29	1.21	1.25	1.19						
110	1.75	1.72	1.72	1.56	1.67	1.62	1.80	1.79	1.85	1.76	1.79	1.71						
115	2.37	2.34	2.34	2.13	2.30	2.21	2.44	2.42	2.48	2.41	2.40	2.32						
120	3.05	2.97	2.91	2.74	2.87	2.84	3.08	3.12	3.02	3.06	3.00	2.96						
125	3.72	3.60	3.58	3.31	3.49	3.52	3.77	3.81	3.69	3.72	3.64	3.66						
130	4.38	4.24	4.26	3.95	4.14	4.16	4.38	4.41	4.35	4.34	4.26	4.23						
135	5.02	4.81	4.88	4.53	4.73	4.69	4.93	4.94	5.00	4.93	4.79	4.74						
140	5.47	5.31	5.40	5.11	5.26	5.10	5.45	5.45	5.42	5.46	5.26	5.18						
145	5.96	5.83	5.91	5.62	5.69	5.60	5.90	5.89	5.75	5.92	5.68	5.68						
150	6.32	6.23	6.33	6.08	6.13	6.12	6.31	6.29	6.24	6.33	6.17	6.08						
155	6.73	6.66	6.79	6.53	6.65	6.58	6.80	6.90	6.87	6.72	6.57	6.50						
160	7.20	7.12	7.29	7.03	7.06	6.99	7.28	7.38	7.42	7.17	6.97	6.96						
165	7.53	7.60	7.74	7.52	7.51	7.33	7.95	7.76	7.94	7.79	7.49	7.31						
170	8.07	8.09	8.13	7.86	7.95	7.85	8.26	8.27	8.28	8.09	7.92	7.69						
175	8.40	8.46	8.60	8.29	8.21	8.20	8.62	8.55	8.40	8.41	8.28	8.09						
180	8.66	8.85	8.75	8.53	8.37	8.28	8.77	8.78	8.75	8.56	8.29	8.28						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-08

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2471]
 Remarks: