
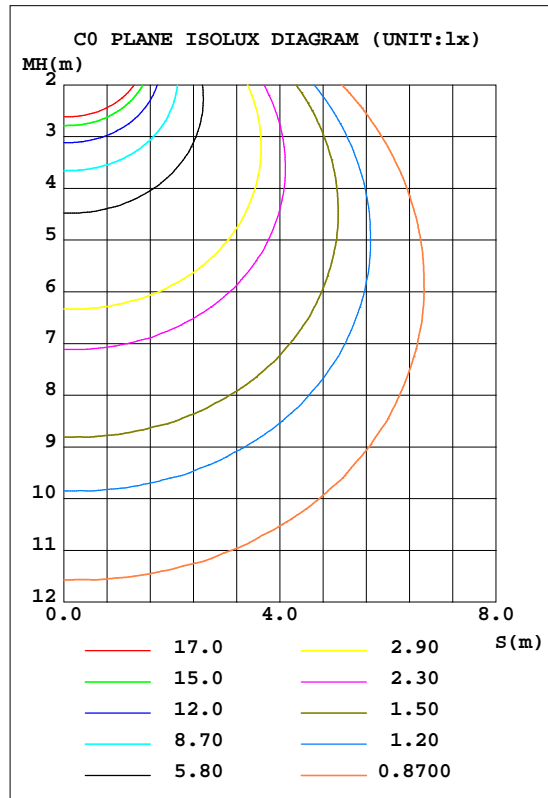


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 76.20 lm/W			
MODEL	WLS12-D12AC-XX(3500K)	I _{max} (cd)	127.6	S/MH(C0/180)	1.51
NOMINAL POWER(W)	12	LOR(%)	107.0	S/MH(C90/270)	1.65
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	855.72	h UP, DN(C0-180)	16.1, 35.8
NOMINAL FLUX(lm)	800	CIE CLASS	SEMI-D.	h UP, DN(C180-360)	17.7, 37.4
LAMPS INSIDE	1	h up(%)	33.8	CIBSE SHR NOM	1.75
TEST VOLTAGE(V)	120	h down(%)	73.2	CIBSE SHR MAX	1.75

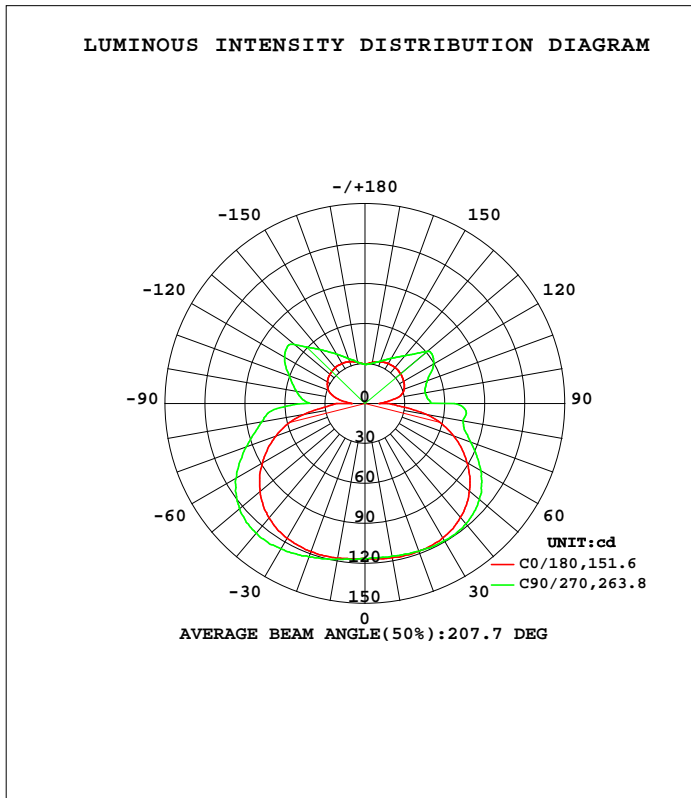

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	117.6	117.1	116.3	117.1	117.9	118.9	118.6	118.6	0- 10	11.19	11.19	1.31,1.4
20	118.1	118.3	118.0	118.6	118.5	121.4	122.7	121.3	10- 20	33.70	44.89	5.25,5.61
30	116.5	118.5	119.0	118.7	116.9	123.2	126.0	123.4	20- 30	55.66	100.6	11.8,12.6
40	111.5	115.8	118.0	115.7	112.0	122.1	127.0	121.9	30- 40	75.13	175.7	20.5,22
50	102.3	108.5	112.2	108.7	102.8	115.7	122.9	115.7	40- 50	89.17	264.9	31,33.1
60	88.36	96.42	100.5	96.85	88.81	103.9	111.6	104.0	50- 60	94.70	359.6	42,44.9
70	70.64	81.00	84.32	81.62	71.00	88.02	94.63	87.74	60- 70	90.46	450.0	52.6,56.3
80	46.32	64.99	74.84	64.68	46.02	67.85	78.50	68.21	70- 80	78.10	528.1	61.7,66
90	17.09	40.51	66.97	41.90	21.00	34.20	45.89	30.71	80- 90	57.53	585.6	68.4,73.2
100	24.08	40.15	46.04	37.73	20.97	46.28	51.99	43.86	90-100	37.92	623.6	72.9,77.9
110	31.25	47.94	49.76	45.59	29.28	55.00	60.48	53.49	100-110	46.30	669.9	78.3,83.7
120	33.61	51.00	59.50	48.48	32.63	57.78	69.80	55.47	110-120	49.49	719.4	84.1,89.9
130	34.95	47.34	60.98	45.05	34.40	52.21	68.75	49.95	120-130	46.01	765.4	89.4,95.7
140	35.28	42.00	46.94	41.11	35.10	45.46	53.02	44.24	130-140	35.55	800.9	93.6,100
150	34.79	37.95	39.27	37.73	34.74	40.08	42.91	39.39	140-150	25.59	826.5	96.6,103
160	33.33	34.21	33.85	34.33	33.56	35.56	35.82	35.26	150-160	16.93	843.4	98.6,105
170	31.32	31.03	30.66	31.26	31.39	31.68	31.47	31.68	160-170	9.379	852.8	99.7,107
180	29.66	29.66	29.66	29.66	29.66	29.66	29.66	29.66	170-180	2.915	855.7	100,107
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:

g Range: 0 - 180DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1494]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

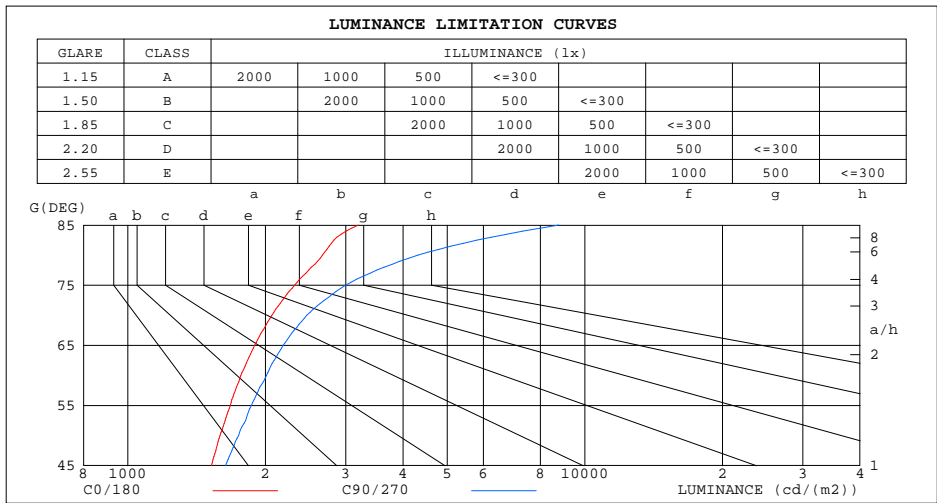

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	3194	8762
80	2667	4310
75	2318	2995
70	2065	2465
65	1894	2187
60	1767	2010
55	1677	1863
50	1592	1746
45	1524	1635


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.13	1.13	1.13	1.00	1.00	1.00	.89	.89	.89	.78	.78	.78	.73
1.0	.99	.93	.88	.93	.88	.84	.83	.79	.75	.73	.69	.67	.63	.61	.59	.54
2.0	.84	.76	.69	.79	.72	.66	.70	.64	.59	.61	.57	.53	.53	.50	.47	.42
3.0	.73	.63	.56	.68	.60	.53	.60	.53	.48	.53	.47	.43	.46	.42	.38	.34
4.0	.64	.54	.46	.60	.51	.44	.53	.45	.40	.46	.40	.35	.40	.35	.31	.28
5.0	.56	.46	.39	.53	.44	.37	.47	.39	.33	.41	.35	.30	.36	.31	.27	.23
6.0	.50	.40	.33	.47	.38	.32	.42	.34	.29	.37	.31	.26	.32	.27	.23	.20
7.0	.45	.35	.29	.42	.34	.27	.38	.30	.25	.33	.27	.22	.29	.24	.20	.17
8.0	.41	.31	.25	.38	.30	.24	.34	.27	.22	.30	.24	.20	.27	.21	.18	.15
9.0	.37	.28	.22	.35	.27	.21	.31	.24	.19	.28	.22	.17	.24	.19	.16	.13
10.0	.34	.25	.20	.32	.24	.19	.29	.22	.17	.26	.20	.16	.23	.18	.14	.12

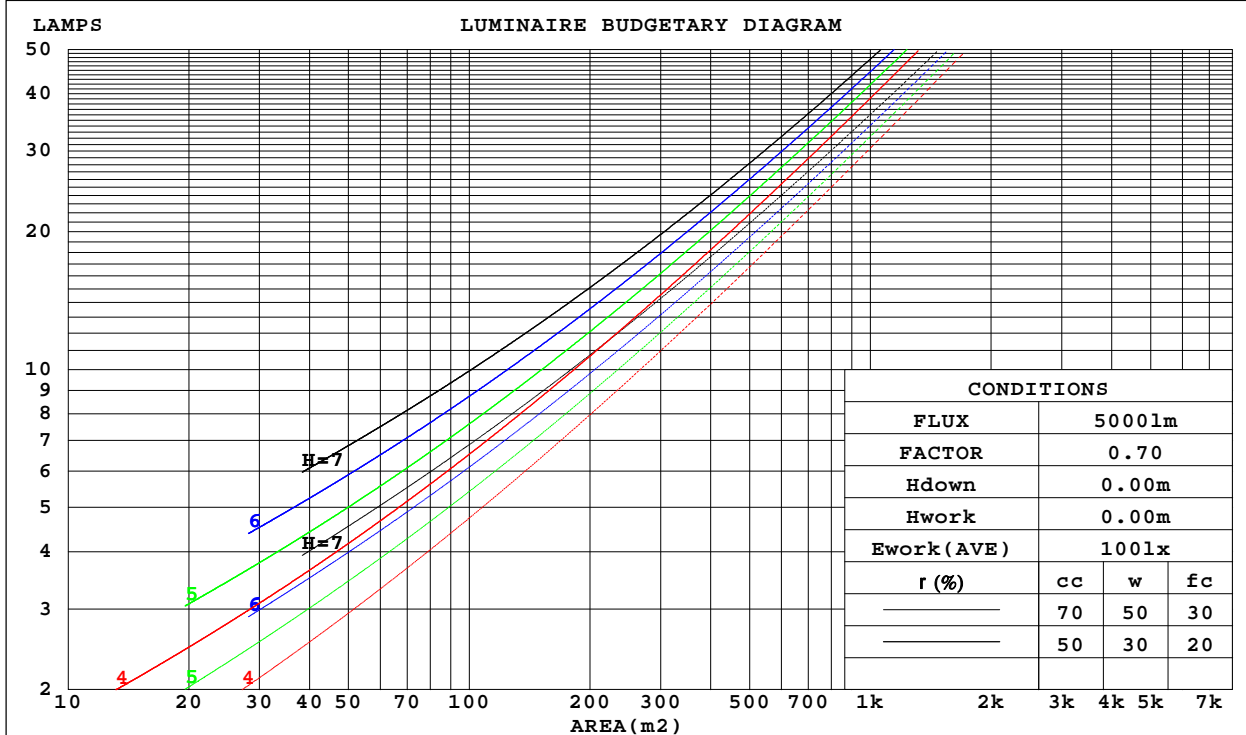

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.407	.231	.073	.389	.222	.070	.355	.204	.065	.324	.187	.060	.295	.171	.055	
2.0	.353	.193	.059	.337	.185	.057	.306	.170	.053	.278	.156	.049	.252	.142	.045	
3.0	.314	.167	.050	.299	.160	.048	.271	.147	.045	.245	.134	.041	.221	.123	.038	
4.0	.283	.147	.043	.269	.141	.042	.244	.129	.039	.220	.118	.036	.198	.108	.033	
5.0	.257	.131	.038	.244	.126	.037	.221	.115	.034	.199	.105	.031	.179	.096	.029	
6.0	.235	.118	.034	.224	.113	.033	.203	.104	.030	.183	.095	.028	.164	.086	.026	
7.0	.217	.107	.030	.206	.103	.029	.187	.094	.027	.168	.086	.025	.151	.078	.023	
8.0	.201	.098	.028	.191	.094	.027	.173	.087	.025	.156	.079	.023	.140	.072	.021	
9.0	.187	.091	.025	.178	.087	.024	.161	.080	.023	.146	.073	.021	.131	.066	.019	
10.0	.175	.084	.023	.167	.081	.022	.151	.074	.021	.136	.068	.019	.122	.062	.018	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.461	.461	.461	.394	.394	.394	.269	.269	.269	.154	.154	.154	.049	.049	.049	
1.0	.457	.426	.397	.391	.365	.342	.268	.251	.236	.154	.145	.137	.049	.047	.044	
2.0	.451	.402	.361	.386	.346	.312	.265	.239	.218	.153	.139	.128	.049	.045	.042	
3.0	.443	.385	.338	.380	.332	.293	.261	.231	.206	.151	.135	.121	.048	.044	.040	
4.0	.435	.372	.324	.374	.321	.281	.257	.224	.198	.149	.131	.117	.048	.043	.039	
5.0	.427	.362	.313	.367	.313	.273	.253	.219	.193	.146	.128	.114	.047	.042	.038	
6.0	.420	.354	.306	.361	.306	.267	.249	.214	.189	.144	.126	.112	.047	.041	.037	
7.0	.412	.347	.301	.355	.301	.262	.245	.211	.186	.142	.124	.111	.046	.041	.037	
8.0	.405	.341	.297	.349	.296	.259	.242	.208	.184	.141	.123	.109	.045	.040	.036	
9.0	.399	.336	.294	.344	.292	.256	.238	.205	.182	.139	.121	.109	.045	.040	.036	
10.0	.393	.332	.291	.339	.288	.254	.235	.203	.181	.137	.120	.108	.044	.039	.036	

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm										
NAME: LED WALL SCONCES					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.6	12.8	12.4	13.6	14.6	12.4	13.5	13.1	14.3	15.3
3H	14.2	15.3	15.0	16.1	17.1	15.2	16.3	16.0	17.1	18.1
4H	15.4	16.5	16.2	17.3	18.3	16.6	17.7	17.4	18.5	19.5
6H	16.6	17.6	17.4	18.4	19.4	18.3	19.3	19.1	20.1	21.1
8H	17.1	18.0	17.9	18.8	19.9	19.3	20.2	20.1	21.1	22.1
12H	17.5	18.4	18.3	19.2	20.3	20.5	21.4	21.3	22.2	23.3
4H 2H	12.6	13.6	13.4	14.5	15.5	13.1	14.2	13.9	15.0	16.0
3H	15.4	16.3	16.2	17.2	18.2	16.3	17.2	17.1	18.0	19.0
4H	16.8	17.6	17.6	18.5	19.5	17.9	18.8	18.8	19.6	20.7
6H	18.1	18.8	19.0	19.7	20.8	19.8	20.6	20.7	21.4	22.5
8H	18.7	19.4	19.5	20.2	21.3	20.9	21.6	21.8	22.5	23.6
12H	19.2	19.8	20.0	20.7	21.8	22.3	22.9	23.1	23.8	24.9
8H 4H	17.6	18.3	18.4	19.2	20.2	18.5	19.2	19.4	20.1	21.1
6H	19.1	19.7	20.0	20.6	21.7	20.7	21.3	21.6	22.2	23.3
8H	19.9	20.4	20.7	21.3	22.4	22.0	22.6	22.9	23.5	24.5
12H	20.5	21.0	21.4	21.9	23.0	23.6	24.1	24.5	25.0	26.1
12H 4H	17.8	18.5	18.7	19.4	20.4	18.6	19.2	19.5	20.1	21.2
6H	19.5	20.1	20.4	21.0	22.1	20.9	21.4	21.8	22.3	23.4
8H	20.4	20.8	21.2	21.7	22.9	22.3	22.8	23.2	23.7	24.8
CIE190: 2010										

CIE190: 2010
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:

g Range: 0 - 180DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1494]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	46	33	25	44	32	24	41	30	23	16
0.80	56	41	33	53	40	32	49	38	30	21
1.00	64	50	41	61	48	39	56	47	37	26
1.25	71	58	48	68	55	47	62	51	44	31
1.50	77	64	54	73	61	52	66	56	49	35
2.00	85	73	64	81	70	62	72	64	57	41
2.50	90	79	70	85	75	68	76	68	62	45
3.00	94	84	76	89	80	73	80	72	67	48
4.00	100	91	84	94	86	80	84	78	73	53
5.00	103	96	89	97	91	85	86	81	77	56
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

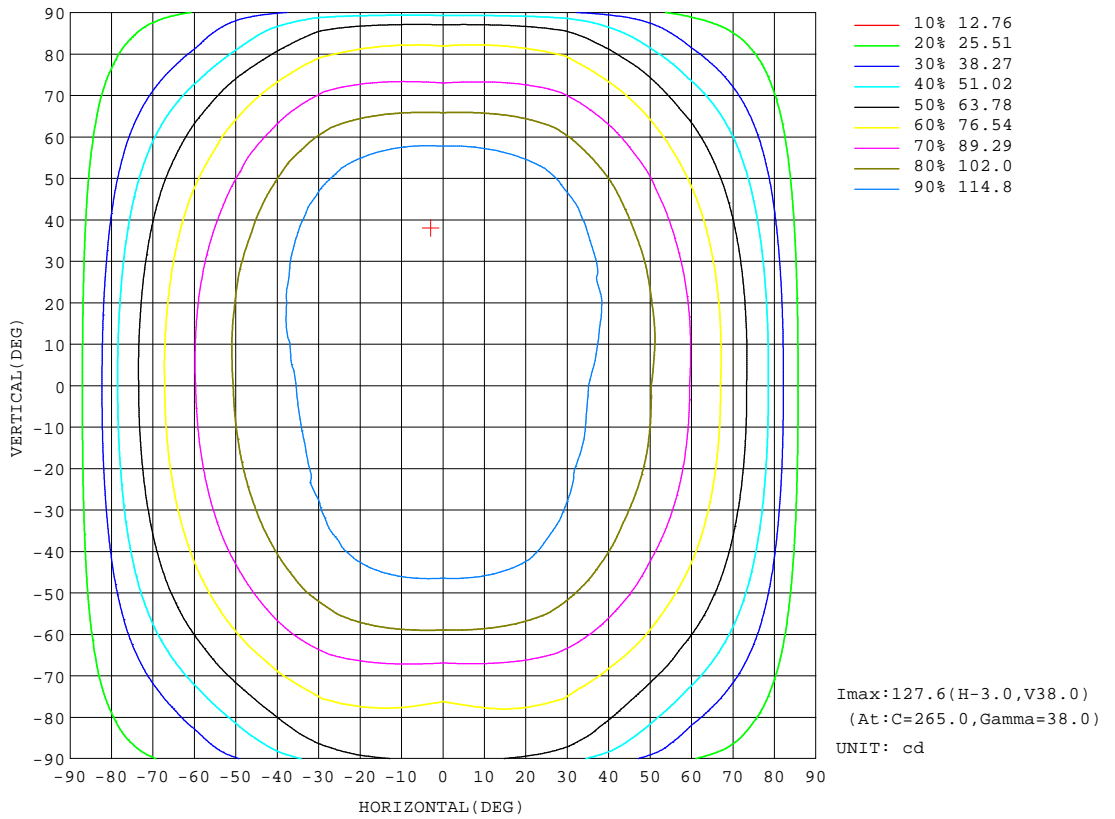


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

AAI CURVES

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

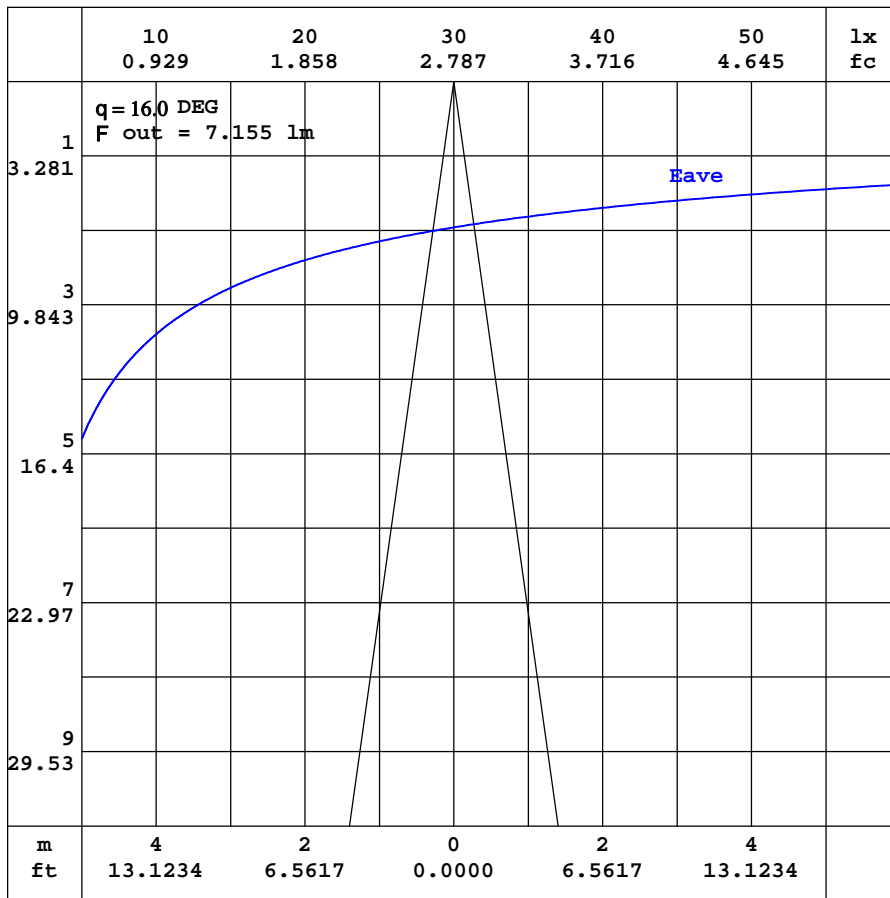


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

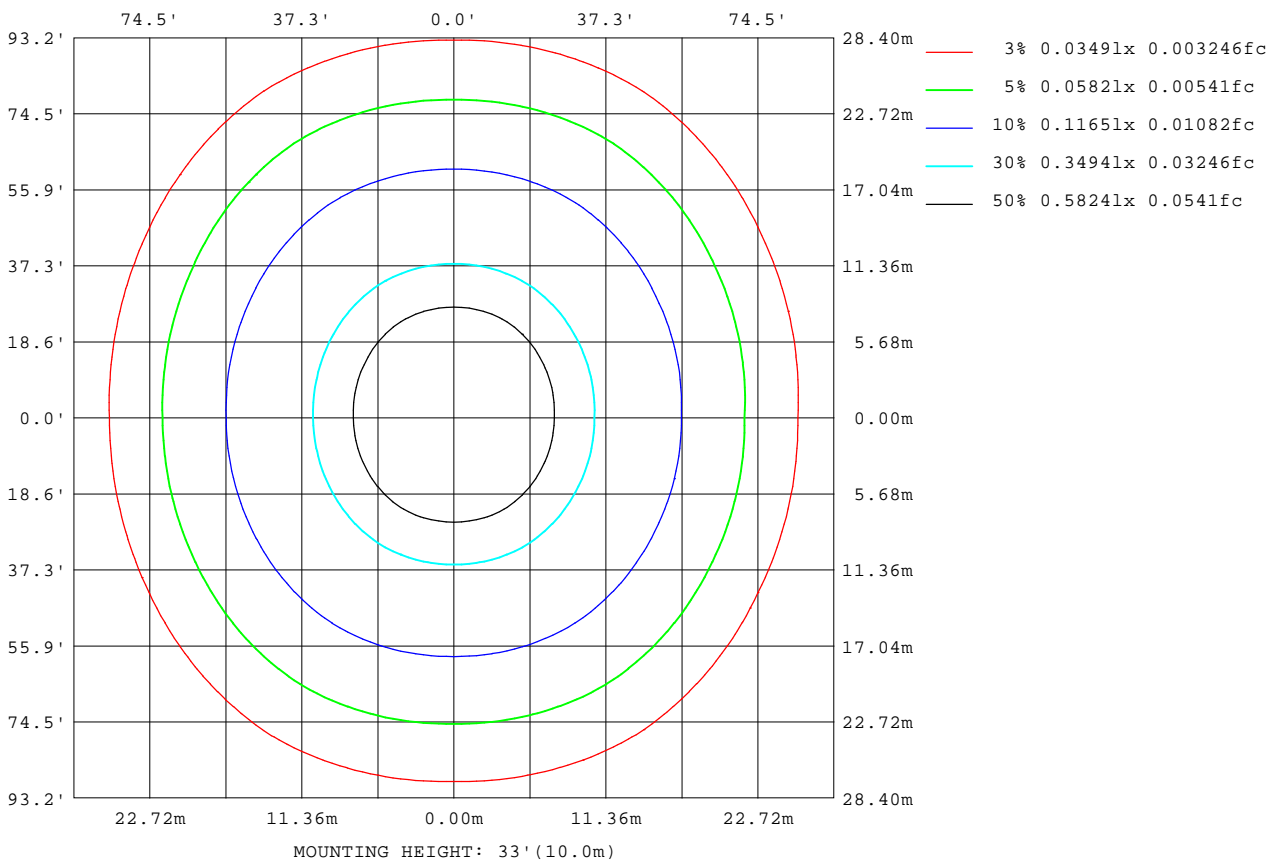

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System: EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1494]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1900
L_0~180(75)av	2326
L_0~180(85)av	3288
L_90~270(65)av	2321
L_90~270(75)av	3155
L_90~270(85)av	8511
L_45(65)av	2196
L_45(75)av	2937
L_45(85)av	6268

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:
Test Date:

g Range: 0 - 180DEG
g Interval: 0.5DEG
Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1494]
Remarks:

Planar Illuminance Curve

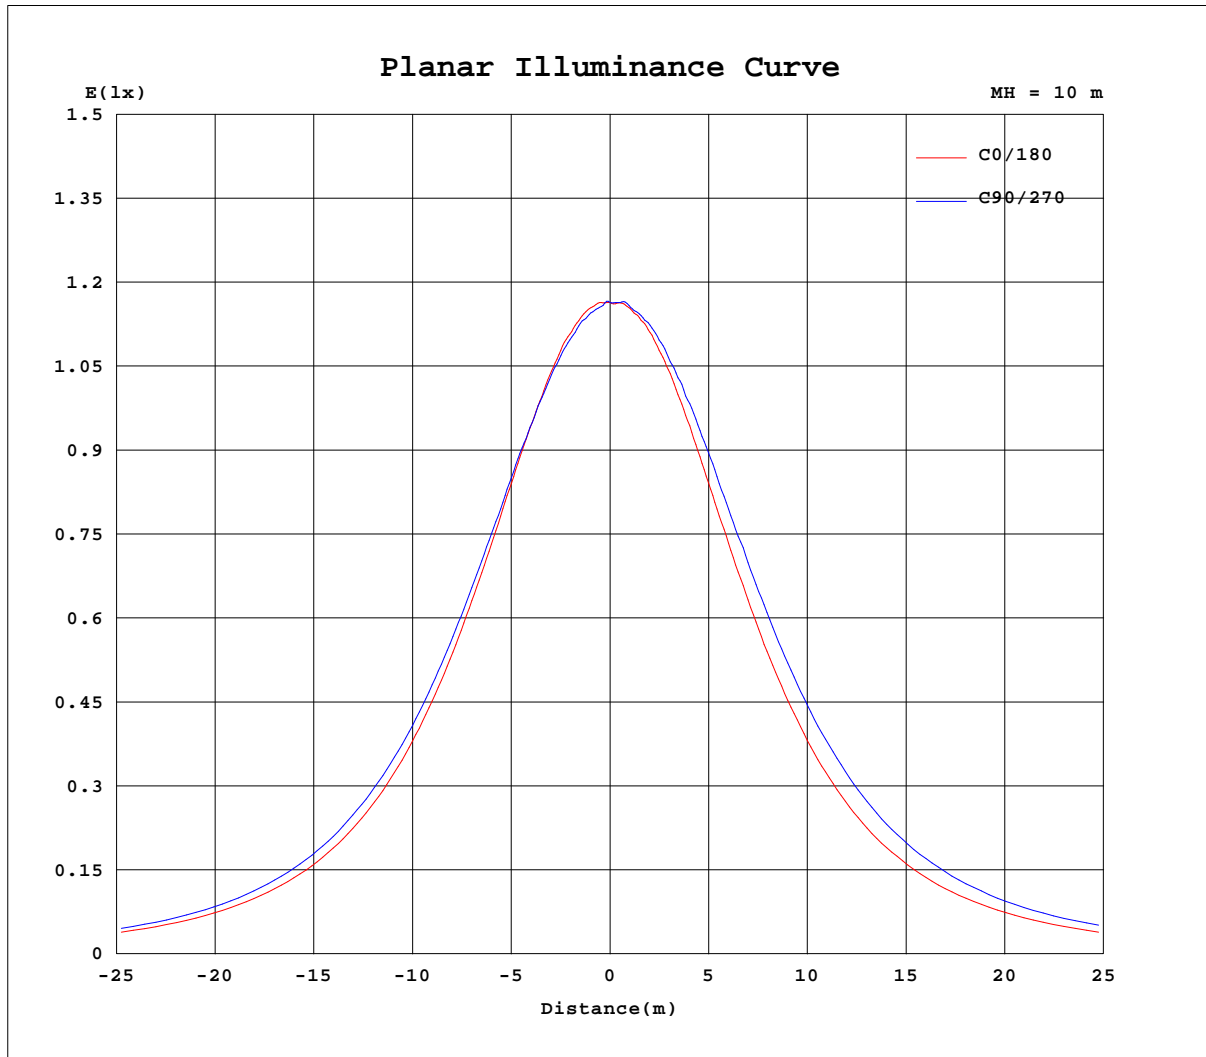

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System: EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1494]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCNCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	116	116	116	116	116	116	116	116	116	116	116	116	116	116	116	116	116	116	116
5	117	117	117	117	117	117	117	116	116	116	116	116	116	116	116	116	116	116	116
10	118	118	117	117	117	117	117	117	117	117	117	117	117	117	117	117	116	116	116
15	118	118	118	118	118	118	118	118	118	118	118	118	117	117	117	117	117	117	117
20	118	118	118	118	118	118	118	118	118	118	118	118	118	118	118	118	118	118	118
25	118	118	118	118	118	118	118	118	118	118	119	119	119	119	119	119	119	119	119
30	116	117	117	117	117	117	117	118	118	119	119	119	119	119	119	119	119	119	119
35	115	115	115	115	115	115	116	116	117	117	118	119	119	119	119	119	119	119	119
40	112	112	112	112	113	113	113	114	115	116	117	117	118	118	118	118	118	118	118
45	108	108	108	109	109	109	110	111	112	113	114	115	115	116	116	116	116	116	116
50	102	103	103	103	104	104	105	106	107	109	110	111	112	112	112	112	112	112	112
55	96.2	96.3	96.6	97.0	97.6	98.2	99.0	100	102	103	104	105	106	107	107	107	107	107	107
60	88.4	88.7	89.2	89.7	90.4	91.2	92.2	93.5	95.0	96.4	97.8	99.1	100	101	101	101	101	101	101
65	80.1	80.4	80.9	81.6	82.3	83.2	84.2	85.8	87.4	89.0	90.5	91.9	93.1	93.3	93.4	93.2	93.0	92.7	92.4
70	70.6	71.1	71.7	72.4	73.3	74.3	75.5	77.3	79.2	81.0	82.8	84.4	85.7	85.9	85.8	85.5	85.1	84.7	84.3
75	60.0	60.5	61.2	62.2	63.3	64.6	66.1	68.4	70.8	73.1	75.4	77.5	79.2	79.4	79.4	79.0	78.6	78.0	77.5
80	46.3	47.0	47.9	49.2	50.8	52.6	54.8	58.1	61.5	65.0	68.3	71.5	74.2	75.1	75.7	75.8	75.7	75.3	74.8
85	27.8	29.0	30.6	32.7	35.1	37.9	41.1	45.8	50.6	55.5	60.4	65.0	69.1	71.6	73.6	75.0	76.0	76.4	76.4
90	17.1	17.2	17.9	19.1	20.9	23.2	26.1	30.6	35.4	40.5	45.6	50.6	55.2	58.6	61.4	63.7	65.4	66.5	67.0
95	16.2	16.8	18.0	19.6	21.6	24.1	26.7	29.8	32.9	36.0	39.0	41.9	44.4	45.7	46.6	47.2	47.4	47.4	47.1
100	24.1	24.7	25.8	27.3	29.2	31.4	33.7	35.9	38.0	40.1	42.1	43.9	45.5	46.1	46.5	46.6	46.6	46.4	46.0
105	29.0	29.7	31.0	32.6	34.6	36.8	39.0	40.8	42.6	44.2	45.6	46.9	47.9	48.2	48.2	48.1	47.8	47.4	47.0
110	31.3	32.2	33.7	35.7	38.0	40.5	43.0	44.8	46.4	47.9	49.3	50.4	51.2	51.3	51.3	51.0	50.6	50.2	49.8
115	32.6	33.5	35.0	36.8	39.0	41.4	43.9	46.2	48.4	50.5	52.5	54.2	55.6	55.9	56.0	55.8	55.4	55.0	54.5
120	33.6	34.1	35.0	36.3	38.0	40.0	42.3	45.1	48.1	51.0	53.8	56.4	58.7	59.6	60.1	60.3	60.2	59.9	59.5
125	34.4	34.6	35.2	36.2	37.5	39.3	41.3	44.4	47.7	51.0	54.3	57.4	60.1	61.3	62.1	62.5	62.7	62.5	62.2
130	35.0	35.1	35.6	36.4	37.5	38.8	40.5	42.6	44.9	47.3	49.8	52.1	54.4	56.2	57.8	59.1	60.1	60.7	61.0
135	35.3	35.4	35.8	36.4	37.3	38.3	39.5	41.0	42.6	44.2	45.8	47.4	48.9	50.0	51.0	51.8	52.3	52.7	52.8
140	35.3	35.4	35.7	36.2	36.8	37.6	38.4	39.6	40.8	42.0	43.2	44.3	45.4	46.0	46.4	46.7	46.9	47.0	46.9
145	35.1	35.2	35.4	35.8	36.3	36.8	37.5	38.3	39.1	40.0	40.8	41.5	42.2	42.5	42.7	42.8	42.8	42.8	42.7
150	34.8	34.9	35.0	35.3	35.6	36.0	36.4	36.9	37.4	38.0	38.4	38.9	39.3	39.4	39.5	39.5	39.4	39.4	39.3
155	34.2	34.2	34.3	34.5	34.7	34.9	35.1	35.4	35.7	35.9	36.2	36.4	36.6	36.6	36.6	36.5	36.4	36.3	36.3
160	33.3	33.4	33.4	33.5	33.6	33.7	33.9	34.0	34.1	34.2	34.3	34.4	34.4	34.3	34.2	34.1	34.0	33.9	33.9
165	32.3	32.3	32.3	32.4	32.4	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.4	32.3	32.3	32.2	32.2	32.1
170	31.3	31.3	31.2	31.2	31.2	31.2	31.1	31.1	31.1	31.0	31.0	31.0	30.9	30.9	30.8	30.8	30.7	30.7	30.7
175	30.3	30.2	30.2	30.1	30.1	30.0	30.0	29.9	29.9	29.9	29.8	29.8	29.8	29.8	29.8	29.7	29.7	29.7	29.7
180	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCNCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	116	117	117	117	117	117	117	116	116	116	116	116	116	116	116	116	116	116	116
5	116	116	116	116	116	116	116	117	117	117	117	117	117	117	117	117	117	117	117
10	116	116	117	117	117	117	117	117	117	117	117	117	117	117	118	118	118	118	118
15	117	117	118	118	118	118	118	118	118	118	118	118	118	118	118	118	118	118	119
20	118	118	118	119	119	119	119	119	119	118	118	118	118	118	118	118	118	118	119
25	119	119	119	119	119	119	119	119	119	119	119	118	118	118	118	118	118	118	118
30	119	119	120	120	120	120	119	119	119	118	118	117	117	117	117	117	117	117	117
35	119	119	120	120	120	119	119	118	118	117	117	116	116	115	115	115	115	115	116
40	118	118	118	118	118	118	117	116	116	115	114	113	113	112	112	112	112	112	113
45	116	116	116	116	116	116	115	114	113	112	111	110	109	109	108	108	108	108	109
50	112	112	112	112	112	112	111	110	109	108	106	105	105	104	103	103	103	103	103
55	107	107	107	107	107	107	106	105	103	102	101	99.5	98.5	97.7	97.1	96.7	96.5	96.6	97.3
60	101	101	101	101	101	101	99.7	98.3	96.8	95.3	93.8	92.3	91.2	90.3	89.5	89.0	88.8	88.8	89.5
65	92.9	93.3	93.7	94.0	94.1	93.9	92.7	91.2	89.5	87.8	86.1	84.4	83.2	82.2	81.4	80.8	80.5	80.5	81.3
70	84.9	85.4	85.9	86.3	86.5	86.4	85.0	83.4	81.6	79.7	77.8	76.0	74.5	73.3	72.3	71.5	71.1	71.0	71.8
75	78.1	78.8	79.3	79.7	79.9	79.7	77.9	75.8	73.5	71.0	68.6	66.3	64.6	63.1	61.9	61.1	60.6	60.4	61.2
80	75.2	75.4	75.5	75.2	74.6	73.6	71.0	67.9	64.7	61.3	58.0	54.8	52.4	50.3	48.6	47.2	46.4	46.0	46.7
85	76.0	75.3	74.1	72.4	70.2	67.6	63.7	59.4	54.9	50.3	45.9	41.7	38.5	35.7	33.3	31.5	30.2	29.5	29.8
90	66.2	64.9	63.0	60.5	57.7	54.4	50.4	46.2	41.9	37.7	33.6	29.8	27.3	25.2	23.6	22.3	21.5	21.0	20.9
95	46.9	46.5	45.8	44.9	43.6	42.0	39.5	36.7	33.7	30.7	27.7	24.8	22.6	20.6	18.8	17.1	15.7	14.4	16.9
100	46.1	46.0	45.8	45.4	44.8	43.9	42.0	40.0	37.7	35.4	33.0	30.6	28.8	27.0	25.4	23.8	22.3	21.0	23.8
105	47.1	47.3	47.3	47.2	46.9	46.4	45.1	43.5	41.8	39.9	37.9	35.9	34.2	32.5	30.8	29.1	27.5	25.8	28.9
110	50.0	50.2	50.4	50.5	50.4	50.0	48.8	47.3	45.6	43.8	41.8	39.8	38.1	36.3	34.6	32.8	31.1	29.3	32.6
115	54.8	55.0	55.2	55.1	54.8	54.2	52.3	50.0	47.6	45.0	42.4	39.9	38.1	36.4	34.8	33.4	32.2	31.1	33.9
120	59.7	59.7	59.5	59.1	58.4	57.2	54.6	51.6	48.5	45.3	42.1	39.2	37.3	35.7	34.5	33.5	32.9	32.6	34.4
125	62.2	62.0	61.6	60.8	59.8	58.3	55.4	52.1	48.7	45.3	42.0	38.9	37.1	35.6	34.5	33.9	33.6	33.7	34.7
130	60.3	59.3	57.9	56.2	54.4	52.3	49.9	47.5	45.1	42.7	40.4	38.4	37.1	36.0	35.2	34.6	34.4	34.4	35.3
135	52.5	52.0	51.3	50.3	49.2	48.0	46.3	44.6	42.9	41.2	39.5	38.0	37.0	36.2	35.6	35.2	34.9	34.8	35.7
140	46.9	46.7	46.4	45.9	45.4	44.7	43.6	42.4	41.1	39.9	38.6	37.5	36.8	36.2	35.7	35.4	35.2	35.1	35.8
145	42.7	42.7	42.6	42.4	42.1	41.8	41.1	40.3	39.4	38.6	37.7	37.0	36.4	36.0	35.6	35.4	35.2	35.1	35.6
150	39.3	39.3	39.3	39.3	39.2	39.0	38.6	38.2	37.7	37.2	36.8	36.3	36.0	35.6	35.4	35.1	34.9	34.7	35.2
155	36.3	36.4	36.5	36.5	36.5	36.5	36.4	36.2	35.9	35.7	35.5	35.2	35.0	34.8	34.7	34.5	34.4	34.2	34.6
160	33.9	34.0	34.1	34.3	34.4	34.5	34.4	34.4	34.3	34.2	34.2	34.1	34.0	33.9	33.8	33.7	33.6	33.6	33.8
165	32.2	32.3	32.4	32.5	32.7	32.8	32.8	32.7	32.7	32.7	32.6	32.6	32.6	32.6	32.6	32.5	32.5	32.5	32.6
170	30.7	30.8	30.9	31.0	31.1	31.2	31.2	31.2	31.3	31.3	31.3	31.3	31.3	31.3	31.3	31.4	31.4	31.4	31.4
175	29.8	29.8	29.9	29.9	30.0	30.0	30.0	30.1	30.1	30.1	30.2	30.2	30.2	30.2	30.3	30.3	30.3	30.4	30.3
180	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCONCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--3

UNIT: cd

C(DEG) g (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	116	116	116	116	116	116	116	116	116	116	116	116	116	116	116	116	116	116	117
5	117	117	117	117	117	117	117	117	117	117	117	117	117	117	117	118	118	118	118
10	118	118	118	118	119	119	119	119	119	119	119	119	119	119	119	119	119	119	119
15	119	119	119	119	120	120	120	120	121	121	121	121	121	121	121	121	121	121	121
20	119	119	120	120	120	121	121	121	122	122	122	123	123	123	123	123	123	123	123
25	119	119	120	120	121	122	122	123	123	124	124	124	124	124	124	124	124	124	124
30	118	118	119	120	121	122	122	123	124	125	125	126	126	126	126	126	126	126	126
35	116	117	118	119	120	121	122	123	124	125	126	127	127	127	127	127	127	127	127
40	113	114	115	116	118	119	121	122	123	125	126	126	127	127	127	127	127	127	127
45	109	110	112	113	114	116	118	119	121	123	124	125	125	126	126	126	126	126	126
50	104	106	107	108	110	112	114	116	118	119	121	122	122	123	123	123	123	123	123
55	98.2	99.4	101	102	104	106	108	110	113	114	116	117	118	118	118	118	118	118	118
60	90.5	91.8	93.3	95.0	96.8	99.1	102	104	106	108	110	111	111	112	112	112	112	112	112
65	82.3	83.6	85.2	87.0	89.0	91.4	93.9	96.4	98.7	101	103	104	104	104	104	104	104	104	104
70	72.9	74.3	76.0	78.0	80.1	82.7	85.4	88.0	90.5	92.8	94.8	95.4	95.7	95.6	95.4	95.1	94.6	95.0	95.2
75	62.3	63.7	65.5	67.5	69.8	72.7	75.7	78.7	81.5	84.1	86.3	86.9	87.1	87.0	86.7	86.3	85.8	86.3	86.8
80	47.9	49.5	51.5	53.9	56.7	60.3	64.1	67.9	71.5	74.8	77.8	78.8	79.3	79.5	79.4	79.0	78.5	79.0	79.4
85	30.8	32.4	34.4	37.0	40.1	44.4	49.0	53.7	58.3	62.6	66.6	68.7	70.2	71.2	71.9	72.1	72.0	72.2	72.1
90	21.2	21.8	22.8	24.1	25.8	28.4	31.3	34.2	37.1	39.9	42.4	43.8	44.9	45.6	46.0	46.1	45.9	45.5	44.9
95	19.4	21.9	24.6	27.3	30.0	33.4	36.8	40.0	43.0	45.8	48.1	49.0	49.4	49.5	49.2	48.7	48.1	47.7	47.2
100	26.6	29.3	32.0	34.8	37.4	40.5	43.5	46.3	48.8	51.1	53.0	53.5	53.7	53.6	53.2	52.7	52.0	51.9	51.8
105	32.0	34.9	37.7	40.4	43.0	45.9	48.5	51.0	53.2	55.1	56.7	57.2	57.4	57.4	57.1	56.7	56.2	56.3	56.4
110	35.8	38.9	41.8	44.6	47.3	50.0	52.6	55.0	57.1	59.0	60.5	61.1	61.3	61.4	61.2	60.9	60.5	60.7	60.9
115	36.8	39.6	42.4	45.2	48.0	51.2	54.4	57.4	60.2	62.6	64.8	65.6	66.1	66.3	66.2	65.9	65.5	65.8	66.0
120	36.3	38.5	40.8	43.4	46.3	50.1	53.9	57.8	61.5	64.9	67.8	69.1	70.0	70.4	70.4	70.2	69.8	70.0	70.1
125	36.0	37.7	39.7	42.1	44.8	48.8	53.0	57.2	61.3	65.2	68.6	70.3	71.5	72.2	72.5	72.4	72.0	71.7	71.1
130	36.5	37.9	39.5	41.4	43.5	46.3	49.2	52.2	55.2	58.1	60.8	63.0	65.0	66.5	67.7	68.5	68.7	68.0	66.7
135	36.7	37.8	39.1	40.5	42.1	44.2	46.4	48.6	50.8	52.9	54.8	56.2	57.4	58.4	59.1	59.5	59.6	59.2	58.5
140	36.6	37.4	38.4	39.5	40.7	42.2	43.8	45.5	47.0	48.5	49.9	50.9	51.7	52.3	52.7	53.0	53.0	52.8	52.3
145	36.2	36.8	37.6	38.3	39.2	40.3	41.5	42.7	43.8	44.8	45.8	46.4	46.8	47.1	47.3	47.4	47.4	47.2	47.0
150	35.6	36.1	36.6	37.2	37.8	38.6	39.3	40.1	40.8	41.5	42.1	42.4	42.7	42.9	43.0	43.0	42.9	42.8	42.7
155	35.0	35.4	35.8	36.1	36.5	36.9	37.3	37.7	38.1	38.4	38.7	38.8	39.0	39.0	39.1	39.1	39.0	39.0	39.0
160	34.0	34.2	34.4	34.6	34.9	35.1	35.3	35.6	35.8	35.9	36.1	36.1	36.1	36.0	36.0	35.9	35.8	35.9	35.9
165	32.7	32.8	32.9	33.0	33.1	33.3	33.4	33.5	33.7	33.8	33.9	33.9	33.9	33.9	33.8	33.8	33.7	33.7	33.7
170	31.5	31.5	31.5	31.6	31.6	31.6	31.6	31.7	31.7	31.7	31.7	31.7	31.6	31.6	31.5	31.5	31.5	31.5	31.5
175	30.3	30.3	30.3	30.3	30.3	30.3	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2
180	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0940A P:11.230W PF:0.9800 Freq:60.00Hz Lamp Flux:800x1 lm		
NAME: LED WALL SCNCES	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--4

UNIT: cd

C(DEG) g (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355			
0	117	117	117	117	117	116	116	116	116	116	116	116	116	116	116			
5	118	117	117	117	117	117	117	117	117	117	117	117	117	117	117			
10	119	119	119	119	119	119	119	119	118	118	118	118	118	118	118			
15	121	121	121	121	120	120	120	120	120	120	119	119	119	119	118			
20	123	123	122	122	122	122	121	121	121	120	120	120	119	119	118			
25	125	125	124	124	124	123	123	122	122	121	121	120	119	119	118			
30	126	126	126	126	125	124	123	123	122	121	120	119	119	118	117			
35	127	127	127	126	125	124	123	122	121	120	119	118	117	116	116			
40	127	127	126	126	125	123	122	120	119	118	116	115	114	113	112			
45	126	125	125	124	123	121	120	118	116	115	113	112	111	110	109			
50	123	122	122	121	119	118	116	114	112	110	108	107	106	104	103			
55	118	118	117	116	115	113	111	109	106	104	103	101	99.7	98.4	97.2			
60	112	111	111	110	108	106	104	102	99.3	97.0	95.2	93.6	92.1	90.7	89.5			
65	104	104	103	103	101	98.7	96.4	94.0	91.5	89.1	87.3	85.6	84.0	82.6	81.2			
70	95.4	95.3	95.0	94.4	92.4	90.2	87.7	85.2	82.5	80.0	78.1	76.3	74.7	73.2	71.8			
75	87.1	87.3	87.1	86.5	84.2	81.6	78.7	75.7	72.7	69.7	67.6	65.7	64.0	62.4	61.1			
80	79.5	79.4	78.9	77.9	75.0	71.8	68.2	64.5	60.8	57.2	54.7	52.5	50.6	48.9	47.5			
85	71.6	70.6	69.2	67.2	63.3	59.0	54.5	49.8	45.2	40.8	37.7	35.0	32.6	30.7	29.1			
90	44.0	42.8	41.3	39.5	36.7	33.8	30.7	27.7	24.8	22.1	20.4	19.0	18.0	17.4	17.1			
95	46.5	45.7	44.6	43.2	41.2	39.0	36.6	34.1	31.5	28.9	26.1	23.4	21.0	19.0	17.3			
100	51.5	51.1	50.5	49.6	47.9	46.0	43.9	41.6	39.2	36.8	34.1	31.5	29.1	27.0	25.3			
105	56.3	56.1	55.7	55.0	53.4	51.5	49.4	47.1	44.8	42.3	39.5	36.8	34.2	32.0	30.2			
110	60.9	60.8	60.3	59.6	57.9	55.8	53.5	51.0	48.4	45.7	42.6	39.6	36.9	34.5	32.6			
115	65.9	65.6	64.9	63.8	61.1	58.1	54.8	51.4	47.9	44.5	41.6	39.0	36.7	34.8	33.4			
120	69.8	69.2	68.2	66.7	63.3	59.5	55.5	51.4	47.3	43.5	40.7	38.4	36.5	35.1	34.1			
125	70.2	68.9	67.3	65.2	61.7	58.0	54.0	50.0	46.2	42.6	40.2	38.2	36.6	35.5	34.7			
130	65.1	63.1	60.9	58.4	55.6	52.8	49.9	47.1	44.4	41.9	40.0	38.4	37.1	36.0	35.3			
135	57.5	56.3	54.9	53.2	51.2	49.1	46.9	44.8	42.7	40.8	39.3	38.0	37.0	36.2	35.6			
140	51.7	50.9	50.0	48.9	47.4	45.8	44.2	42.6	41.1	39.6	38.5	37.5	36.7	36.0	35.6			
145	46.7	46.2	45.6	44.9	43.9	42.9	41.8	40.6	39.5	38.5	37.6	36.9	36.2	35.7	35.3			
150	42.4	42.1	41.8	41.4	40.7	40.1	39.4	38.7	38.0	37.3	36.7	36.2	35.7	35.3	35.0			
155	38.9	38.8	38.6	38.4	38.0	37.6	37.2	36.7	36.3	35.8	35.5	35.1	34.8	34.5	34.3			
160	36.0	36.0	36.0	35.9	35.7	35.5	35.3	35.0	34.7	34.4	34.2	34.0	33.8	33.6	33.4			
165	33.7	33.7	33.7	33.7	33.6	33.5	33.4	33.2	33.1	33.0	32.9	32.7	32.6	32.5	32.4			
170	31.6	31.7	31.7	31.7	31.7	31.7	31.7	31.6	31.6	31.6	31.5	31.5	31.4	31.4	31.4			
175	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.2	30.3	30.3	30.3	30.3	30.3	30.3			
180	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7	29.7			

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:
 Test Date:

g Range: 0 - 180DEG
 g Interval: 0.5DEG
 Test System:EVERFINE GO-2000_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks: