
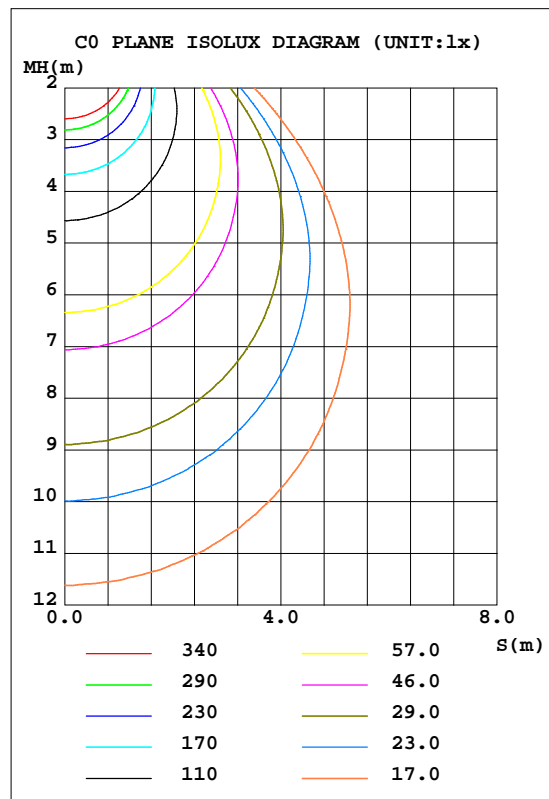


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 83.86 lm/W			
MODEL	7-10DA60AC(60W 4000K)	I _{max} (cd)	2294	S/MH(C0/180)	1.18
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	4972.6	h UP, DN(C0-180)	0.2,50.5
NOMINAL FLUX(lm)	4972.62	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

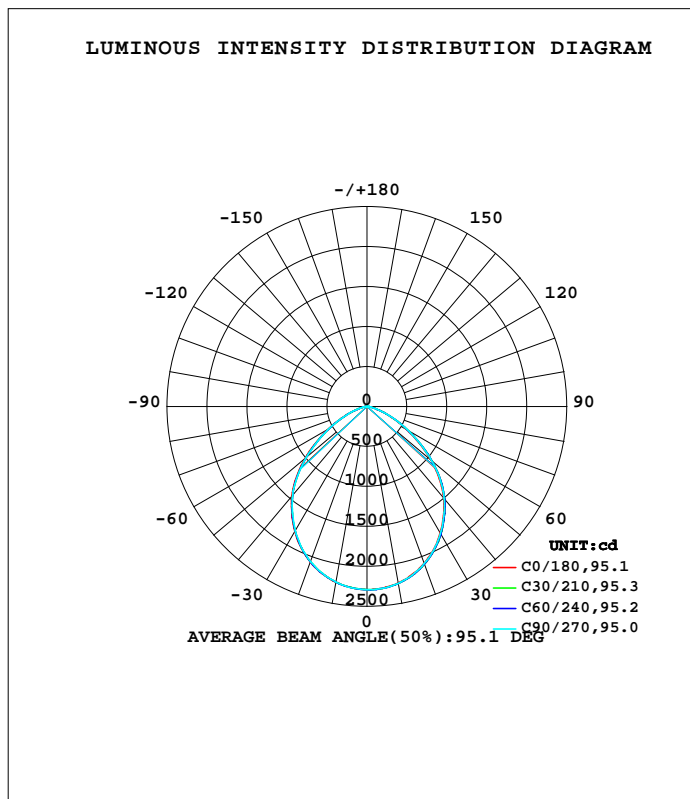

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2644]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	2241	2248	2248	2239	2234	2232	2232	2238	0- 10	216.2	216.2	4.35,4.35
20	2087	2100	2093	2079	2072	2068	2066	2078	10- 20	612.2	828.4	16.7,16.7
30	1832	1847	1840	1815	1808	1798	1794	1816	20- 30	902.4	1731	34.8,34.8
40	1495	1514	1503	1476	1465	1449	1444	1472	30- 40	1033	2764	55.6,55.6
50	1044	1067	1060	1028	1011	992.7	988.9	1024	40- 50	971.9	3736	75.1,75.1
60	572.3	587.7	582.7	558.6	549.2	535.0	533.0	557.3	50- 60	701.7	4438	89.2,89.2
70	226.7	230.9	226.6	212.9	208.0	203.7	205.9	218.0	60- 70	370.0	4808	96.7,96.7
80	53.62	52.70	49.13	48.86	49.81	49.01	49.93	51.72	70- 80	122.0	4930	99.1,99.1
90	0.4511	0.2645	0.2472	0.2726	0.2302	0.4350	0.2301	0.2720	80- 90	22.42	4952	99.6,99.6
100	0.5183	0.6091	0.8096	0.8256	0.7755	0.7499	0.7147	0.7493	90-100	0.4720	4953	99.6,99.6
110	1.301	1.504	1.815	1.868	1.746	1.721	1.796	1.737	100-110	1.242	4954	99.6,99.6
120	2.458	2.679	3.084	3.128	2.955	2.957	3.098	2.992	110-120	2.280	4956	99.7,99.7
130	3.692	3.949	4.378	4.460	4.249	4.226	4.444	4.324	120-130	3.208	4959	99.7,99.7
140	4.621	5.006	5.630	5.571	5.210	5.215	5.636	5.380	130-140	3.684	4963	99.8,99.8
150	5.574	5.917	6.600	6.563	6.036	6.143	6.582	6.355	140-150	3.613	4967	99.9,99.9
160	6.383	6.825	7.384	7.406	6.666	7.060	7.595	7.411	150-160	3.073	4970	99.9,99.9
170	7.234	7.647	8.312	8.326	7.474	7.749	8.472	8.330	160-170	2.130	4972	100,100
180	7.882	8.512	8.720	8.896	8.026	8.231	8.847	8.832	170-180	0.7836	4973	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2644]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

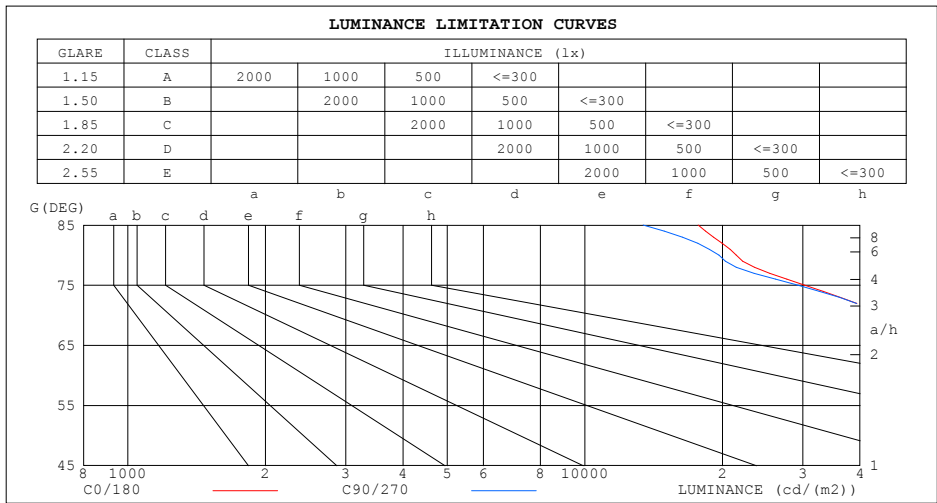

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	17714	13419
80	21454	19650
75	30292	29281
70	46058	46011
65	62193	63516
60	79525	80932
55	96685	98453
50	112894	114497
45	126168	127538


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2644]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.60	.54	.68	.60	.54	.65	.59	.54	.63	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.54	.48	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.39	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.35	.31	.30

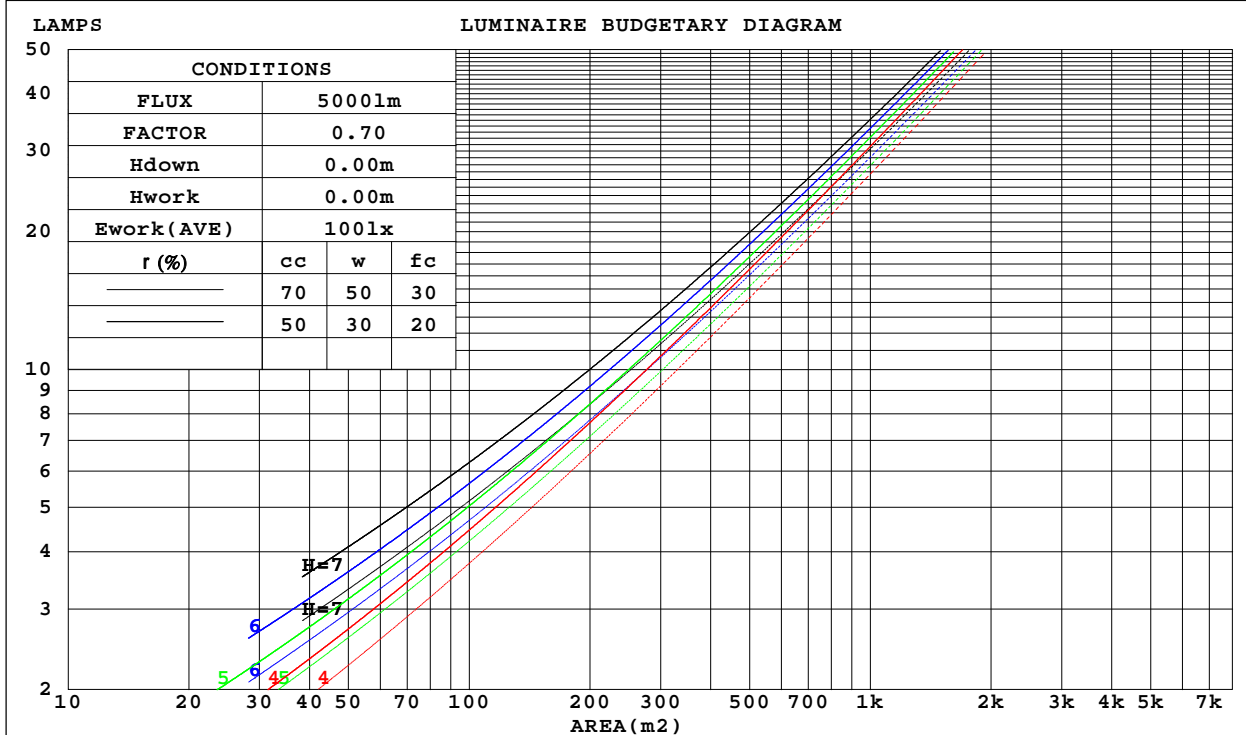

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2644]
 Remarks:

WEC AND CCEC

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.255	.145	.046	.248	.141	.045	.234	.134	.043	.222	.128	.041	.211	.122	.039	
2.0	.247	.136	.042	.241	.133	.041	.230	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.106	.031	.203	.104	.030	.195	.102	.030	.188	.099	.029	.181	.097	.029	
6.0	.195	.098	.028	.191	.096	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.183	.091	.026	.180	.090	.026	.173	.088	.025	.167	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.146	.074	.021	
10.0	.154	.074	.020	.152	.073	.020	.147	.072	.020	.143	.071	.020	.138	.070	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.084	.061	.055	.049	.019	.018	.016	
2.0	.170	.135	.107	.145	.116	.092	.099	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.089	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.120	.073	.039	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.029	.075	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.018	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2644]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.4	28.8	27.7	29.2	29.5	27.2	28.7	27.6	29.0	29.3
3H	28.1	29.5	28.5	29.8	30.2	28.0	29.3	28.4	29.6	30.0
4H	28.3	29.5	28.7	29.9	30.3	28.1	29.3	28.5	29.7	30.1
6H	28.3	29.4	28.7	29.8	30.2	28.1	29.3	28.6	29.6	30.0
8H	28.3	29.4	28.8	29.8	30.2	28.1	29.2	28.6	29.6	30.0
12H	28.3	29.3	28.7	29.7	30.2	28.1	29.1	28.5	29.5	30.0
4H 2H	27.7	28.9	28.1	29.3	29.7	27.5	28.7	27.9	29.1	29.5
3H	28.6	29.6	29.0	30.0	30.4	28.4	29.4	28.8	29.8	30.2
4H	28.8	29.7	29.2	30.1	30.5	28.5	29.4	29.0	29.9	30.3
6H	28.9	29.6	29.3	30.1	30.6	28.6	29.4	29.1	29.8	30.3
8H	28.9	29.6	29.3	30.0	30.5	28.6	29.3	29.1	29.8	30.3
12H	28.9	29.5	29.4	30.0	30.5	28.6	29.2	29.1	29.7	30.2
8H 4H	28.8	29.5	29.3	30.0	30.4	28.5	29.3	29.0	29.7	30.2
6H	28.9	29.5	29.4	30.0	30.5	28.6	29.2	29.1	29.7	30.2
8H	28.9	29.5	29.4	30.0	30.5	28.6	29.2	29.2	29.7	30.2
12H	29.0	29.4	29.5	29.9	30.5	28.6	29.1	29.2	29.6	30.2
12H 4H	28.8	29.4	29.3	29.9	30.4	28.5	29.2	29.0	29.7	30.1
6H	28.9	29.4	29.4	29.9	30.4	28.6	29.1	29.1	29.6	30.2
8H	28.9	29.4	29.4	29.9	30.5	28.6	29.1	29.1	29.6	30.2
CIE190: 2010										

CIE190: 2010
Area: 0.0144 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-07

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2644]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	47	63	53	46	62	52	46	40
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	92	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2644]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

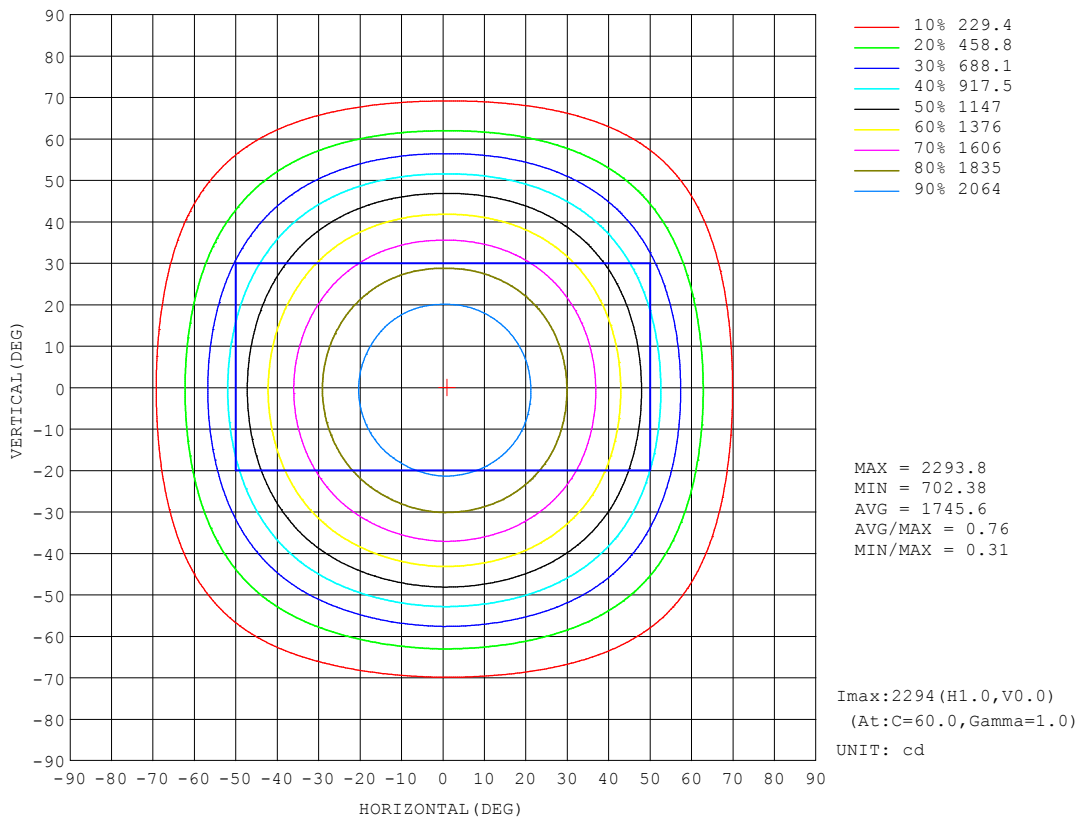


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2644]
 Remarks:

AAI Figure

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:3558 lm

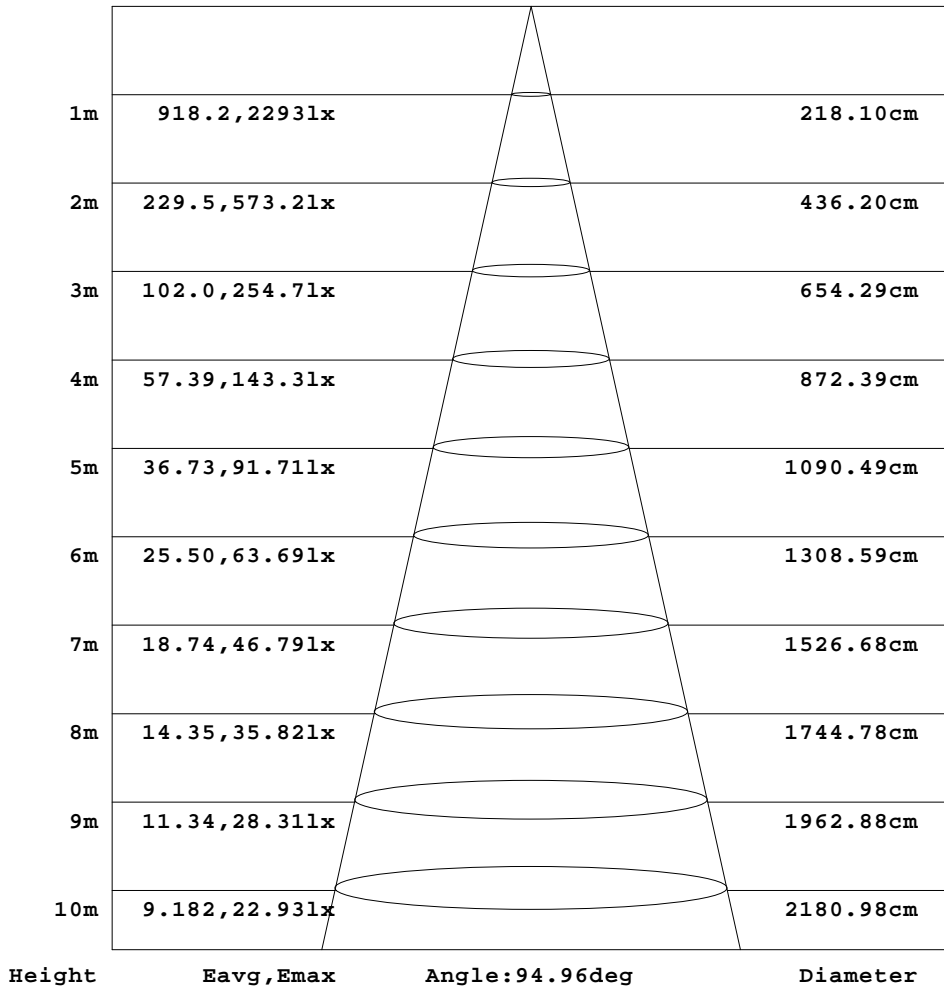


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2644]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

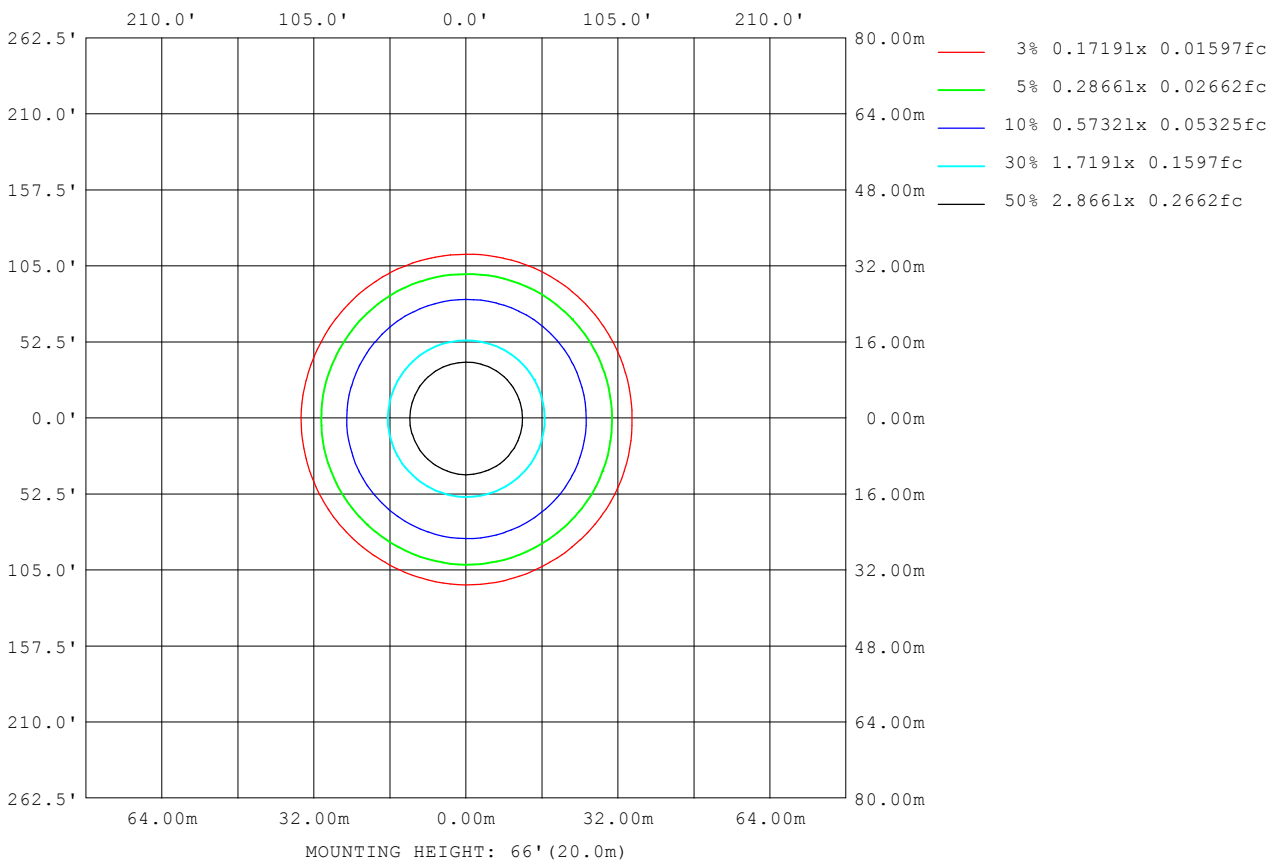

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2644]
 Remarks:

LED Avg.L Report

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	60599
L_0~180(75)av	28693
L_0~180(85)av	16472
L_90~270(65)av	60559
L_90~270(75)av	28385
L_90~270(85)av	13408
L_45(65)av	60501
L_45(75)av	28680
L_45(85)av	14678

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-07

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2644]
Remarks:

Planar Illuminance Curve

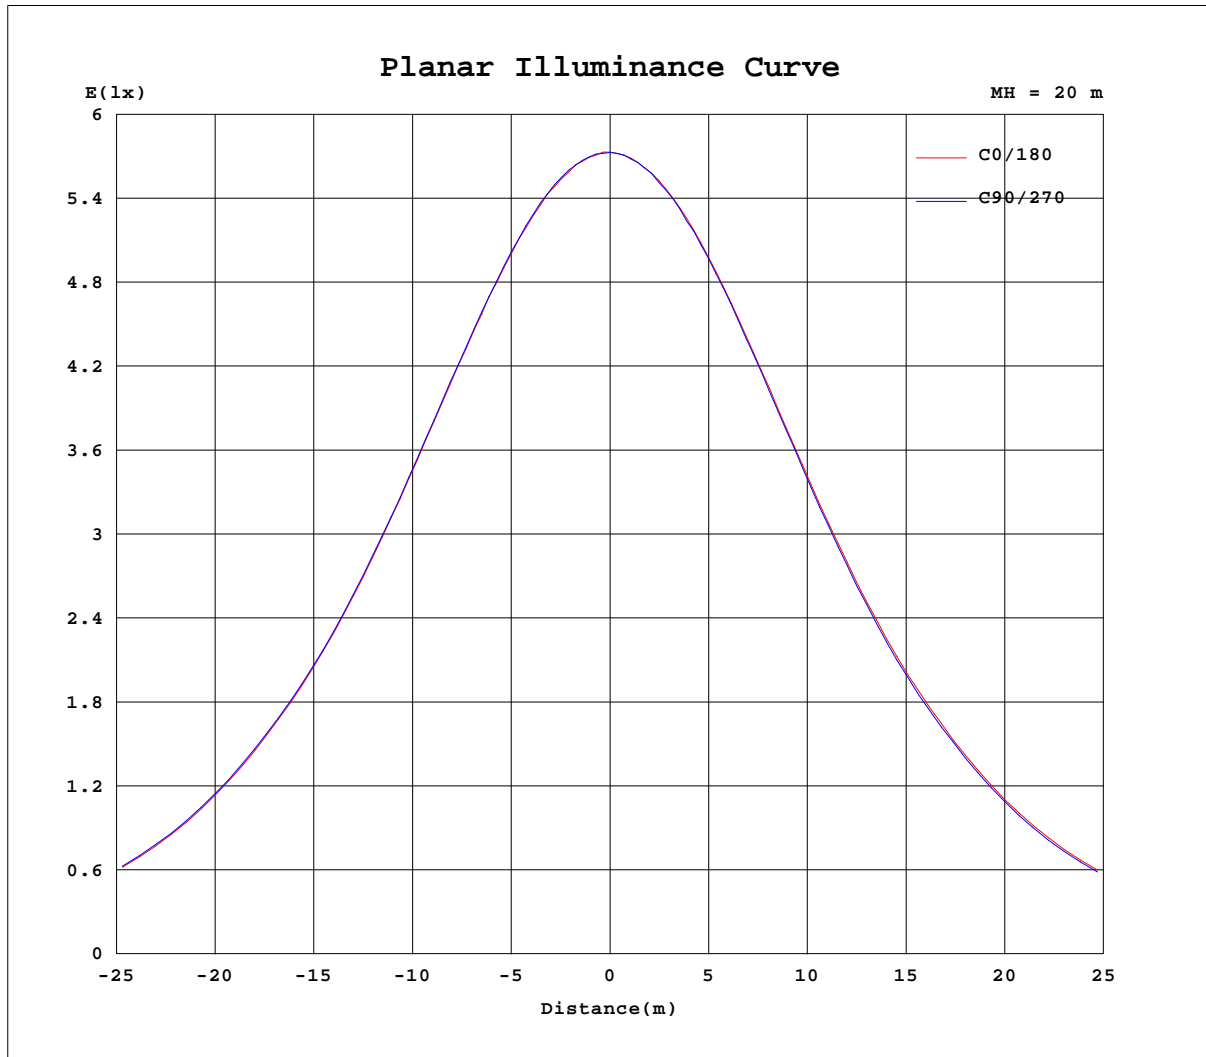

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2644]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.02V I:0.5020A P:59.300W PF:0.9851 Freq:60.00Hz Lamp Flux:4972.62x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2292	2292	2292	2292	2292	2292	2292	2292	2292	2292	2292	2292						
5	2281	2282	2284	2281	2278	2278	2273	2273	2276	2274	2276	2279						
10	2241	2248	2248	2248	2241	2238	2234	2232	2233	2232	2237	2239						
15	2178	2188	2188	2183	2173	2169	2166	2162	2163	2160	2166	2175						
20	2087	2100	2100	2093	2082	2076	2072	2066	2069	2066	2074	2082						
25	1973	1987	1984	1980	1960	1955	1950	1945	1946	1943	1953	1964						
30	1832	1846	1849	1840	1819	1811	1808	1797	1800	1794	1809	1822						
35	1669	1687	1686	1678	1653	1647	1641	1630	1629	1626	1640	1654						
40	1495	1514	1514	1503	1482	1470	1465	1448	1449	1444	1464	1480						
45	1284	1306	1304	1299	1270	1263	1248	1233	1233	1232	1253	1269						
50	1044	1069	1065	1060	1033	1023	1011	993	992	989	1016	1032						
55	798	820	817	813	787	778	770	753	755	751	775	786						
60	572	590	586	583	562	556	549	532	537	533	553	561						
65	378	391	387	387	368	364	359	347	352	351	365	372						
70	227	232	230	227	215	211	208	202	206	206	216	220						
75	113	116	112	109	103	102	101	99.5	102	102	108	111						
80	53.6	54.4	51.0	49.1	48.0	49.7	49.8	47.4	50.7	49.9	52.4	51.0						
85	22.2	22.7	18.6	16.8	16.2	18.8	19.1	15.3	17.8	16.8	19.7	18.5						
90	0.45	0.29	0.24	0.25	0.25	0.30	0.23	0.65	0.22	0.23	0.23	0.31						
95	0.23	0.26	0.39	0.47	0.42	0.54	0.46	0.39	0.43	0.37	0.44	0.35						
100	0.52	0.51	0.71	0.81	0.76	0.89	0.78	0.72	0.78	0.71	0.78	0.71						
105	0.85	0.87	1.17	1.27	1.21	1.38	1.20	1.18	1.23	1.18	1.24	1.12						
110	1.30	1.30	1.70	1.81	1.80	1.93	1.75	1.69	1.76	1.80	1.80	1.68						
115	1.86	1.85	2.30	2.44	2.42	2.58	2.34	2.31	2.38	2.43	2.44	2.31						
120	2.46	2.45	2.90	3.08	3.01	3.24	2.95	2.94	2.98	3.10	3.04	2.94						
125	3.10	3.06	3.59	3.76	3.68	3.97	3.62	3.63	3.64	3.77	3.71	3.69						
130	3.69	3.65	4.25	4.38	4.31	4.62	4.25	4.24	4.21	4.44	4.32	4.33						
135	4.25	4.13	4.90	5.01	4.88	5.20	4.76	4.77	4.72	5.07	4.88	4.80						
140	4.62	4.61	5.40	5.63	5.45	5.70	5.21	5.26	5.17	5.64	5.43	5.33						
145	5.14	5.09	5.90	6.17	5.96	6.22	5.59	5.74	5.63	6.09	5.93	5.91						
150	5.57	5.53	6.31	6.60	6.42	6.71	6.04	6.28	6.01	6.58	6.39	6.32						
155	5.96	5.99	6.73	6.98	6.90	7.10	6.36	6.80	6.49	7.08	6.90	6.82						
160	6.38	6.45	7.20	7.38	7.33	7.48	6.67	7.18	6.94	7.59	7.47	7.35						
165	6.81	6.90	7.63	7.83	7.74	7.89	7.12	7.57	7.28	8.09	7.98	7.86						
170	7.23	7.28	8.02	8.31	8.26	8.39	7.47	7.93	7.57	8.47	8.39	8.27						
175	7.64	7.76	8.49	8.69	8.61	8.75	7.70	8.29	8.00	8.75	8.77	8.63						
180	7.88	8.37	8.66	8.72	8.86	8.93	8.03	8.25	8.22	8.85	8.82	8.85						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-07

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2644]
 Remarks: