
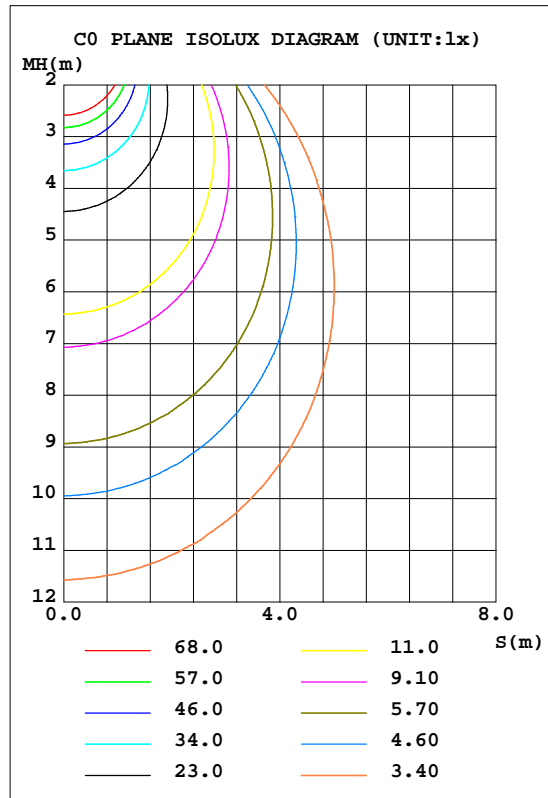


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.34lx1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 87.02 lm/W			
MABELLRKR-6D12AC-WH(5000K)		I _{max} (cd)	455.2	S/MH(C0/180)	1.15
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.13
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	996.34	h UP, DN(C0-180)	0.2,49.8
NOMINAL FLUX(lm)	996.341	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.8
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

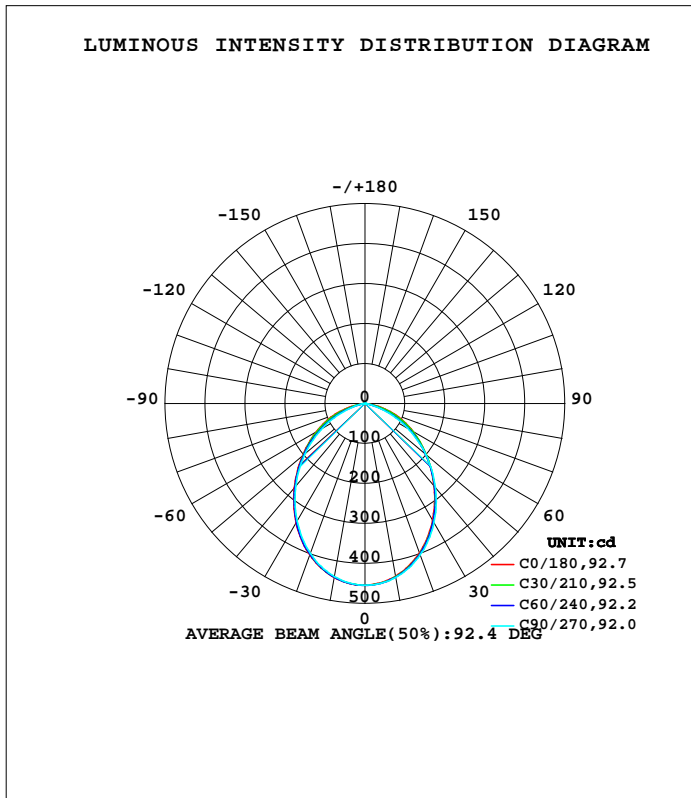

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0943]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	438.8	440.8	442.1	442.2	442.0	441.4	439.6	439.5	0- 10	42.74	42.74	4.29,4.29
20	397.7	400.7	403.4	403.6	403.1	402.0	399.6	399.1	10- 20	119.3	162.0	16.3,16.3
30	338.1	341.2	345.2	345.2	345.0	342.7	339.8	339.7	20- 30	171.8	333.9	33.5,33.5
40	268.7	271.0	274.4	275.2	275.1	272.7	269.4	270.5	30- 40	192.3	526.2	52.8,52.8
50	199.9	199.8	199.3	202.8	204.6	201.0	195.8	199.9	40- 50	182.2	708.4	71.1,71.1
60	137.7	131.2	122.9	132.3	140.0	132.2	122.0	131.9	50- 60	148.2	856.5	86,86
70	78.75	64.56	50.25	63.56	79.35	65.22	50.57	65.13	60- 70	96.75	953.3	95.7,95.7
80	15.55	10.05	4.929	9.247	14.92	9.615	4.697	9.558	70- 80	36.58	989.9	99.4,99.4
90	0.0278	0.0001	0.0001	0.0001	0	0.0067	0.0002	0.0034	80- 90	2.618	992.5	99.6,99.6
100	0.1017	0.0703	0.1469	0.0797	0.1340	0.0926	0.0572	0.0542	90-100	0.0326	992.5	99.6,99.6
110	0.2547	0.2776	0.3892	0.2901	0.3253	0.3064	0.2741	0.2393	100-110	0.1953	992.7	99.6,99.6
120	0.4650	0.5201	0.6953	0.5611	0.5291	0.5489	0.5419	0.4783	110-120	0.4084	993.1	99.7,99.7
130	0.7262	0.7562	0.9951	0.7878	0.8159	0.7945	0.8033	0.7302	120-130	0.5942	993.7	99.7,99.7
140	0.9623	0.9604	1.231	1.068	1.007	1.043	1.007	0.9503	130-140	0.6990	994.4	99.8,99.8
150	1.223	1.168	1.403	1.352	1.198	1.232	1.237	1.180	140-150	0.7087	995.1	99.9,99.9
160	1.370	1.396	1.575	1.547	1.345	1.461	1.498	1.339	150-160	0.6203	995.8	99.9,99.9
170	1.523	1.574	1.664	1.646	1.695	1.634	1.645	1.566	160-170	0.4303	996.2	100,100
180	1.753	1.768	1.716	1.700	1.753	1.841	1.779	1.732	170-180	0.1592	996.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0943]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.34lx1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

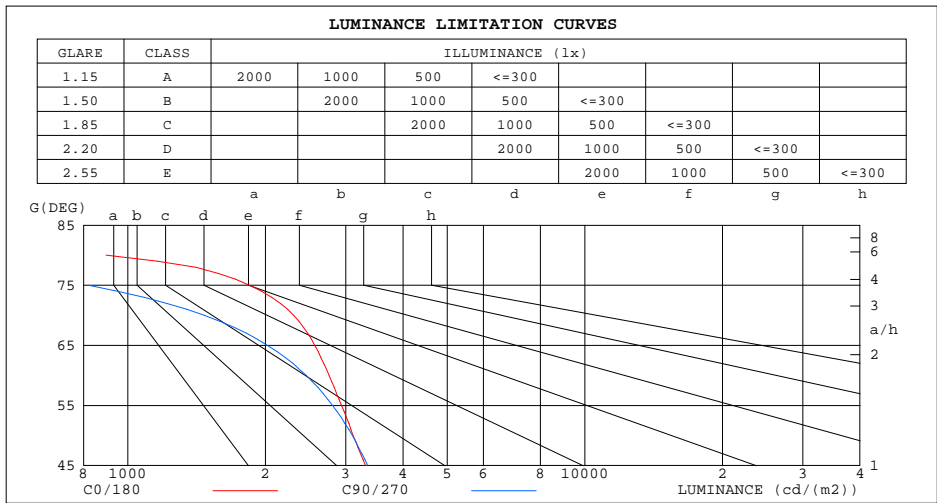

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	172	134
80	896	284
75	1847	820
70	2305	1469
65	2564	2021
60	2756	2458
55	2936	2808
50	3112	3101
45	3315	3352


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0943]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.34lx1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.01	.97	.00	.97	.94	.96	.93	.91	.92	.90	.89	.87
2.0	.94	.88	.83	.92	.86	.82	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.83	.76	.70	.82	.75	.69	.79	.73	.68	.76	.71	.67	.74	.69	.66	.64
4.0	.75	.67	.60	.73	.66	.60	.71	.64	.59	.68	.63	.58	.66	.61	.57	.55
5.0	.67	.59	.53	.66	.58	.52	.64	.57	.52	.62	.56	.51	.60	.55	.51	.49
6.0	.61	.52	.46	.60	.52	.46	.58	.51	.46	.56	.50	.45	.55	.49	.45	.43
7.0	.55	.47	.41	.55	.47	.41	.53	.46	.41	.52	.45	.41	.50	.45	.40	.38
8.0	.51	.43	.37	.50	.42	.37	.49	.42	.37	.48	.41	.37	.46	.41	.36	.35
9.0	.47	.39	.34	.46	.39	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.31
10.0	.43	.36	.31	.43	.36	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.29

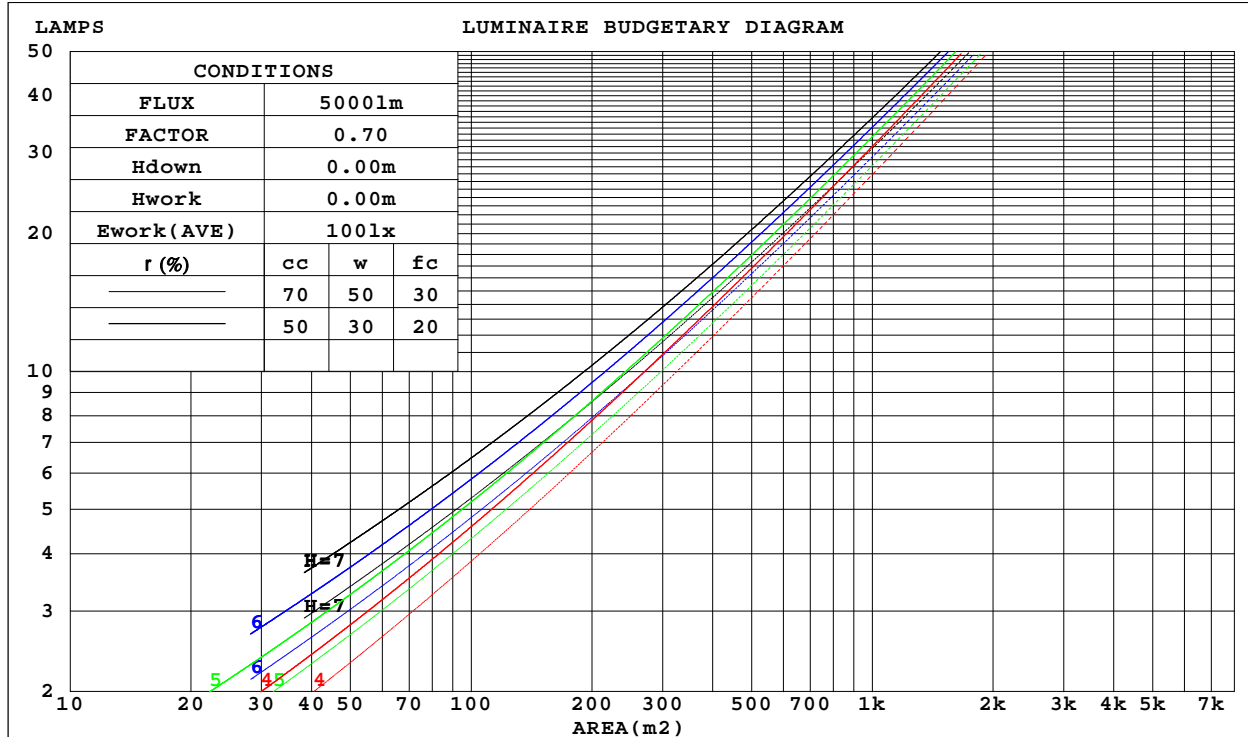

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0943]
 Remarks:

WEC AND CCEC

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.341x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.265	.151	.048	.258	.147	.047	.245	.140	.045	.232	.134	.043	.221	.128	.041	
2.0	.258	.141	.043	.251	.138	.043	.240	.133	.041	.229	.129	.040	.219	.124	.039	
3.0	.243	.129	.039	.238	.127	.038	.228	.123	.037	.218	.120	.037	.209	.116	.036	
4.0	.228	.118	.035	.223	.117	.035	.214	.114	.034	.206	.110	.033	.198	.107	.033	
5.0	.213	.109	.031	.209	.107	.031	.201	.105	.031	.193	.102	.030	.186	.100	.030	
6.0	.199	.100	.029	.196	.099	.028	.188	.097	.028	.182	.094	.028	.175	.092	.027	
7.0	.187	.092	.026	.183	.091	.026	.177	.090	.026	.171	.088	.026	.165	.086	.025	
8.0	.176	.086	.024	.173	.085	.024	.167	.083	.024	.161	.082	.024	.156	.080	.023	
9.0	.165	.080	.022	.163	.079	.022	.157	.078	.022	.153	.076	.022	.148	.075	.022	
10.0	.156	.075	.021	.154	.074	.021	.149	.073	.021	.145	.072	.020	.140	.071	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.159	.141	.154	.137	.121	.105	.094	.084	.061	.054	.049	.019	.018	.016	
2.0	.171	.135	.105	.146	.116	.091	.100	.080	.063	.058	.047	.037	.019	.015	.012	
3.0	.162	.117	.081	.139	.101	.070	.096	.070	.049	.055	.041	.029	.018	.013	.010	
4.0	.155	.104	.065	.133	.089	.056	.091	.062	.039	.053	.037	.023	.017	.012	.008	
5.0	.147	.093	.053	.127	.080	.046	.087	.056	.032	.050	.033	.019	.016	.011	.006	
6.0	.140	.084	.044	.121	.073	.039	.083	.051	.027	.048	.030	.016	.016	.010	.005	
7.0	.134	.077	.038	.115	.067	.033	.080	.047	.023	.046	.028	.014	.015	.009	.005	
8.0	.128	.072	.033	.110	.062	.029	.076	.044	.020	.044	.026	.012	.014	.008	.004	
9.0	.122	.067	.029	.105	.058	.026	.073	.041	.018	.042	.024	.011	.014	.008	.004	
10.0	.117	.062	.026	.101	.054	.023	.070	.038	.016	.041	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0943]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.34lx1 lm										
NAME: LED DOWNLIGHT					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.: 0.1*0.1			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.7	17.2	16.0	17.5	17.8	15.2	16.7	15.6	17.0	17.4
3H	17.2	18.6	17.6	18.9	19.3	16.1	17.5	16.5	17.8	18.2
4H	17.7	19.0	18.1	19.3	19.7	16.2	17.5	16.6	17.9	18.2
6H	17.9	19.0	18.3	19.4	19.8	16.2	17.4	16.6	17.7	18.1
8H	17.8	19.0	18.3	19.4	19.8	16.2	17.3	16.6	17.7	18.1
12H	17.8	18.9	18.3	19.3	19.7	16.1	17.2	16.6	17.6	18.0
4H 2H	16.1	17.4	16.5	17.7	18.1	15.7	17.0	16.1	17.4	17.7
3H	17.9	18.9	18.3	19.3	19.7	16.8	17.8	17.2	18.2	18.6
4H	18.4	19.3	18.8	19.8	20.2	16.9	17.8	17.3	18.3	18.7
6H	18.6	19.4	19.1	19.9	20.3	16.9	17.7	17.4	18.2	18.6
8H	18.6	19.4	19.1	19.8	20.3	16.8	17.6	17.3	18.1	18.5
12H	18.6	19.2	19.1	19.7	20.2	16.8	17.5	17.3	18.0	18.5
8H 4H	18.4	19.2	18.9	19.6	20.1	17.0	17.8	17.5	18.2	18.7
6H	18.7	19.3	19.2	19.8	20.3	17.0	17.6	17.5	18.1	18.6
8H	18.6	19.2	19.2	19.7	20.2	17.0	17.5	17.5	18.0	18.5
12H	18.6	19.1	19.1	19.6	20.2	16.9	17.4	17.4	17.9	18.5
12H 4H	18.4	19.1	18.9	19.6	20.0	17.0	17.7	17.5	18.2	18.6
6H	18.6	19.2	19.2	19.7	20.2	17.0	17.5	17.5	18.0	18.6
8H	18.6	19.1	19.1	19.6	20.2	16.9	17.4	17.5	17.9	18.5
CIE190: 2010										

CIE190: 2010
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0943]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.34lx1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	62	51	45	61	51	45	60	51	45	39
0.80	72	62	55	71	61	55	70	60	54	48
1.00	81	71	64	79	70	64	77	71	63	57
1.25	87	78	72	86	77	71	83	76	70	64
1.50	92	83	77	90	82	77	88	81	76	69
2.00	98	91	85	97	90	84	93	88	83	76
2.50	102	95	90	100	94	89	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	104	101	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0943]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.34lx1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

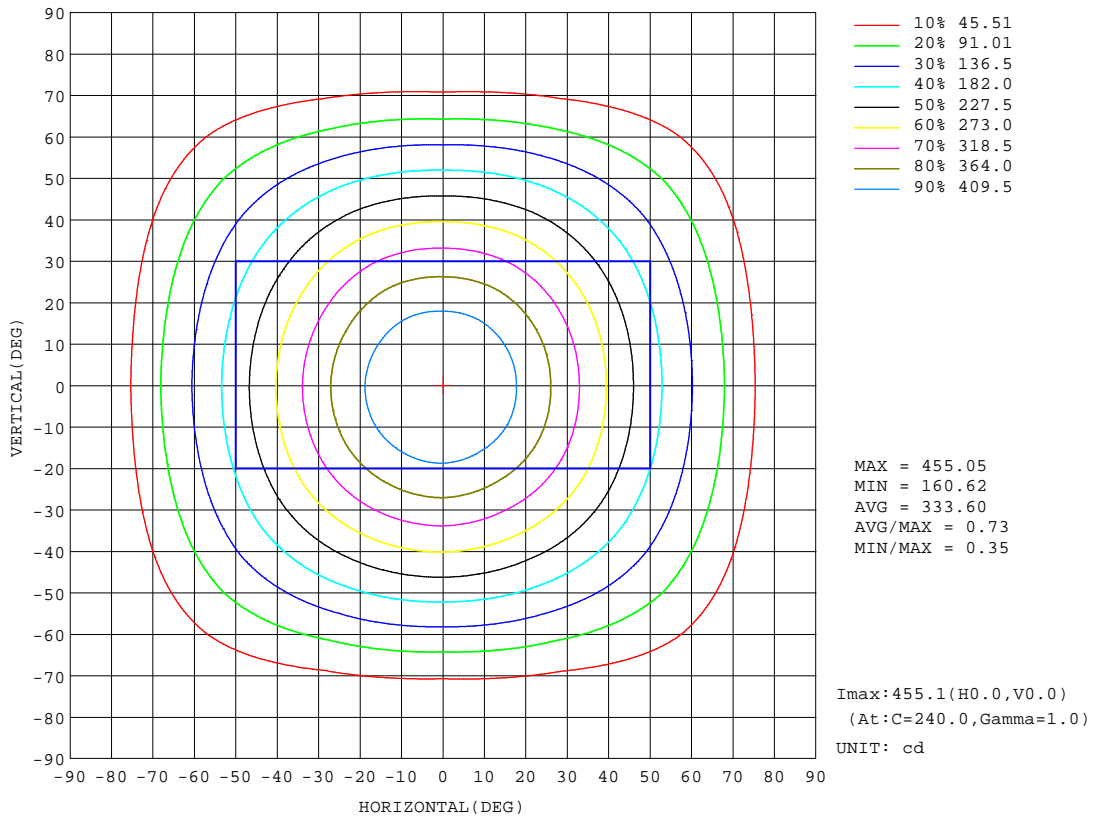


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0943]
 Remarks:

AAI Figure

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.34lx1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Flux out:638.4 lm

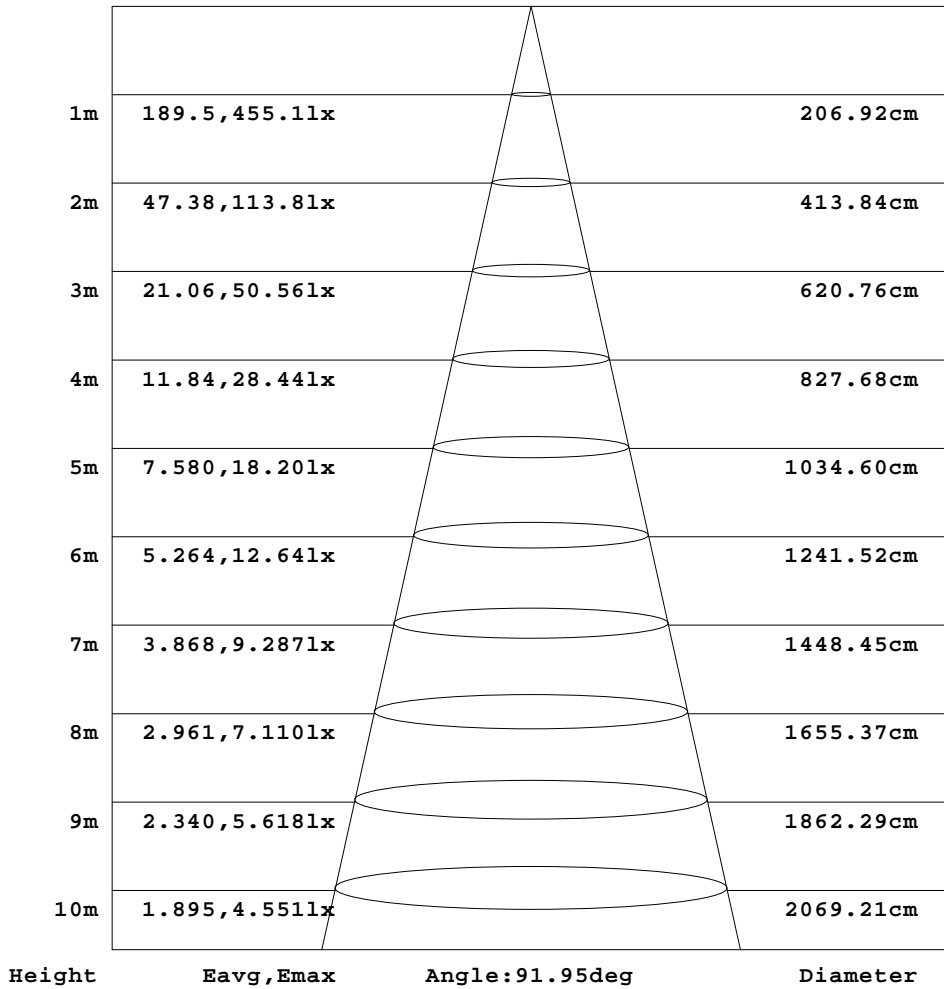


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0943]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.34lx1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

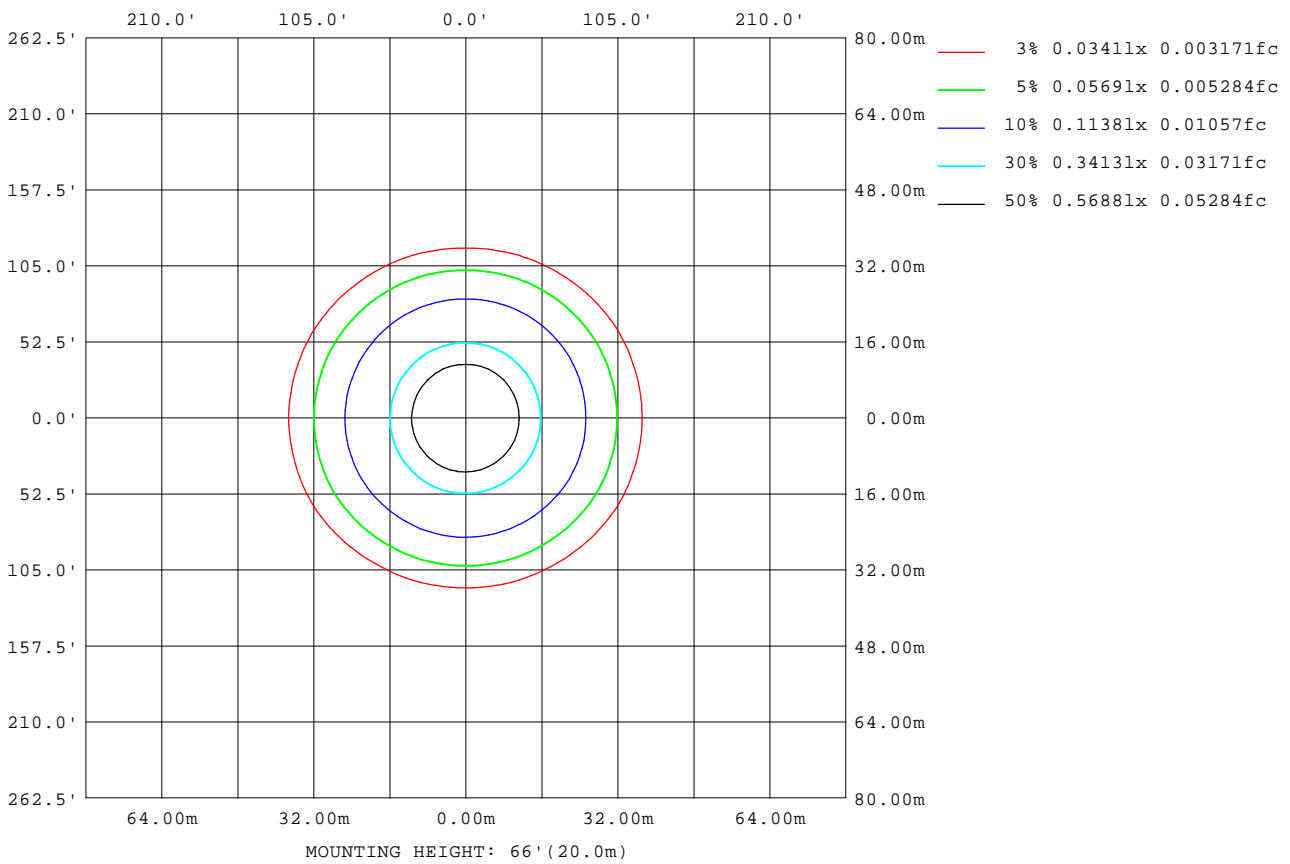

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0943]
 Remarks:

LED Avg.L Report

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.341x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2582
L_0~180(75)av	1843
L_0~180(85)av	167
L_90~270(65)av	2021
L_90~270(75)av	814
L_90~270(85)av	134
L_45(65)av	2324
L_45(75)av	1272
L_45(85)av	156

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0943]
Remarks:

Planar Illuminance Curve

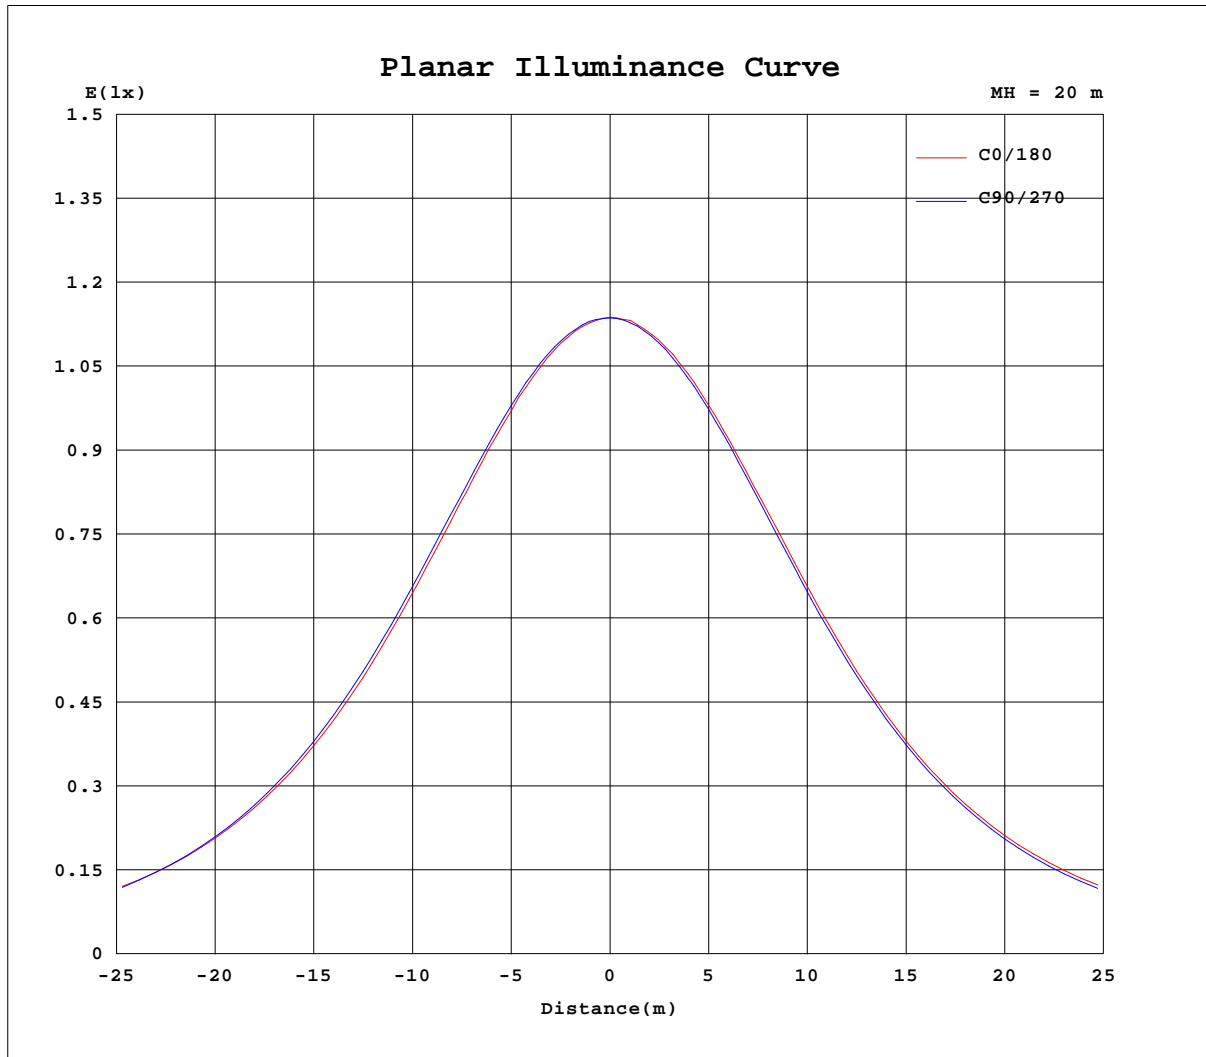

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0943]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.95V I:0.1071A P:11.450W PF:0.8448 Freq:60.00Hz Lamp Flux:996.341x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	455	455	455	455	455	455	455	455	455	455	455	455						
5	450	451	451	452	452	452	451	451	452	450	451	451						
10	439	440	441	442	442	443	442	442	441	440	440	439						
15	421	423	424	426	425	426	426	424	425	422	423	422						
20	398	400	401	403	403	404	403	402	402	400	400	398						
25	370	372	373	377	376	377	376	374	375	372	373	371						
30	338	341	341	345	345	346	345	342	343	340	341	339						
35	304	307	307	311	310	312	311	308	309	305	307	305						
40	269	271	271	274	274	276	275	272	273	269	271	270						
45	234	236	234	237	237	240	239	237	237	233	235	235						
50	200	201	198	199	200	205	205	202	200	196	199	201						
55	168	168	162	161	164	171	172	169	164	159	163	168						
60	138	136	126	123	127	138	140	136	128	122	128	136						
65	108	105	90.6	85.4	90.0	105	110	105	92.6	85.4	92.3	105						
70	78.8	73.3	55.8	50.3	54.8	72.3	79.3	72.6	57.9	50.6	57.6	72.6						
75	47.8	41.7	25.2	21.2	24.1	40.1	47.6	40.5	26.3	20.9	26.1	40.7						
80	15.6	14.0	6.09	4.93	5.57	12.9	14.9	12.9	6.37	4.70	6.11	13.0						
85	1.50	1.65	1.17	1.17	1.15	1.50	1.42	1.40	1.27	1.17	1.21	1.49						
90	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.01						
95	0.02	0.04	0.00	0.06	0.00	0.04	0.06	0.00	0.05	0.00	0.01	0.00						
100	0.10	0.13	0.01	0.15	0.03	0.13	0.13	0.05	0.13	0.06	0.07	0.04						
105	0.17	0.23	0.10	0.26	0.12	0.24	0.23	0.15	0.24	0.16	0.17	0.12						
110	0.25	0.36	0.20	0.39	0.24	0.34	0.33	0.25	0.36	0.27	0.27	0.21						
115	0.36	0.49	0.31	0.54	0.38	0.49	0.43	0.36	0.50	0.41	0.39	0.33						
120	0.46	0.62	0.42	0.70	0.52	0.61	0.53	0.47	0.63	0.54	0.50	0.45						
125	0.60	0.75	0.52	0.84	0.62	0.73	0.69	0.59	0.75	0.68	0.63	0.60						
130	0.73	0.87	0.64	1.00	0.73	0.84	0.82	0.71	0.87	0.80	0.74	0.72						
135	0.86	0.97	0.75	1.11	0.87	1.00	0.94	0.82	1.03	0.89	0.84	0.82						
140	0.96	1.06	0.86	1.23	1.01	1.13	1.01	0.93	1.16	1.01	0.96	0.94						
145	1.06	1.17	0.96	1.33	1.14	1.28	1.10	1.03	1.23	1.14	1.07	1.05						
150	1.22	1.27	1.07	1.40	1.30	1.40	1.20	1.14	1.32	1.24	1.18	1.18						
155	1.34	1.40	1.18	1.49	1.43	1.51	1.25	1.25	1.44	1.35	1.29	1.24						
160	1.37	1.51	1.28	1.58	1.50	1.59	1.34	1.38	1.55	1.50	1.40	1.28						
165	1.45	1.58	1.37	1.65	1.55	1.64	1.50	1.47	1.62	1.60	1.51	1.43						
170	1.52	1.64	1.51	1.66	1.65	1.65	1.70	1.59	1.67	1.65	1.64	1.49						
175	1.67	1.73	1.62	1.72	1.77	1.60	1.80	1.71	1.70	1.70	1.69	1.65						
180	1.75	1.77	1.76	1.72	1.62	1.78	1.75	1.79	1.90	1.78	1.74	1.72						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0943]
 Remarks: