
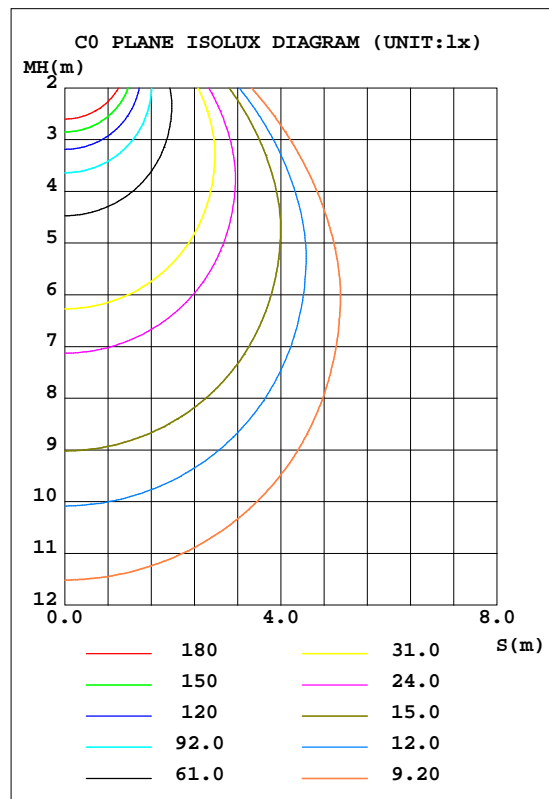


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 86.79 lm/W			
AMODEDL7-6DA30AC(30W 4000K)		I _{max} (cd)	1221	S/MH(C0/180)	1.18
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	2577.7	h UP, DN(C0-180)	0.2,48.8
NOMINAL FLUX(lm)	2577.7	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.8
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

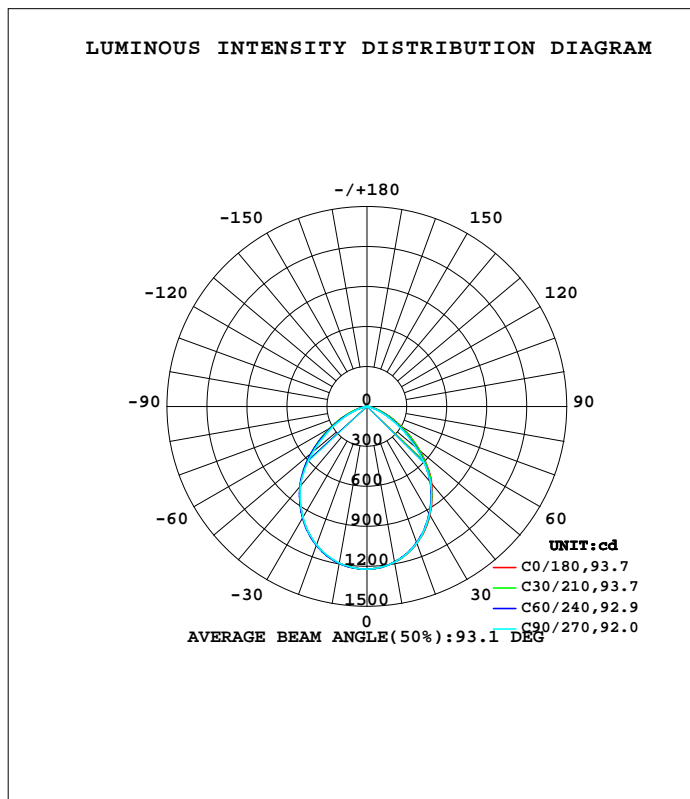

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2299]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1188	1186	1187	1190	1194	1196	1193	1193	0- 10	115.1	115.1	4.46,4.46
20	1095	1089	1091	1099	1107	1109	1105	1103	10- 20	324.7	439.8	17.1,17.1
30	943.8	935.5	936.3	949.2	962.8	966.3	961.4	956.7	20- 30	474.7	914.5	35.5,35.5
40	756.3	743.8	740.1	762.2	779.6	783.4	776.8	769.7	30- 40	538.0	1453	56.4,56.4
50	519.4	501.7	482.3	517.3	546.1	548.8	529.4	530.9	40- 50	498.5	1951	75.7,75.7
60	291.2	270.1	243.4	277.2	312.1	307.9	280.4	291.4	50- 60	356.9	2308	89.5,89.5
70	122.2	103.7	83.03	102.9	128.3	121.2	102.4	115.5	60- 70	189.1	2497	96.9,96.9
80	25.97	21.67	18.27	20.92	24.28	23.03	22.14	24.97	70- 80	60.75	2558	99.2,99.2
90	0.2069	0.0809	0	0.0366	0.0244	0.0767	0.0977	0.0504	80- 90	9.180	2567	99.6,99.6
100	0.2010	0.3425	0.2498	0.2578	0.3387	0.3062	0.2172	0.2580	90-100	0.1388	2567	99.6,99.6
110	0.7003	0.9024	0.7815	0.7935	0.8385	0.8503	0.7804	0.7978	100-110	0.5560	2568	99.6,99.6
120	1.320	1.616	1.547	1.491	1.459	1.576	1.473	1.519	110-120	1.142	2569	99.7,99.7
130	2.045	2.313	2.304	2.220	2.361	2.321	2.270	2.220	120-130	1.690	2570	99.7,99.7
140	2.593	2.889	2.883	2.828	3.022	2.954	2.874	2.873	130-140	1.988	2572	99.8,99.8
150	3.157	3.421	3.415	3.401	3.634	3.462	3.333	3.389	140-150	1.970	2574	99.9,99.9
160	3.794	3.937	4.035	3.941	4.044	4.029	3.929	3.864	150-160	1.693	2576	99.9,99.9
170	4.213	4.336	4.412	4.320	4.375	4.428	4.163	4.216	160-170	1.167	2577	100,100
180	4.664	4.650	4.928	4.714	4.616	4.908	4.783	4.634	170-180	0.4245	2578	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2299]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

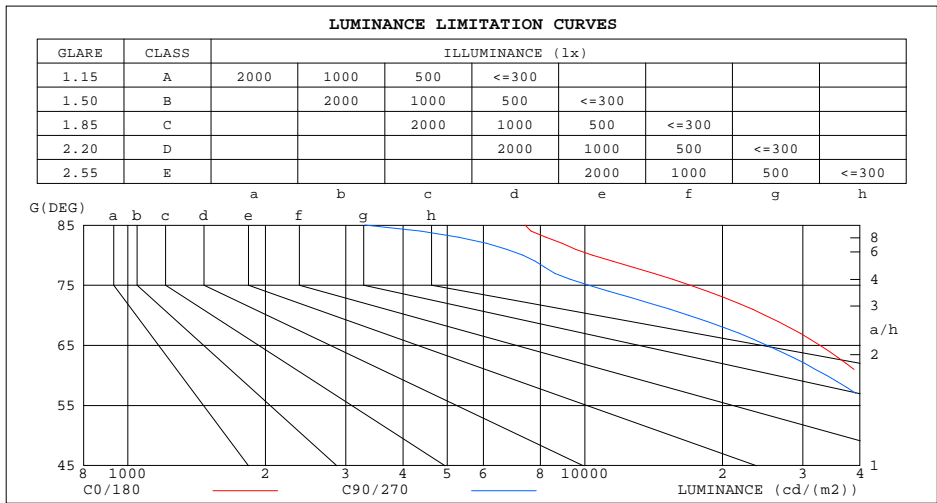

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	7398	3302
80	10387	7310
75	17016	10195
70	24815	16868
65	32717	25041
60	40448	33832
55	48395	42963
50	56126	52133
45	63273	60369


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2299]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	1.00	1.05	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.90	.88
2.0	.95	.89	.85	.93	.88	.84	.90	.85	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.85	.78	.72	.83	.77	.72	.81	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.69	.63	.75	.68	.62	.73	.66	.61	.70	.65	.60	.68	.64	.60	.58
5.0	.69	.61	.55	.68	.60	.55	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.54	.49	.62	.54	.48	.60	.53	.48	.58	.52	.48	.57	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.43	.52	.47	.42	.40
8.0	.52	.45	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

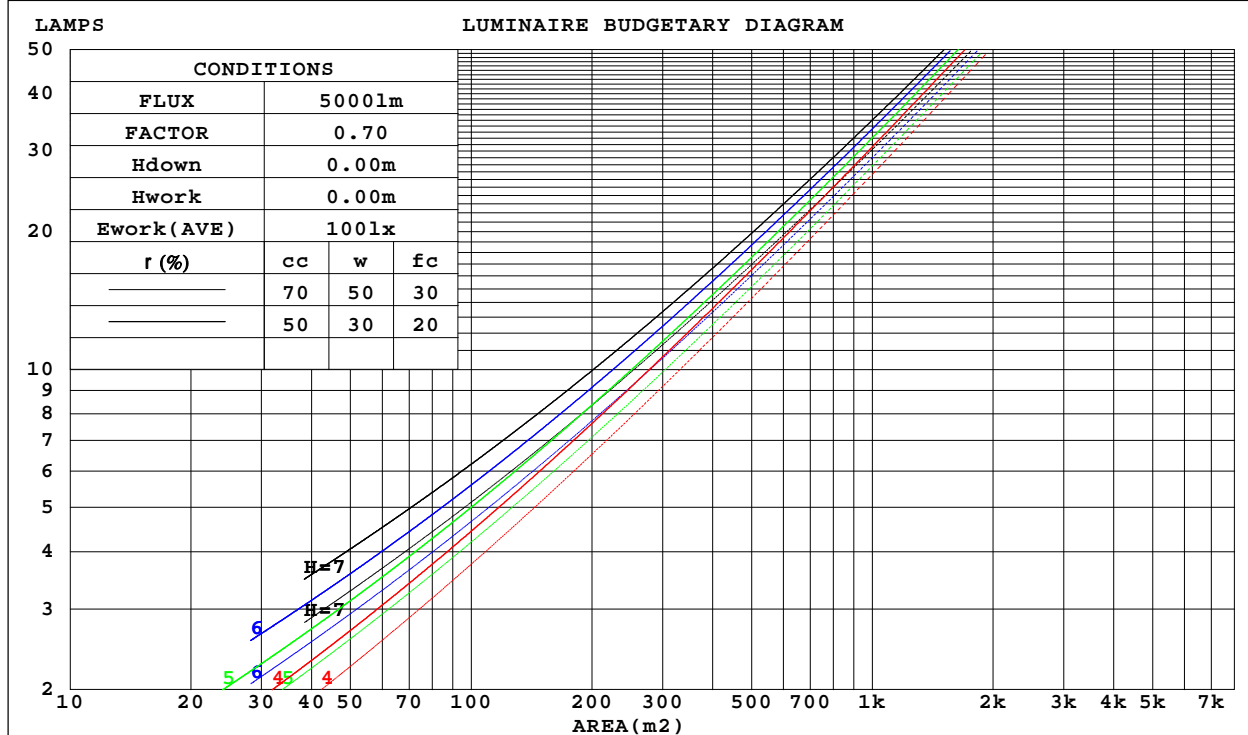

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2299]
 Remarks:

WEC AND CCEC

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.252	.143	.045	.245	.140	.044	.232	.133	.042	.220	.127	.041	.208	.121	.039	
2.0	.245	.134	.041	.239	.132	.041	.228	.127	.039	.217	.122	.038	.207	.117	.037	
3.0	.233	.124	.037	.228	.122	.037	.217	.118	.036	.208	.114	.035	.199	.110	.034	
4.0	.219	.114	.034	.215	.112	.033	.206	.109	.033	.197	.106	.032	.190	.103	.031	
5.0	.206	.105	.030	.202	.104	.030	.194	.101	.030	.186	.098	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	.170	.089	.027	
7.0	.182	.090	.026	.179	.089	.025	.172	.087	.025	.166	.085	.025	.161	.084	.025	
8.0	.172	.084	.024	.169	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.074	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.060	.055	.049	.019	.018	.016	
2.0	.169	.135	.107	.145	.117	.092	.099	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.119	.073	.039	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.132	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.126	.072	.034	.109	.062	.029	.075	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2299]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.2	25.1	26.5	26.8	23.9	25.4	24.3	25.7	26.0
3H	25.6	26.9	26.0	27.3	27.6	24.5	25.8	24.9	26.1	26.5
4H	25.8	27.0	26.2	27.4	27.8	24.5	25.8	25.0	26.1	26.5
6H	25.8	27.0	26.3	27.3	27.7	24.5	25.7	25.0	26.0	26.4
8H	25.8	26.9	26.3	27.3	27.7	24.5	25.6	25.0	26.0	26.4
12H	25.8	26.8	26.3	27.2	27.7	24.5	25.5	24.9	25.9	26.3
4H 2H	25.0	26.2	25.4	26.6	27.0	24.3	25.5	24.7	25.9	26.3
3H	26.0	27.0	26.4	27.4	27.8	25.0	26.0	25.4	26.4	26.8
4H	26.2	27.1	26.7	27.6	28.0	25.0	25.9	25.5	26.4	26.8
6H	26.3	27.1	26.8	27.5	28.0	25.1	25.8	25.5	26.3	26.8
8H	26.3	27.0	26.8	27.5	28.0	25.1	25.8	25.5	26.2	26.7
12H	26.3	26.9	26.8	27.4	27.9	25.0	25.7	25.5	26.2	26.6
8H 4H	26.2	26.9	26.7	27.4	27.9	25.1	25.8	25.5	26.2	26.7
6H	26.3	26.9	26.8	27.4	27.9	25.1	25.7	25.6	26.2	26.7
8H	26.3	26.9	26.8	27.4	27.9	25.1	25.6	25.6	26.1	26.6
12H	26.3	26.8	26.9	27.3	27.9	25.1	25.6	25.6	26.1	26.6
12H 4H	26.2	26.8	26.7	27.3	27.8	25.0	25.7	25.5	26.2	26.7
6H	26.3	26.8	26.8	27.3	27.8	25.1	25.6	25.6	26.1	26.6
8H	26.3	26.8	26.8	27.3	27.9	25.1	25.6	25.6	26.1	26.6
CIE190: 2010										

CIE190: 2010
Area: 0.0144 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2299]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	53	47	41
0.80	74	64	58	73	64	57	72	63	57	51
1.00	83	73	67	81	72	66	79	73	66	60
1.25	89	80	74	88	80	74	85	78	73	67
1.50	94	86	80	92	85	79	89	83	78	72
2.00	100	93	88	98	92	87	95	89	85	78
2.50	103	97	92	101	95	91	97	93	89	81
3.00	106	100	96	104	99	95	100	96	92	85
4.00	109	104	101	107	103	99	103	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.700m [K=1.2299]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

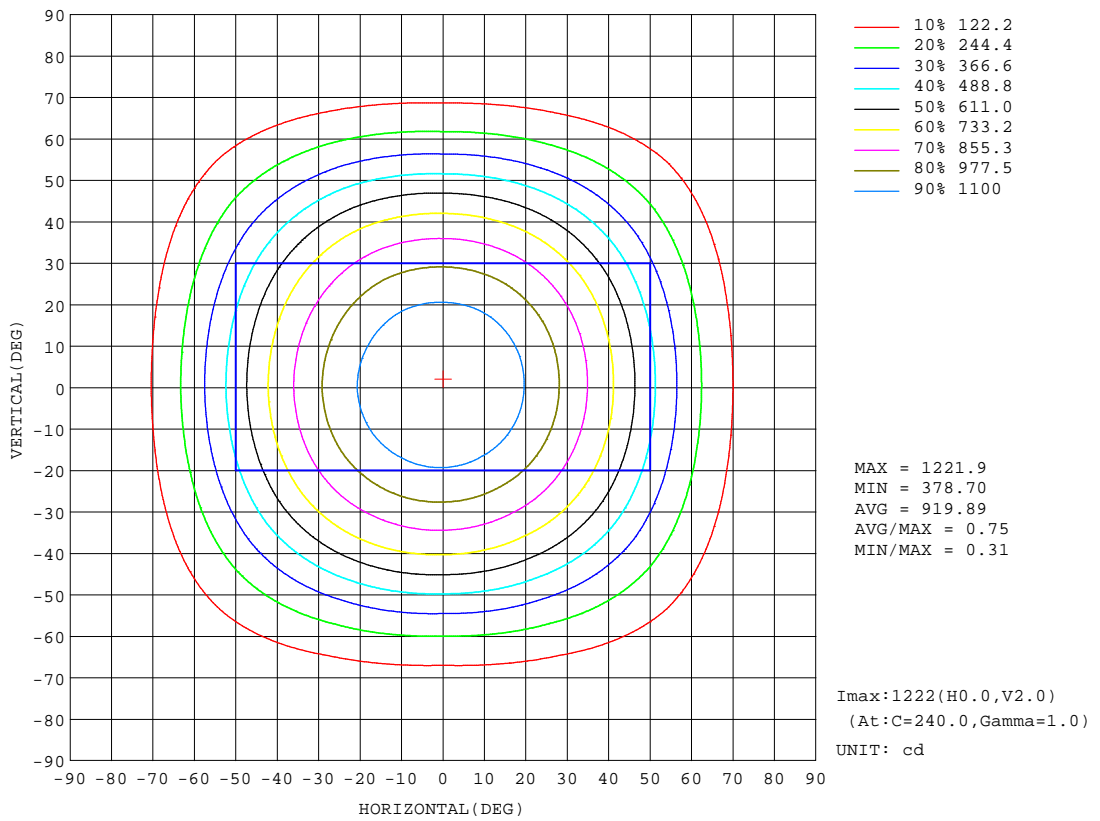


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2299]
 Remarks:

AAI Figure

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:1813 lm

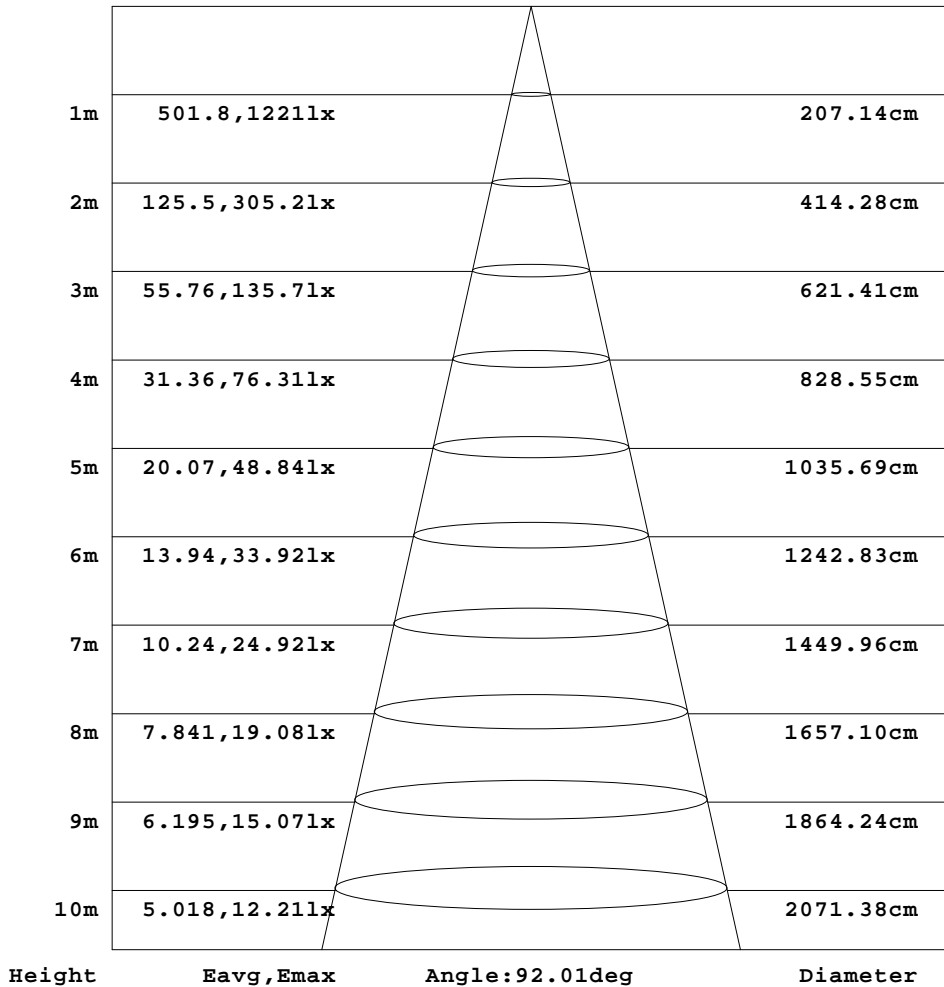


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2299]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

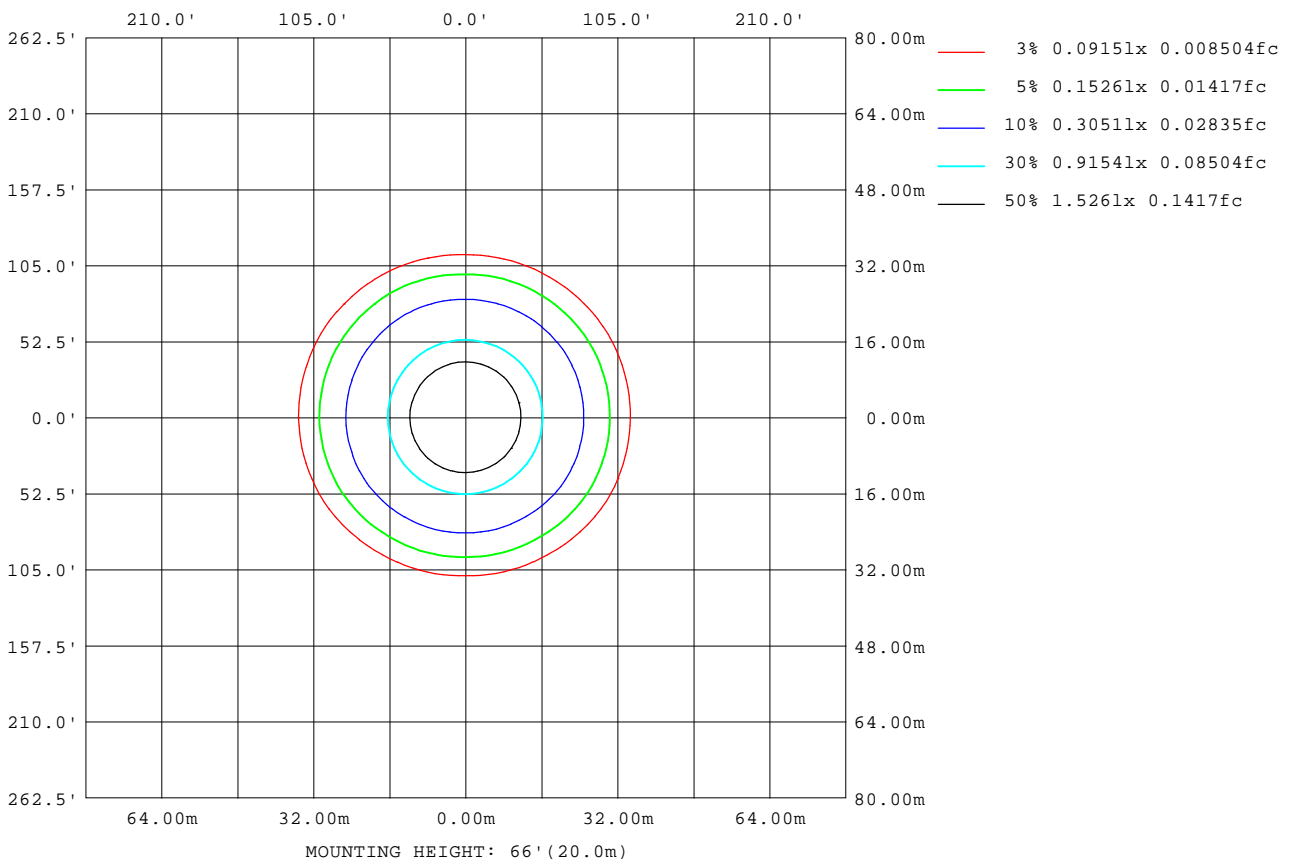

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2299]
 Remarks:

LED Avg.L Report

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	33791
L_0~180(75)av	16964
L_0~180(85)av	6884
L_90~270(65)av	27414
L_90~270(75)av	11498
L_90~270(85)av	4454
L_45(65)av	31269
L_45(75)av	14302
L_45(85)av	5648

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2299]
Remarks:

Planar Illuminance Curve

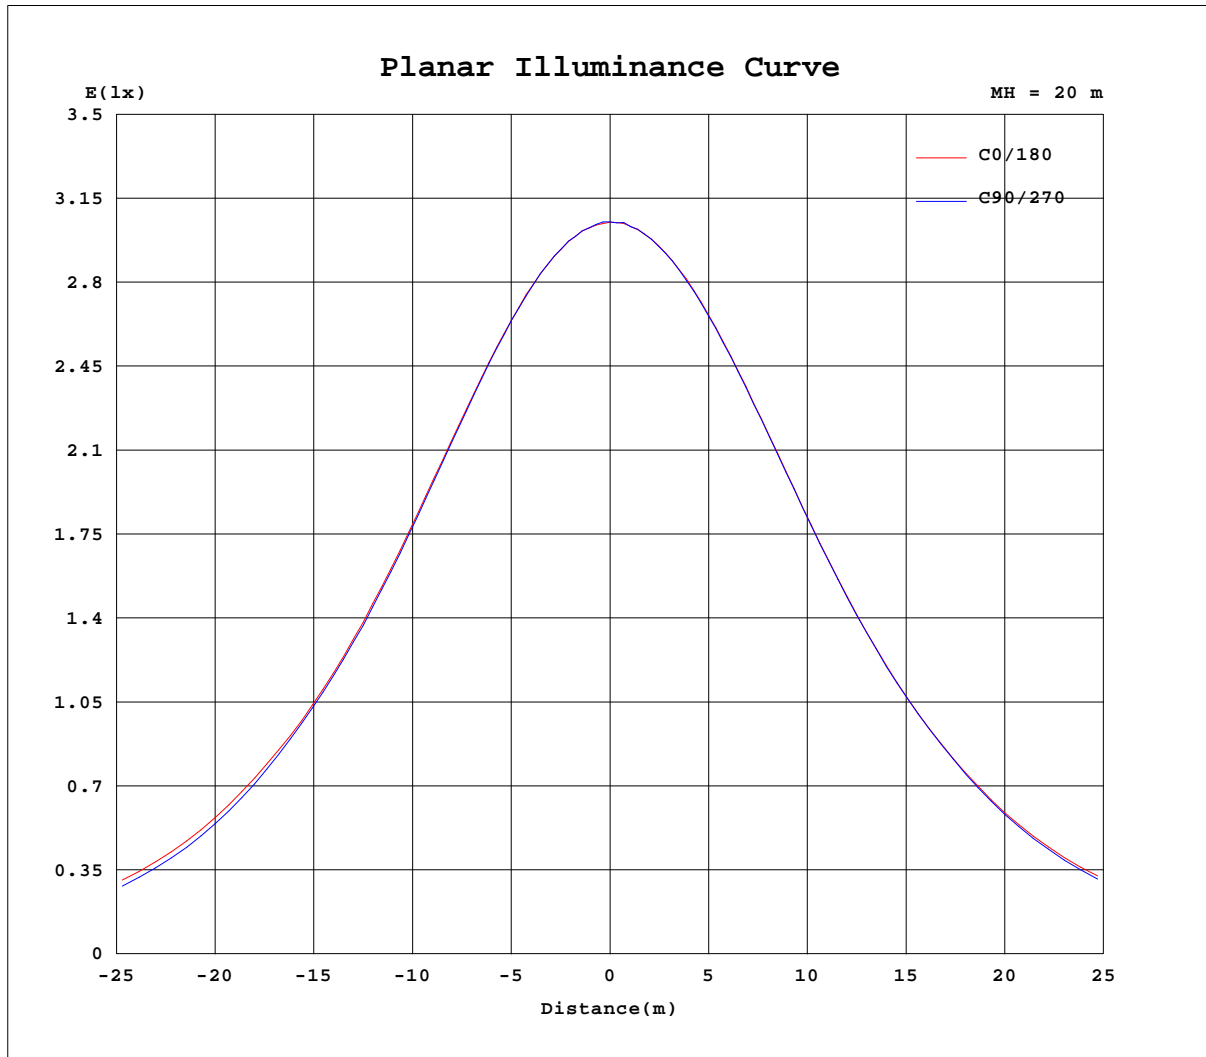

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2299]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.13V I:0.2500A P:29.700W PF:0.9885 Freq:60.00Hz Lamp Flux:2577.7x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1220	1220	1220	1220	1220	1220	1220	1220	1220	1220	1220	1220						
5	1210	1211	1212	1210	1213	1213	1214	1214	1216	1214	1214	1211						
10	1188	1186	1187	1187	1189	1191	1194	1197	1195	1193	1194	1191						
15	1148	1147	1144	1145	1149	1154	1159	1159	1161	1157	1157	1153						
20	1095	1091	1087	1091	1095	1102	1107	1108	1110	1105	1106	1100						
25	1026	1022	1017	1020	1026	1035	1043	1042	1045	1041	1040	1033						
30	944	938	933	936	944	954	963	964	968	961	961	953						
35	853	846	840	845	853	866	875	876	879	872	870	862						
40	756	749	739	740	754	770	780	780	787	777	774	765						
45	644	637	619	614	633	656	667	673	673	659	658	654						
50	519	514	490	482	502	532	546	551	547	529	531	530						
55	400	393	365	355	374	408	426	429	421	398	405	407						
60	291	285	255	243	260	295	312	315	301	280	287	296						
65	199	192	165	152	166	195	212	215	198	181	187	201						
70	122	115	92.3	83.0	91.1	115	128	129	113	102	108	123						
75	63.4	57.6	42.6	38.0	41.0	54.9	63.0	63.0	52.1	47.7	51.7	63.2						
80	26.0	23.5	19.8	18.3	19.1	22.7	24.3	23.1	22.9	22.1	23.7	26.2						
85	9.28	8.64	5.30	4.14	4.51	7.38	8.00	6.34	7.34	7.04	8.33	8.89						
90	0.21	0.11	0.05	0.00	0.01	0.06	0.02	0.10	0.06	0.10	0.02	0.08						
95	0.03	0.22	0.09	0.07	0.06	0.13	0.15	0.10	0.17	0.04	0.11	0.05						
100	0.20	0.41	0.27	0.25	0.23	0.29	0.34	0.26	0.35	0.22	0.29	0.23						
105	0.43	0.66	0.52	0.48	0.48	0.52	0.58	0.48	0.61	0.46	0.55	0.45						
110	0.70	0.96	0.85	0.78	0.79	0.80	0.84	0.78	0.92	0.78	0.86	0.73						
115	1.00	1.27	1.20	1.14	1.13	1.12	1.14	1.11	1.27	1.10	1.23	1.05						
120	1.32	1.64	1.59	1.55	1.51	1.47	1.46	1.48	1.67	1.47	1.63	1.41						
125	1.70	1.95	2.00	1.93	1.86	1.85	1.90	1.88	2.04	1.87	2.01	1.76						
130	2.05	2.25	2.38	2.30	2.26	2.18	2.36	2.22	2.42	2.27	2.36	2.08						
135	2.36	2.51	2.70	2.62	2.60	2.47	2.73	2.57	2.75	2.59	2.73	2.40						
140	2.59	2.75	3.03	2.88	2.91	2.75	3.02	2.84	3.07	2.87	3.07	2.67						
145	2.84	2.99	3.34	3.17	3.21	3.00	3.35	3.14	3.33	3.14	3.37	2.94						
150	3.16	3.30	3.54	3.41	3.50	3.30	3.63	3.38	3.54	3.33	3.58	3.20						
155	3.49	3.56	3.76	3.70	3.77	3.62	3.85	3.66	3.79	3.64	3.85	3.45						
160	3.79	3.87	4.01	4.03	3.99	3.89	4.04	4.00	4.06	3.93	4.07	3.66						
165	4.03	4.09	4.17	4.28	4.16	4.10	4.23	4.22	4.28	4.01	4.31	3.80						
170	4.21	4.36	4.31	4.41	4.27	4.37	4.37	4.39	4.47	4.16	4.45	3.99						
175	4.51	4.57	4.50	4.53	4.46	4.62	4.56	4.64	4.66	4.39	4.64	4.21						
180	4.66	4.75	4.55	4.93	4.62	4.81	4.62	4.94	4.88	4.78	4.73	4.54						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2299]
 Remarks: