
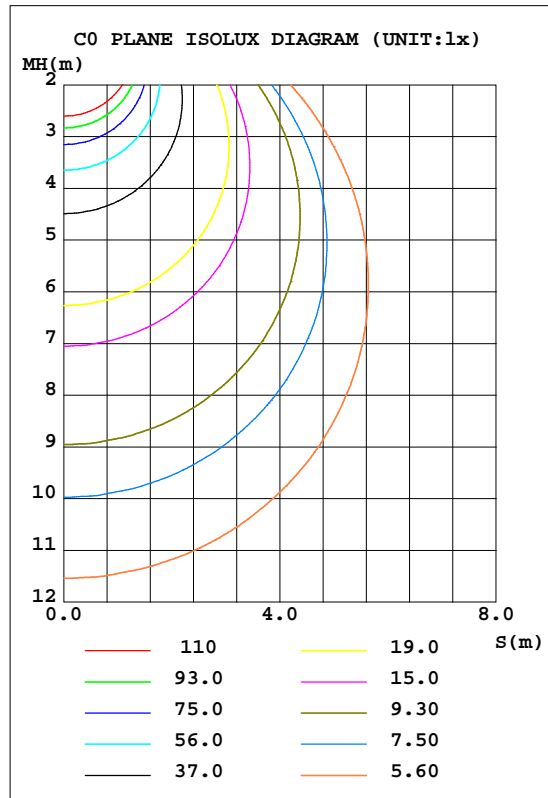


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 89.57 lm/W			
M&B&LJBR-12D24AC-WH(4000K)		I _{max} (cd)	746.5	S/MH(C0/180)	1.26
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2169.5	h UP, DN(C0-180)	0.2,49.5
NOMINAL FLUX(lm)	2169.47	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

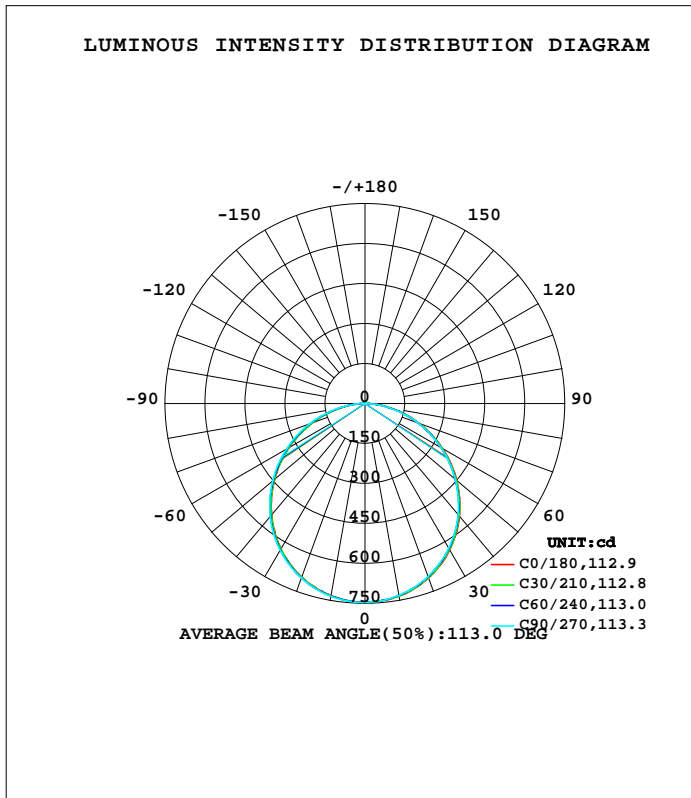

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9884]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	733.8	732.2	731.8	730.9	732.2	733.2	734.5	735.0	0- 10	70.57	70.57	3.25,3.25
20	696.5	693.8	691.3	691.1	692.5	695.2	697.1	699.3	10- 20	202.4	272.9	12.6,12.6
30	635.4	631.4	627.8	626.9	630.1	633.4	636.4	638.1	20- 30	307.1	580.1	26.7,26.7
40	551.9	546.9	543.4	541.7	544.6	549.0	553.2	555.2	30- 40	370.9	951.0	43.8,43.8
50	450.4	444.9	442.2	440.2	442.3	446.5	452.5	454.8	40- 50	385.2	1336	61.6,61.6
60	335.3	330.6	328.5	326.0	327.5	332.0	339.2	342.0	50- 60	349.2	1685	77.7,77.7
70	215.1	210.6	209.6	206.7	207.0	210.9	218.1	222.2	60- 70	270.2	1956	90.1,90.1
80	98.02	93.57	89.63	89.70	89.64	89.82	96.61	99.15	70- 80	160.9	2116	97.6,97.6
90	2.369	0.6509	0.3001	0.3307	0.2953	0.3301	0.3002	1.060	80- 90	43.77	2160	99.6,99.6
100	0.6202	0.5972	0.6664	0.6153	0.6668	0.6456	0.9718	0.7369	90-100	0.5494	2161	99.6,99.6
110	1.027	1.029	1.114	1.065	1.099	1.037	1.021	1.045	100-110	0.8930	2162	99.6,99.6
120	1.459	1.418	1.510	1.485	1.516	1.449	1.418	1.459	110-120	1.245	2163	99.7,99.7
130	1.816	1.726	1.876	1.823	1.852	1.779	1.713	1.797	120-130	1.465	2164	99.8,99.8
140	2.106	2.021	2.186	2.166	2.132	2.094	2.003	2.098	130-140	1.503	2166	99.8,99.8
150	2.376	2.326	2.446	2.400	2.437	2.379	2.282	2.359	140-150	1.401	2167	99.9,99.9
160	2.625	2.577	2.674	2.662	2.753	2.702	2.643	2.667	150-160	1.161	2168	100,100
170	2.854	2.908	2.908	2.952	3.012	2.987	2.969	2.939	160-170	0.7905	2169	100,100
180	3.124	3.109	3.040	3.056	3.113	3.121	3.060	3.104	170-180	0.2875	2169	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9884]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

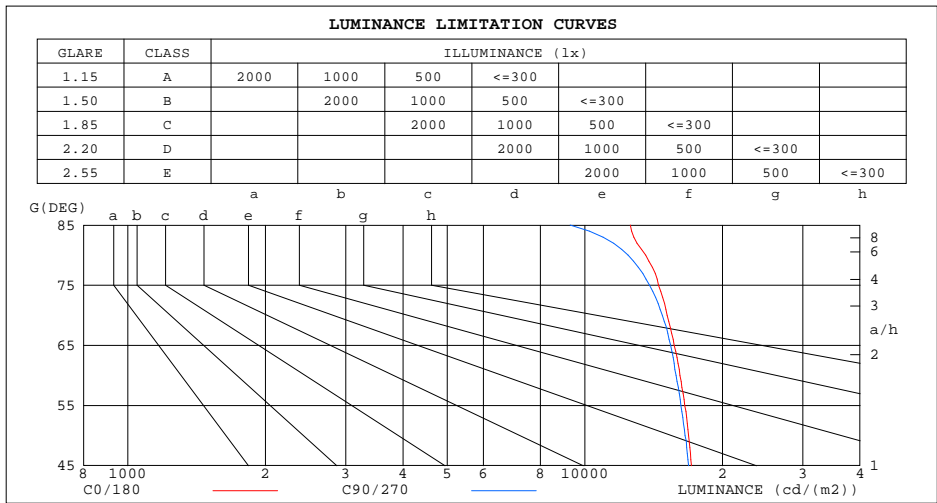

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12581	9288
80	13596	12440
75	14500	13854
70	15150	14773
65	15699	15402
60	16150	15835
55	16550	16233
50	16876	16579
45	17126	16859


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9884]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

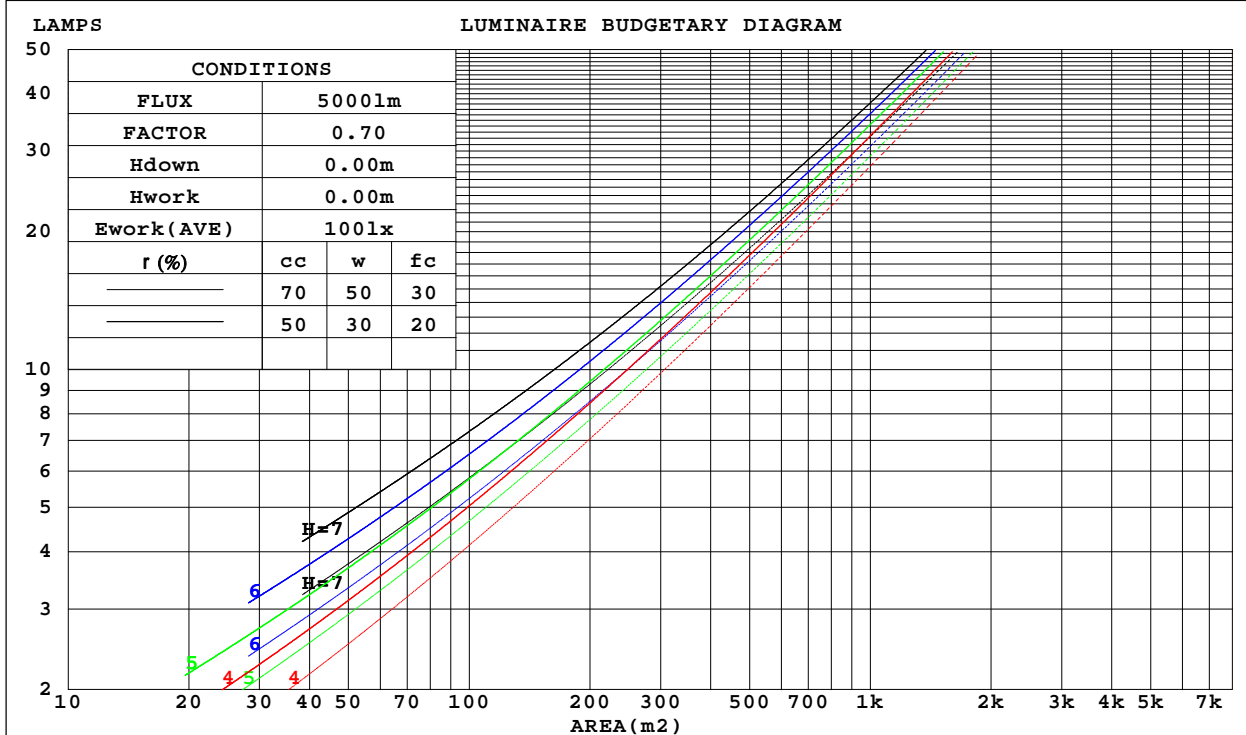

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9884]
 Remarks:

WEC AND CCEC

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.46	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.314	.178	.057	.307	.175	.056	.293	.168	.054	.281	.162	.052	.269	.156	.050	
2.0	.295	.161	.050	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.166	.085	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.101	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.125	.074	.037	.087	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.036	.120	.068	.032	.083	.048	.023	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.029	.109	.059	.025	.076	.041	.018	.044	.025	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.022	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9884]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: ASD LIGHTNG CORP			SUR.: φ0.46			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.9	23.5	22.2	23.8	24.2	21.7	23.4	22.1	23.7	24.0
3H	23.8	25.3	24.2	25.6	26.0	23.6	25.1	24.0	25.4	25.8
4H	24.5	25.9	24.9	26.3	26.7	24.3	25.7	24.7	26.1	26.5
6H	25.1	26.4	25.5	26.8	27.2	24.9	26.2	25.3	26.5	26.9
8H	25.3	26.5	25.7	26.9	27.3	25.0	26.3	25.5	26.7	27.1
12H	25.4	26.6	25.9	27.0	27.5	25.1	26.3	25.6	26.7	27.1
4H 2H	22.5	23.9	22.9	24.3	24.7	22.4	23.8	22.8	24.1	24.5
3H	24.6	25.8	25.1	26.2	26.6	24.5	25.7	24.9	26.1	26.5
4H	25.5	26.6	26.0	27.0	27.4	25.3	26.4	25.8	26.8	27.3
6H	26.2	27.2	26.7	27.6	28.1	26.0	26.9	26.4	27.4	27.8
8H	26.5	27.4	27.0	27.8	28.3	26.2	27.1	26.7	27.5	28.0
12H	26.7	27.5	27.2	28.0	28.4	26.3	27.1	26.8	27.6	28.1
8H 4H	25.8	26.7	26.3	27.2	27.6	25.7	26.5	26.1	27.0	27.5
6H	26.7	27.4	27.2	27.9	28.4	26.4	27.2	26.9	27.7	28.1
8H	27.0	27.7	27.5	28.2	28.7	26.7	27.4	27.2	27.9	28.4
12H	27.3	27.9	27.8	28.4	29.0	26.9	27.5	27.4	28.0	28.5
12H 4H	25.9	26.7	26.4	27.2	27.6	25.7	26.5	26.2	27.0	27.4
6H	26.8	27.4	27.3	27.9	28.4	26.5	27.2	27.0	27.6	28.2
8H	27.2	27.7	27.7	28.2	28.8	26.8	27.4	27.3	27.9	28.5
CIE190: 2010										

CIE190: 2010
 Area: 0.0415 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9884]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9884]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

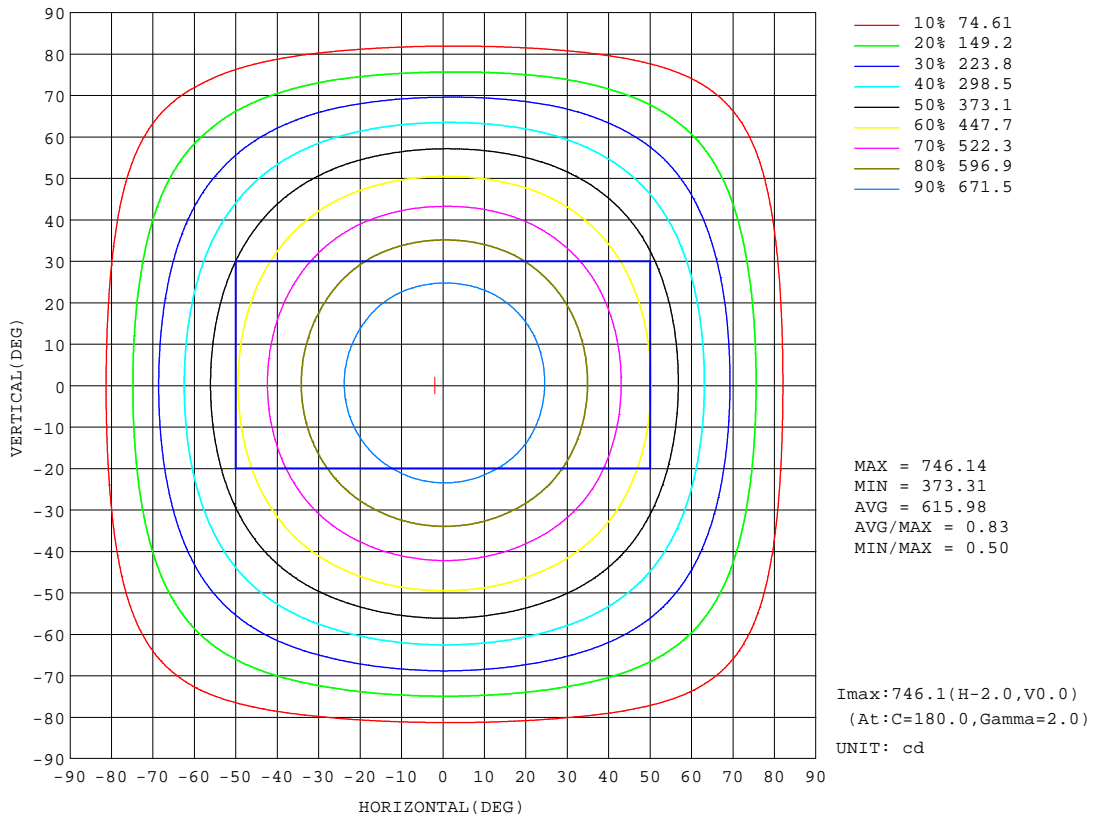


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9884]
 Remarks:

AAI Figure

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

Flux out:1587 lm

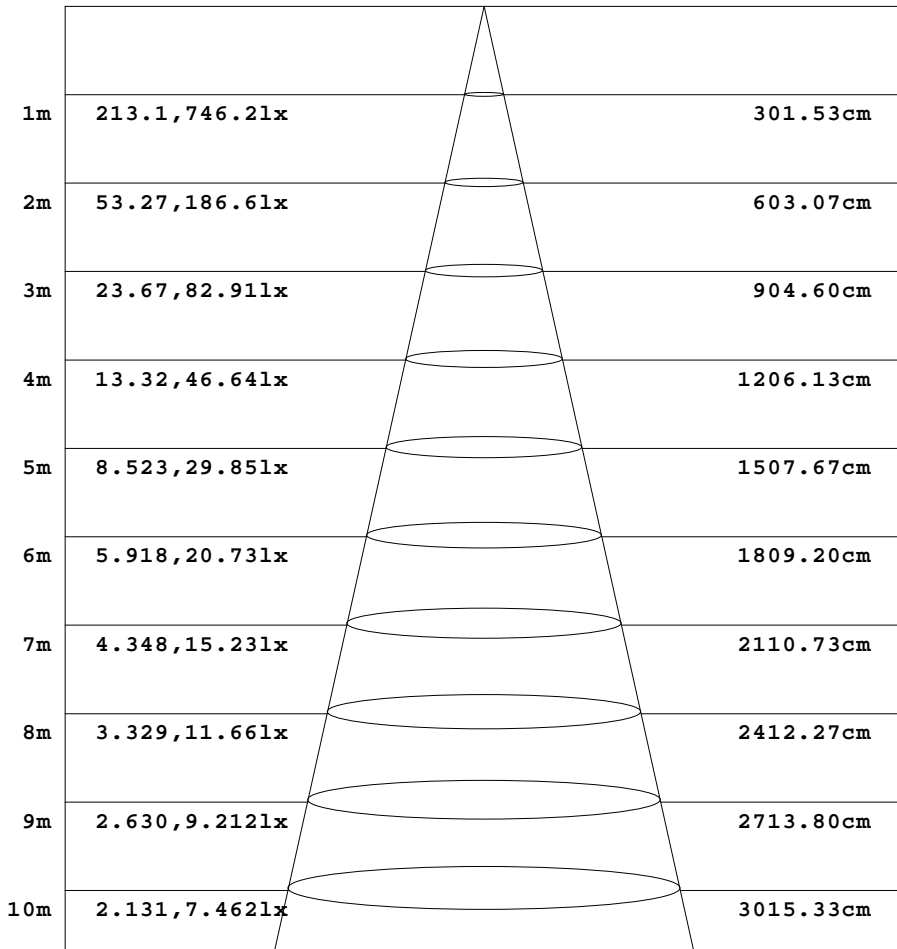

Height Eavg, Emax Angle:112.89deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9884]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

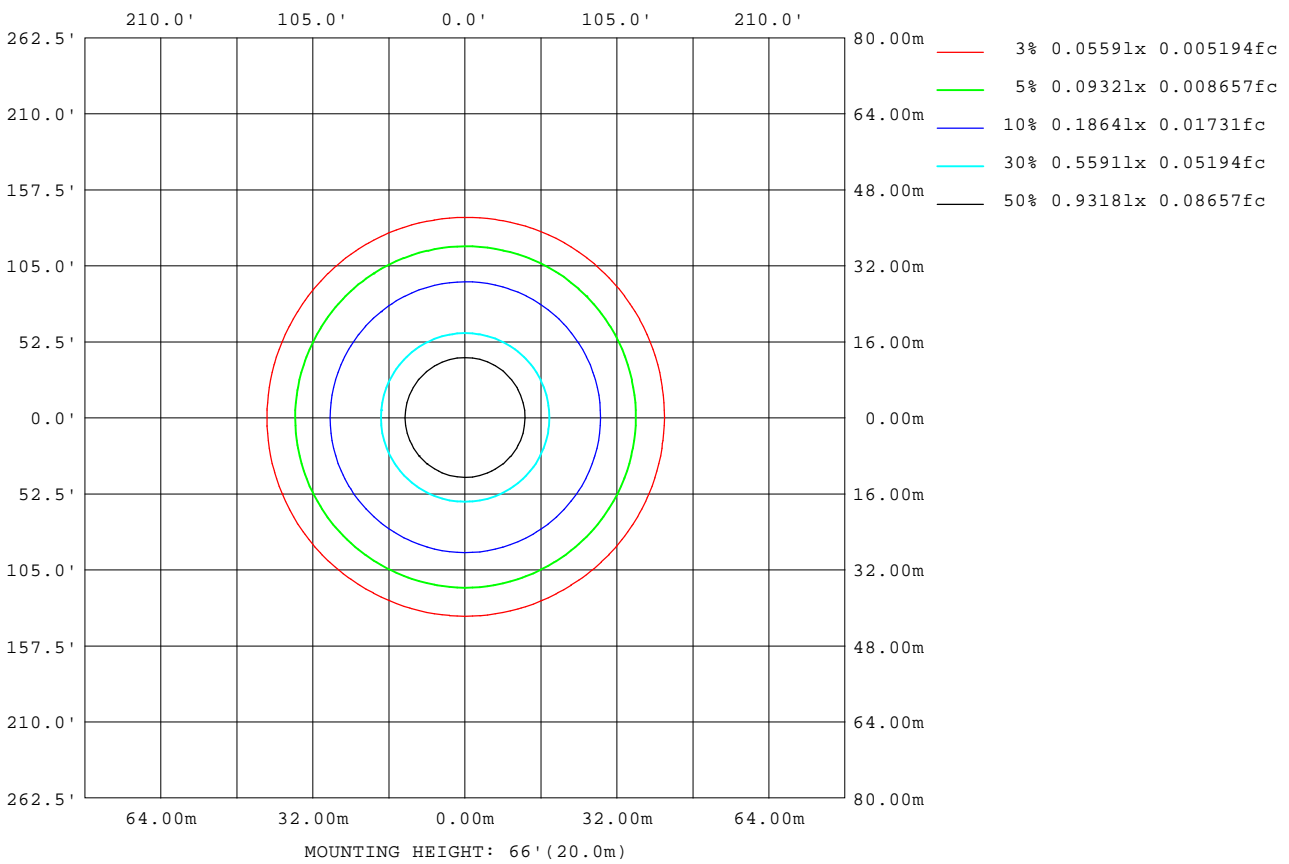

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9884]
 Remarks:

LED Avg.L Report

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	15489
L_0~180(75)av	14125
L_0~180(85)av	11382
L_90~270(65)av	15670
L_90~270(75)av	14194
L_90~270(85)av	10089
L_45(65)av	15581
L_45(75)av	14191
L_45(85)av	10287

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9884]
Remarks:

Planar Illuminance Curve

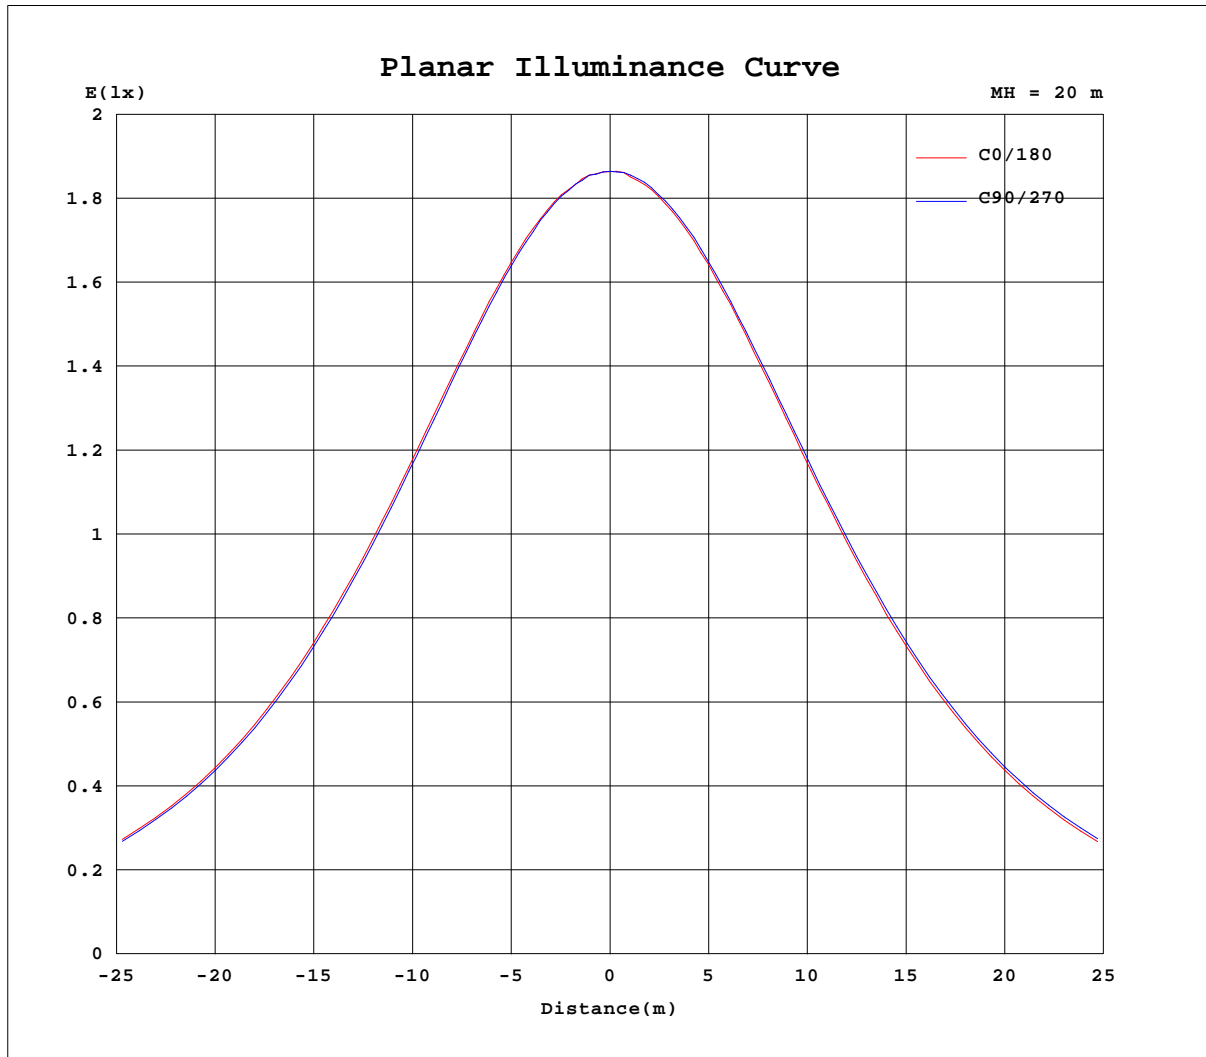

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9884]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.20V I:0.2044A P:24.221W PF:0.9858 Freq:59.98Hz Lamp Flux:2169.47x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.46	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	746	746	746	746	746	746	746	746	746	746	746	746						
5	742	743	741	742	741	742	742	743	743	744	744	744						
10	734	734	731	732	730	732	732	733	734	734	734	735						
15	719	717	715	715	712	716	715	717	718	719	721	719						
20	696	695	692	691	690	692	692	694	697	697	699	699						
25	669	667	664	663	661	662	665	666	668	670	671	672						
30	635	633	630	628	626	628	630	632	635	636	639	638						
35	596	594	590	589	586	588	589	592	596	598	600	599						
40	552	549	545	543	541	543	545	547	551	553	556	555						
45	503	500	496	495	492	494	496	498	502	504	508	507						
50	450	447	443	442	440	441	442	444	449	452	456	454						
55	394	391	387	386	384	385	386	388	393	398	401	399						
60	335	333	329	329	326	326	328	329	335	339	343	341						
65	275	273	269	270	266	268	268	268	276	280	284	281						
70	215	213	209	210	206	207	207	207	215	218	223	221						
75	156	153	149	149	147	148	148	146	154	156	162	159						
80	98.0	96.0	91.2	89.6	88.5	90.9	89.6	86.6	93.0	96.6	99.4	98.9						
85	45.5	43.1	36.3	33.6	32.7	36.9	36.8	32.1	35.7	39.4	40.7	41.6						
90	2.37	0.98	0.33	0.30	0.31	0.36	0.30	0.36	0.30	0.30	0.32	1.81						
95	0.41	0.44	0.41	0.45	0.39	0.47	0.46	0.46	0.54	0.44	0.54	0.46						
100	0.62	0.62	0.58	0.67	0.57	0.66	0.67	0.62	0.67	0.97	0.85	0.63						
105	0.81	0.82	0.81	0.88	0.81	0.89	0.87	0.82	0.85	0.81	0.87	0.80						
110	1.03	1.03	1.03	1.11	1.03	1.10	1.10	1.03	1.05	1.02	1.08	1.01						
115	1.23	1.22	1.24	1.30	1.25	1.32	1.31	1.24	1.25	1.22	1.29	1.21						
120	1.46	1.43	1.41	1.51	1.46	1.51	1.52	1.44	1.45	1.42	1.50	1.42						
125	1.66	1.60	1.58	1.70	1.64	1.70	1.69	1.65	1.63	1.60	1.69	1.61						
130	1.82	1.74	1.71	1.88	1.80	1.85	1.85	1.78	1.77	1.71	1.85	1.75						
135	1.97	1.90	1.85	2.02	1.98	2.00	1.99	1.94	1.93	1.88	1.98	1.92						
140	2.11	2.05	1.99	2.19	2.15	2.18	2.13	2.13	2.06	2.00	2.13	2.07						
145	2.26	2.20	2.12	2.30	2.27	2.32	2.29	2.26	2.20	2.16	2.28	2.20						
150	2.38	2.36	2.29	2.45	2.35	2.45	2.44	2.41	2.35	2.28	2.39	2.32						
155	2.51	2.52	2.45	2.57	2.46	2.54	2.59	2.56	2.51	2.47	2.53	2.50						
160	2.62	2.58	2.58	2.67	2.62	2.71	2.75	2.76	2.65	2.64	2.66	2.68						
165	2.75	2.67	2.76	2.83	2.79	2.79	2.93	2.88	2.84	2.81	2.82	2.82						
170	2.85	2.88	2.94	2.91	2.99	2.92	3.01	3.01	2.96	2.97	2.99	2.89						
175	3.00	3.06	3.06	2.99	3.11	3.05	3.08	3.13	3.03	3.05	3.06	2.99						
180	3.12	3.11	3.11	3.04	3.07	3.04	3.11	3.13	3.11	3.06	3.12	3.09						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9884]
 Remarks: