
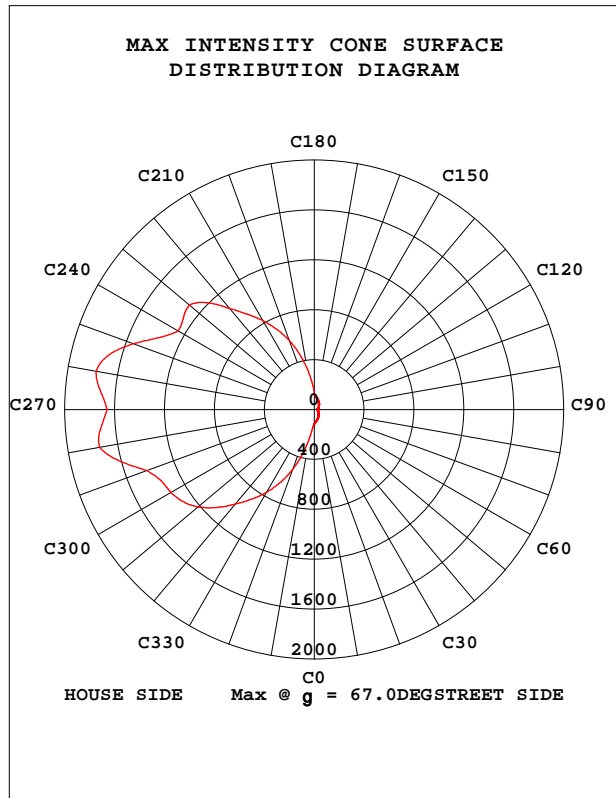


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:120.25V I:0.2084A P:24.698W PF:0.9856 Freq:59.98Hz Lamp Flux:3344.11x1 lm		
NAME: ASD-LSWP01-26DCC-PC(4000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.40 lm/W			
MSDELSWP01-26DCC-PC(4000K)		Imax(cd)	1775	h street_up(%)	1.0
NOMINAL POWER(W)	26	LOR(%)	100.0	h street_down(%)	8.8
RATED VOLTAGE(V)	110-277	TOTAL FLUX(lm)	3344	h house_up(%)	4.8
NOMINAL FLUX(lm)	3344.11	MAXIMUM @(C,g)	260,67.0	h house_down(%)	85.4
LAMPS INSIDE	1	h up(%)	5.8	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	120.0	h down(%)	94.2	SLI	16.317

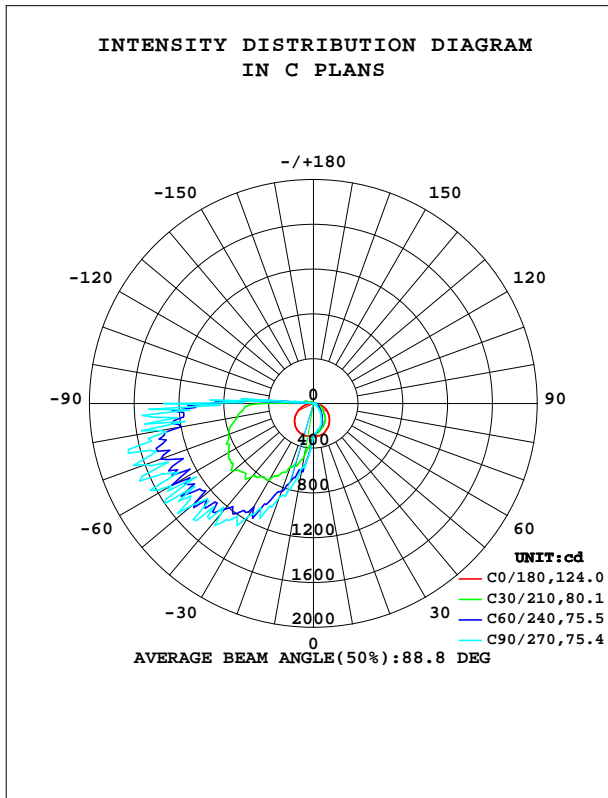


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:7.980m [K=1.0000]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:120.25V I:0.2084A P:24.698W PF:0.9856 Freq:59.98Hz Lamp Flux:3344.1lx1 lm		
NAME: ASD-LSWP01-26DCC-PC(4000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

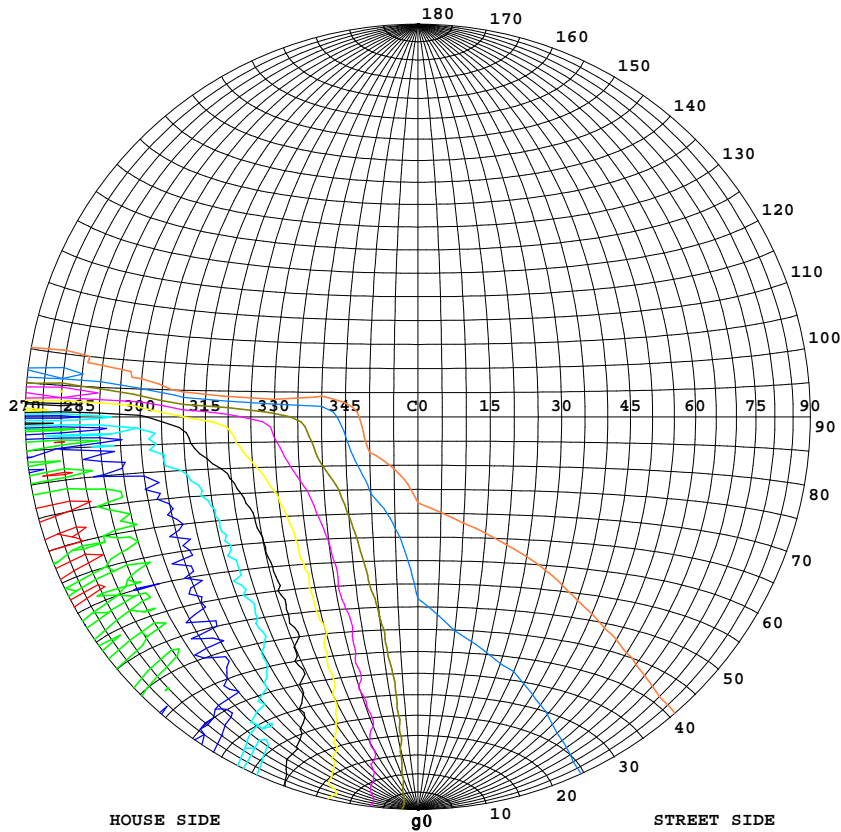

Classification:



IES:Type V - Very Short
 CIE:Narrow - Intermediate
 IES:None cut-off
 CIE:Non-cut-off
 Max.At80:415.1cd/klm
 Max.At90:402.9cd/klm
 Max.80-90:500.0cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	1775
90%	1598
80%	1420
70%	1243
60%	1065
50%	888
40%	710
30%	533
20%	355
10%	178
5%	89

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:7.980m [K=1.0000]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

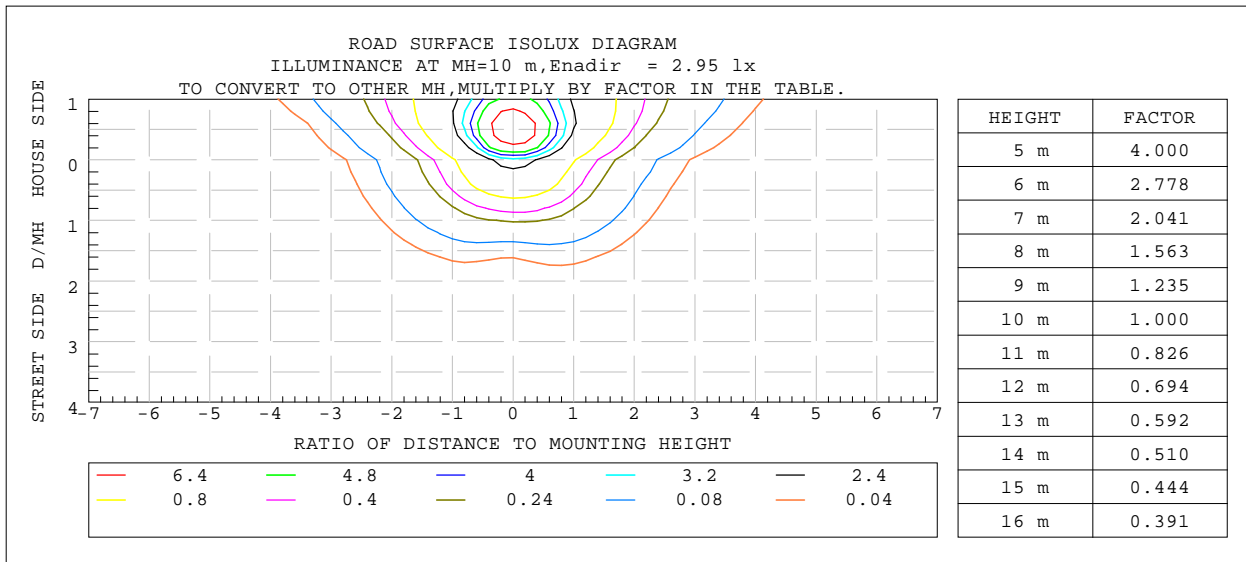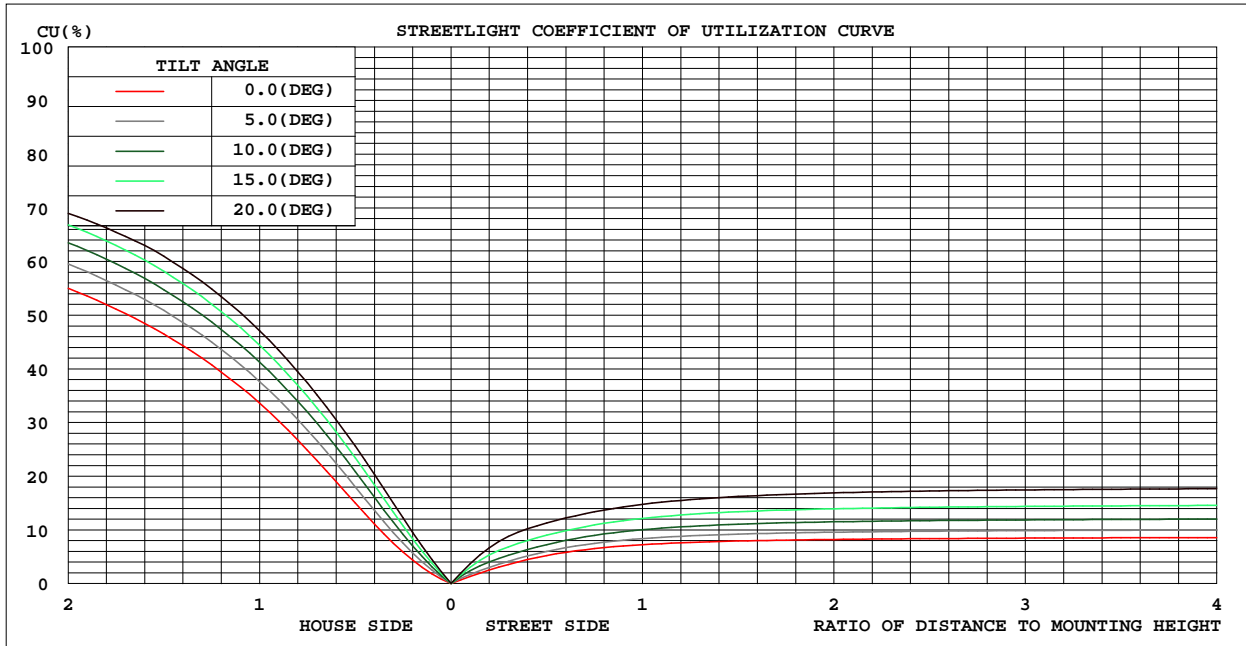

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-05-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 7.980m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:120.25V I:0.2084A P:24.698W PF:0.9856 Freq:59.98Hz Lamp Flux:3344.1lx1 lm		
NAME: ASD-LSWP01-26DCC-PC(4000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	293.0	251.1	239.3	253.6	297.6	537.4	592.4	539.0	0- 10	33.57	33.57	1,1
20	280.0	219.7	205.8	221.3	294.4	745.2	893.3	722.4	10- 20	120.1	153.7	4.6,4.6
30	254.4	183.7	143.2	189.6	281.3	966.4	1164	887.9	20- 30	228.2	381.9	11.4,11.4
40	223.1	134.3	92.17	141.9	255.8	1116	1283	1043	30- 40	340.1	722.0	21.6,21.6
50	185.2	93.51	49.50	100.7	220.5	1165	1410	1100	40- 50	428.5	1150	34.4,34.4
60	145.2	62.41	25.75	68.39	175.9	1160	1470	1111	50- 60	489.1	1640	49,49
70	99.81	40.48	18.48	43.78	121.3	1158	1598	1079	60- 70	531.1	2171	64.9,64.9
80	50.54	25.89	11.98	26.50	67.10	1039	1388	941.3	70- 80	531.1	2702	80.8,80.8
90	19.34	15.82	8.963	15.93	26.79	697.3	1339	643.7	80- 90	447.0	3149	94.2,94.2
100	11.31	13.38	11.88	13.62	15.84	71.30	100.6	54.09	90-100	133.1	3282	98.1,98.1
110	13.58	16.76	12.54	16.29	14.57	27.85	6.711	21.71	100-110	23.20	3305	98.8,98.8
120	11.61	14.18	12.51	14.79	11.38	8.296	2.643	8.501	110-120	12.54	3317	99.2,99.2
130	11.54	10.50	11.44	11.11	12.61	7.360	4.084	10.15	120-130	10.12	3328	99.5,99.5
140	8.688	8.349	9.676	8.687	8.775	6.623	6.996	6.046	130-140	7.799	3335	99.7,99.7
150	6.374	7.000	8.099	7.005	6.238	4.914	7.223	2.758	140-150	4.374	3340	99.9,99.9
160	5.617	6.669	6.728	6.337	5.044	3.484	3.055	3.047	150-160	2.407	3342	99.9,99.9
170	6.184	5.752	5.635	5.866	5.896	4.574	3.760	4.425	160-170	1.406	3344	100,100
180	5.434	5.722	4.996	5.491	5.429	5.715	4.964	5.495	170-180	0.5038	3344	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:7.980m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.25V I:0.2084A P:24.698W PF:0.9856 Freq:59.98Hz Lamp Flux:3344.11x1 lm		
NAME: ASD-LSWP01-26DCC-PC(4000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

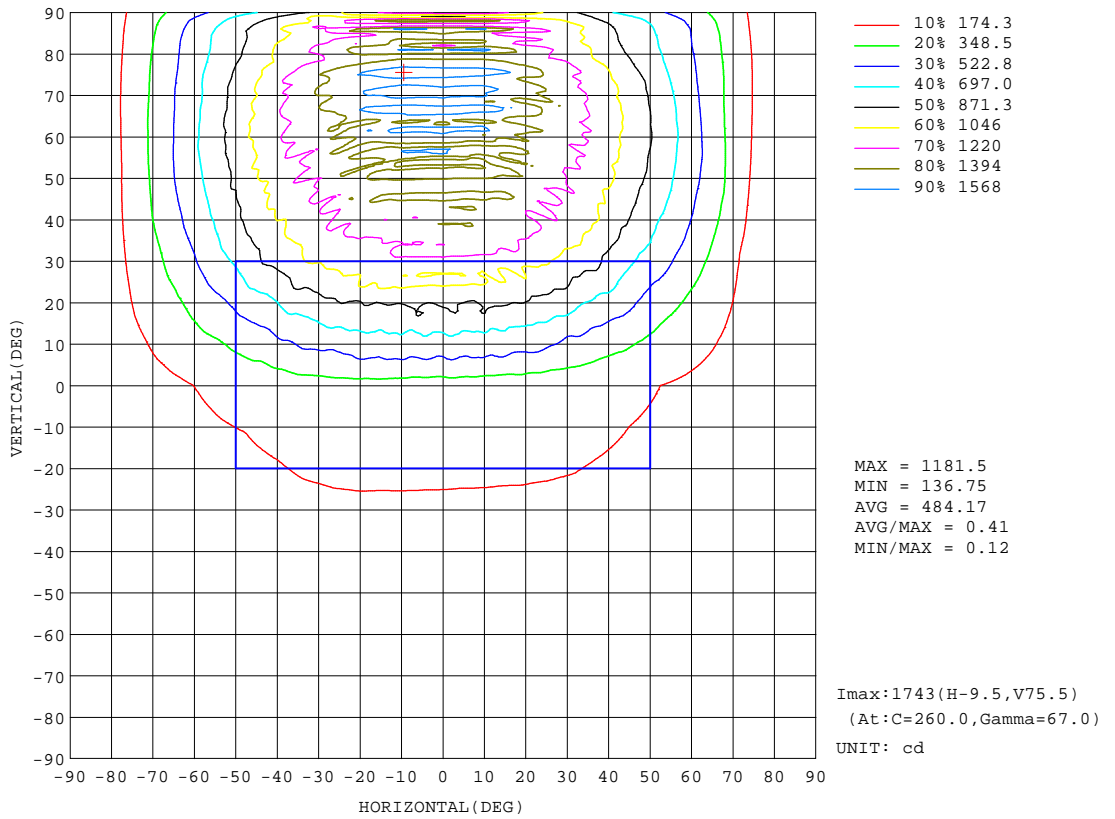

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:7.980m [K=1.0000]
 Remarks:

Planar Illuminance Curve

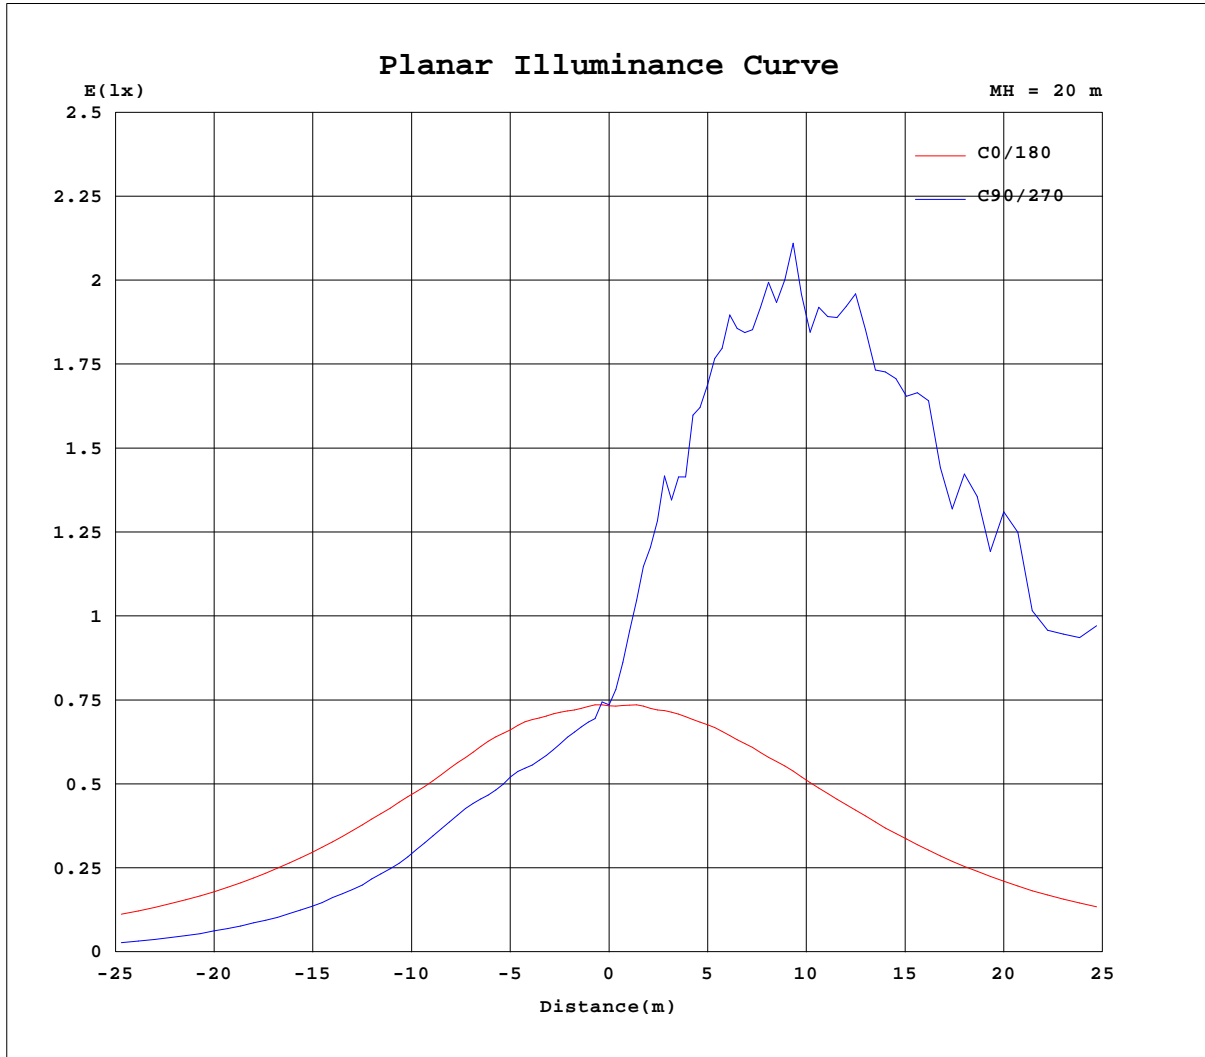


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 7.980m [K=1.0000]
 Remarks:

LCS REPORT

Test:U:120.25V I:0.2084A P:24.698W PF:0.9856 Freq:59.98Hz Lamp Flux:3344.11x1 lm		
NAME: ASD-LSWP01-26DCC-PC(4000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

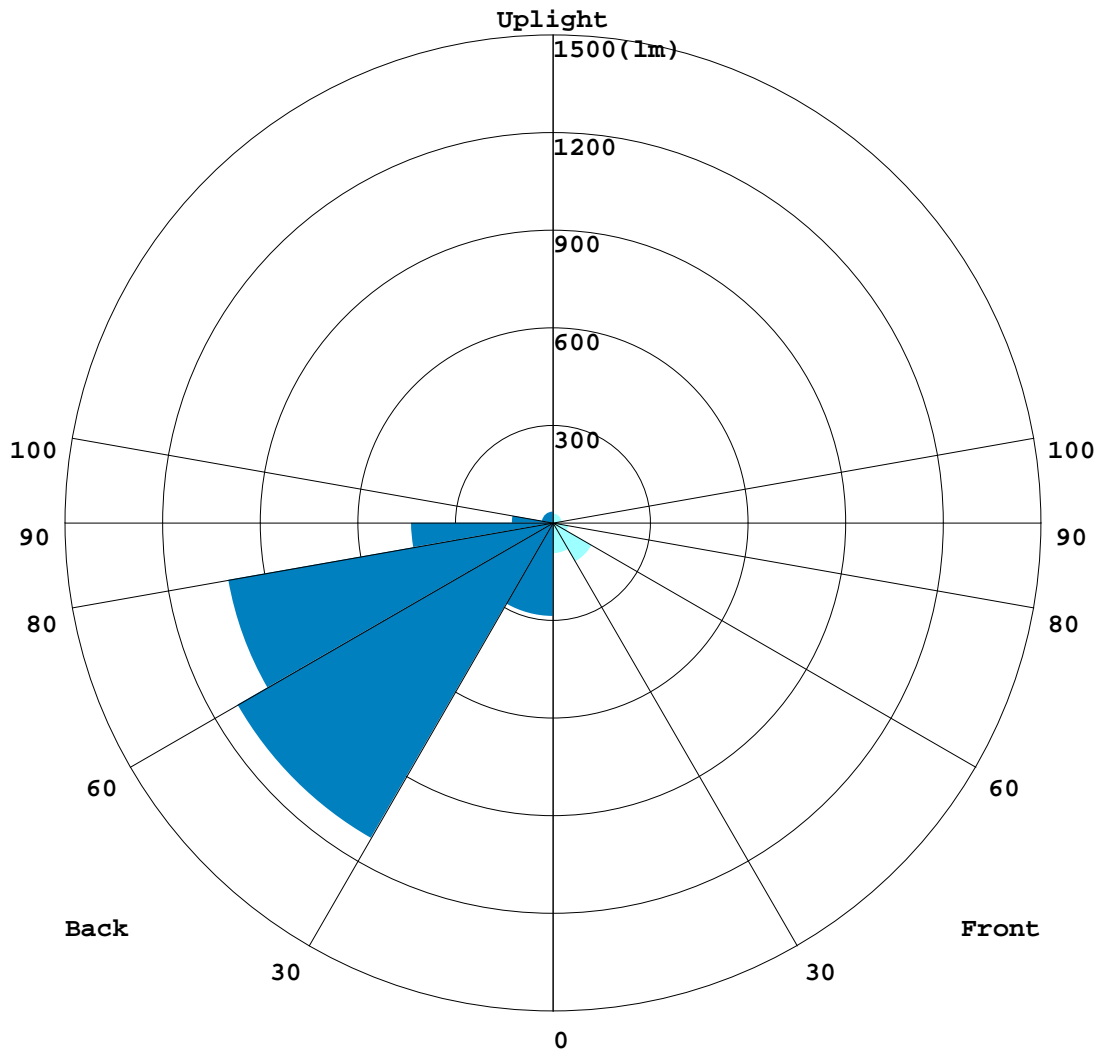

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:7.980m [K=1.0000]
 Remarks:

BUG REPORT

Test:U:120.25V I:0.2084A P:24.698W PF:0.9856 Freq:59.98Hz Lamp Flux:3344.11x1 lm		
NAME: ASD-LSWP01-26DCC-PC(4000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	94.9	2.8
FM - Front-Medium(30-60)	138.35	4.1
FH - Front-High(60-80)	49.201	1.5
FVH - Front-Very High(80-90)	11.25	0.3
Total Forward Light	328.77	9.8

BL - Back-Low(0-30)	286.99	8.6
BM - Back-Medium(30-60)	1119.3	33.5
BH - Back-High(60-80)	1012.9	30.3
BVH - Back-Very High(80-90)	435.73	13.0
Total Back Light	3015.3	90.2

UL - Uplight-Low(90-100)	133.07	4.0
UH - Uplight-High(100-180)	62.352	1.9
Total Up Light	195.42	5.8

BUG(Back,Up,Glare) Rating	B3-U3-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	2855	160.35	3015.3
Street Side	293.7	35.07	328.77


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-05-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:7.980m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

Test:U:120.25V I:0.2084A P:24.698W PF:0.9856 Freq:59.98Hz Lamp Flux:3344.11x1 lm		
NAME: ASD-LSWP01-26DCC-PC(4000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

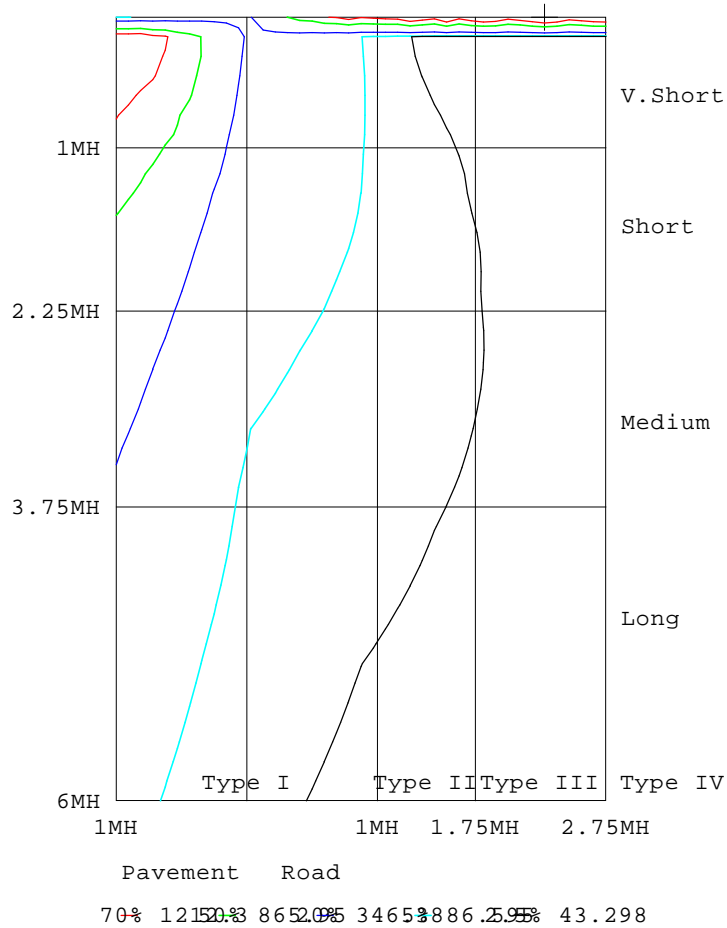

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 7.980m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.25V I:0.2084A P:24.698W PF:0.9856 Freq:59.98Hz Lamp Flux:3344.1lx1 lm		
NAME: ASD-LSWP01-26DCC-PC(4000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	294	294	294	294	294	294	294	294	294	294	294	294	294	294	294	294	294	294	294
5	293	294	280	277	273	270	267	266	265	265	264	266	266	270	274	276	286	290	297
10	293	277	267	262	254	248	244	242	240	239	240	242	245	250	257	263	271	286	298
15	290	268	255	245	237	234	231	226	223	222	223	228	231	232	238	248	258	271	297
20	280	256	240	230	224	216	212	209	207	206	207	209	211	217	226	233	247	263	294
25	266	245	228	217	208	200	190	181	176	175	178	185	194	204	209	221	234	253	291
30	254	230	214	201	191	176	158	150	144	143	146	152	166	183	197	206	219	239	281
35	240	214	196	186	168	149	134	123	119	118	121	127	139	156	176	190	203	224	269
40	223	196	180	165	143	125	111	101	93.7	92.2	95.8	105	117	132	152	172	185	206	256
45	204	178	162	141	122	104	92.2	80.6	73.8	72.1	76.2	84.1	97.1	111	130	151	167	188	239
50	185	159	141	121	101	85.9	73.2	60.4	51.7	49.5	54.7	65.7	78.0	92.5	109	129	149	168	220
55	165	141	122	102	84.2	69.0	56.2	44.2	33.7	31.4	37.1	48.4	61.2	75.2	91.2	109	130	148	199
60	145	123	103	85.7	69.5	55.3	45.1	34.6	26.9	25.7	29.1	38.4	48.9	60.7	76.1	92.1	111	128	176
65	124	102	84.1	69.8	55.9	44.6	38.3	29.5	22.7	21.9	24.4	33.3	40.9	48.5	61.6	74.4	89.6	106	148
70	99.8	79.7	65.4	54.8	44.0	37.0	33.1	25.0	19.3	18.5	20.6	28.8	34.8	39.3	48.3	58.6	70.2	85.2	121
75	74.6	58.1	48.5	41.2	34.4	30.2	27.3	21.0	15.6	14.6	17.1	23.9	28.2	31.4	36.9	43.6	51.7	63.5	93.8
80	50.5	39.2	33.4	29.8	26.7	25.1	24.3	18.2	13.1	12.0	14.7	20.8	24.1	25.3	27.7	30.8	35.2	43.5	67.1
85	31.9	24.4	22.0	21.4	21.4	21.7	22.2	16.3	11.9	10.5	13.1	18.9	21.2	21.0	20.8	20.8	22.1	26.6	43.2
90	19.3	15.8	14.4	15.4	15.6	16.0	13.8	12.3	9.80	8.96	10.8	13.6	15.0	16.1	15.8	14.3	14.1	16.7	26.8
95	13.4	12.1	11.4	11.8	11.1	10.4	11.3	10.8	10.3	9.92	10.4	11.8	10.9	11.7	13.2	12.3	12.4	14.0	18.6
100	11.3	11.3	11.4	11.3	12.7	14.0	13.6	12.4	12.4	11.9	12.4	12.6	14.2	13.9	13.3	12.9	12.6	13.3	15.8
105	12.7	11.4	11.6	12.7	15.2	16.9	14.1	12.7	12.7	12.3	12.6	13.2	15.5	17.1	13.7	12.1	12.0	12.7	15.4
110	13.6	12.4	12.7	14.2	16.7	16.8	13.5	12.7	12.8	12.5	12.7	13.0	14.6	17.5	15.1	13.2	12.0	12.1	14.6
115	12.4	12.1	13.4	14.2	17.4	15.5	12.7	12.4	12.7	12.6	12.7	12.5	13.3	17.1	15.1	13.4	12.4	11.8	12.9
120	11.6	12.0	12.9	13.9	15.2	13.1	12.0	12.4	12.6	12.5	12.7	12.2	12.4	14.6	15.0	13.1	12.4	11.1	11.4
125	11.7	11.7	12.4	13.7	13.3	11.5	11.2	12.1	12.5	12.4	12.5	11.9	11.4	12.2	14.5	12.9	11.9	11.7	11.9
130	11.5	11.6	12.3	12.5	10.7	10.3	9.96	11.3	11.6	11.4	11.7	10.9	10.3	10.6	11.6	12.8	12.0	11.2	12.6
135	11.4	11.6	11.0	9.63	9.22	9.13	9.15	10.1	10.4	10.5	10.2	9.62	9.23	9.42	9.51	10.4	11.8	11.2	12.2
140	8.69	8.40	8.28	8.20	8.59	8.11	8.64	9.17	9.54	9.68	9.39	8.93	8.50	8.94	8.43	8.36	8.41	8.68	8.78
145	6.85	7.21	7.56	7.99	6.98	7.38	8.39	8.73	8.69	8.82	8.70	8.67	8.02	7.29	8.23	7.80	7.41	6.99	6.61
150	6.37	6.37	5.52	6.57	7.05	6.95	7.47	7.84	8.07	8.10	8.02	7.66	7.20	7.09	6.92	6.06	6.73	6.51	6.24
155	5.04	5.42	5.41	5.94	6.73	7.04	7.04	7.31	7.38	7.38	7.37	7.03	7.09	6.92	6.52	5.48	5.04	4.90	4.56
160	5.62	5.99	5.82	5.95	6.54	6.80	6.79	6.67	6.71	6.73	6.76	6.74	6.89	6.76	5.91	5.38	5.55	5.38	5.04
165	6.03	6.43	6.69	6.37	6.50	6.47	6.27	6.15	6.20	6.18	6.18	6.20	6.28	6.33	6.17	6.32	6.15	5.75	5.62
170	6.18	6.33	6.01	5.87	5.83	5.67	5.72	5.72	5.70	5.64	5.61	5.50	5.48	5.82	5.91	5.81	5.87	5.63	5.90
175	5.73	5.59	5.41	5.31	5.33	5.32	5.28	5.23	5.18	5.22	5.25	5.19	5.18	5.14	5.20	5.21	5.16	5.42	5.71
180	5.43	5.37	5.31	5.26	5.53	5.91	5.83	5.76	5.78	5.00	5.67	5.61	5.57	5.50	5.48	5.40	5.39	5.39	5.43

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:7.980m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.25V I:0.2084A P:24.698W PF:0.9856 Freq:59.98Hz Lamp Flux:3344.1lx1 lm		
NAME: ASD-LSWP01-26DCC-PC(4000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	294	294	294	294	294	294	294	294	294	294	294	294	294	294	294	294	294		
5	313	341	376	403	429	442	451	453	464	471	468	449	424	396	363	332	306		
10	348	416	480	500	575	599	608	587	592	630	591	572	567	511	463	392	324		
15	386	484	579	611	672	684	784	773	784	793	723	703	640	575	547	454	344		
20	417	555	602	685	805	838	880	864	893	876	837	884	751	694	582	492	366		
25	441	567	689	850	859	996	1038	1111	1134	1107	967	953	870	765	650	547	377		
30	451	605	785	876	1056	1068	1128	1136	1164	1135	1106	1035	945	831	703	540	381		
35	482	631	799	1014	1086	1203	1225	1218	1257	1238	1251	1155	1019	898	754	563	381		
40	451	674	846	1029	1203	1231	1346	1331	1283	1394	1365	1242	1148	936	771	564	370		
45	423	645	876	1098	1230	1246	1320	1370	1483	1318	1369	1201	1168	1015	837	579	366		
50	417	670	934	1101	1230	1378	1295	1384	1410	1362	1292	1374	1160	1039	801	565	346		
55	389	656	905	1101	1202	1443	1416	1369	1295	1420	1331	1304	1180	1002	795	546	316		
60	381	655	884	1102	1217	1459	1337	1597	1470	1565	1204	1262	1200	1022	789	549	287		
65	348	601	858	1124	1216	1426	1313	1566	1488	1506	1308	1307	1209	1004	768	525	257		
70	315	563	810	1080	1235	1449	1408	1671	1598	1620	1312	1401	1174	984	739	482	215		
75	270	518	759	1016	1235	1398	1456	1721	1711	1584	1347	1280	1107	928	689	441	168		
80	202	447	687	928	1148	1206	1352	1356	1388	1287	1225	1213	1039	843	611	353	115		
85	148	384	629	834	1028	1163	1095	1279	1429	1218	1020	1148	909	741	541	302	68.1		
90	107	293	467	638	756	911	1156	1313	1339	1347	1127	922	706	581	414	239	47.3		
95	47.4	88.3	40.9	54.2	104	255	322	420	328	443	287	179	54.0	35.9	27.9	58.9	21.5		
100	26.9	67.9	9.27	49.9	92.7	42.6	65.3	105	101	134	64.0	50.7	52.2	56.0	4.99	49.1	13.5		
105	30.4	65.5	81.6	20.5	26.3	22.4	4.92	5.93	5.17	6.36	6.63	23.8	13.3	38.4	75.7	41.6	20.6		
110	25.8	39.6	41.0	32.9	22.8	5.50	7.03	6.77	6.71	6.78	6.38	3.39	3.62	39.9	35.8	29.8	19.2		
115	17.2	20.6	19.2	16.1	9.00	4.49	2.80	2.11	1.85	2.27	3.08	5.70	5.12	17.8	18.7	17.7	14.3		
120	13.4	16.3	16.0	10.04	6.56	4.72	3.51	2.88	2.64	3.02	3.61	5.44	5.17	11.8	16.8	15.1	11.8		
125	15.7	20.1	22.1	8.66	6.22	5.15	4.09	3.46	3.21	3.59	4.23	5.31	5.96	14.6	21.7	16.3	12.7		
130	17.6	26.2	26.2	8.48	6.24	5.82	5.36	4.30	4.08	4.57	5.20	5.75	6.41	13.9	26.2	20.0	14.2		
135	16.8	20.5	13.2	6.94	6.77	6.84	6.32	5.72	5.58	6.03	6.11	6.74	6.09	7.60	16.1	19.9	14.0		
140	8.77	6.49	5.52	6.71	6.54	7.02	7.20	7.03	7.00	7.17	6.92	6.57	6.14	5.95	5.23	6.98	8.31		
145	6.18	5.16	5.41	5.20	5.93	7.10	7.40	7.12	7.27	7.15	7.00	6.45	5.24	2.89	4.40	5.23	5.89		
150	5.94	5.14	3.04	4.91	4.92	6.63	7.01	6.90	7.22	6.86	6.62	5.80	2.20	3.32	2.60	4.48	5.42		
155	4.02	3.52	3.27	3.18	5.83	2.54	2.59	4.05	4.59	3.75	2.14	3.70	2.60	2.65	2.80	3.14	3.63		
160	4.17	3.85	3.61	3.60	3.37	3.22	2.55	3.27	3.05	2.66	2.22	2.73	2.94	3.15	3.30	3.40	4.22		
165	4.84	4.36	4.17	3.98	3.47	3.22	3.01	2.81	2.66	2.68	2.80	2.97	3.48	3.75	3.95	4.11	5.03		
170	5.49	4.67	4.88	4.67	4.48	4.13	4.11	3.87	3.76	3.75	3.86	3.97	4.10	4.76	4.87	5.36	5.76		
175	5.44	5.61	5.66	5.68	5.67	5.60	5.29	5.43	5.45	5.36	5.21	5.19	5.14	5.18	5.25	5.43	5.53		
180	5.37	5.31	5.26	5.52	5.91	5.84	5.76	5.78	4.96	5.68	5.61	5.58	5.51	5.48	5.40	5.39	5.38		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:7.980m [K=1.0000]
 Remarks: