
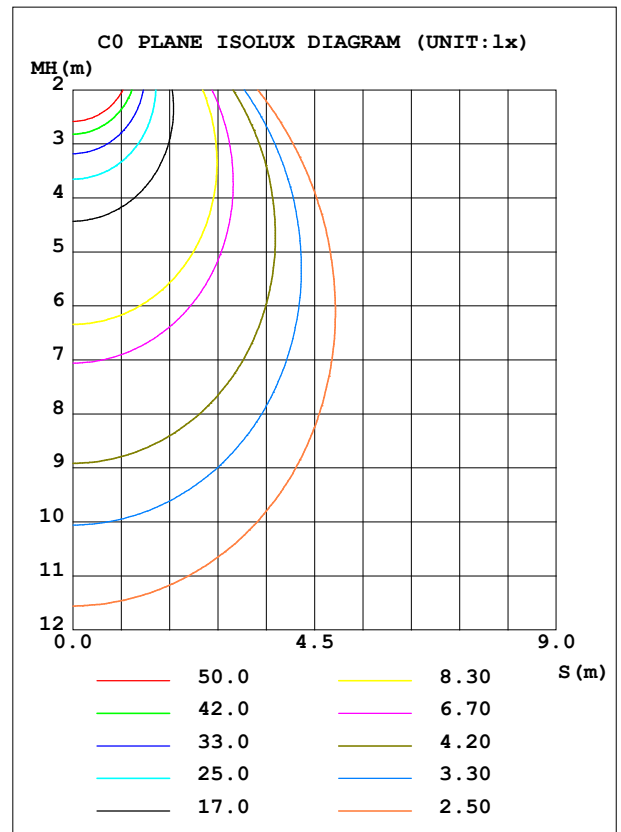


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODE: ASD-LRKS-4D9AC-XX (3000K)		Imax (cd)	334.4	S/MH (C0/180)	1.12
NOMINAL POWER (W)	8.6	LOR (%)	100.0	S/MH (C90/270)	1.14
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	674.81	<input type="checkbox"/> UP, DN (C0-180)	0.2, 48.8
NOMINAL FLUX (lm)	674.812	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.2, 50.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120.0	<input type="checkbox"/> down (%)	99.6	CIBSE SHR MAX	1.25

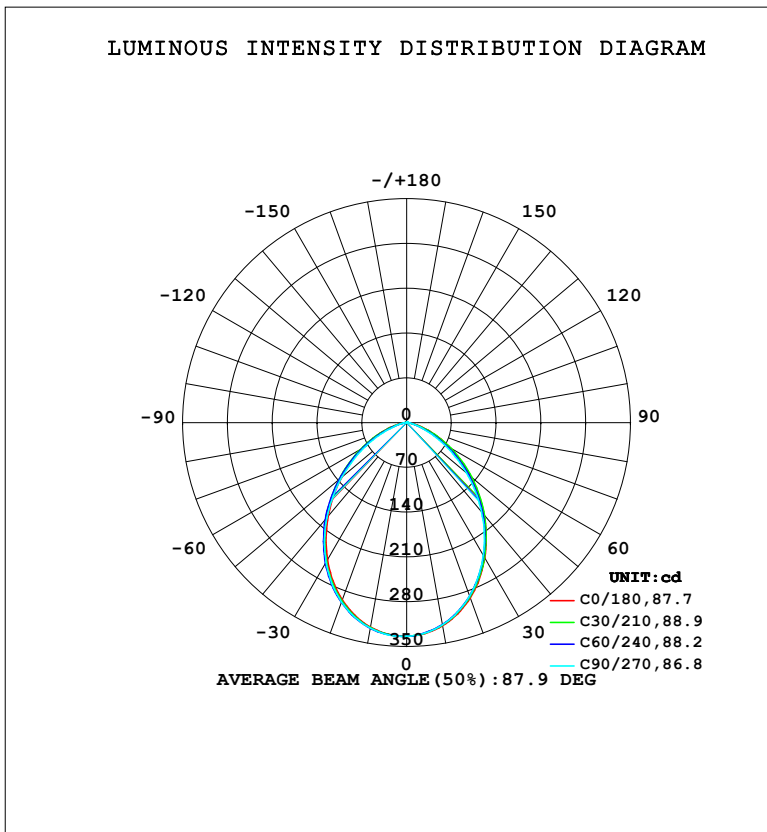

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1237]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum,lamp
10	322.4	321.1	321.2	322.3	324.7	326.0	326.4	325.0	0- 10	31.38	31.38	4.65,4.65
20	291.1	288.8	288.1	290.8	294.7	297.6	298.2	296.1	10- 20	87.40	118.8	17.6,17.6
30	244.1	242.1	239.7	243.9	247.3	252.4	252.3	251.0	20- 30	124.8	243.6	36.1,36.1
40	188.2	187.2	182.3	188.4	190.8	196.8	194.1	195.7	30- 40	137.1	380.7	56.4,56.4
50	130.5	130.1	122.5	130.5	132.4	137.8	132.0	136.8	40- 50	124.5	505.2	74.9,74.9
60	78.24	75.65	66.69	75.46	79.98	81.37	74.10	80.59	50- 60	92.89	598.1	88.6,88.6
70	36.20	31.42	25.72	31.04	37.55	34.13	28.06	33.49	60- 70	52.85	650.9	96.5,96.5
80	9.725	6.811	5.464	6.718	9.223	7.183	5.442	6.891	70- 80	18.84	669.8	99.3,99.3
90	0.0009	0.0000	0	0.0029	0.0057	0.0115	0.0001	0.0086	80- 90	2.328	672.1	99.6,99.6
100	0.0227	0.0484	0.0343	0.0541	0.1026	0.0399	0	0.0341	90-100	0.0171	672.1	99.6,99.6
110	0.1477	0.1876	0.1652	0.2018	0.2562	0.1791	0.1023	0.1706	100-110	0.1139	672.2	99.6,99.6
120	0.3241	0.3781	0.3528	0.3895	0.4552	0.3639	0.2787	0.3470	110-120	0.2646	672.5	99.7,99.7
130	0.5517	0.5857	0.5577	0.5914	0.6829	0.5517	0.4664	0.5432	120-130	0.4167	672.9	99.7,99.7
140	0.6996	0.7621	0.7455	0.7536	0.8534	0.7337	0.6597	0.7223	130-140	0.5070	673.4	99.8,99.8
150	0.8588	0.9241	0.8933	0.9072	0.9957	0.8958	0.8078	0.8958	140-150	0.5162	673.9	99.9,99.9
160	1.001	1.055	1.053	1.058	1.155	1.066	0.9726	1.038	150-160	0.4489	674.4	99.9,99.9
170	1.103	1.157	1.183	1.175	1.240	1.183	1.109	1.166	160-170	0.3130	674.7	100,100
180	1.234	1.282	1.286	1.260	1.314	1.277	1.286	1.283	170-180	0.1158	674.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1237]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

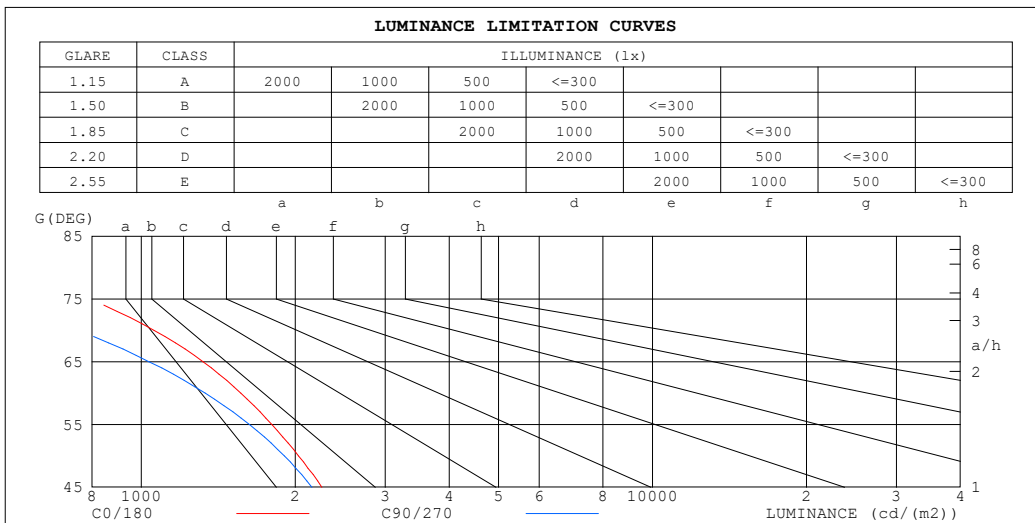

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	215	73
80	560	315
75	792	526
70	1058	752
65	1320	1034
60	1565	1333
55	1799	1627
50	2030	1906
45	2253	2156


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1237]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.68	.62	.72	.66	.61	.70	.65	.60	.68	.63	.60	.58
5.0	.69	.61	.55	.68	.60	.54	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.54	.49	.62	.54	.48	.60	.53	.48	.58	.52	.47	.57	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.43	.52	.47	.42	.40
8.0	.52	.45	.39	.52	.44	.39	.50	.44	.39	.49	.43	.39	.48	.43	.38	.37
9.0	.48	.41	.36	.48	.41	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.33
10.0	.45	.37	.33	.44	.37	.32	.43	.37	.32	.42	.36	.32	.42	.36	.32	.30

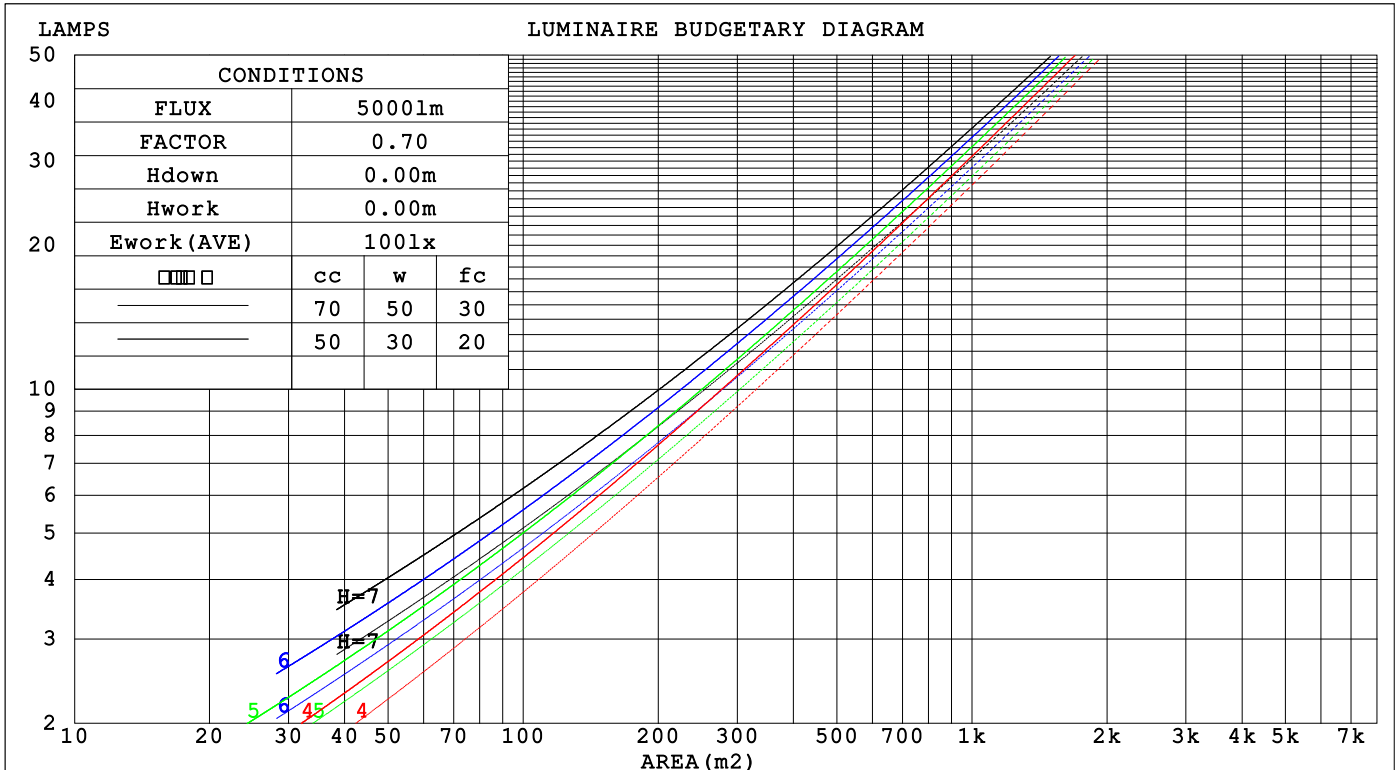

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1237]
 Remarks:

WEC AND CCEC

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.145	.046	.247	.141	.045	.234	.134	.043	.222	.128	.041	.211	.122	.039	
2.0	.247	.135	.042	.241	.133	.041	.230	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.234	.125	.037	.229	.122	.037	.219	.118	.036	.209	.115	.035	.201	.111	.034	
4.0	.220	.114	.034	.215	.113	.033	.206	.109	.033	.198	.106	.032	.190	.103	.031	
5.0	.206	.105	.030	.202	.104	.030	.194	.101	.030	.187	.099	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	.170	.090	.027	
7.0	.182	.090	.026	.179	.089	.025	.172	.087	.025	.166	.085	.025	.161	.084	.025	
8.0	.171	.084	.024	.168	.083	.023	.163	.081	.023	.157	.080	.023	.152	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.073	.021	
10.0	.153	.073	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.137	.069	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.084	.060	.055	.049	.019	.018	.016	
2.0	.169	.135	.107	.145	.116	.092	.099	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.103	.066	.131	.089	.057	.090	.062	.040	.052	.036	.024	.017	.012	.008	
5.0	.145	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.119	.073	.039	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.132	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.126	.071	.034	.109	.062	.029	.075	.043	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.066	.030	.104	.058	.026	.072	.041	.018	.042	.024	.011	.014	.008	.004	
10.0	.115	.062	.027	.099	.054	.023	.069	.038	.017	.040	.022	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1237]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: LED DOWNLIGHT		TYPE:					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.: ASD LIGHTING CORP		SUR.: 0.1*0.1					Shielding Angle:				
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		15.8	17.2	16.1	17.4	17.6	15.3	16.7	15.6	16.8	17.1
	3H	16.6	17.8	16.9	18.1	18.3	15.8	17.0	16.1	17.2	17.5
	4H	16.8	17.9	17.1	18.2	18.4	15.8	17.0	16.1	17.3	17.5
	6H	16.8	17.9	17.1	18.2	18.5	15.8	16.9	16.1	17.2	17.5
	8H	16.8	17.8	17.1	18.1	18.4	15.8	16.8	16.1	17.1	17.4
	12H	16.7	17.8	17.1	18.1	18.4	15.7	16.8	16.1	17.0	17.4
4H	2H	16.1	17.3	16.4	17.6	17.8	15.7	16.8	16.0	17.1	17.3
	3H	17.0	18.0	17.3	18.3	18.6	16.2	17.3	16.6	17.5	17.9
	4H	17.2	18.2	17.6	18.5	18.8	16.4	17.3	16.7	17.6	17.9
	6H	17.3	18.2	17.7	18.5	18.9	16.4	17.2	16.8	17.5	17.9
	8H	17.3	18.1	17.7	18.4	18.8	16.3	17.1	16.8	17.5	17.9
	12H	17.3	18.0	17.7	18.4	18.8	16.3	17.0	16.7	17.4	17.8
8H	4H	17.2	18.0	17.6	18.3	18.7	16.4	17.1	16.8	17.5	17.9
	6H	17.4	18.0	17.8	18.4	18.8	16.4	17.1	16.9	17.5	17.9
	8H	17.4	17.9	17.8	18.3	18.8	16.4	17.0	16.9	17.4	17.9
	12H	17.4	17.8	17.8	18.3	18.8	16.4	16.9	16.9	17.3	17.8
12H	4H	17.2	17.9	17.6	18.3	18.7	16.4	17.0	16.8	17.4	17.8
	6H	17.3	17.9	17.8	18.3	18.8	16.4	17.0	16.9	17.4	17.8
	8H	17.4	17.8	17.8	18.3	18.8	16.4	16.9	16.9	17.3	17.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.4 / - 0.5					+ 0.6 / - 0.7				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.7 / - 0.7					+ 0.9 / - 1.1				

CIE Pub.117, 674.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.4)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1237]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	54	47	63	53	47	62	53	47	41
0.80	74	64	58	73	64	57	72	63	57	51
1.00	82	73	67	81	72	66	79	73	66	59
1.25	89	80	74	88	80	74	85	78	73	67
1.50	94	85	80	92	85	79	89	83	78	71
2.00	100	93	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	89	81
3.00	106	100	95	104	98	94	100	96	92	84
4.00	109	104	100	107	102	99	102	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1237]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

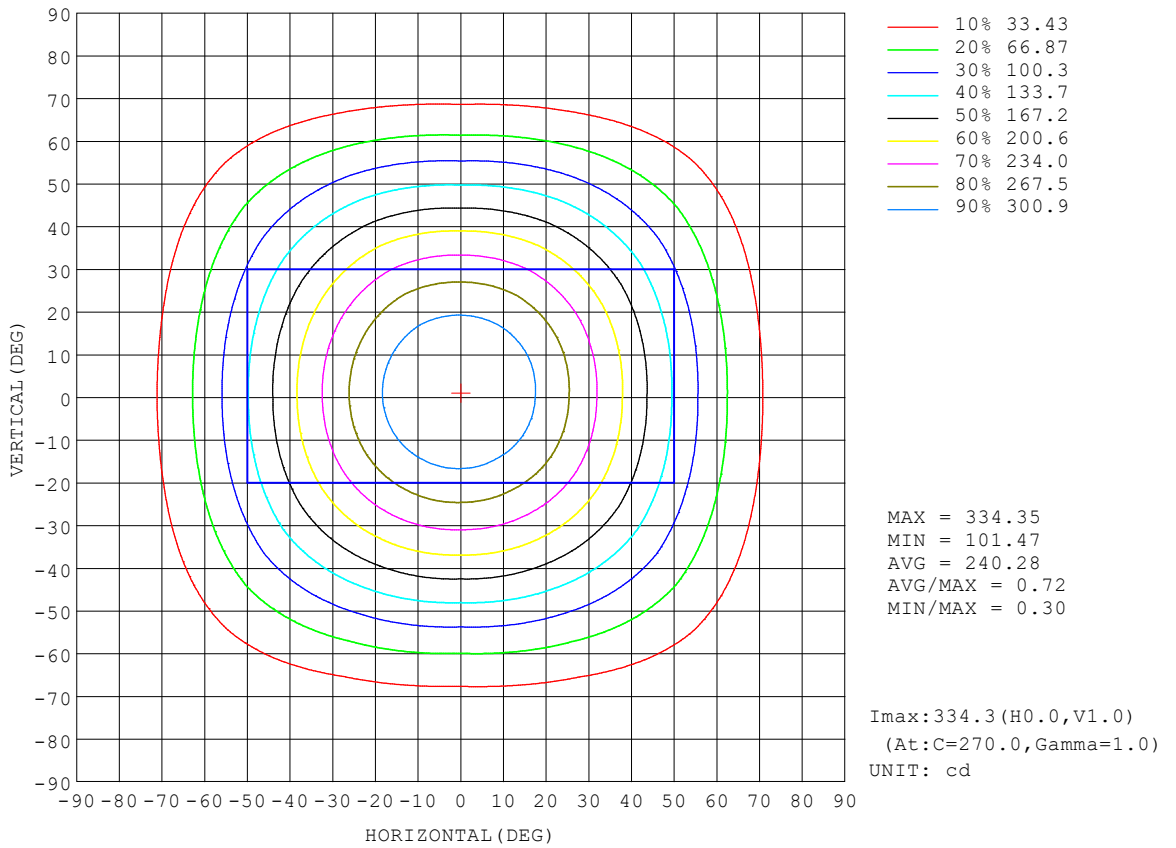


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1237]
 Remarks:

AAI Figure

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Flux out:433.3 lm

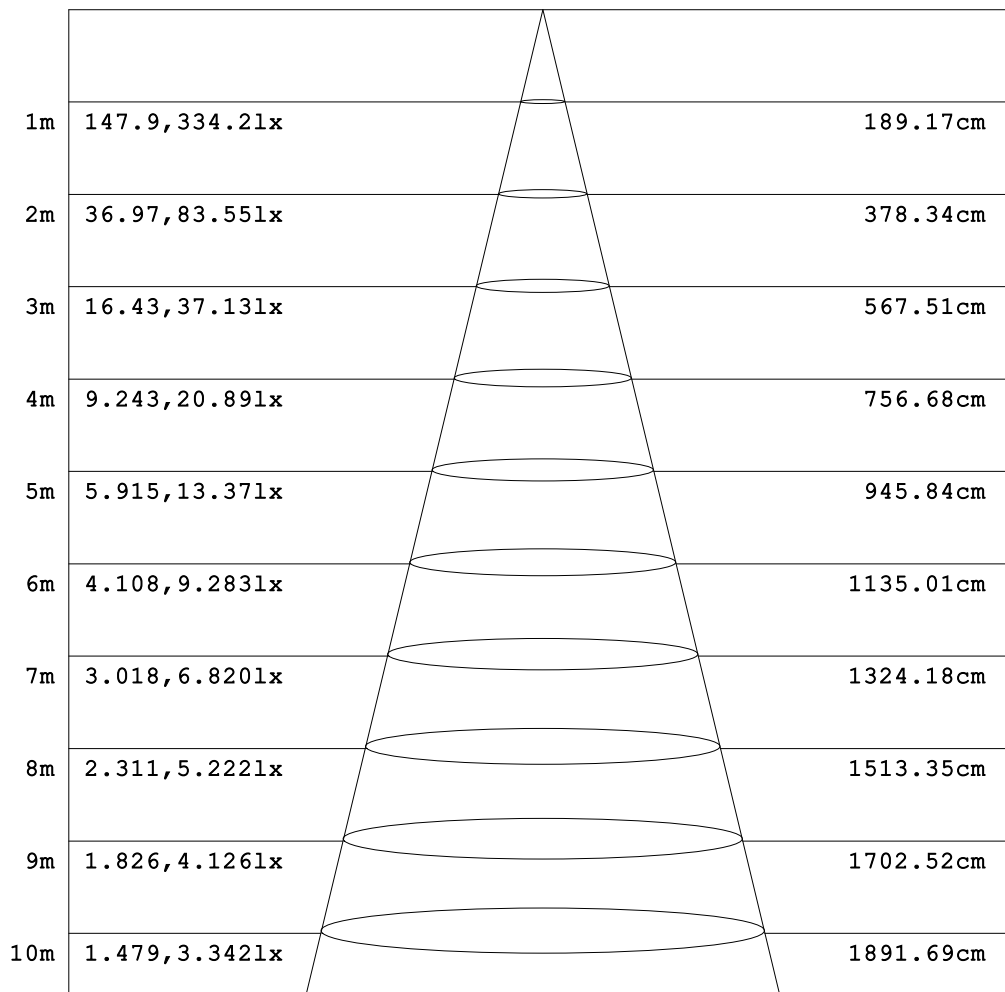

Angle:86.81deg

Height

Eavg, Emax

Diameter


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1237]
 Remarks:

ISOLUX DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

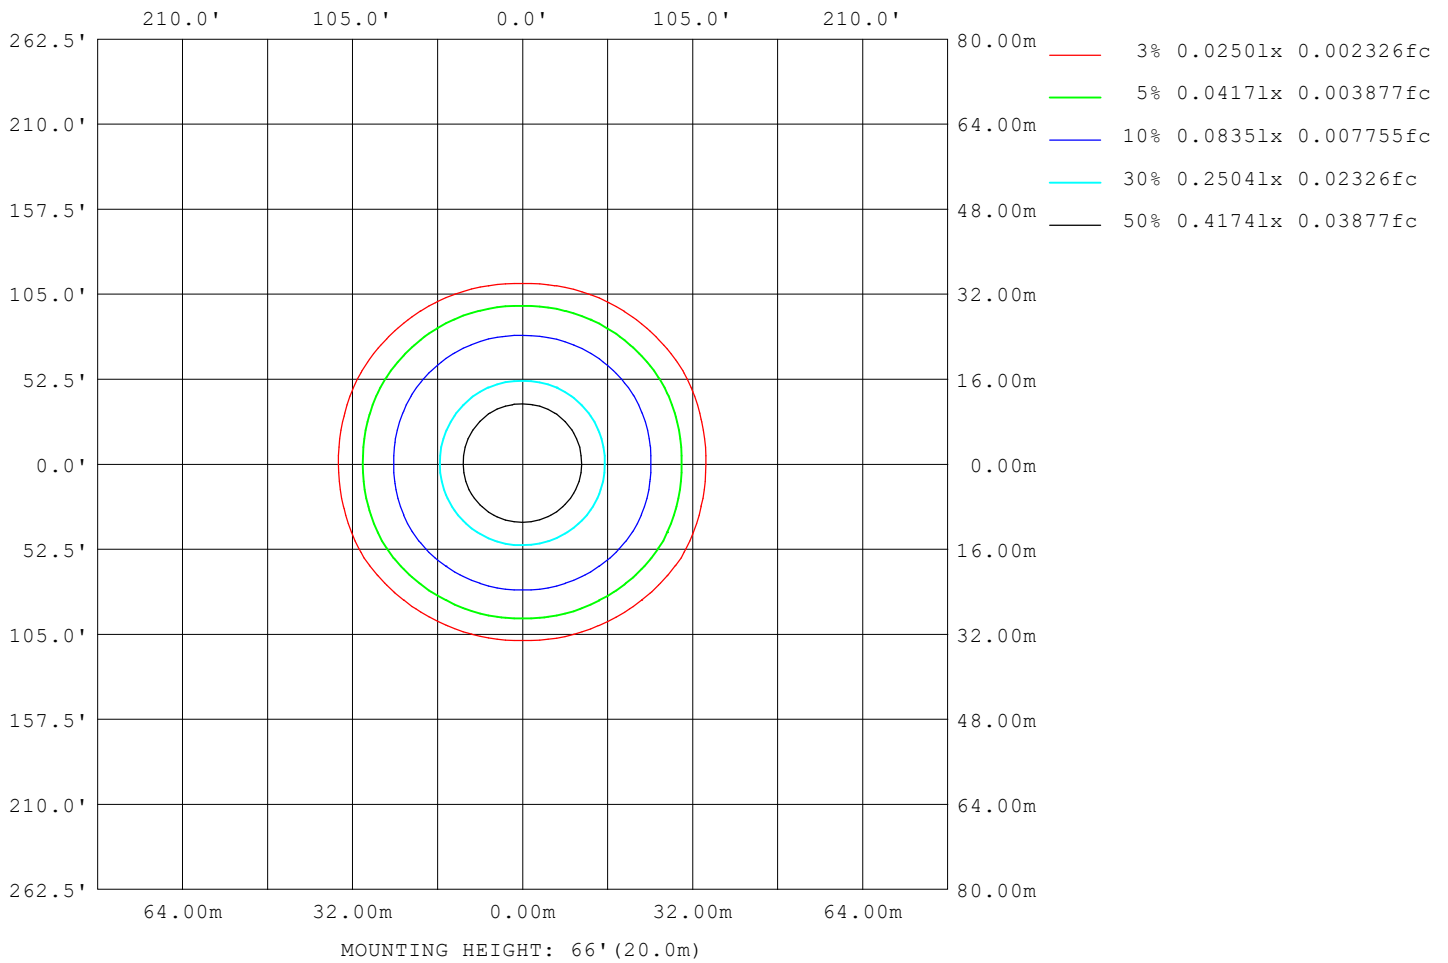

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1237]
 Remarks:

LED Avg.L Report

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1340
L_0~180 (75) av	808
L_0~180 (85) av	251
L_90~270 (65) av	1095
L_90~270 (75) av	533
L_90~270 (85) av	78
L_45 (65) av	1277
L_45 (75) av	644
L_45 (85) av	151

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1237]
 Remarks:

Planar Illuminance Curve

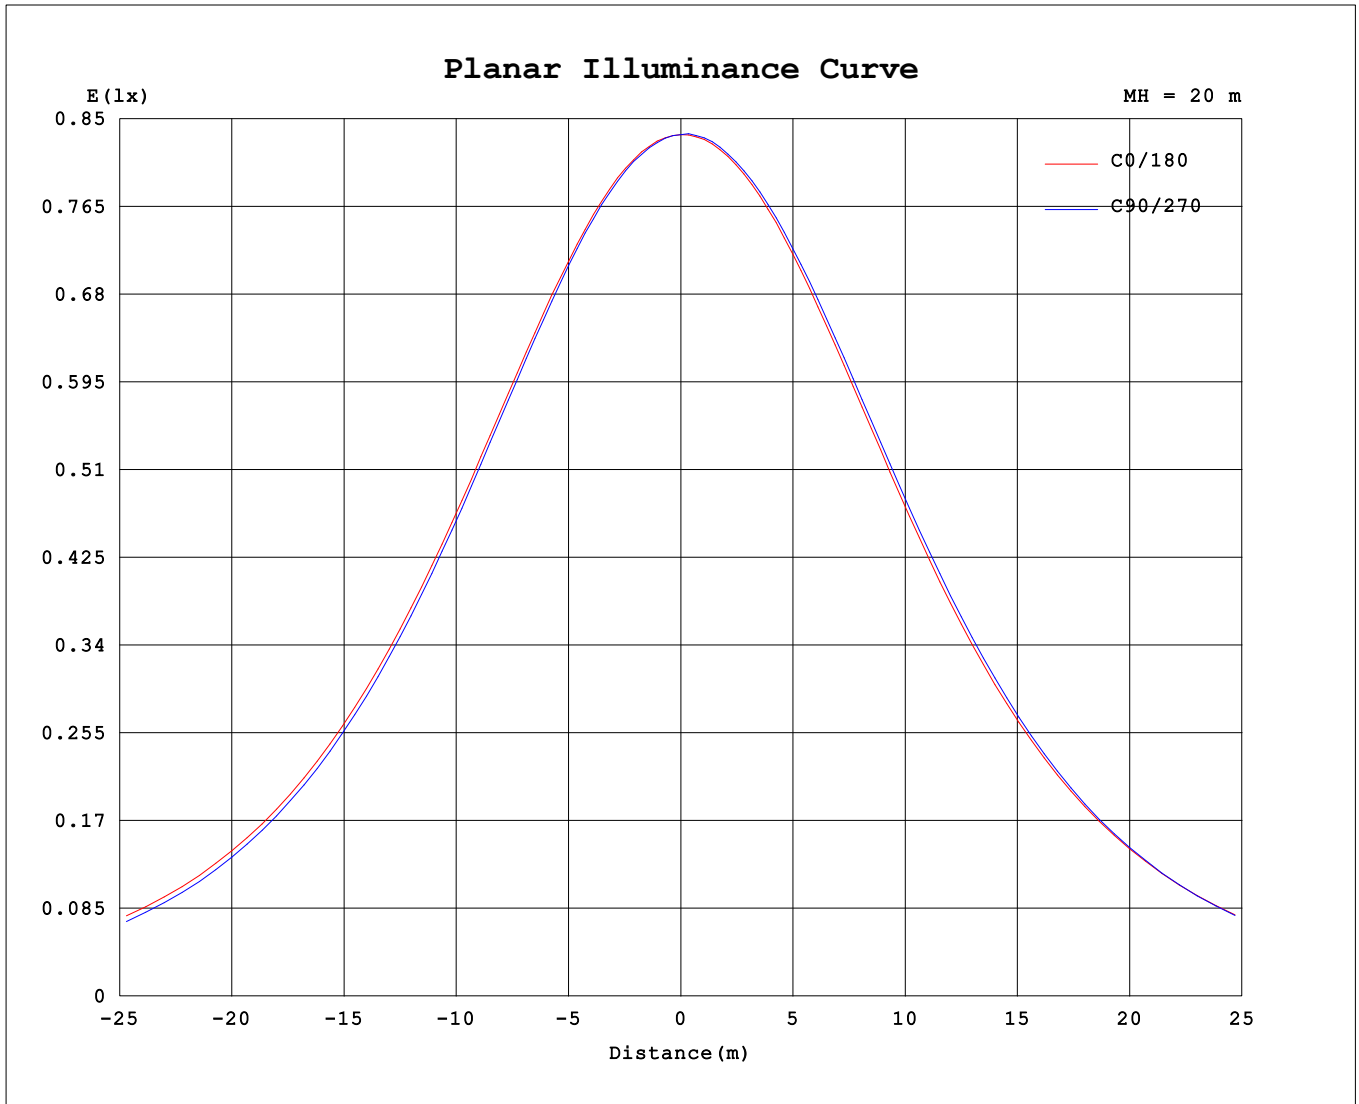

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1237]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	334	334	334	334	334	334	334	334	334	334	334	334							
5	331	330	330	330	330	331	332	332	333	333	332	332							
10	322	321	321	321	322	323	325	325	327	326	326	324							
15	309	308	307	307	308	310	312	314	315	315	314	312							
20	291	290	288	288	289	292	295	297	299	298	297	295							
25	269	268	266	266	267	270	273	275	278	277	277	274							
30	244	243	241	240	242	246	247	251	254	252	253	249							
35	217	217	213	212	215	219	220	224	227	224	225	223							
40	188	189	185	182	186	191	191	196	198	194	197	195							
45	159	161	156	152	157	162	161	167	168	163	166	166							
50	131	133	127	123	127	134	132	138	137	132	136	138							
55	103	106	98.1	93.3	97.8	106	105	110	108	102	107	109							
60	78.2	79.9	71.3	66.7	70.8	80.1	80.0	83.1	79.7	74.1	78.7	82.5							
65	55.8	56.1	47.5	43.7	46.9	55.9	57.5	58.6	53.8	48.8	53.0	57.9							
70	36.2	34.9	27.9	25.7	27.4	34.6	37.5	36.8	31.5	28.1	30.9	36.0							
75	20.5	18.3	14.5	13.6	14.2	18.1	21.3	19.2	15.7	14.0	15.3	18.6							
80	9.73	7.89	5.73	5.46	5.67	7.76	9.22	8.12	6.25	5.44	6.02	7.76							
85	1.87	1.91	0.75	0.64	0.66	1.82	2.51	2.03	0.92	0.72	0.82	1.73							
90	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.00	0.00	0.00	0.02							
95	0.00	0.03	0.00	0.01	0.00	0.04	0.05	0.01	0.01	0.00	0.01	0.00							
100	0.02	0.10	0.00	0.03	0.01	0.10	0.10	0.03	0.05	0.00	0.05	0.02							
105	0.09	0.16	0.06	0.10	0.09	0.18	0.18	0.10	0.10	0.03	0.11	0.10							
110	0.15	0.24	0.13	0.17	0.16	0.24	0.26	0.19	0.17	0.10	0.17	0.17							
115	0.23	0.34	0.22	0.25	0.24	0.34	0.35	0.28	0.26	0.18	0.25	0.26							
120	0.32	0.44	0.32	0.35	0.34	0.44	0.46	0.38	0.35	0.28	0.34	0.35							
125	0.46	0.55	0.40	0.44	0.45	0.55	0.57	0.48	0.43	0.38	0.44	0.45							
130	0.55	0.66	0.51	0.56	0.53	0.65	0.68	0.57	0.53	0.47	0.53	0.55							
135	0.65	0.74	0.60	0.65	0.63	0.73	0.78	0.65	0.62	0.57	0.63	0.65							
140	0.70	0.83	0.69	0.75	0.71	0.80	0.85	0.75	0.72	0.66	0.73	0.72							
145	0.77	0.92	0.78	0.84	0.78	0.90	0.92	0.84	0.81	0.75	0.80	0.82							
150	0.86	1.00	0.85	0.89	0.85	0.96	1.00	0.92	0.88	0.81	0.88	0.92							
155	0.93	1.05	0.93	0.98	0.94	1.02	1.08	0.99	0.95	0.92	0.95	0.96							
160	1.00	1.10	1.01	1.05	1.02	1.10	1.15	1.10	1.04	0.97	1.04	1.04							
165	1.05	1.13	1.06	1.13	1.11	1.13	1.21	1.17	1.09	1.06	1.13	1.09							
170	1.10	1.17	1.14	1.18	1.18	1.17	1.24	1.19	1.17	1.11	1.17	1.16							
175	1.16	1.25	1.23	1.26	1.22	1.24	1.30	1.25	1.26	1.20	1.26	1.21							
180	1.23	1.28	1.29	1.29	1.27	1.25	1.31	1.29	1.27	1.29	1.29	1.28							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1237]
 Remarks: