
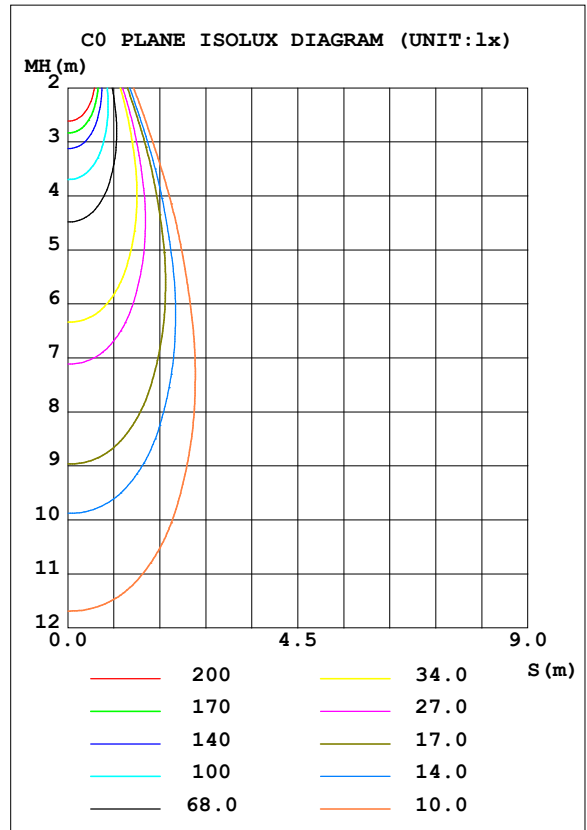


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 77.54 lm/W			
MODEL		I _{max} (cd)	1365	S/MH (C0/180)	0.59
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	0.58
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	612.64	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	612.64	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

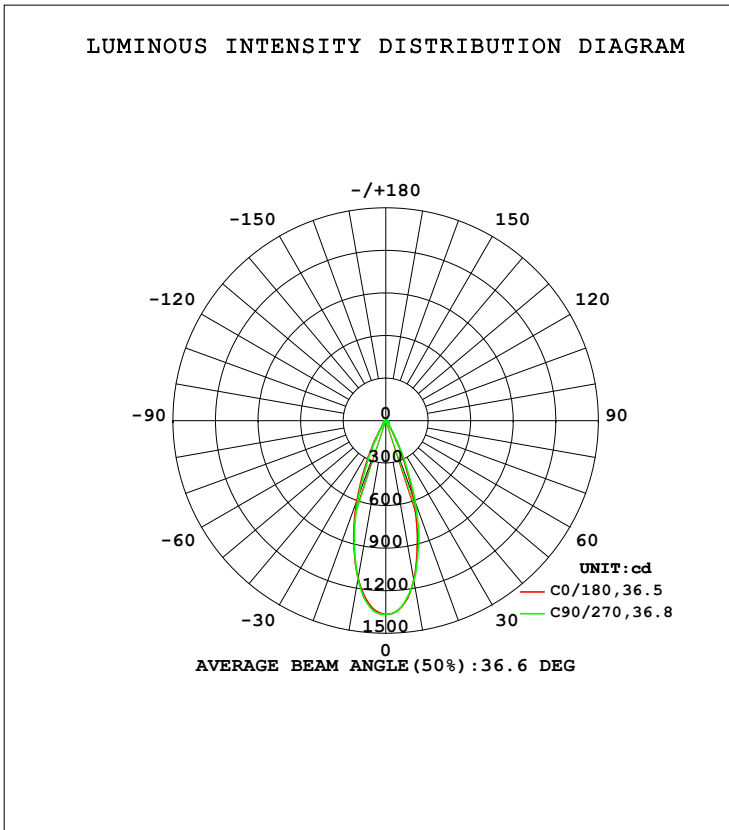

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1142	1150	1145	1142	1127	1133	1135	1145	0- 10	119.8	119.8	19.5,19.5
20	559.8	620.5	612.3	619.8	598.7	611.4	563.1	636.6	10- 20	241.0	360.7	58.9,58.9
30	110.1	184.9	129.6	187.0	134.4	186.1	104.5	183.6	20- 30	156.2	517.0	84.4,84.4
40	31.37	38.17	30.20	38.13	31.45	39.25	30.70	39.17	30- 40	42.04	559.0	91.2,91.2
50	19.58	21.49	19.28	21.54	19.70	21.69	19.74	21.65	40- 50	20.29	579.3	94.6,94.6
60	14.05	13.06	13.77	13.12	13.99	13.12	13.92	13.21	50- 60	15.01	594.3	97,97
70	8.499	8.201	8.303	8.143	8.303	8.076	8.235	8.196	60- 70	10.93	605.2	98.8,98.8
80	3.555	3.484	3.374	3.400	3.398	3.310	3.347	3.398	70- 80	6.118	611.4	99.8,99.8
90	0.0244	0.0204	0.0244	0.0184	0.0357	0.0280	0.0304	0.0307	80- 90	1.280	612.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

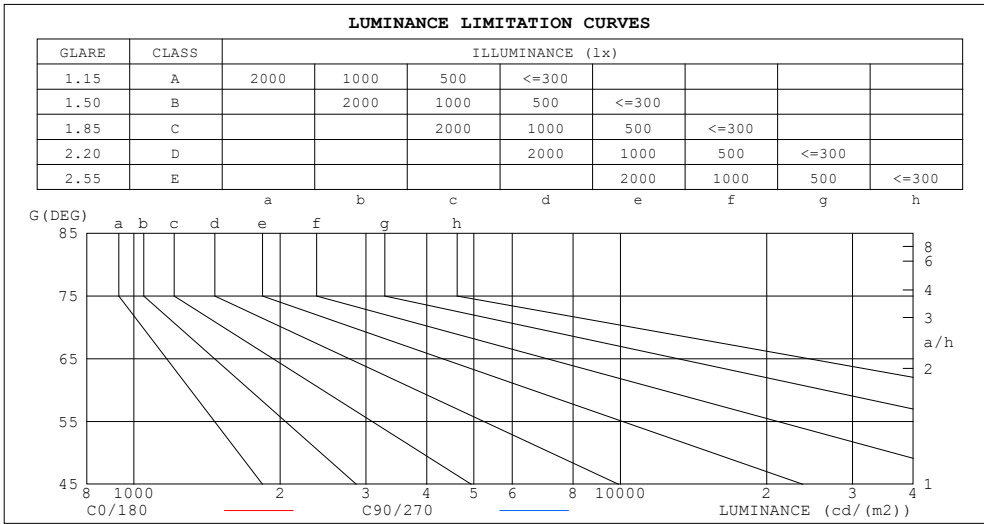

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	110	10
80	184	175
75	205	199
70	224	218
65	240	235
60	253	248
55	252	247
50	274	270
45	313	308


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.94	.92	.90	.88
3.0	.98	.93	.90	.97	.92	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.89	.86	.82	.88	.84	.81	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.84	.78	.75	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.76	.73	.72
7.0	.80	.75	.71	.79	.74	.71	.78	.74	.70	.77	.73	.70	.76	.72	.70	.68
8.0	.76	.71	.68	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.65
9.0	.73	.68	.65	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.67	.64	.63
10.0	.70	.65	.62	.70	.65	.62	.69	.65	.62	.68	.64	.61	.68	.64	.61	.60

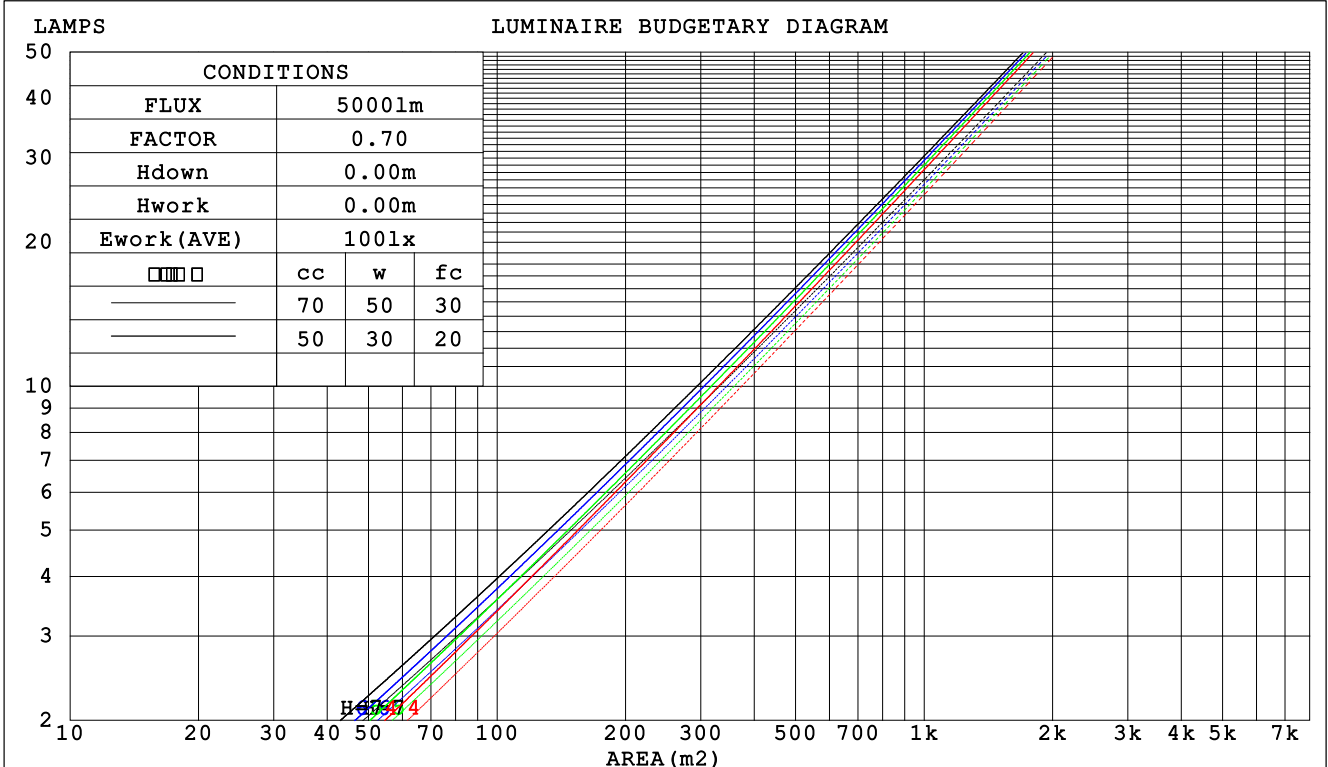

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.171 .097 .031	.164 .094 .030	.151 .087 .028	.140 .081 .026	.129 .075 .024	
2.0	.160 .088 .027	.155 .085 .026	.144 .080 .025	.135 .076 .024	.126 .071 .022	
3.0	.150 .080 .024	.146 .078 .023	.137 .074 .023	.128 .070 .022	.121 .067 .021	
4.0	.141 .073 .022	.137 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.133 .068 .020	.130 .067 .019	.123 .064 .019	.117 .062 .018	.111 .059 .018	
6.0	.126 .063 .018	.123 .062 .018	.117 .060 .017	.112 .058 .017	.107 .056 .017	
7.0	.120 .059 .017	.117 .058 .017	.112 .057 .016	.107 .055 .016	.103 .053 .016	
8.0	.114 .056 .016	.111 .055 .016	.107 .053 .015	.103 .052 .015	.099 .051 .015	
9.0	.109 .053 .015	.107 .052 .015	.103 .051 .014	.099 .050 .014	.095 .048 .014	
10.0	.104 .050 .014	.102 .049 .014	.099 .048 .014	.095 .047 .013	.092 .046 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.012 .009 .006	
7.0	.105 .069 .044	.091 .060 .038	.063 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.099 .063 .038	.086 .055 .033	.059 .038 .023	.034 .023 .014	.011 .007 .005	
9.0	.094 .057 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm										
NAME: ASD-CD-PS-2D8AC-WH					TYPE:			WEIGHT:		
SPEC.:4000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.3	5.2	4.6	5.3	5.5	4.3	5.1	4.5	5.3	5.4
3H	5.5	6.3	5.8	6.5	6.7	5.5	6.2	5.7	6.4	6.6
4H	6.0	6.8	6.3	7.0	7.2	5.9	6.7	6.2	6.9	7.1
6H	6.4	7.1	6.7	7.3	7.6	6.3	7.0	6.6	7.2	7.5
8H	6.5	7.2	6.8	7.4	7.7	6.3	7.0	6.6	7.3	7.5
12H	6.5	7.2	6.8	7.4	7.7	6.3	7.0	6.6	7.2	7.5
4H 2H	4.8	5.5	5.1	5.7	6.0	4.7	5.5	5.0	5.7	5.9
3H	6.2	6.8	6.5	7.1	7.4	6.1	6.8	6.4	7.0	7.3
4H	6.8	7.4	7.1	7.7	8.0	6.7	7.3	7.1	7.6	7.9
6H	7.3	7.8	7.7	8.1	8.5	7.2	7.7	7.6	8.0	8.4
8H	7.4	7.9	7.8	8.3	8.6	7.3	7.8	7.7	8.1	8.5
12H	7.5	7.9	7.9	8.3	8.7	7.2	7.7	7.6	8.1	8.4
8H 4H	7.0	7.5	7.4	7.8	8.2	6.9	7.4	7.3	7.8	8.1
6H	7.6	8.0	8.0	8.4	8.8	7.5	7.9	7.9	8.3	8.7
8H	7.8	8.2	8.3	8.6	9.0	7.6	8.0	8.1	8.4	8.9
12H	7.9	8.2	8.4	8.7	9.1	7.6	7.9	8.1	8.4	8.8
12H 4H	7.0	7.4	7.4	7.8	8.2	6.9	7.4	7.3	7.7	8.1
6H	7.6	8.0	8.1	8.4	8.9	7.5	7.9	8.0	8.3	8.8
8H	7.9	8.2	8.3	8.6	9.1	7.7	8.0	8.1	8.4	8.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				

CIE Pub.117, 612.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.7)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	79	76	85	79	75	72
0.80	94	87	84	93	87	83	92	87	83	79
1.00	98	92	88	97	92	88	96	92	88	83
1.25	102	97	93	101	96	93	99	95	92	87
1.50	105	100	96	104	99	96	101	98	95	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	106	102	108	104	101	105	102	100	94
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	113	110	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

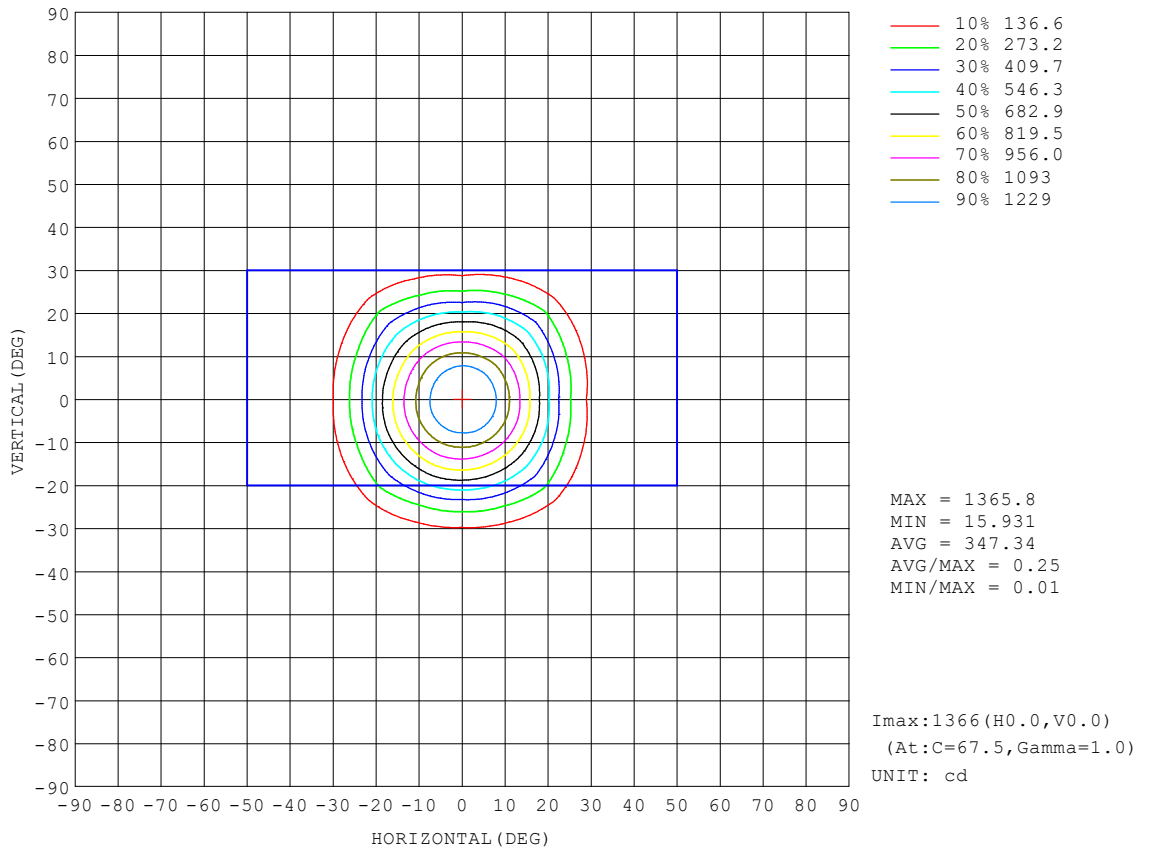


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

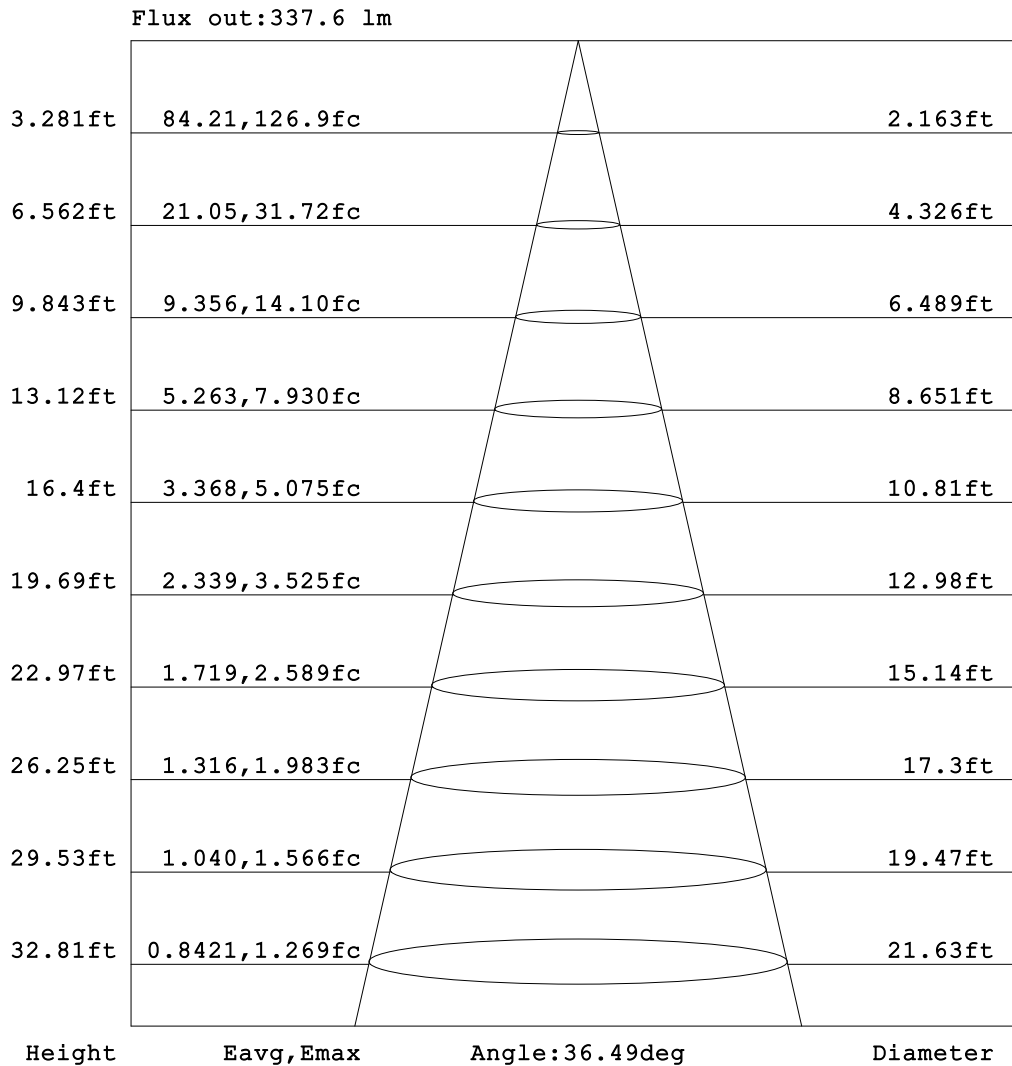


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

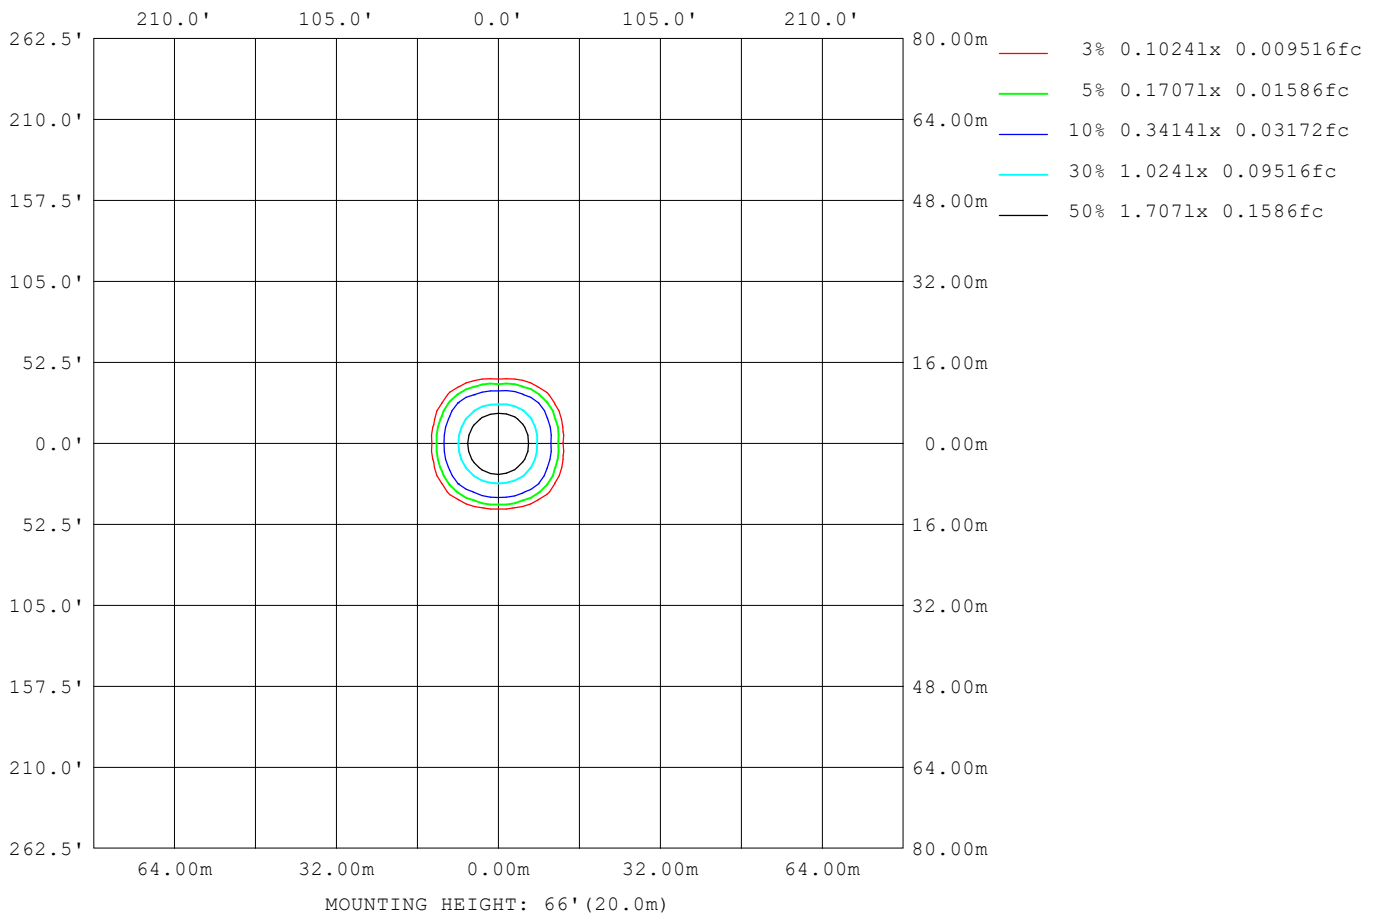

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	238
L_0~180 (75) av	202
L_0~180 (85) av	112
L_90~270 (65) av	235
L_90~270 (75) av	198
L_90~270 (85) av	33
L_45 (65) av	226
L_45 (75) av	198
L_45 (85) av	79

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

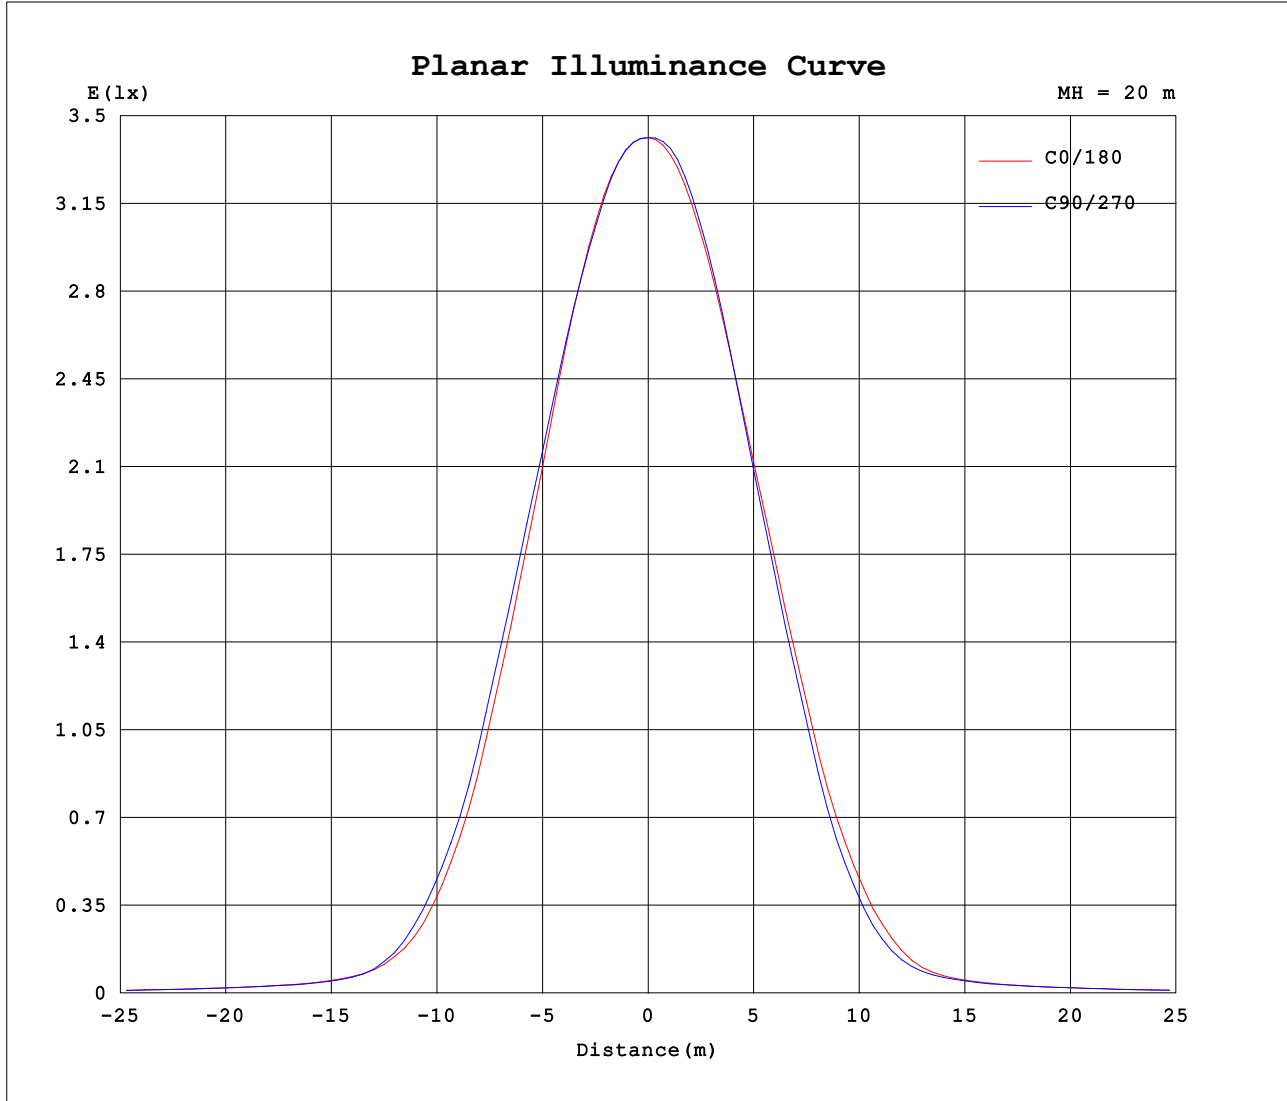

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.99V I:0.0963A P:7.9005W PF:0.9369 Freq:59.98Hz Lamp Flux:612.64x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365	1365			
5	1317	1322	1321	1322	1315	1307	1303	1306	1303	1303	1308	1311	1318	1317	1318	1315			
10	1142	1150	1150	1149	1145	1146	1142	1136	1127	1124	1133	1135	1135	1135	1145	1140			
15	863	886	891	892	898	904	895	888	879	869	875	868	860	876	895	878			
20	560	595	621	615	612	621	620	615	599	596	611	586	563	605	637	599			
25	282	324	386	343	324	338	378	340	324	340	380	319	278	332	392	329			
30	110	141	185	148	130	146	187	155	134	153	186	135	105	139	184	143			
35	49.0	56.3	71.1	55.0	46.9	54.2	70.9	58.8	50.4	58.3	71.3	52.9	46.5	54.5	70.1	55.3			
40	31.4	33.6	38.2	32.8	30.2	32.7	38.1	34.3	31.4	34.0	39.3	33.1	30.7	33.1	39.2	33.6			
45	24.6	25.9	27.2	25.7	24.2	25.6	27.1	25.9	24.6	25.9	27.8	26.0	24.7	25.9	27.3	25.8			
50	19.6	21.0	21.5	20.9	19.3	21.0	21.5	21.1	19.7	20.9	21.7	21.1	19.7	21.1	21.7	21.0			
55	16.1	16.8	16.6	16.6	15.8	16.6	16.9	16.8	16.1	16.7	16.8	16.7	16.1	16.7	16.9	16.7			
60	14.1	14.0	13.1	13.8	13.8	13.9	13.1	14.0	14.0	13.9	13.1	13.9	13.9	13.9	13.2	14.0			
65	11.3	11.4	10.6	11.2	11.0	11.2	10.6	11.3	11.1	11.1	10.6	11.1	11.1	11.2	10.7	11.3			
70	8.50	8.57	8.20	8.44	8.30	8.41	8.14	8.42	8.30	8.32	8.08	8.29	8.24	8.36	8.20	8.51			
75	5.90	5.96	5.76	5.85	5.74	5.81	5.68	5.80	5.70	5.70	5.59	5.68	5.64	5.74	5.71	5.88			
80	3.56	3.60	3.48	3.52	3.37	3.43	3.40	3.47	3.40	3.37	3.31	3.35	3.35	3.40	3.40	3.51			
85	1.06	1.48	0.75	0.27	0.09	0.19	0.66	1.37	1.11	1.30	0.87	0.59	0.55	0.50	0.77	1.34			
90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: