
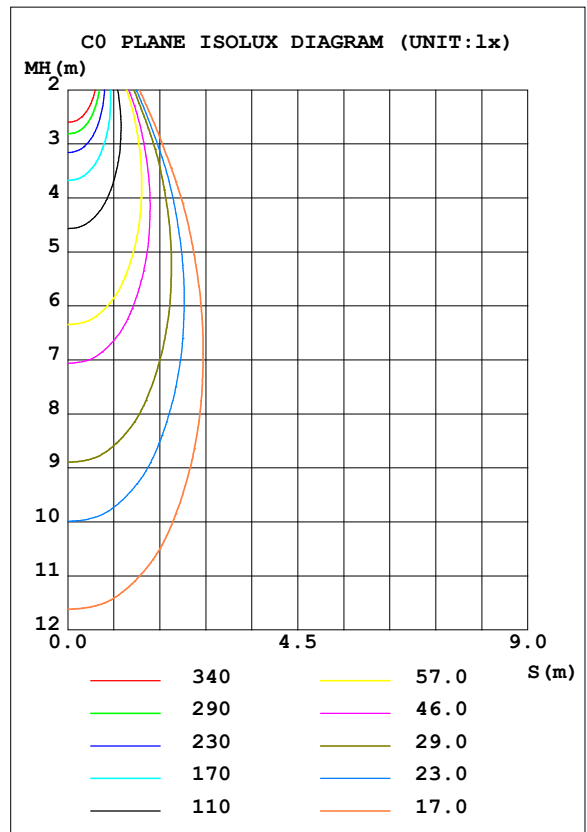


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.89 lm/W			
MODEL		I _{max} (cd)	2294	S/MH (C0/180)	0.59
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.59
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1078.7	<input type="checkbox"/> UP, DN (C0-180)	0.0, 51.4
NOMINAL FLUX (lm)	1078.65	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 48.6
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

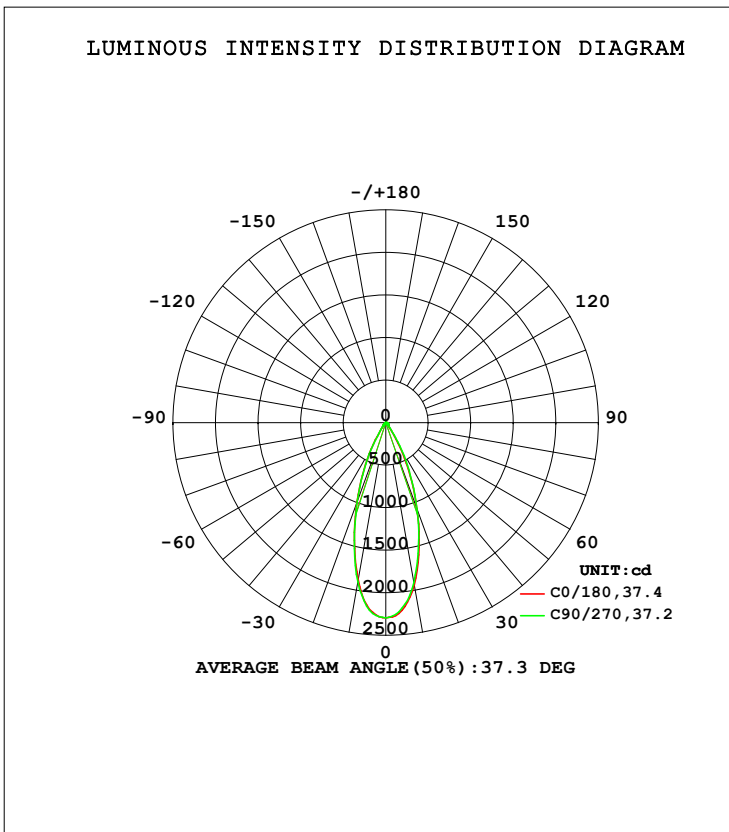

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1936	1938	1906	1882	1876	1885	1899	1929	0- 10	201.0	201.0	18.6,18.6
20	1077	1115	1074	1036	990.3	1015	978.7	1041	10- 20	405.0	606.0	56.2,56.2
30	340.3	398.5	389.8	351.4	297.3	295.8	290.3	315.6	20- 30	298.9	904.9	83.9,83.9
40	59.95	66.59	66.35	62.34	56.66	56.62	57.06	59.29	30- 40	89.00	993.9	92.1,92.1
50	35.09	35.97	36.31	35.75	35.06	34.67	34.80	34.90	40- 50	34.66	1029	95.4,95.4
60	20.85	21.23	21.40	21.22	21.10	21.07	20.98	20.83	50- 60	24.54	1053	97.6,97.6
70	11.42	11.54	11.56	11.48	11.69	11.93	11.94	11.61	60- 70	16.09	1069	99.1,99.1
80	4.466	3.763	2.813	3.682	4.619	4.437	3.904	4.190	70- 80	8.143	1077	99.9,99.9
90	0.0444	0.0381	0.0390	0.0340	0.0510	0.0494	0.0521	0.0491	80- 90	1.331	1079	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:



LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	88	6
80	232	146
75	266	246
70	301	304
65	341	347
60	376	385
55	424	440
50	492	508
45	550	555


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.93	.90	.97	.92	.89	.94	.91	.88	.92	.89	.86	.90	.87	.85	.84
4.0	.93	.88	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.73	.79	.75	.73	.71
7.0	.79	.74	.70	.79	.74	.70	.78	.73	.70	.76	.72	.69	.75	.72	.69	.68
8.0	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
9.0	.73	.67	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.70	.66	.63	.62
10.0	.70	.64	.61	.69	.64	.61	.68	.64	.61	.68	.64	.61	.67	.63	.61	.59

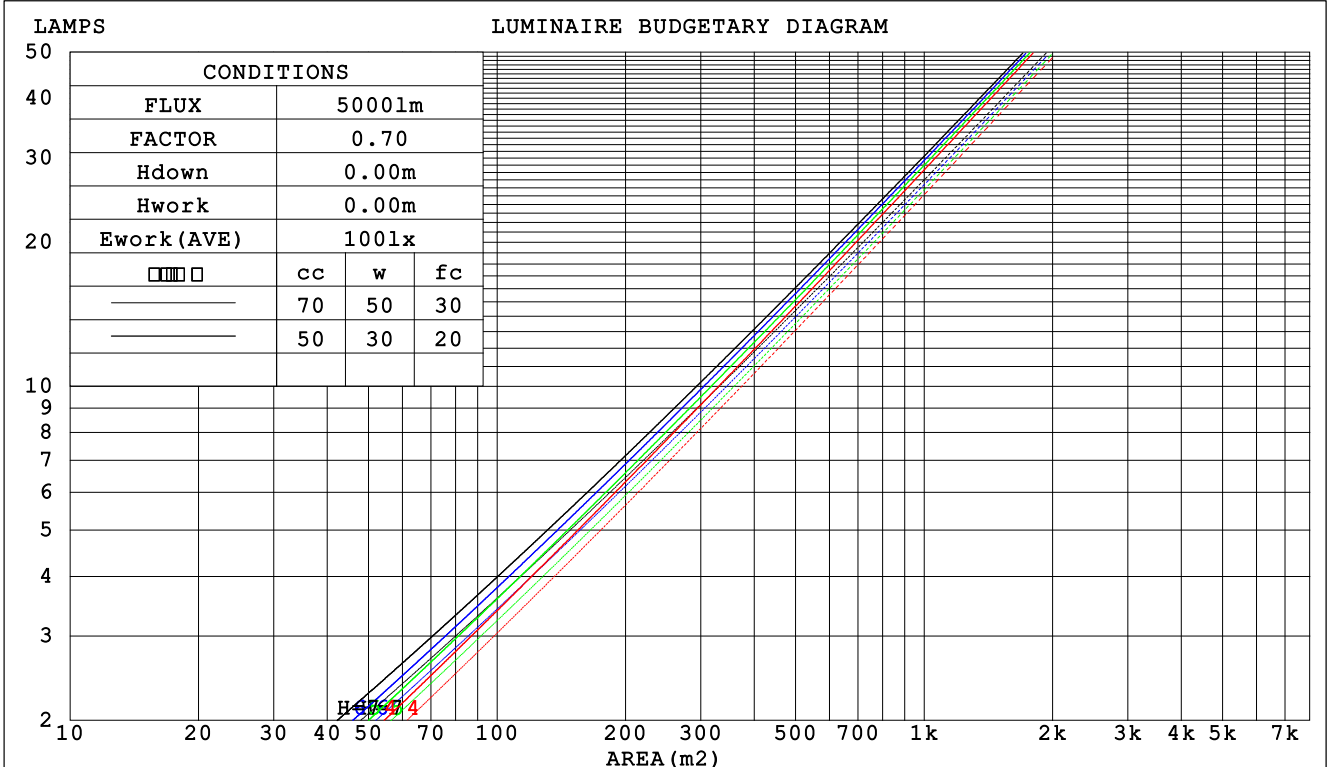

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.169 .096 .031	.163 .093 .029	.150 .086 .028	.139 .080 .026	.128 .074 .024	
2.0	.160 .088 .027	.154 .085 .026	.144 .080 .025	.134 .075 .024	.125 .071 .022	
3.0	.150 .080 .024	.146 .078 .023	.137 .074 .023	.128 .070 .022	.121 .067 .021	
4.0	.142 .074 .022	.138 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.134 .068 .020	.130 .067 .019	.124 .064 .019	.118 .062 .018	.112 .060 .018	
6.0	.127 .064 .018	.124 .063 .018	.118 .061 .018	.113 .059 .017	.108 .057 .017	
7.0	.121 .060 .017	.118 .059 .017	.113 .057 .016	.108 .055 .016	.104 .054 .016	
8.0	.115 .056 .016	.113 .055 .016	.108 .054 .015	.104 .053 .015	.100 .051 .015	
9.0	.110 .053 .015	.108 .053 .015	.104 .051 .015	.100 .050 .014	.096 .049 .014	
10.0	.105 .050 .014	.103 .050 .014	.100 .049 .014	.096 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .045	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.072 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.059 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.077 .046 .025	.054 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm										
NAME: ASD-CD-PR-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:3500K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.7	5.6	4.9	5.7	5.9	5.0	5.8	5.2	6.0	6.2
3H	5.4	6.1	5.6	6.3	6.5	5.6	6.4	5.8	6.6	6.8
4H	5.6	6.4	5.9	6.6	6.8	5.8	6.6	6.1	6.8	7.0
6H	5.8	6.5	6.1	6.7	7.0	5.9	6.6	6.2	6.8	7.1
8H	5.8	6.5	6.1	6.7	7.0	5.8	6.5	6.2	6.8	7.0
12H	5.8	6.4	6.1	6.7	7.0	5.8	6.5	6.1	6.7	7.0
4H 2H	4.9	5.7	5.2	5.9	6.1	5.2	5.9	5.5	6.1	6.4
3H	5.8	6.4	6.1	6.7	6.9	6.0	6.6	6.3	6.9	7.2
4H	6.1	6.7	6.5	7.0	7.3	6.3	6.9	6.6	7.2	7.5
6H	6.4	6.9	6.8	7.3	7.6	6.4	6.9	6.8	7.2	7.6
8H	6.4	6.9	6.8	7.3	7.6	6.4	6.9	6.8	7.2	7.6
12H	6.4	6.9	6.8	7.2	7.6	6.3	6.8	6.7	7.1	7.5
8H 4H	6.2	6.7	6.6	7.0	7.4	6.3	6.8	6.7	7.2	7.5
6H	6.6	7.0	7.0	7.4	7.8	6.5	6.9	6.9	7.3	7.7
8H	6.6	7.0	7.1	7.4	7.9	6.5	6.8	6.9	7.3	7.7
12H	6.6	6.9	7.1	7.4	7.9	6.4	6.7	6.9	7.2	7.7
12H 4H	6.2	6.6	6.6	7.0	7.4	6.3	6.8	6.7	7.1	7.5
6H	6.5	6.9	7.0	7.3	7.8	6.5	6.8	6.9	7.3	7.7
8H	6.6	6.9	7.1	7.4	7.8	6.5	6.8	6.9	7.2	7.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.6					+ 0.7 / - 0.8				
1.5H	+ 0.8 / - 0.4					+ 1.3 / - 0.4				
2.0H	+ 0.5 / - 0.5					+ 0.7 / - 0.6				

CIE Pub.117, 1079 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.3)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	73
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

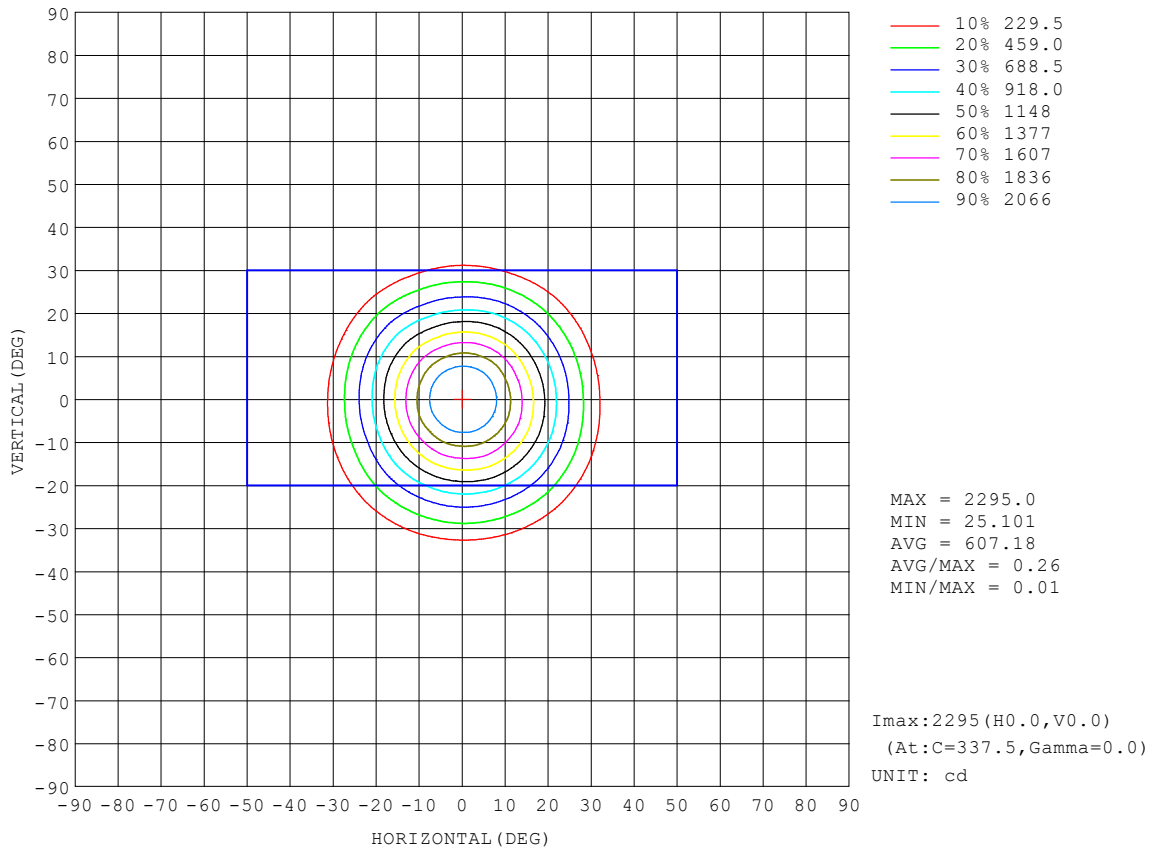


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

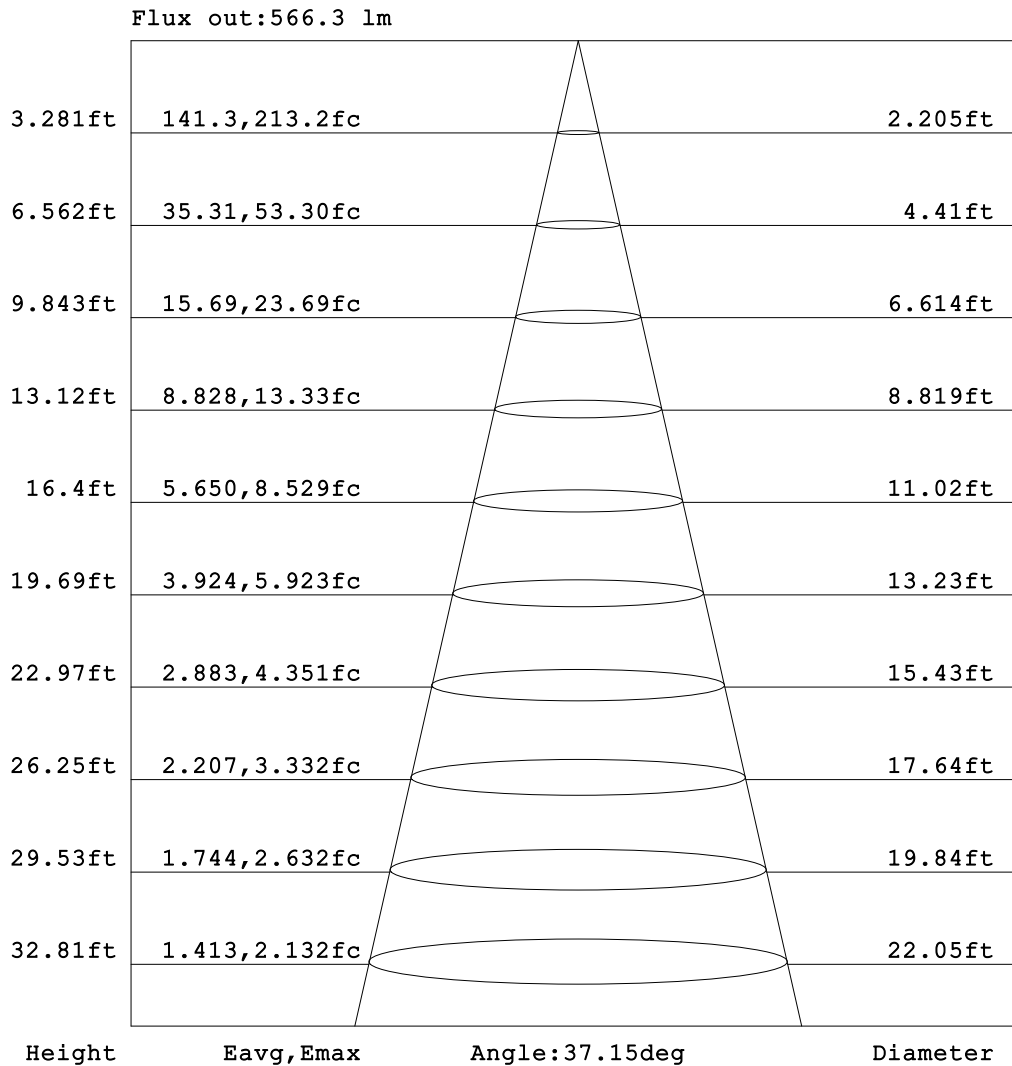


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

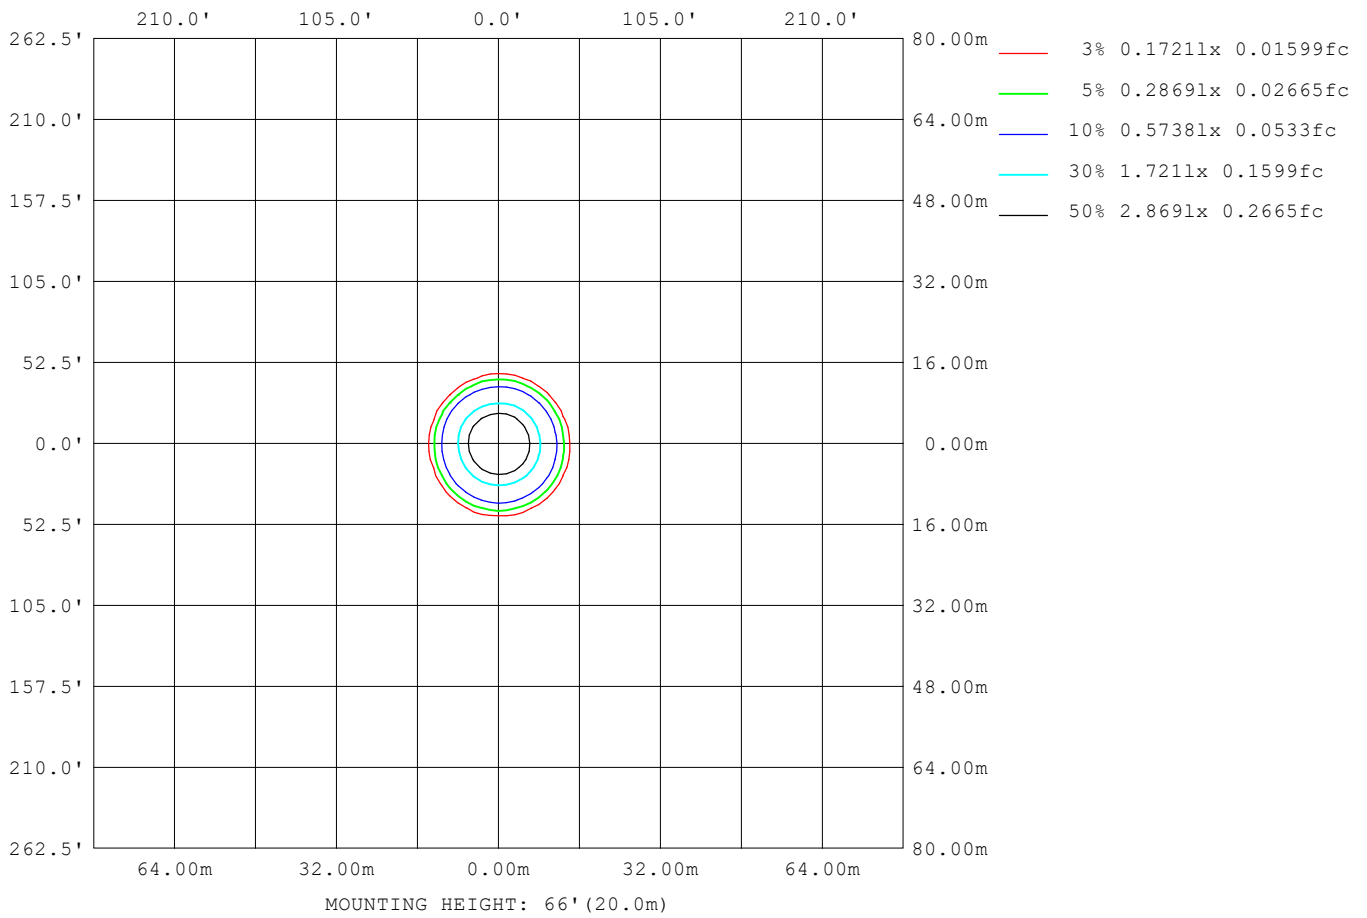

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	344
L_0~180 (75) av	269
L_0~180 (85) av	96
L_90~270 (65) av	348
L_90~270 (75) av	262
L_90~270 (85) av	25
L_45 (65) av	345
L_45 (75) av	270
L_45 (85) av	62

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

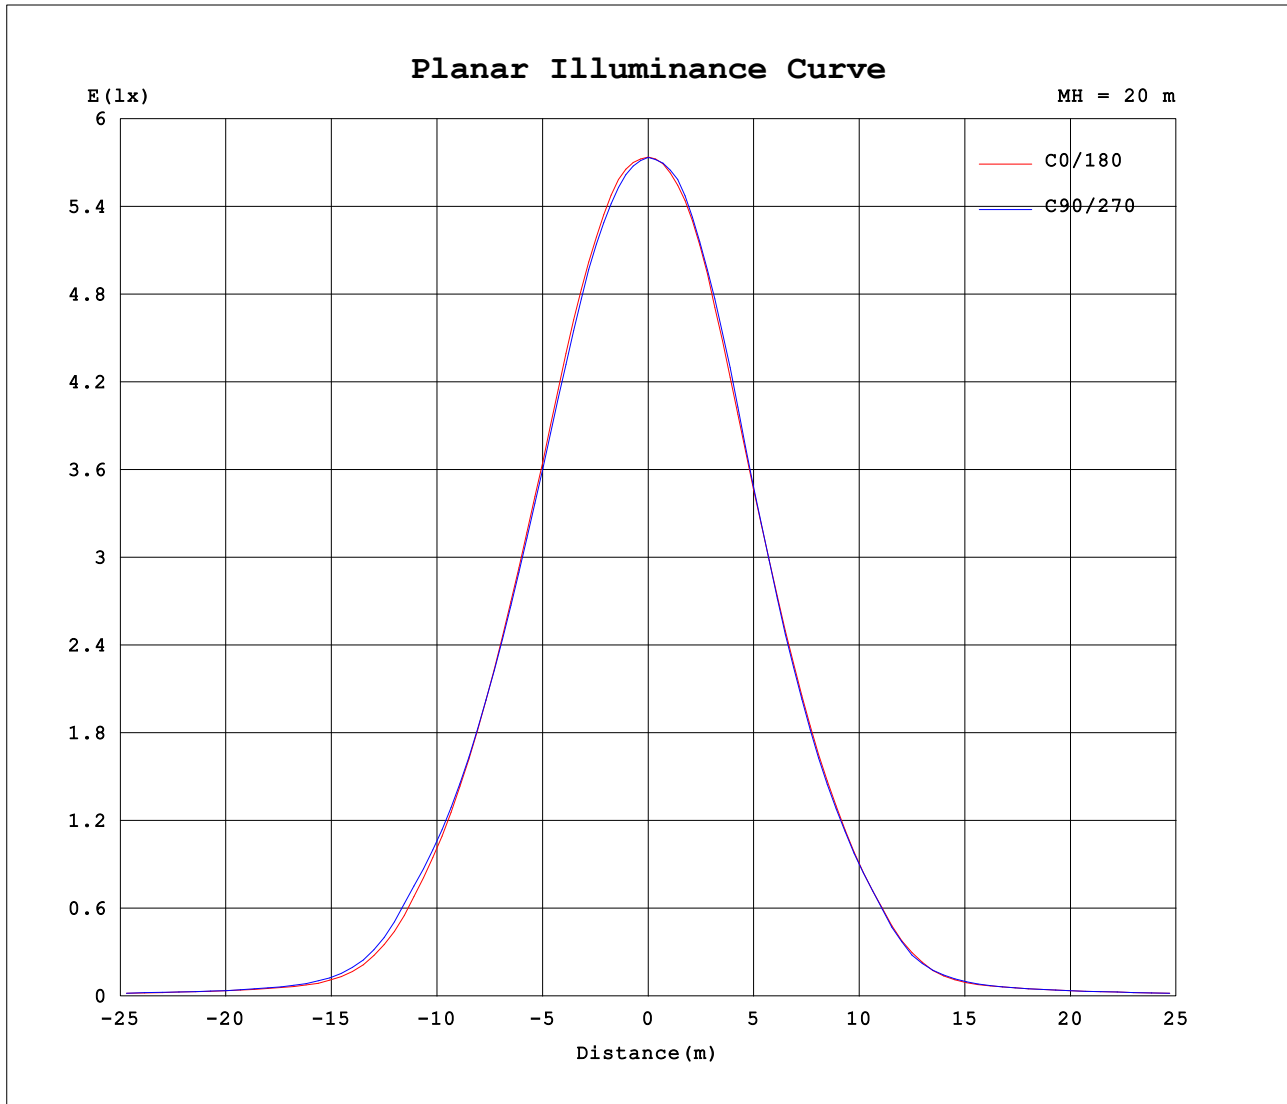

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.96V I:0.1142A P:13.502W PF:0.9471 Freq:59.98Hz Lamp Flux:1078.65x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2294	2294	2294	2294	2294	2294	2294	2294	2294	2294	2294	2294	2294	2294	2294	2294			
5	2215	2211	2203	2197	2192	2196	2197	2199	2201	2206	2208	2209	2214	2219	2221	2219			
10	1936	1944	1938	1925	1906	1900	1882	1887	1876	1875	1885	1882	1899	1913	1929	1926			
15	1516	1544	1543	1533	1496	1483	1456	1440	1431	1440	1447	1423	1435	1461	1487	1490			
20	1077	1112	1115	1105	1074	1055	1036	997	990	1013	1015	969	979	1018	1041	1057			
25	675	710	720	704	693	674	659	615	610	629	633	598	605	633	651	664			
30	340	380	399	394	390	372	351	314	297	294	296	282	290	299	316	326			
35	123	139	149	145	144	139	126	108	101	103	104	102	106	110	115	115			
40	60.0	64.4	66.6	66.5	66.3	65.5	62.3	58.3	56.7	56.9	56.6	56.1	57.1	57.8	59.3	59.2			
45	43.2	43.2	43.4	43.6	43.6	43.8	43.5	43.1	42.8	42.3	42.3	42.4	42.7	42.8	43.0	42.7			
50	35.1	35.6	36.0	36.3	36.3	36.3	35.7	35.4	35.1	34.7	34.7	34.7	34.8	34.8	34.9	34.9			
55	27.0	27.4	27.7	28.1	28.0	27.7	27.3	27.1	27.0	26.5	26.4	26.3	26.3	26.3	26.5	26.6			
60	20.9	21.1	21.2	21.4	21.4	21.4	21.2	21.2	21.1	21.0	21.1	21.0	21.0	20.8	20.8	20.7			
65	16.0	16.2	16.2	16.4	16.3	16.3	16.1	16.2	16.3	16.2	16.4	16.3	16.4	16.1	16.1	15.9			
70	11.4	11.6	11.5	11.7	11.6	11.6	11.5	11.6	11.7	11.7	11.9	11.9	11.9	11.7	11.6	11.4			
75	7.65	7.67	7.65	7.33	7.07	7.24	7.57	7.74	7.82	7.91	8.05	8.03	8.02	7.84	7.78	7.63			
80	4.47	4.46	3.76	3.12	2.81	3.06	3.68	4.50	4.62	4.68	4.44	4.07	3.90	3.91	4.19	4.47			
85	0.85	1.38	0.43	0.05	0.06	0.05	0.38	1.33	1.01	1.55	0.88	0.51	0.42	0.42	0.70	1.37			
90	0.04	0.04	0.04	0.03	0.04	0.03	0.03	0.03	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: