
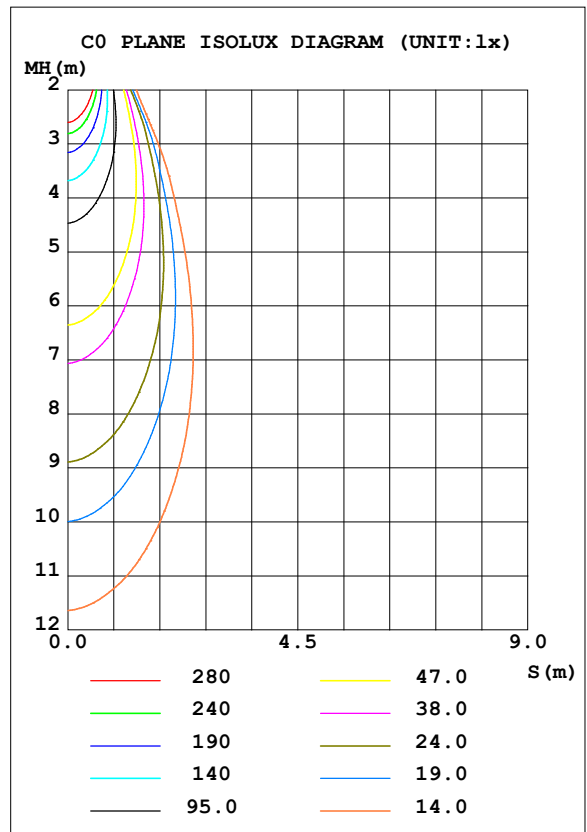


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 70.39 lm/W			
MODEL		I <sub>max</sub> (cd)	1939	S/MH (C0/180)	0.67
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.65
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	902.36	<input type="checkbox"/> UP, DN (C0-180)	0.0, 48.8
NOMINAL FLUX (lm)	902.356	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 51.2
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

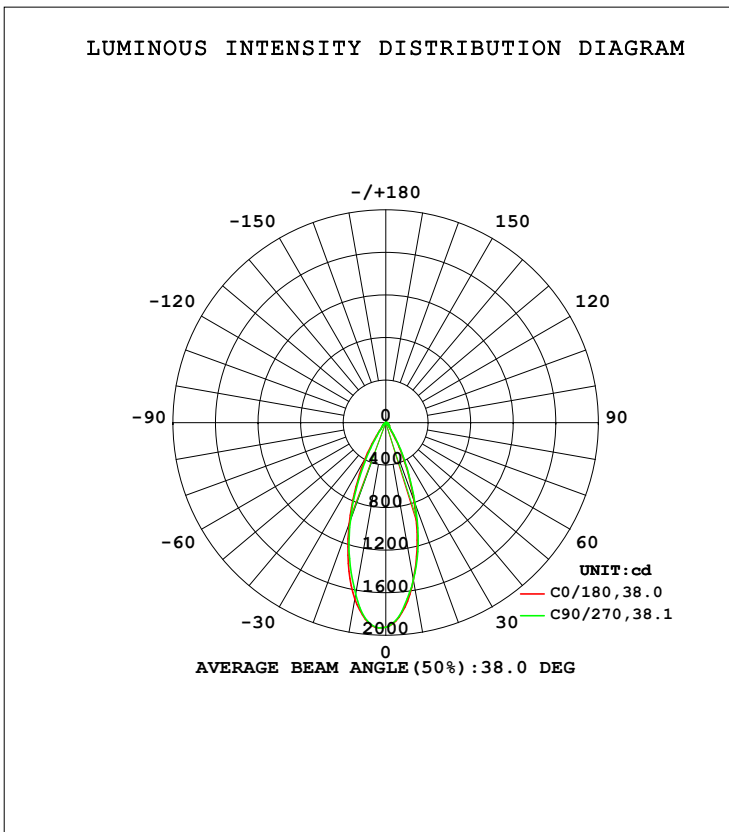

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1503	1597	1502	1610	1680	1565	1637	1505	0- 10	166.8	166.8	18.5,18.5
20	776.7	878.2	806.5	927.9	1007	836.1	975.1	717.9	10- 20	338.2	505.0	56,56
30	224.5	285.1	250.2	345.1	381.5	269.4	322.9	210.5	20- 30	246.1	751.1	83.2,83.2
40	51.91	56.84	55.69	64.11	67.22	54.82	63.77	51.31	30- 40	80.17	831.2	92.1,92.1
50	30.29	32.44	29.85	31.38	33.28	31.16	32.32	29.47	40- 50	32.46	863.7	95.7,95.7
60	15.98	17.26	15.89	16.69	17.54	16.36	16.85	15.77	50- 60	20.63	884.3	98,98
70	8.417	8.866	8.185	8.532	8.879	7.845	7.610	8.206	60- 70	12.03	896.4	99.3,99.3
80	2.843	2.411	1.680	2.431	3.040	2.020	1.616	2.065	70- 80	5.338	901.7	99.9,99.9
90	0.0277	0.0193	0.0257	0.0215	0.0325	0.0290	0.0297	0.0291	80- 90	0.6667	902.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

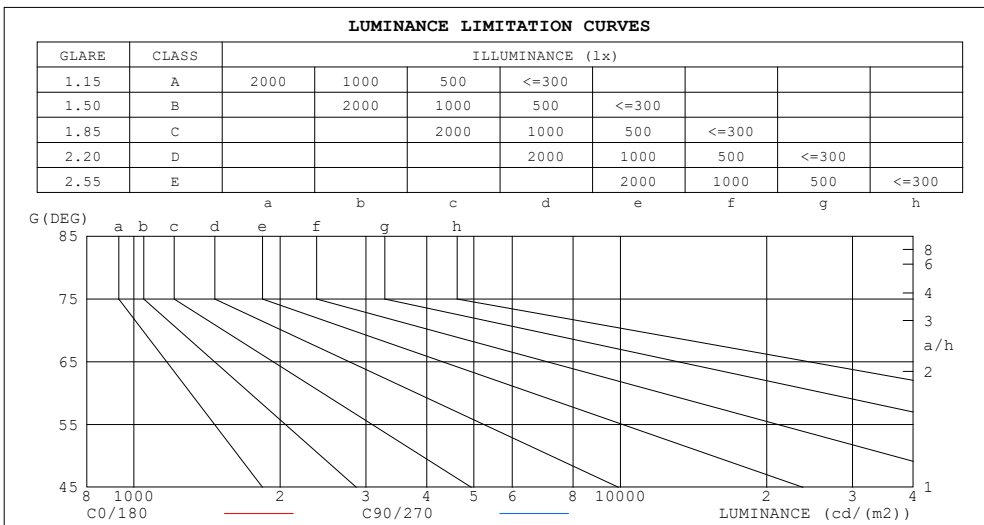

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	25	8
80	145	87
75	184	160
70	219	215
65	251	253
60	284	286
55	330	335
50	418	418
45	489	501


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.97	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.86	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.82	.79	.87	.82	.78	.85	.81	.78	.83	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.73	.79	.75	.72	.71
7.0	.79	.74	.70	.79	.74	.70	.78	.73	.70	.76	.72	.69	.75	.72	.69	.68
8.0	.76	.70	.67	.75	.70	.67	.74	.70	.66	.73	.69	.66	.72	.69	.66	.65
9.0	.72	.67	.64	.72	.67	.64	.71	.67	.63	.70	.66	.63	.70	.66	.63	.62
10.0	.69	.64	.61	.69	.64	.61	.68	.64	.61	.68	.63	.61	.67	.63	.60	.59

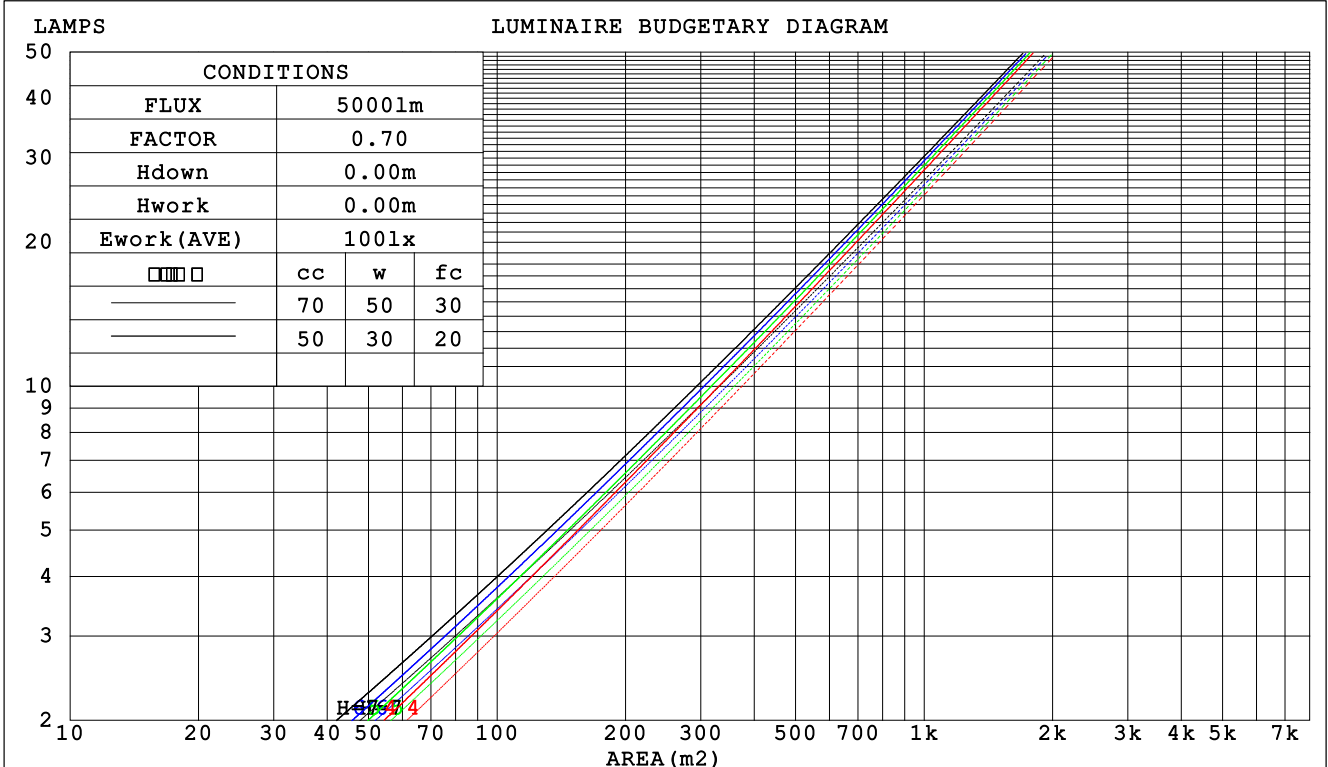

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.168 .096 .030	.162 .092 .029	.149 .085 .027	.137 .079 .025	.127 .074 .024	
2.0	.159 .087 .027	.154 .085 .026	.143 .080 .025	.133 .075 .023	.124 .070 .022	
3.0	.150 .080 .024	.145 .078 .023	.136 .074 .022	.128 .070 .022	.120 .067 .021	
4.0	.142 .074 .022	.137 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.134 .068 .020	.130 .067 .019	.124 .064 .019	.118 .062 .018	.112 .060 .018	
6.0	.127 .064 .018	.124 .063 .018	.118 .061 .018	.113 .059 .017	.108 .057 .017	
7.0	.121 .060 .017	.118 .059 .017	.113 .057 .016	.108 .056 .016	.104 .054 .016	
8.0	.115 .056 .016	.113 .056 .016	.108 .054 .015	.104 .053 .015	.100 .051 .015	
9.0	.110 .053 .015	.108 .053 .015	.104 .051 .015	.100 .050 .014	.097 .049 .014	
10.0	.105 .051 .014	.104 .050 .014	.100 .049 .014	.097 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .045	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.072 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.060 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.095 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.077 .046 .025	.054 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm										
NAME: ASD-CD-TS-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:3000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3.8	4.6	4.0	4.8	5.0	4.6	5.4	4.8	5.6	5.8
3H	4.4	5.2	4.7	5.4	5.6	5.1	5.9	5.4	6.1	6.3
4H	4.7	5.4	4.9	5.6	5.8	5.2	6.0	5.5	6.2	6.4
6H	4.8	5.5	5.1	5.7	6.0	5.3	6.0	5.6	6.2	6.5
8H	4.8	5.5	5.1	5.7	6.0	5.2	5.9	5.5	6.2	6.4
12H	4.7	5.4	5.1	5.7	5.9	5.2	5.8	5.5	6.1	6.4
4H 2H	4.1	4.8	4.4	5.1	5.3	4.8	5.5	5.0	5.7	6.0
3H	4.9	5.5	5.2	5.8	6.1	5.5	6.1	5.8	6.4	6.7
4H	5.2	5.8	5.5	6.1	6.4	5.7	6.3	6.0	6.6	6.9
6H	5.4	5.9	5.8	6.2	6.6	5.7	6.3	6.1	6.6	6.9
8H	5.4	5.9	5.8	6.2	6.6	5.7	6.2	6.1	6.5	6.9
12H	5.4	5.8	5.8	6.2	6.6	5.6	6.1	6.1	6.5	6.9
8H 4H	5.3	5.7	5.7	6.1	6.5	5.7	6.2	6.1	6.6	6.9
6H	5.5	5.9	5.9	6.3	6.7	5.8	6.2	6.2	6.6	7.0
8H	5.5	5.9	6.0	6.3	6.8	5.8	6.1	6.2	6.5	7.0
12H	5.5	5.8	6.0	6.2	6.7	5.7	6.0	6.2	6.5	6.9
12H 4H	5.2	5.7	5.6	6.0	6.4	5.7	6.1	6.1	6.5	6.9
6H	5.5	5.8	5.9	6.3	6.7	5.8	6.1	6.2	6.5	7.0
8H	5.5	5.8	6.0	6.3	6.7	5.7	6.1	6.2	6.5	7.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.7					+ 0.7 / - 1.0				
1.5H	+ 0.5 / - 0.4					+ 0.8 / - 0.7				
2.0H	+ 1.0 / - 0.8					+ 1.1 / - 1.2				

CIE Pub.117, 902.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.4)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	95	93	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	108	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

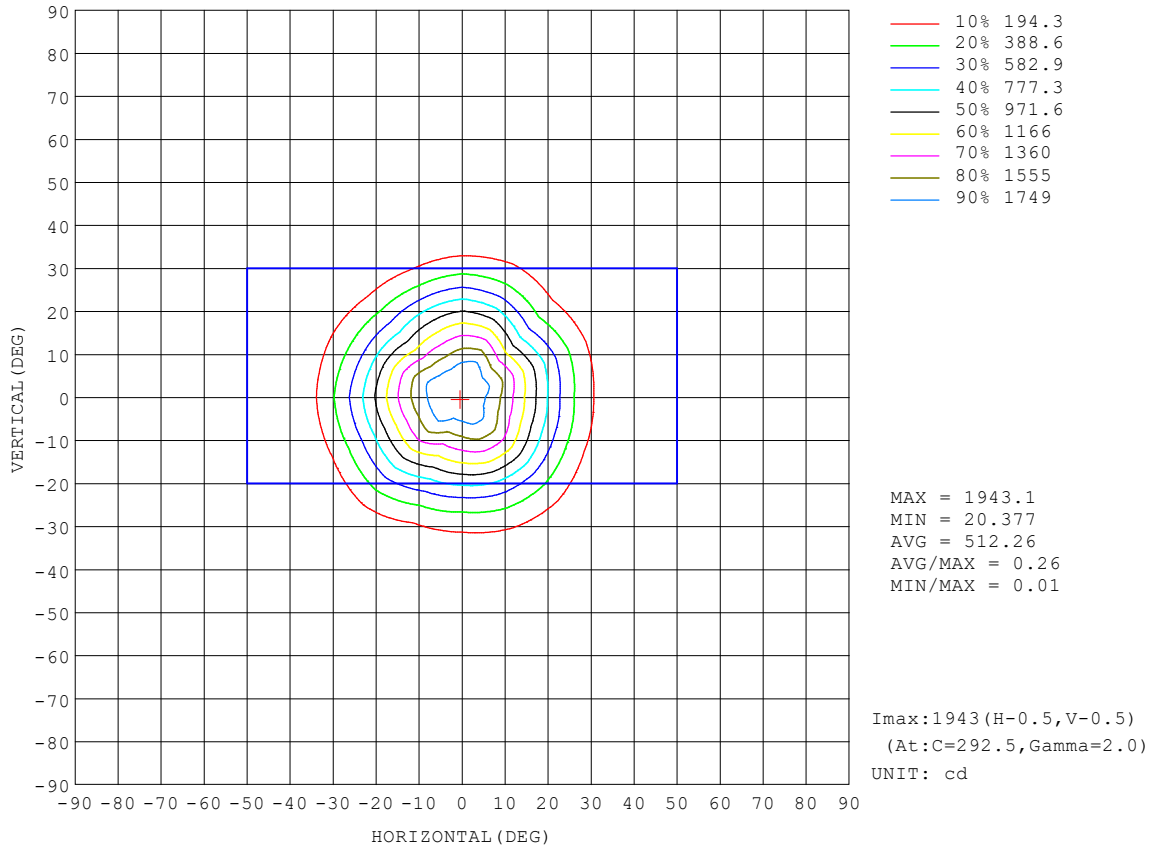


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

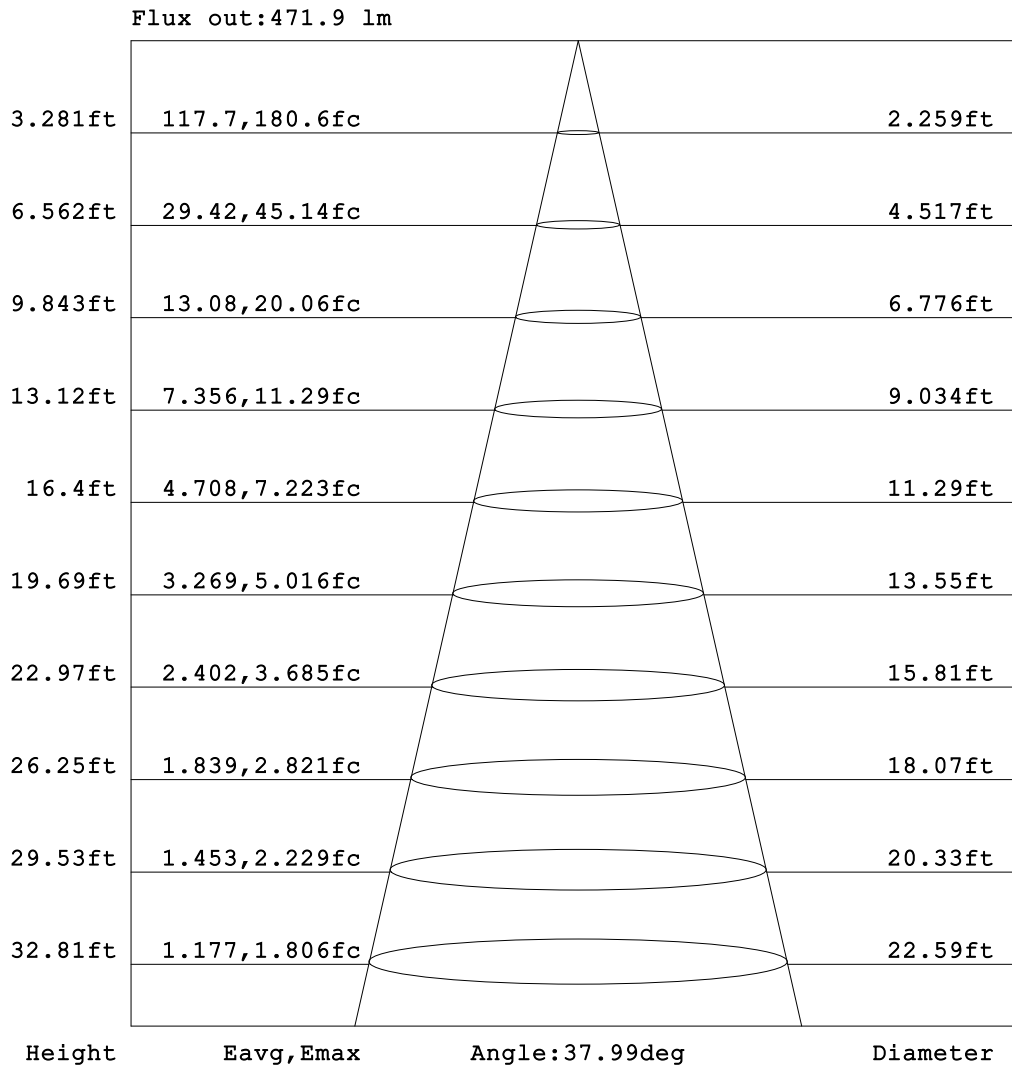


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

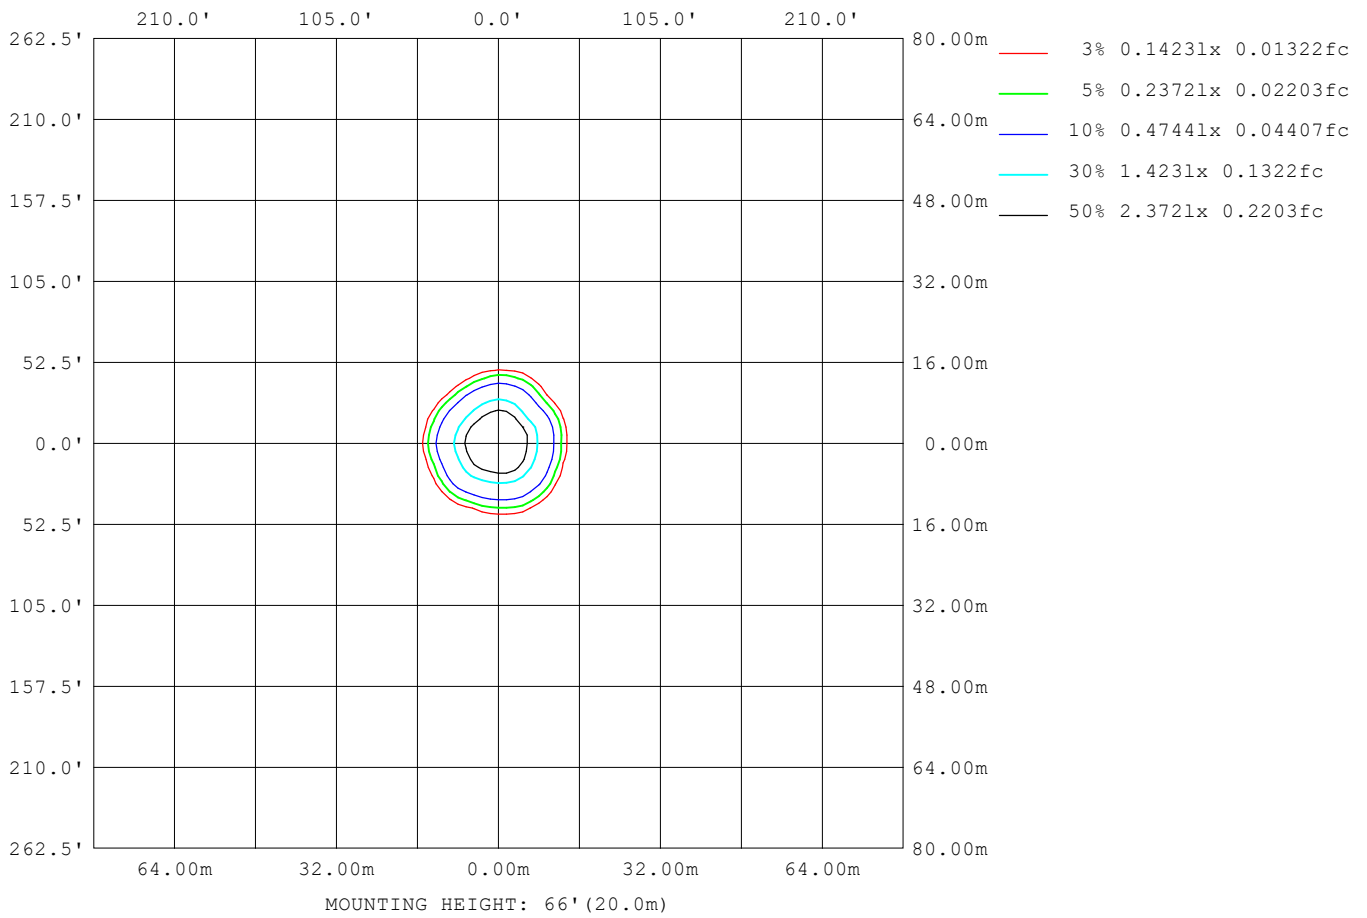

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	264
L_0~180 (75) av	191
L_0~180 (85) av	36
L_90~270 (65) av	253
L_90~270 (75) av	154
L_90~270 (85) av	8
L_45 (65) av	258
L_45 (75) av	175
L_45 (85) av	23

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

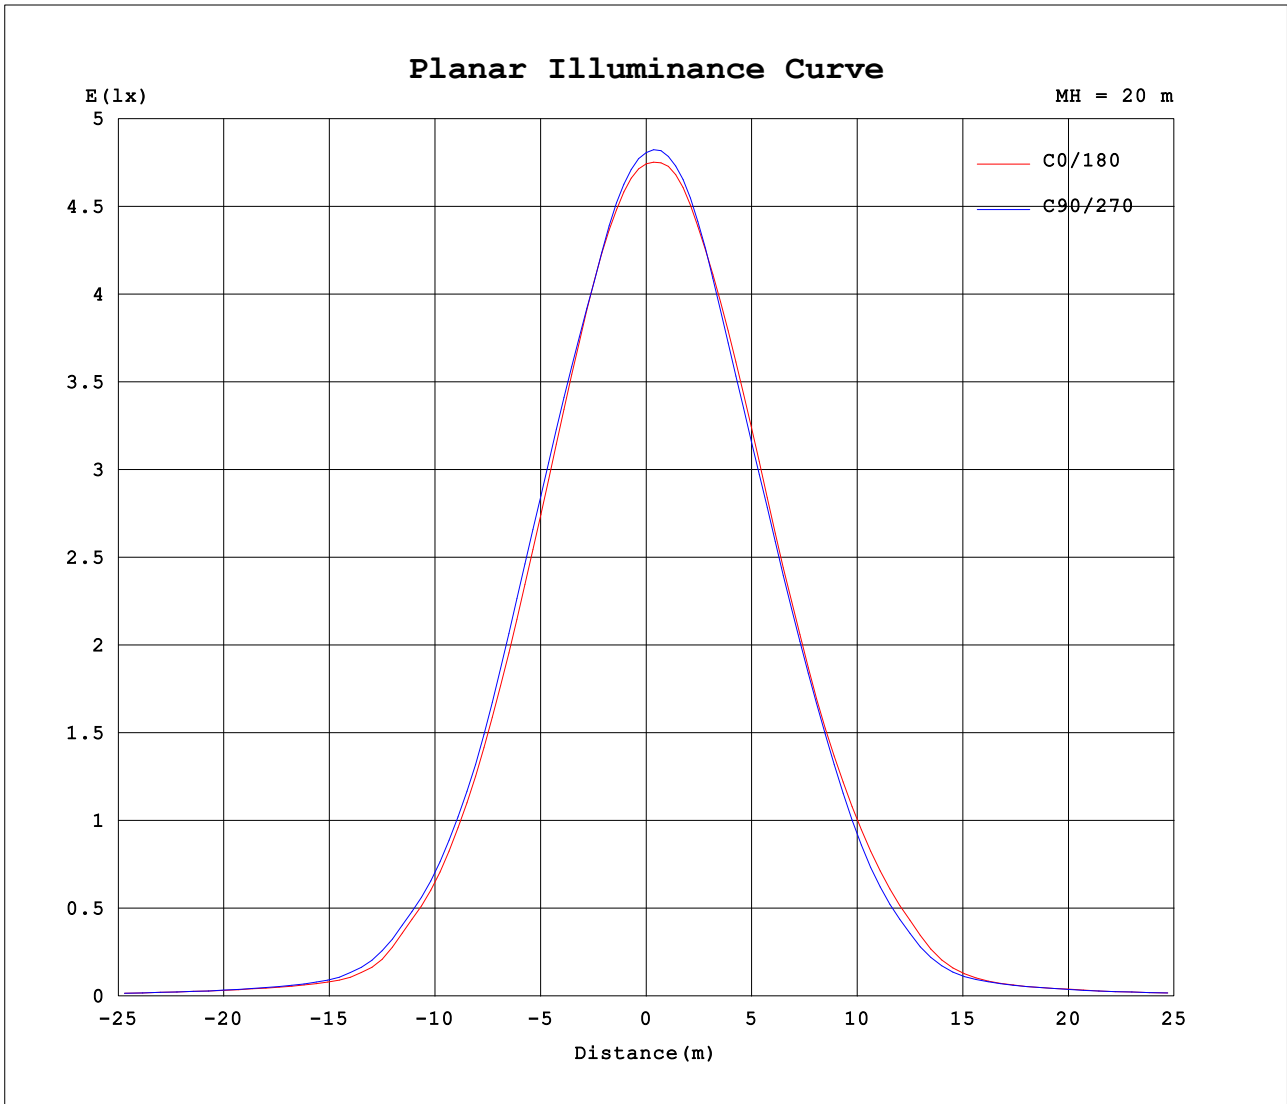

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.02V I:0.1085A P:12.819W PF:0.9470 Freq:59.98Hz Lamp Flux:902.356x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1923	1923	1923	1923	1923	1923	1923	1923	1923	1923	1923	1923	1923	1923	1923	1923			
5	1790	1781	1827	1822	1777	1757	1853	1847	1890	1906	1847	1839	1883	1907	1807	1825			
10	1503	1502	1597	1583	1502	1464	1610	1604	1680	1705	1565	1558	1637	1677	1505	1551			
15	1145	1161	1263	1252	1181	1138	1283	1273	1371	1359	1195	1236	1321	1317	1106	1187			
20	777	794	878	865	807	798	928	916	1007	954	836	904	975	929	718	816			
25	450	477	529	526	478	488	609	592	665	592	519	558	622	570	413	491			
30	225	236	285	285	250	245	345	326	381	327	269	276	323	304	210	249			
35	79.5	80.8	109	115	98.6	92.4	140	124	152	133	96.8	102	127	130	82.4	93.8			
40	51.9	51.7	56.8	59.5	55.7	53.6	64.1	59.9	67.2	60.2	54.8	57.1	63.8	63.6	51.3	53.8			
45	39.0	38.9	42.5	42.6	39.4	36.6	43.2	41.7	46.0	44.2	40.8	39.4	44.3	44.8	38.0	39.9			
50	30.3	30.3	32.4	32.1	29.8	28.3	31.4	30.7	33.3	33.3	31.2	30.3	32.3	33.2	29.5	30.6			
55	21.3	21.5	23.9	23.7	21.4	20.3	23.1	22.3	24.6	24.6	22.7	21.5	23.7	24.8	21.2	21.9			
60	16.0	16.0	17.3	17.2	15.9	15.1	16.7	16.2	17.5	17.4	16.4	15.7	16.9	17.5	15.8	16.2			
65	11.9	12.0	12.7	12.7	11.9	11.3	12.2	12.0	12.8	12.7	11.8	11.1	11.8	12.4	11.8	12.2			
70	8.42	8.35	8.87	8.81	8.18	7.78	8.53	8.30	8.88	8.66	7.84	7.21	7.61	8.14	8.21	8.54			
75	5.37	5.28	5.42	5.13	4.59	4.49	5.21	5.27	5.64	5.32	4.59	4.04	4.24	4.63	4.85	5.45			
80	2.84	2.73	2.41	2.03	1.68	1.75	2.43	2.78	3.04	2.65	2.02	1.58	1.62	1.84	2.07	2.74			
85	0.24	0.52	0.15	0.08	0.08	0.09	0.36	0.76	0.46	0.64	0.22	0.09	0.07	0.08	0.17	0.52			
90	0.03	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: