
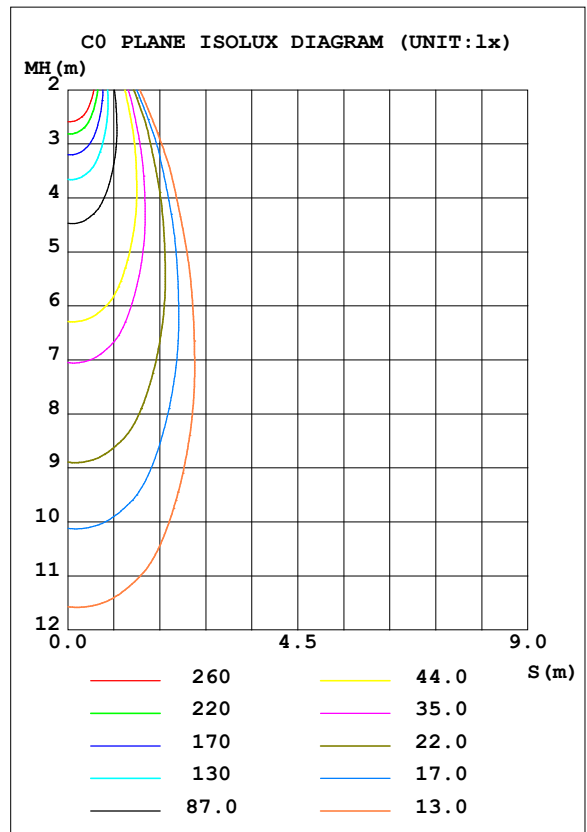


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 63.46 lm/W			
MODEL		Imax (cd)	1751	S/MH (C0/180)	0.62
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.65
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	838.87	<input type="checkbox"/> UP, DN (C0-180)	0.0, 44.1
NOMINAL FLUX (lm)	838.869	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 55.9
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

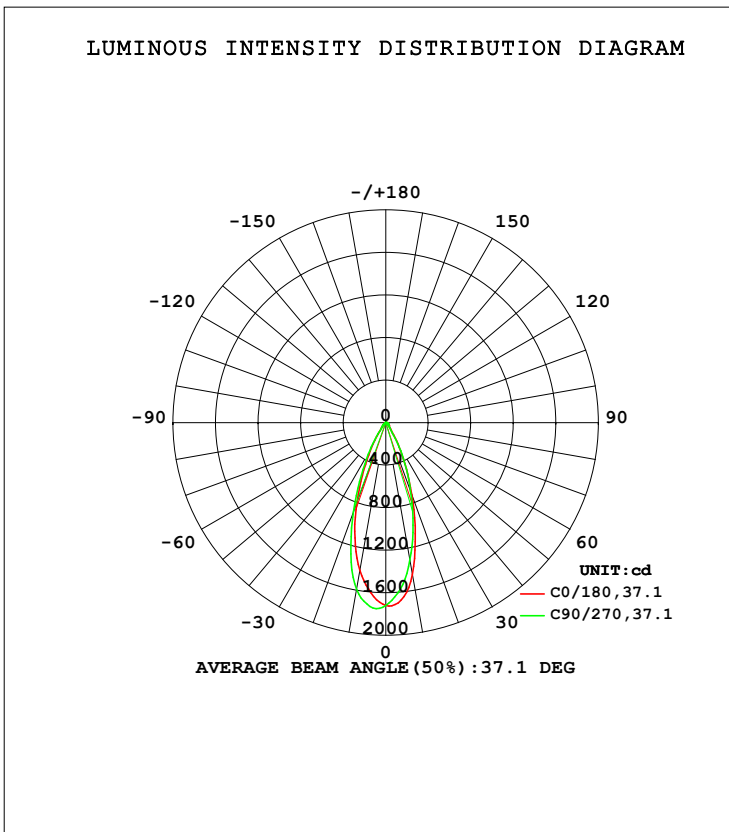

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum,lamp
10	1449	1364	1312	1341	1410	1524	1592	1555	0- 10	150.8	150.8	18,18
20	718.2	680.2	685.5	639.2	796.3	898.1	891.1	1009	10- 20	309.4	460.2	54.9,54.9
30	236.4	215.7	226.2	198.7	275.0	334.2	306.0	355.6	20- 30	227.3	687.5	82,82
40	58.73	54.57	54.56	52.76	61.93	67.37	60.12	68.78	30- 40	79.22	766.7	91.4,91.4
50	32.46	31.51	31.70	30.98	32.20	33.51	32.54	33.94	40- 50	33.44	800.2	95.4,95.4
60	17.60	16.99	16.87	16.54	17.41	16.88	15.40	17.64	50- 60	21.28	821.5	97.9,97.9
70	9.373	8.832	7.372	7.847	8.966	7.409	6.074	7.725	60- 70	12.04	833.5	99.4,99.4
80	3.462	1.979	0.9879	1.553	3.142	1.299	0.5862	1.296	70- 80	4.868	838.4	99.9,99.9
90	0.0287	0.0263	0.0259	0.0221	0.0360	0.0327	0.0323	0.0388	80- 90	0.4850	838.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:



LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	53	22
80	182	51
75	218	128
70	249	192
65	283	252
60	320	301
55	380	356
50	460	440
45	547	503


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.89	.96	.92	.89	.94	.90	.87	.91	.89	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.79
5.0	.87	.82	.78	.86	.81	.78	.85	.80	.77	.83	.79	.76	.82	.78	.76	.74
6.0	.83	.77	.74	.82	.77	.73	.81	.76	.73	.79	.75	.72	.78	.75	.72	.71
7.0	.79	.73	.70	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.68	.67
8.0	.75	.70	.66	.75	.70	.66	.74	.69	.66	.73	.68	.65	.72	.68	.65	.64
9.0	.72	.67	.63	.71	.66	.63	.70	.66	.63	.70	.65	.62	.69	.65	.62	.61
10.0	.69	.64	.60	.68	.63	.60	.68	.63	.60	.67	.63	.60	.66	.62	.60	.58

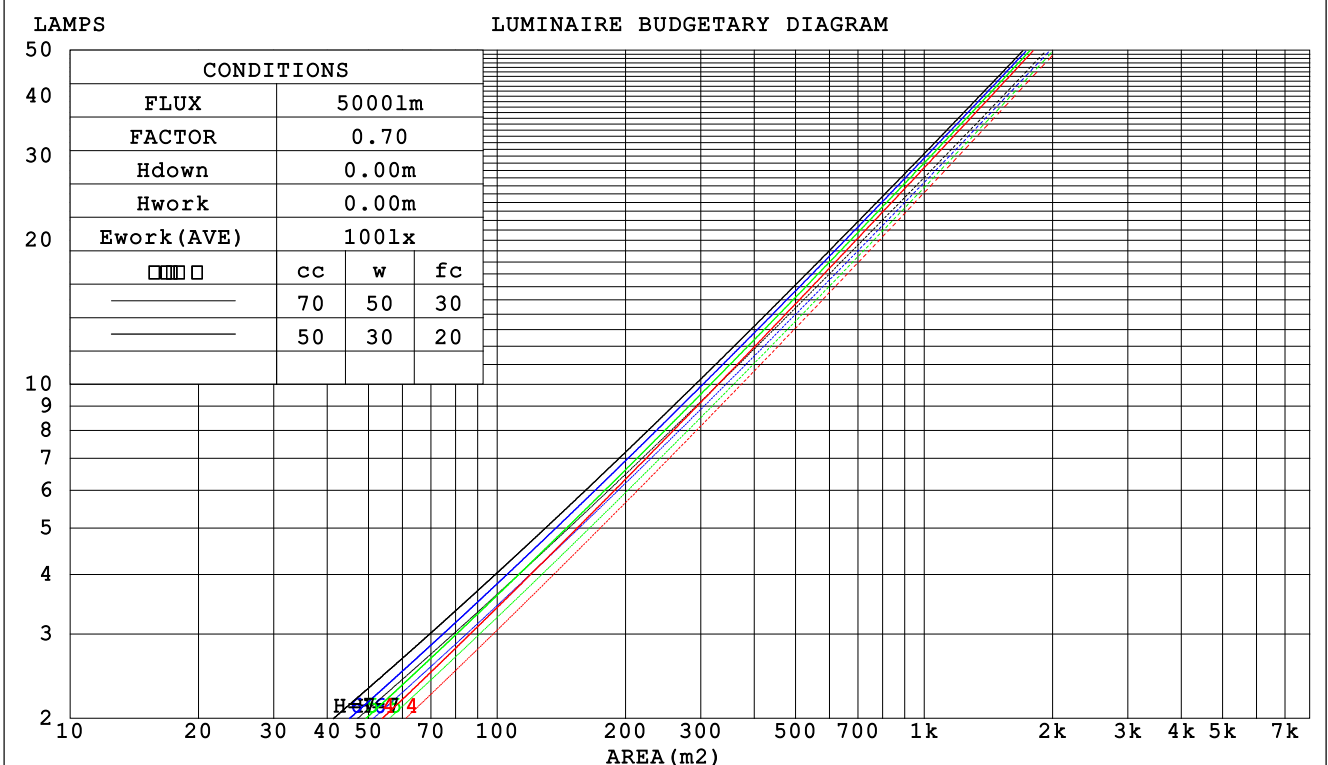

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.170 .097 .031	.163 .093 .030	.151 .086 .028	.139 .080 .026	.128 .074 .024	
2.0	.161 .088 .027	.155 .086 .026	.145 .081 .025	.135 .076 .024	.126 .071 .022	
3.0	.152 .081 .024	.147 .079 .024	.138 .075 .023	.130 .071 .022	.122 .068 .021	
4.0	.143 .074 .022	.139 .073 .022	.132 .070 .021	.125 .067 .020	.118 .064 .020	
5.0	.136 .069 .020	.132 .068 .020	.126 .065 .019	.119 .063 .019	.114 .061 .018	
6.0	.129 .065 .018	.126 .063 .018	.120 .061 .018	.114 .059 .017	.109 .058 .017	
7.0	.122 .061 .017	.120 .060 .017	.115 .058 .017	.110 .056 .016	.105 .055 .016	
8.0	.117 .057 .016	.114 .056 .016	.110 .055 .016	.106 .053 .015	.102 .052 .015	
9.0	.112 .054 .015	.109 .053 .015	.105 .052 .015	.102 .051 .015	.098 .050 .014	
10.0	.107 .051 .014	.105 .051 .014	.101 .050 .014	.098 .049 .014	.095 .048 .014	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.142 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.131 .099 .074	.112 .085 .064	.077 .059 .045	.045 .035 .027	.014 .011 .009	
5.0	.121 .087 .061	.104 .075 .053	.072 .052 .038	.042 .031 .022	.013 .010 .007	
6.0	.113 .077 .051	.098 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.107 .070 .044	.092 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.101 .063 .037	.087 .055 .033	.060 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.095 .058 .033	.082 .050 .028	.057 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.078 .046 .025	.054 .033 .018	.032 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm										
NAME: ASD-CD-TR-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:2700K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.9	5.8	5.1	5.9	6.1	4.4	5.2	4.6	5.4	5.6
3H	5.6	6.4	5.8	6.6	6.8	5.0	5.7	5.2	5.9	6.1
4H	5.8	6.6	6.1	6.8	7.0	5.1	5.8	5.3	6.0	6.3
6H	6.0	6.7	6.3	7.0	7.2	5.0	5.7	5.3	6.0	6.2
8H	6.0	6.7	6.3	6.9	7.2	5.0	5.7	5.3	5.9	6.2
12H	6.0	6.6	6.3	6.9	7.2	4.9	5.6	5.3	5.9	6.1
4H 2H	5.1	5.9	5.4	6.1	6.3	4.7	5.4	4.9	5.6	5.9
3H	6.0	6.6	6.3	6.9	7.2	5.4	6.0	5.7	6.3	6.6
4H	6.3	6.9	6.7	7.2	7.5	5.6	6.2	5.9	6.5	6.8
6H	6.6	7.1	7.0	7.4	7.8	5.5	6.1	5.9	6.4	6.8
8H	6.6	7.1	7.0	7.4	7.8	5.5	6.0	5.9	6.3	6.7
12H	6.5	7.0	6.9	7.4	7.7	5.5	5.9	5.9	6.3	6.7
8H 4H	6.4	6.8	6.7	7.2	7.6	5.6	6.1	6.0	6.5	6.8
6H	6.7	7.1	7.1	7.5	7.9	5.6	6.0	6.1	6.4	6.8
8H	6.7	7.0	7.1	7.4	7.9	5.6	5.9	6.0	6.4	6.8
12H	6.6	6.9	7.1	7.4	7.9	5.5	5.8	6.0	6.3	6.7
12H 4H	6.3	6.8	6.7	7.1	7.5	5.6	6.0	6.0	6.4	6.8
6H	6.6	7.0	7.1	7.4	7.8	5.6	6.0	6.0	6.4	6.8
8H	6.6	6.9	7.1	7.4	7.8	5.6	5.9	6.0	6.3	6.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.7					+ 0.6 / - 0.9				
1.5H	+ 0.9 / - 0.4					+ 0.7 / - 0.4				
2.0H	+ 0.9 / - 0.8					+ 1.1 / - 0.9				

CIE Pub.117, 838.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	79	76	85	79	75	72
0.80	94	88	84	93	87	84	92	87	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

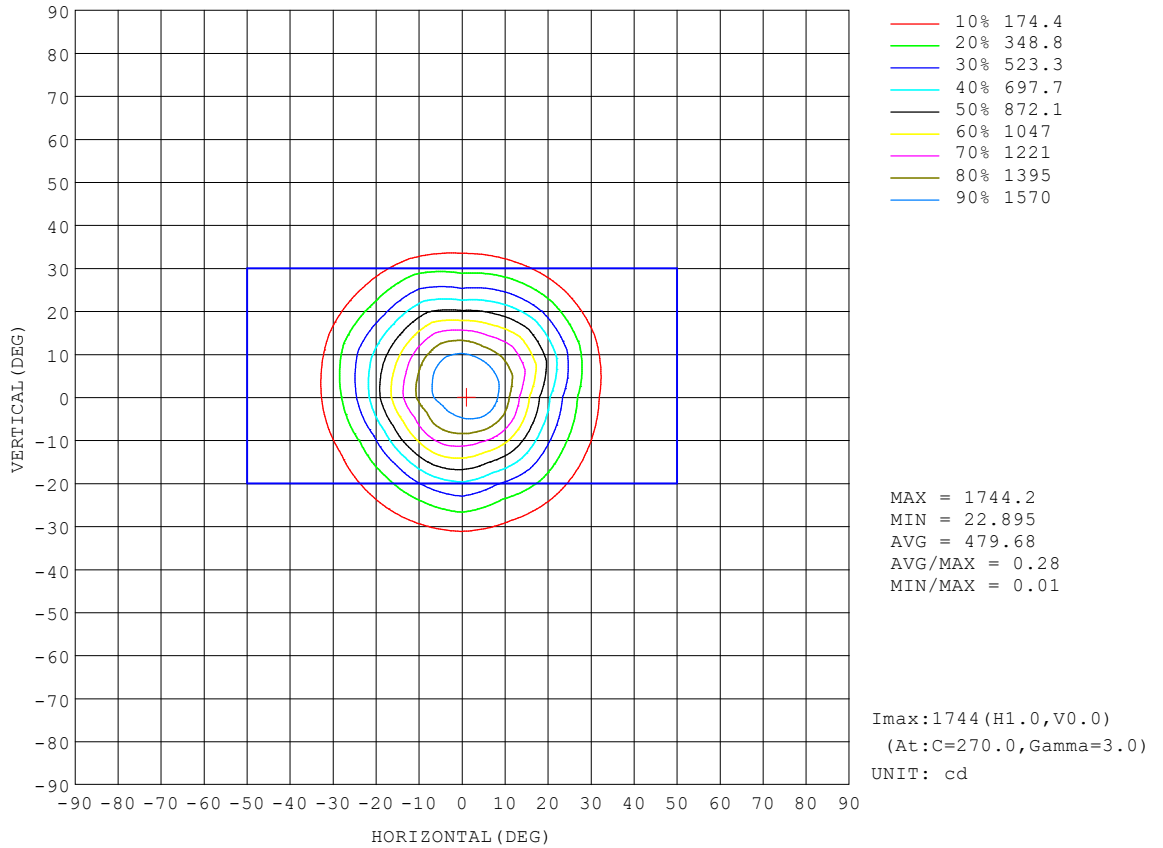


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

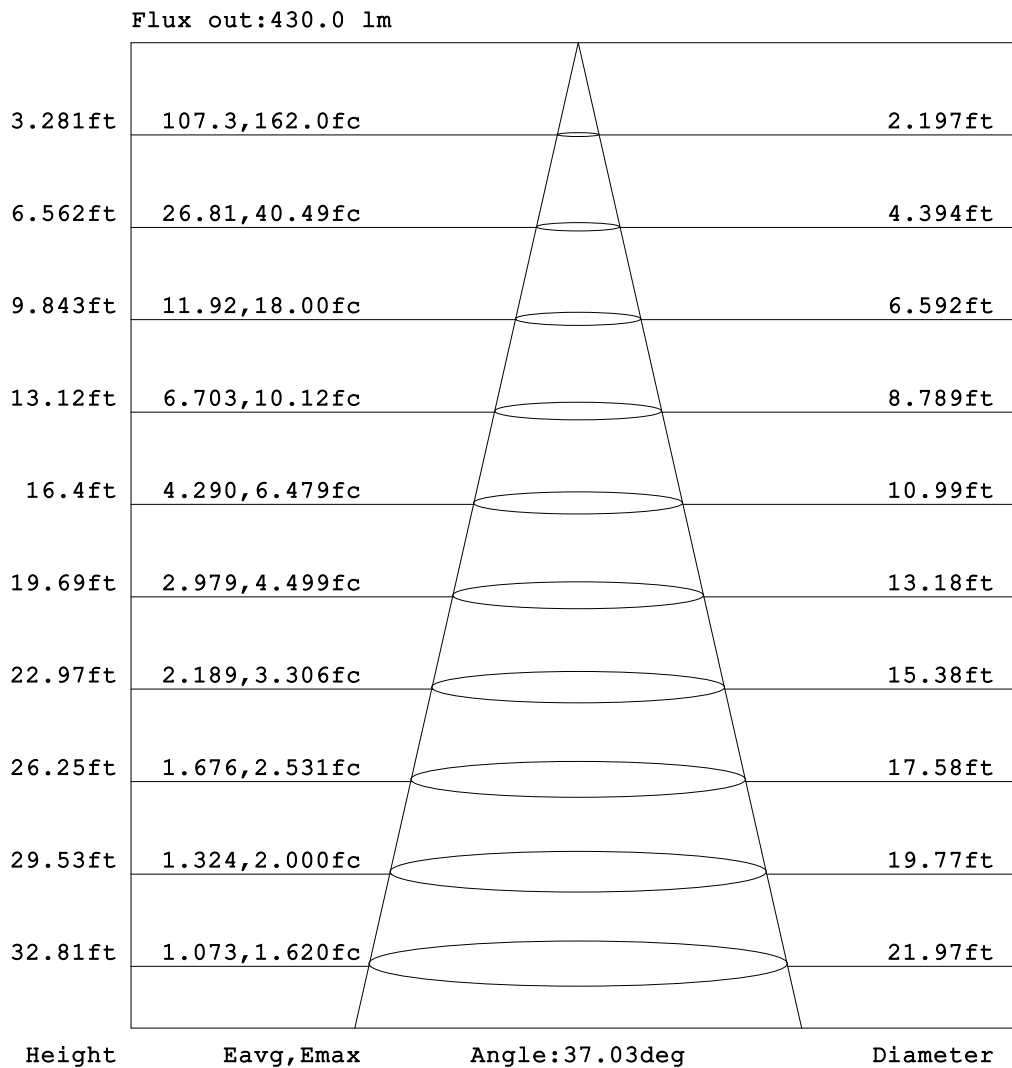


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

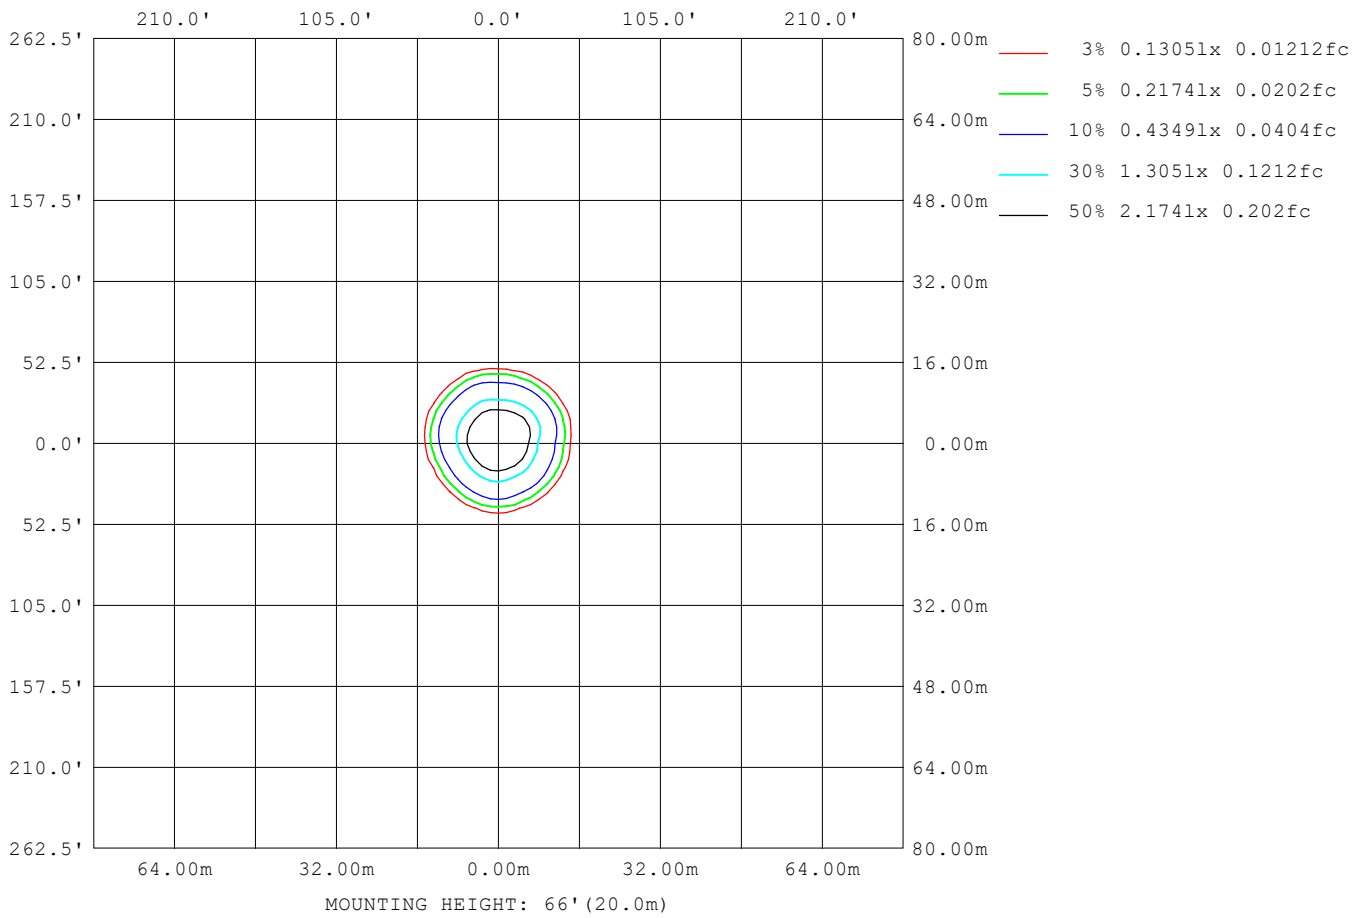

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	276
L_0~180 (75) av	209
L_0~180 (85) av	56
L_90~270 (65) av	236
L_90~270 (75) av	115
L_90~270 (85) av	14
L_45 (65) av	259
L_45 (75) av	153
L_45 (85) av	15

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

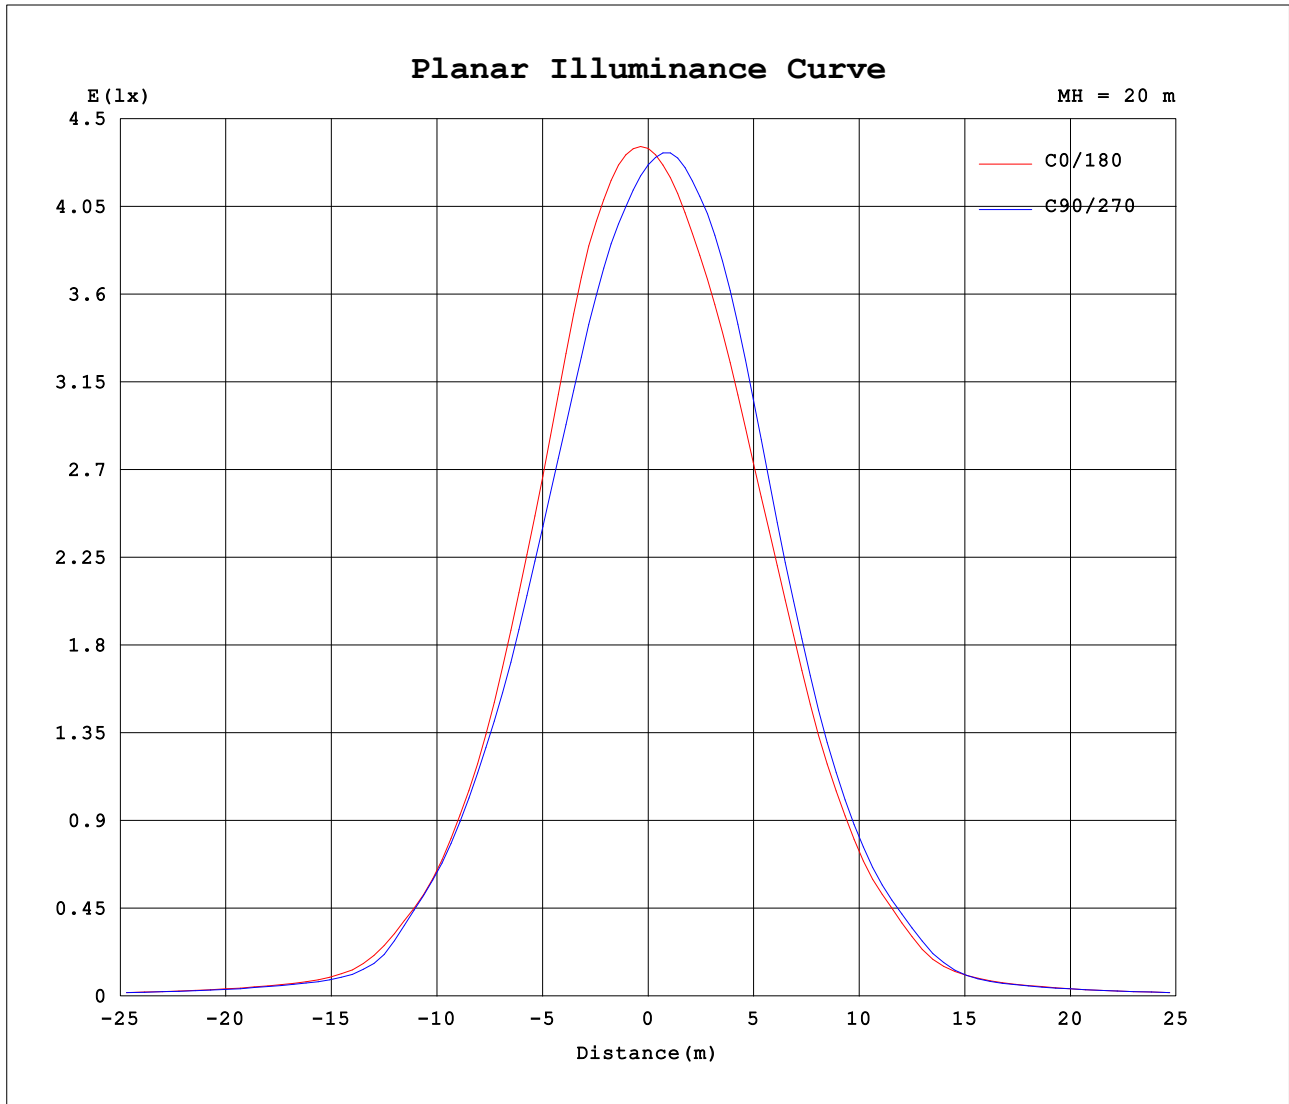

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.93V I:0.1118A P:13.219W PF:0.9485 Freq:59.98Hz Lamp Flux:838.869x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1720	1720	1720	1720	1720	1720	1720	1720	1720	1720	1720	1720	1720	1720	1720	1720			
5	1674	1649	1618	1591	1574	1557	1557	1563	1607	1648	1695	1725	1733	1728	1722	1709			
10	1449	1419	1364	1308	1312	1330	1341	1338	1410	1451	1524	1582	1592	1571	1555	1532			
15	1081	1050	1018	965	999	1017	1006	1028	1123	1164	1239	1305	1278	1263	1309	1274			
20	718	682	680	628	686	666	639	669	796	858	898	963	891	929	1009	961			
25	431	401	407	364	424	386	364	383	491	587	586	640	546	606	663	622			
30	236	218	216	200	226	208	199	204	275	347	334	371	306	333	356	335			
35	97.3	88.9	87.4	78.4	82.2	80.4	79.7	82.6	111	139	140	148	127	128	140	135			
40	58.7	55.8	54.6	52.8	54.6	53.3	52.8	53.3	61.9	68.2	67.4	67.9	60.1	61.6	68.8	67.0			
45	42.5	40.5	39.5	39.3	39.8	39.7	39.3	38.6	42.9	44.9	45.1	45.8	43.6	45.0	45.9	45.5			
50	32.5	32.0	31.5	31.2	31.7	31.4	31.0	30.2	32.2	32.8	33.5	32.7	32.5	33.0	33.9	33.5			
55	24.0	23.4	22.7	22.5	22.9	22.8	22.6	22.2	23.8	24.5	24.4	22.4	22.1	22.5	25.3	25.6			
60	17.6	17.4	17.0	16.8	16.9	16.7	16.5	16.3	17.4	17.5	16.9	15.7	15.4	15.8	17.6	18.4			
65	13.1	13.0	12.7	12.4	12.0	11.8	12.0	12.0	12.8	12.7	11.7	10.6	10.2	10.6	12.3	13.6			
70	9.37	9.21	8.83	8.06	7.37	7.32	7.85	8.30	8.97	8.52	7.41	6.42	6.07	6.36	7.73	9.17			
75	6.20	6.10	5.16	4.28	3.71	3.76	4.34	5.09	5.82	5.06	3.96	3.17	2.89	3.06	4.11	5.44			
80	3.46	3.09	1.98	1.30	0.99	1.05	1.55	2.36	3.14	2.26	1.30	0.74	0.59	0.64	1.30	2.43			
85	0.51	0.60	0.26	0.25	0.21	0.20	0.16	0.44	0.59	0.37	0.05	0.06	0.06	0.07	0.10	0.36			
90	0.03	0.03	0.03	0.02	0.03	0.02	0.02	0.02	0.04	0.04	0.03	0.03	0.03	0.03	0.04	0.03			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: