
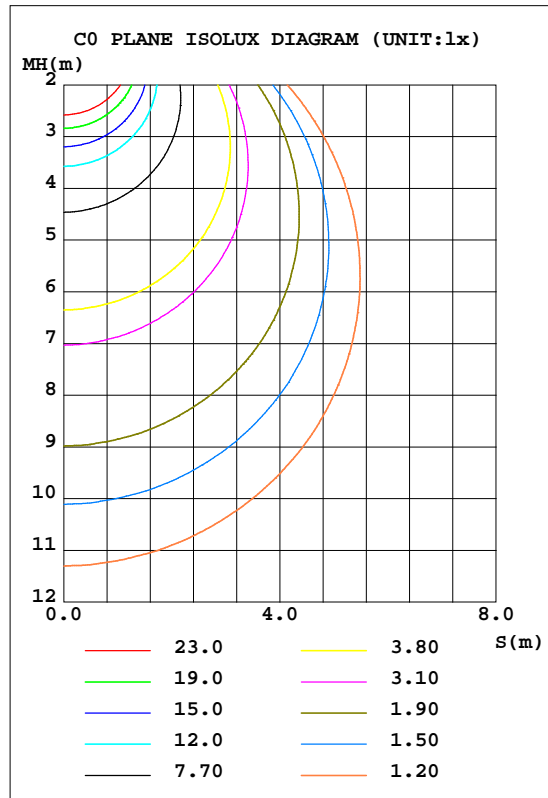


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	ASD-JBS-3D6AC(4000K)	Imax(cd)	153.7	S/MH(C0/180)	1.27
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	445.09	h UP, DN(C0-180)	0.8,47.9
NOMINAL FLUX(lm)	445.095	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.8,50.6
LAMPS INSIDE	1	h up(%)	1.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	98.4	CIBSE SHR MAX	1.35

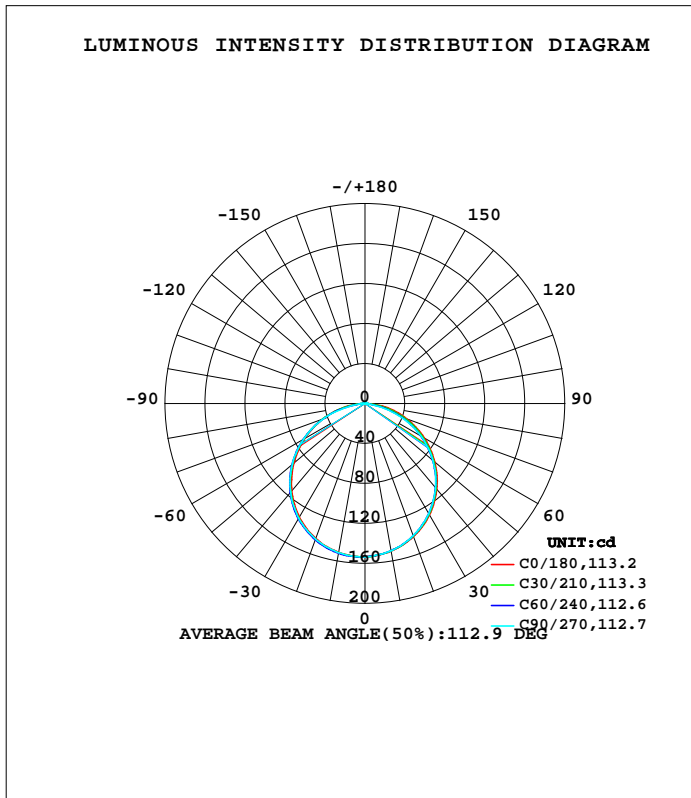

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2186]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	150.1	149.7	149.7	150.2	151.3	151.9	151.5	151.0	0- 10	14.51	14.51	3.26,3.26
20	141.9	141.2	140.8	142.0	143.9	145.0	144.5	143.7	10- 20	41.61	56.13	12.6,12.6
30	129.0	127.8	127.6	129.0	131.3	132.9	132.6	131.5	20- 30	63.22	119.3	26.8,26.8
40	111.8	110.3	110.0	111.7	114.0	116.1	115.9	114.9	30- 40	76.44	195.8	44,44
50	91.33	89.22	88.81	90.71	92.85	95.01	95.20	94.62	40- 50	79.53	275.3	61.9,61.9
60	68.23	65.38	64.32	66.79	69.10	70.77	70.75	71.49	50- 60	72.07	347.4	78,78
70	44.17	39.70	36.55	39.84	44.17	44.44	43.63	45.80	60- 70	54.96	402.3	90.4,90.4
80	21.02	12.76	6.660	10.99	20.04	17.06	12.76	17.37	70- 80	30.13	432.5	97.2,97.2
90	1.075	1.145	1.035	1.113	1.129	1.266	1.129	1.508	80- 90	5.677	438.1	98.4,98.4
100	1.067	1.187	1.178	1.143	1.027	1.120	1.051	1.091	90-100	1.343	439.5	98.7,98.7
110	1.036	1.125	1.048	1.046	1.022	1.078	0.9908	1.054	100-110	1.144	440.6	99,99
120	1.033	1.075	1.046	1.039	1.031	1.073	0.9981	1.044	110-120	1.045	441.7	99.2,99.2
130	1.039	1.067	1.065	1.040	1.055	1.085	1.020	1.056	120-130	0.9435	442.6	99.4,99.4
140	1.050	1.074	1.098	1.042	1.081	1.113	1.026	1.058	130-140	0.8224	443.4	99.6,99.6
150	1.106	1.084	1.135	1.081	1.123	1.124	1.071	1.110	140-150	0.6794	444.1	99.8,99.8
160	1.139	1.126	1.183	1.143	1.199	1.156	1.158	1.166	150-160	0.5214	444.6	99.9,99.9
170	1.183	1.181	1.222	1.198	1.234	1.191	1.251	1.186	160-170	0.3329	445.0	100,100
180	1.268	1.265	1.213	1.267	1.245	1.269	1.244	1.244	170-180	0.1165	445.1	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.2186]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

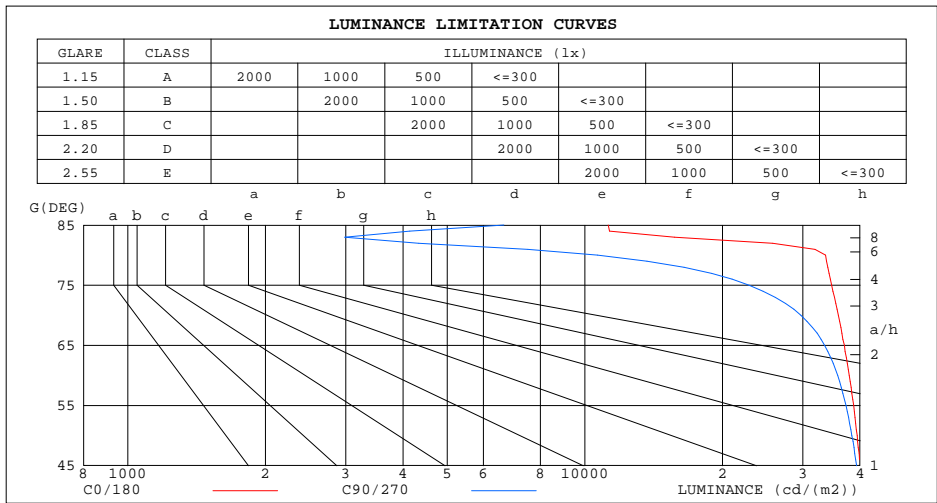

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11261	6650
80	33619	10662
75	34680	22864
70	35865	29709
65	36968	33461
60	37896	35761
55	38733	37270
50	39456	38406
45	40013	39314


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2186]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.00	.96	1.01	.98	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.84	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.65	.78	.70	.64	.74	.68	.63	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.57	.52	.61	.56	.52	.49
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.36	.47	.40	.35	.45	.39	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

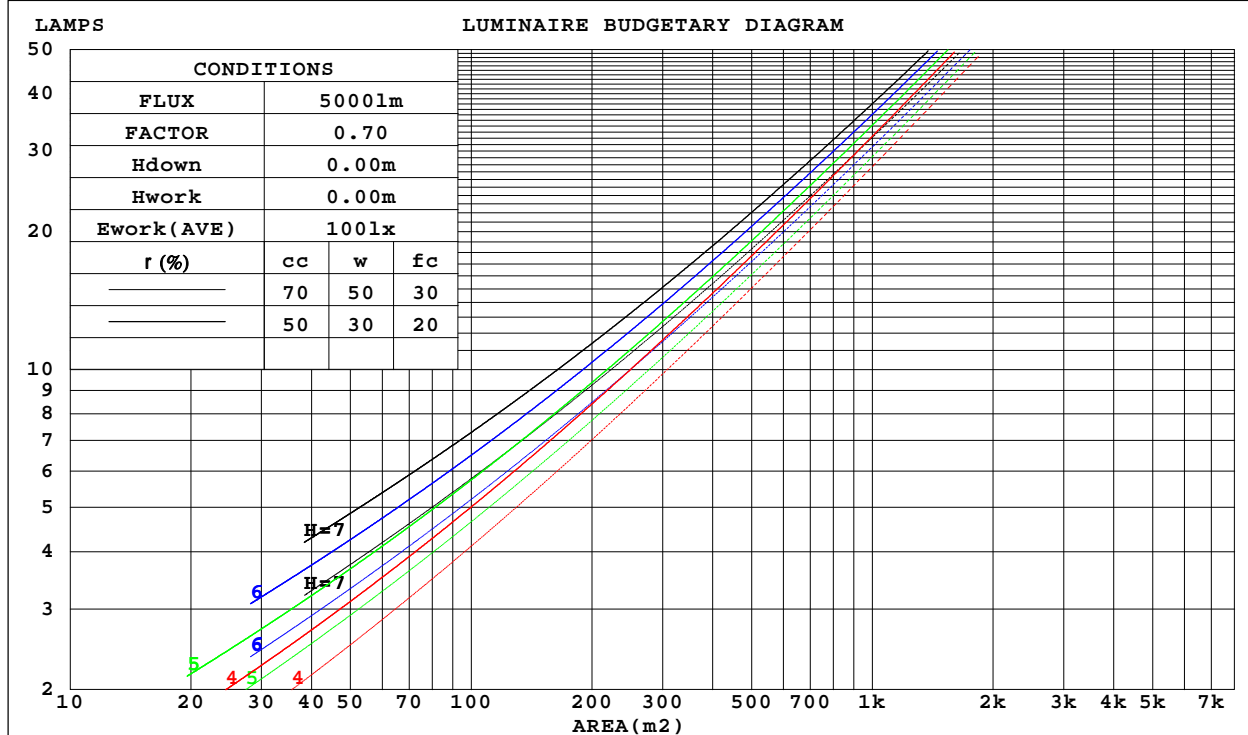

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2186]
 Remarks:

WEC AND CCEC

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.303	.172	.055	.296	.169	.054	.282	.162	.052	.269	.155	.050	.257	.149	.048	
2.0	.288	.158	.048	.281	.155	.048	.269	.150	.046	.257	.144	.045	.247	.140	.044	
3.0	.268	.142	.043	.262	.140	.042	.251	.136	.041	.240	.132	.040	.231	.128	.040	
4.0	.248	.129	.038	.242	.127	.037	.233	.123	.037	.223	.120	.036	.215	.117	.036	
5.0	.229	.117	.034	.225	.115	.034	.216	.112	.033	.208	.110	.033	.200	.107	.032	
6.0	.213	.107	.031	.209	.105	.030	.201	.103	.030	.193	.100	.030	.186	.098	.029	
7.0	.198	.098	.028	.194	.097	.028	.187	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.185	.090	.025	.182	.089	.025	.175	.088	.025	.169	.086	.025	.164	.084	.025	
9.0	.174	.084	.023	.171	.083	.023	.165	.081	.023	.159	.080	.023	.154	.078	.023	
10.0	.163	.078	.022	.160	.077	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.147	.164	.144	.126	.112	.099	.087	.065	.057	.051	.021	.018	.016	
2.0	.184	.144	.111	.157	.124	.096	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.176	.126	.087	.151	.109	.075	.104	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.169	.113	.071	.145	.098	.061	.100	.068	.043	.058	.040	.026	.019	.013	.008	
5.0	.161	.103	.060	.139	.089	.052	.095	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.154	.094	.052	.133	.082	.045	.091	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.147	.088	.046	.127	.076	.040	.088	.053	.028	.051	.031	.017	.016	.010	.006	
8.0	.141	.082	.041	.121	.071	.036	.084	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.135	.077	.038	.116	.067	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.129	.073	.035	.111	.063	.030	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2186]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.06*0.06			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.3	25.1	26.7	27.0	24.6	26.2	25.0	26.5	26.9
3H	26.6	28.1	27.0	28.4	28.8	26.2	27.6	26.6	28.0	28.4
4H	27.4	28.7	27.8	29.1	29.5	26.6	27.9	27.0	28.3	28.7
6H	28.0	29.2	28.4	29.6	30.1	26.7	28.0	27.2	28.4	28.8
8H	28.1	29.3	28.6	29.8	30.2	26.7	27.9	27.1	28.3	28.8
12H	28.1	29.3	28.6	29.7	30.2	26.7	27.8	27.1	28.2	28.7
4H 2H	25.3	26.7	25.7	27.1	27.5	25.2	26.6	25.6	27.0	27.4
3H	27.4	28.6	27.9	29.0	29.4	27.0	28.1	27.4	28.6	29.0
4H	28.3	29.3	28.8	29.8	30.3	27.5	28.5	28.0	29.0	29.4
6H	29.0	29.9	29.5	30.4	30.9	27.7	28.6	28.2	29.1	29.5
8H	29.2	30.1	29.7	30.5	31.0	27.7	28.5	28.1	29.0	29.5
12H	29.2	30.0	29.7	30.5	31.0	27.6	28.4	28.1	28.9	29.4
8H 4H	28.5	29.4	29.0	29.8	30.3	27.8	28.6	28.3	29.1	29.6
6H	29.3	30.0	29.9	30.6	31.1	28.0	28.7	28.5	29.2	29.7
8H	29.6	30.2	30.1	30.7	31.2	27.9	28.6	28.5	29.1	29.6
12H	29.6	30.2	30.2	30.7	31.3	27.9	28.5	28.5	29.0	29.6
12H 4H	28.5	29.3	29.0	29.8	30.3	27.8	28.5	28.3	29.0	29.6
6H	29.3	30.0	29.9	30.5	31.0	28.0	28.6	28.5	29.1	29.7
8H	29.6	30.1	30.1	30.7	31.3	28.0	28.5	28.5	29.0	29.6
CIE190: 2010										

CIE190: 2010
Area: 0.0036 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.2186]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	41
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	65	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	80	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	92	87	82	73
3.00	102	95	90	100	93	88	95	90	86	77
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.2186]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

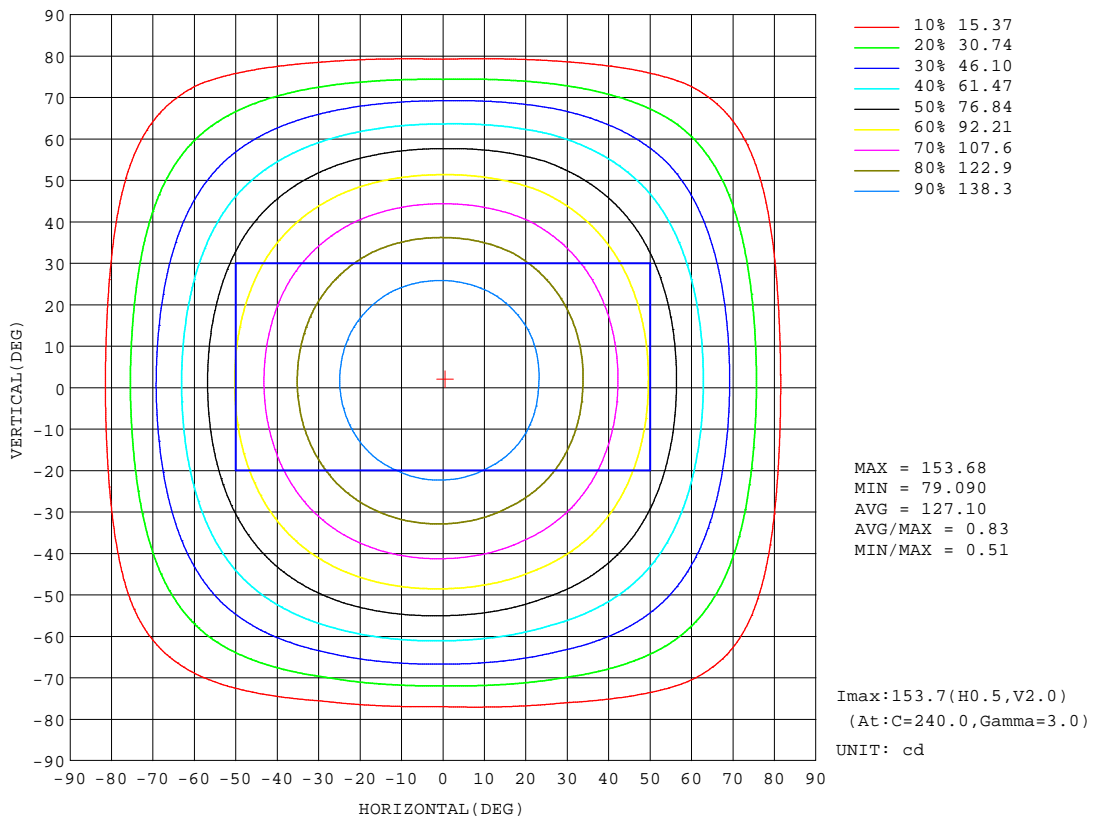


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2186]
 Remarks:

AAI Figure

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

Flux out:327.1 lm

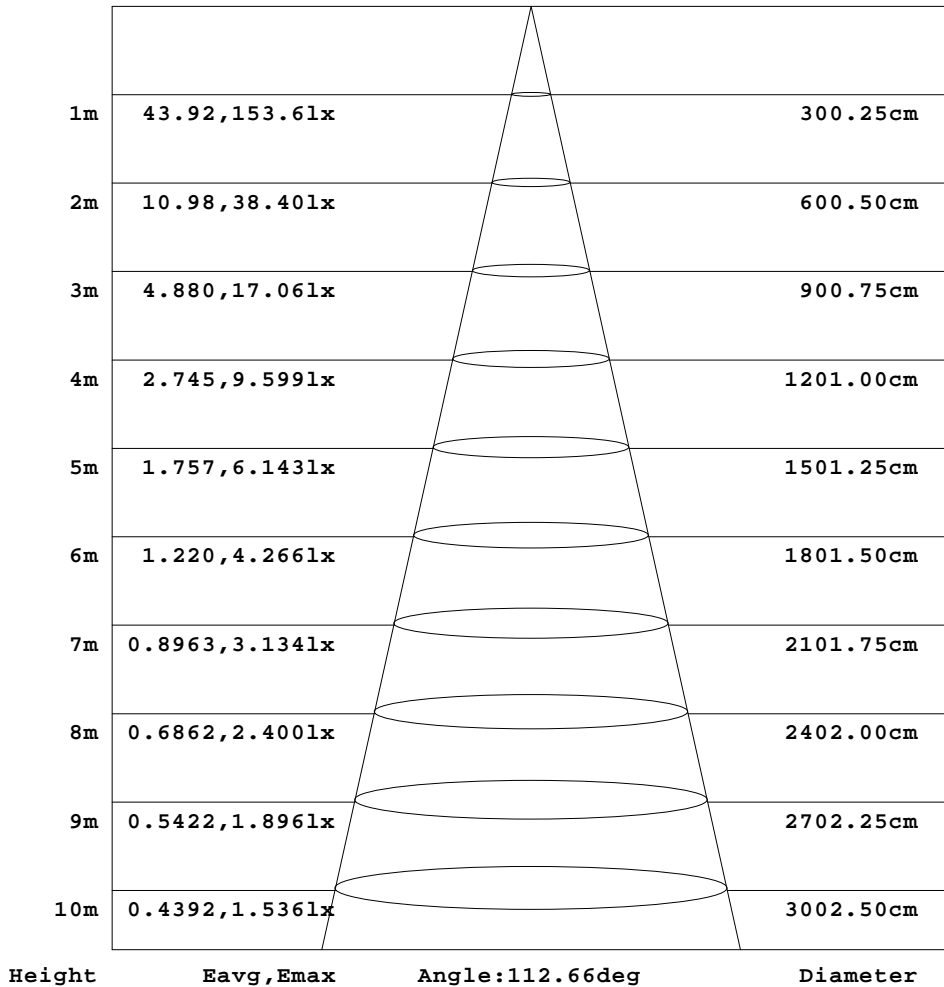


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2186]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

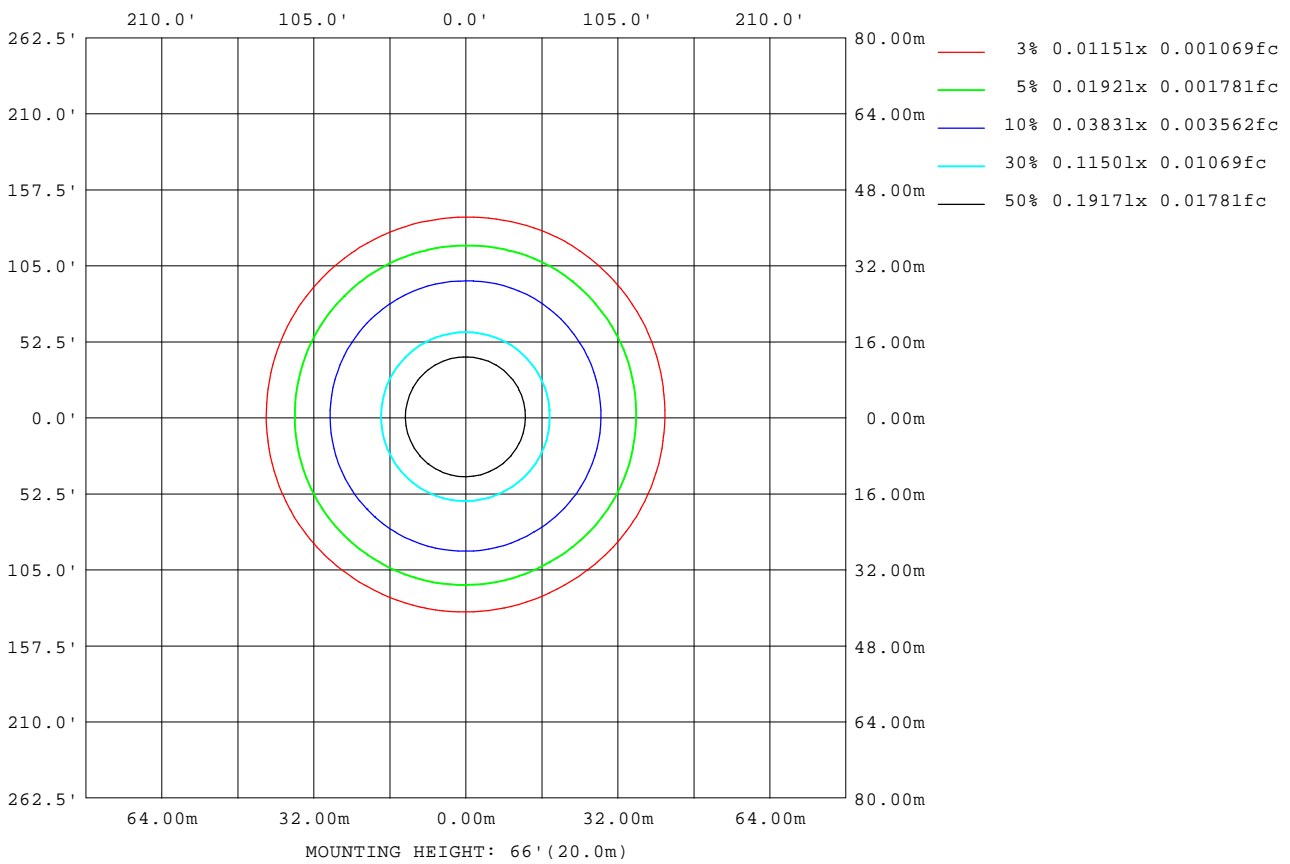

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.2186]
 Remarks:

LED Avg.L Report

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	37122
L_0~180(75)av	34448
L_0~180(85)av	14578
L_90~270(65)av	35659
L_90~270(75)av	26717
L_90~270(85)av	7339
L_45(65)av	36689
L_45(75)av	30802
L_45(85)av	10061

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.2186]
Remarks:

Planar Illuminance Curve

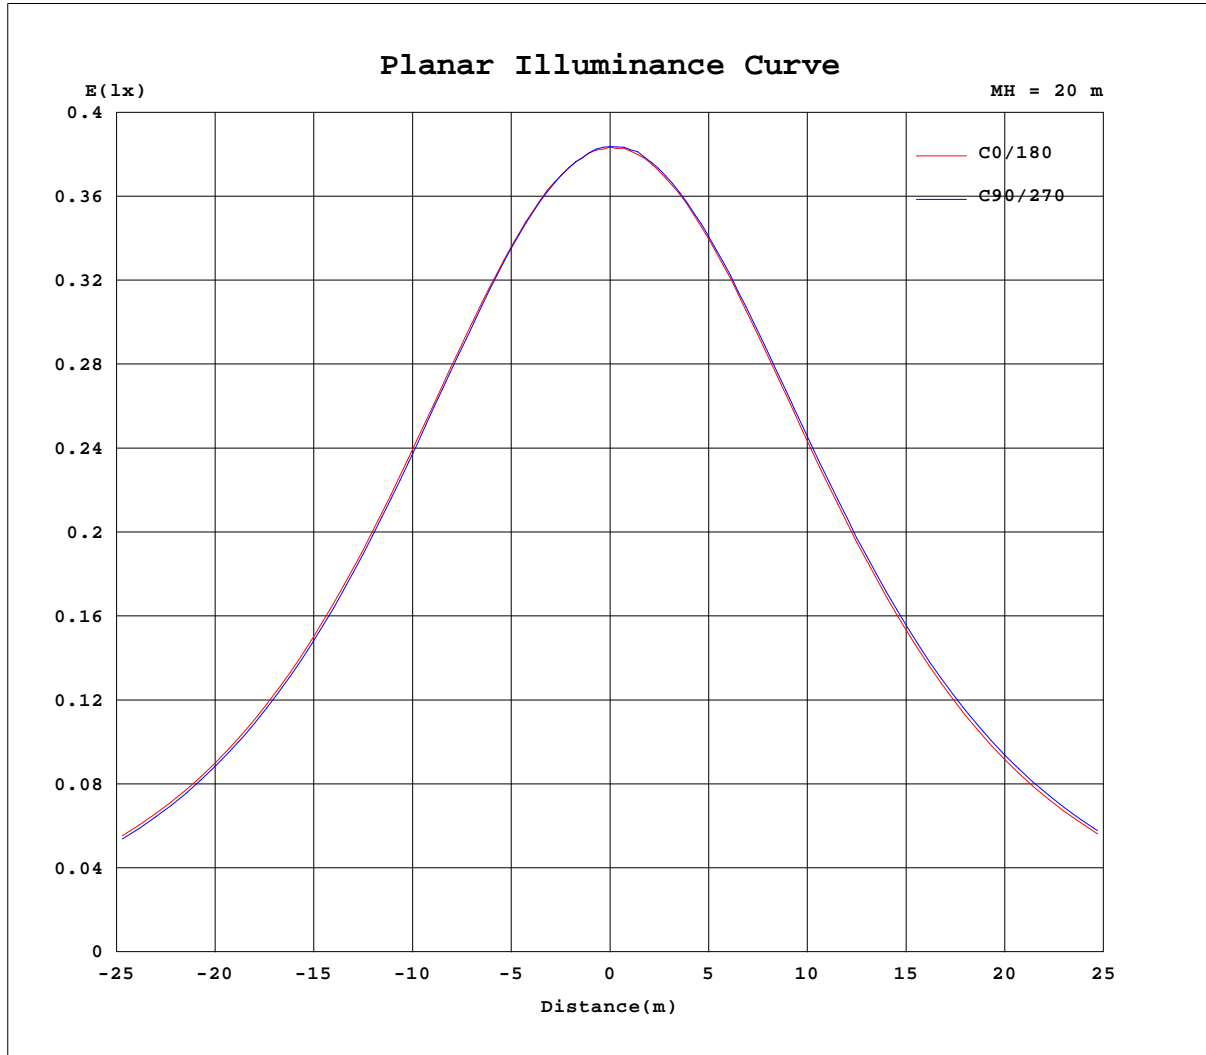

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.2186]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.99V I:0.0540A P:6.1300W PF:0.9387 Freq:60.00Hz Lamp Flux:445.095x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.06*0.06	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	153	153	153	153	153	153	153	153	153	153	153	153						
5	152	152	152	152	152	153	153	153	153	153	153	153						
10	150	150	150	150	150	151	151	152	152	151	151	151						
15	146	146	146	146	146	147	148	149	149	149	148	148						
20	142	141	141	141	141	143	144	145	145	145	144	143						
25	136	135	135	135	135	137	138	139	140	139	139	138						
30	129	128	127	128	128	130	131	132	133	133	132	131						
35	121	120	119	119	120	121	123	125	125	125	125	123						
40	112	111	110	110	111	112	114	116	117	116	116	114						
45	102	101	99.7	100	101	102	104	106	106	106	106	104						
50	91.3	89.9	88.6	88.8	90.1	91.3	92.8	94.5	95.5	95.2	95.7	93.6						
55	80.0	78.6	76.6	76.9	78.6	79.9	81.1	82.9	83.6	83.4	84.3	82.3						
60	68.2	66.6	64.1	64.3	65.7	67.8	69.1	70.6	71.0	70.8	72.3	70.6						
65	56.3	54.2	51.2	50.9	52.2	55.2	56.7	57.7	57.8	57.6	59.4	58.6						
70	44.2	41.5	37.8	36.6	37.8	41.9	44.2	44.7	44.2	43.6	45.6	46.0						
75	32.3	28.9	24.0	21.3	22.7	28.1	31.9	31.5	30.4	28.5	31.1	32.7						
80	21.0	16.2	9.33	6.66	7.95	14.0	20.0	18.8	15.4	12.8	15.6	19.1						
85	3.53	4.12	1.36	2.08	1.81	2.42	5.61	6.25	1.98	2.52	1.93	5.64						
90	1.08	1.13	1.16	1.04	1.01	1.21	1.13	1.36	1.18	1.13	1.18	1.83						
95	1.11	1.18	1.98	1.43	1.83	1.27	1.11	1.28	1.17	1.17	1.24	1.15						
100	1.07	1.17	1.21	1.18	1.08	1.21	1.03	1.14	1.10	1.05	1.09	1.09						
105	1.04	1.11	1.18	1.07	1.07	1.09	1.02	1.08	1.08	1.00	1.08	1.04						
110	1.04	1.10	1.15	1.05	1.06	1.03	1.02	1.07	1.08	0.99	1.07	1.04						
115	1.03	1.10	1.11	1.04	1.06	1.03	1.03	1.07	1.08	0.99	1.06	1.04						
120	1.03	1.10	1.05	1.05	1.05	1.03	1.03	1.06	1.08	1.00	1.05	1.04						
125	1.04	1.10	1.04	1.06	1.05	1.03	1.04	1.06	1.09	1.00	1.07	1.04						
130	1.04	1.09	1.04	1.07	1.05	1.03	1.05	1.06	1.11	1.02	1.08	1.04						
135	1.04	1.09	1.04	1.08	1.05	1.03	1.07	1.06	1.14	1.02	1.08	1.04						
140	1.05	1.11	1.04	1.10	1.06	1.03	1.08	1.06	1.17	1.03	1.08	1.04						
145	1.06	1.12	1.04	1.11	1.06	1.03	1.10	1.06	1.18	1.05	1.11	1.04						
150	1.11	1.12	1.04	1.14	1.10	1.06	1.12	1.06	1.19	1.07	1.14	1.08						
155	1.13	1.13	1.05	1.17	1.12	1.11	1.15	1.07	1.20	1.11	1.18	1.10						
160	1.14	1.17	1.08	1.18	1.13	1.15	1.20	1.11	1.21	1.16	1.21	1.12						
165	1.15	1.20	1.12	1.19	1.14	1.21	1.22	1.13	1.21	1.19	1.22	1.14						
170	1.18	1.22	1.15	1.22	1.15	1.25	1.23	1.15	1.24	1.25	1.22	1.15						
175	1.24	1.26	1.25	1.23	1.23	1.26	1.24	1.18	1.26	1.25	1.23	1.17						
180	1.27	1.28	1.25	1.21	1.27	1.27	1.24	1.27	1.27	1.24	1.22	1.27						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-22

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2186]
 Remarks: