
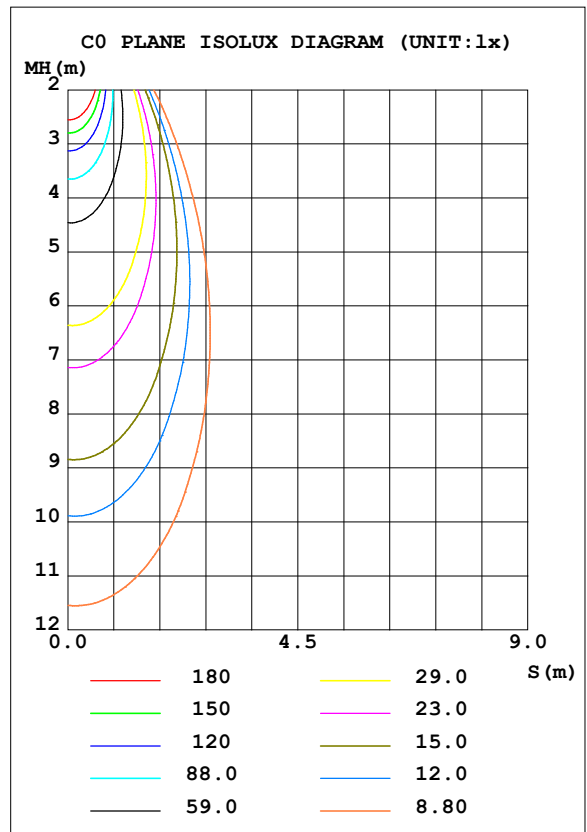


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.94 lm/W			
MODEL		I <sub>max</sub> (cd)	1162	S/MH (C0/180)	0.60
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	0.62
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	550	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.8
NOMINAL FLUX (lm)	550	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.2
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	12	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

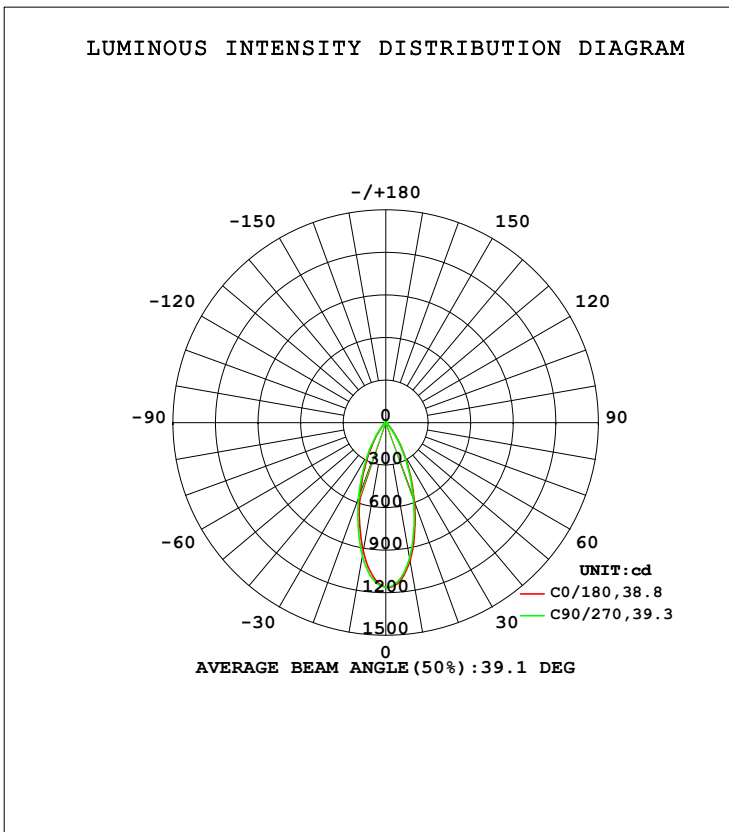

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	987.8	985.7	969.1	939.5	919.2	935.2	954.9	968.7	0- 10	100.7	100.7	16.2,16.2
20	591.9	588.1	571.7	542.7	528.2	542.1	561.8	571.3	10- 20	209.2	309.9	49.8,49.8
30	262.6	262.6	250.6	228.5	219.4	232.7	246.8	249.3	20- 30	177.1	487.0	78.2,78.2
40	77.69	76.83	71.49	66.23	62.11	67.21	73.67	74.76	30- 40	89.55	576.5	92.6,92.6
50	18.65	18.79	16.91	17.46	17.18	17.72	16.98	18.34	40- 50	28.05	604.6	97.1,97.1
60	8.525	8.021	6.243	7.721	8.398	8.248	6.908	8.135	50- 60	10.31	614.9	98.8,98.8
70	4.259	3.356	2.147	3.100	4.199	3.518	2.435	3.545	60- 70	5.376	620.3	99.6,99.6
80	1.387	0.6995	0.3348	0.6575	1.374	0.8672	0.5938	0.8410	70- 80	1.974	622.2	100,100
90	0.0086	0.0013	0.0064	0.0027	0.0083	0.0073	0.0087	0.0107	80- 90	0.2505	622.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

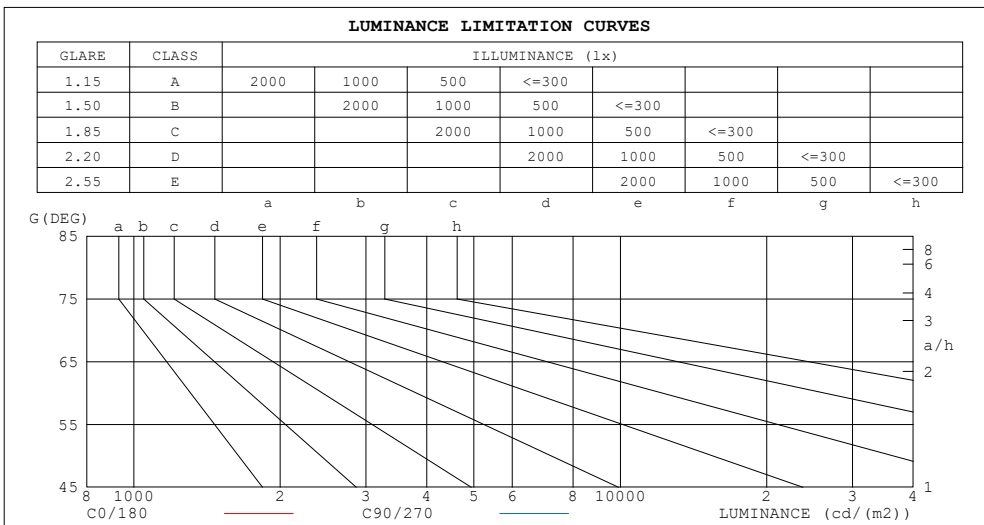

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	29	8
80	73	17
75	74	44
70	113	56
65	129	95
60	155	112
55	185	151
50	264	236
45	453	423


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.91	.90	.88
3.0	.98	.93	.89	.96	.92	.88	.94	.90	.87	.91	.88	.86	.89	.86	.84	.83
4.0	.92	.87	.83	.91	.86	.82	.89	.84	.81	.87	.83	.80	.85	.82	.79	.78
5.0	.87	.81	.77	.86	.81	.77	.84	.79	.76	.82	.78	.75	.81	.77	.75	.73
6.0	.82	.76	.72	.81	.76	.72	.80	.75	.72	.78	.74	.71	.77	.73	.71	.69
7.0	.78	.72	.68	.77	.72	.68	.76	.71	.68	.75	.70	.67	.74	.70	.67	.66
8.0	.74	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.64	.62
9.0	.70	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.59
10.0	.67	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.64	.60	.58	.56

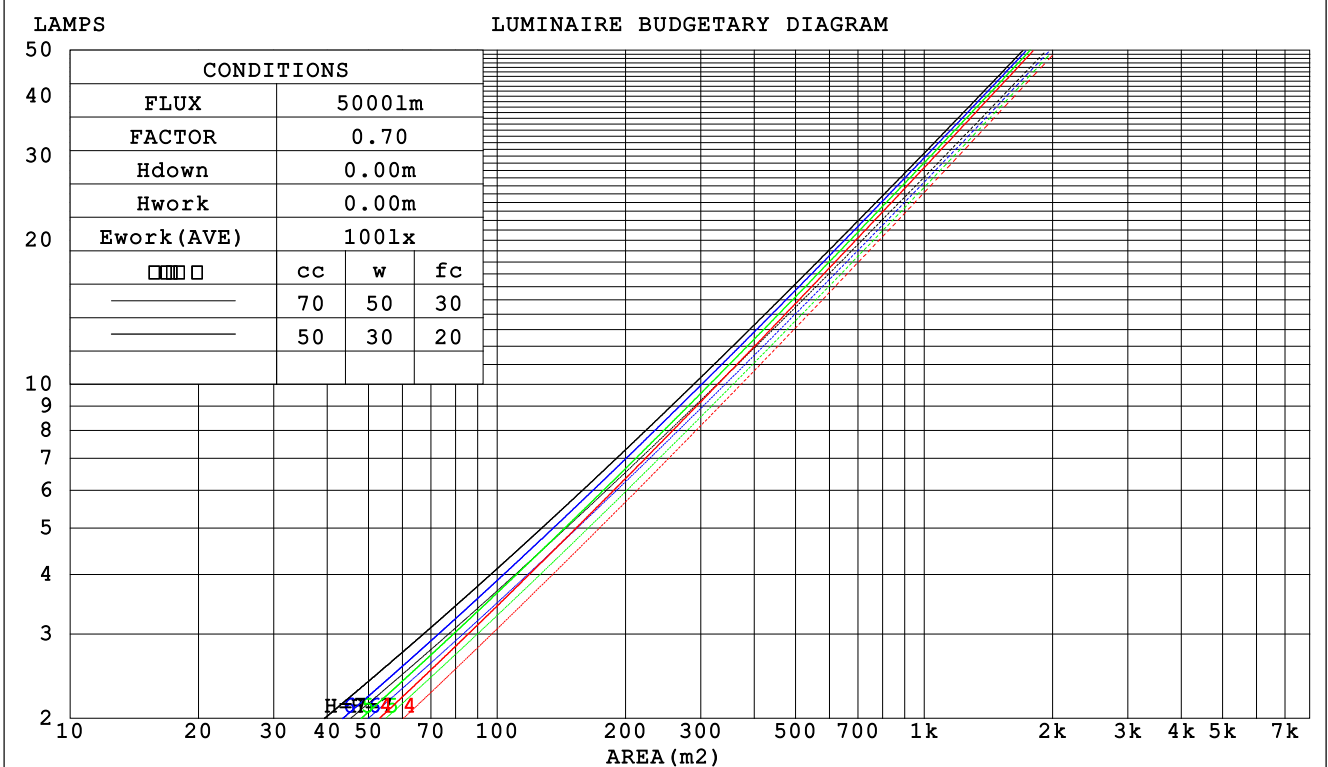

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.170 .097 .031	.164 .093 .030	.151 .087 .028	.140 .081 .026	.129 .075 .024	
2.0	.162 .089 .027	.157 .086 .027	.146 .081 .025	.136 .077 .024	.127 .072 .023	
3.0	.154 .082 .025	.149 .080 .024	.140 .076 .023	.132 .072 .022	.124 .069 .021	
4.0	.146 .076 .022	.142 .074 .022	.134 .071 .021	.127 .068 .021	.120 .065 .020	
5.0	.138 .071 .020	.135 .069 .020	.128 .067 .020	.122 .064 .019	.116 .062 .019	
6.0	.132 .066 .019	.129 .065 .019	.123 .063 .018	.117 .061 .018	.112 .059 .018	
7.0	.126 .062 .018	.123 .061 .017	.118 .060 .017	.113 .058 .017	.108 .056 .017	
8.0	.120 .059 .016	.118 .058 .016	.113 .056 .016	.109 .055 .016	.105 .054 .016	
9.0	.115 .056 .016	.113 .055 .015	.109 .054 .015	.105 .053 .015	.101 .051 .015	
10.0	.110 .053 .015	.108 .052 .015	.105 .051 .014	.101 .050 .014	.098 .049 .014	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.142 .114 .091	.122 .098 .079	.084 .068 .055	.048 .040 .033	.016 .013 .011	
4.0	.131 .099 .074	.113 .085 .064	.078 .059 .045	.045 .035 .027	.014 .011 .009	
5.0	.122 .087 .061	.105 .075 .053	.072 .053 .037	.042 .031 .022	.014 .010 .007	
6.0	.115 .077 .051	.098 .067 .044	.068 .047 .031	.039 .028 .019	.013 .009 .006	
7.0	.108 .070 .043	.093 .061 .038	.064 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.102 .063 .037	.088 .055 .032	.061 .039 .023	.035 .023 .014	.011 .007 .005	
9.0	.097 .058 .032	.083 .050 .028	.058 .035 .020	.034 .021 .012	.011 .007 .004	
10.0	.092 .054 .028	.079 .047 .025	.055 .033 .017	.032 .019 .010	.010 .006 .003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.7	7.6	7.0	7.8	8.0	6.4	7.3	6.6	7.5	7.6
3H	6.8	7.6	7.0	7.8	8.0	6.4	7.2	6.6	7.4	7.6
4H	6.8	7.5	7.0	7.8	8.0	6.3	7.1	6.6	7.3	7.5
6H	6.7	7.5	7.0	7.7	7.9	6.2	6.9	6.5	7.2	7.4
8H	6.7	7.4	7.0	7.6	7.9	6.2	6.9	6.5	7.1	7.4
12H	6.7	7.3	7.0	7.6	7.9	6.1	6.8	6.4	7.1	7.3
4H 2H	6.6	7.4	6.9	7.6	7.8	6.3	7.1	6.6	7.3	7.5
3H	6.7	7.4	7.0	7.6	7.9	6.2	6.9	6.6	7.2	7.4
4H	6.7	7.3	7.0	7.6	7.9	6.2	6.8	6.5	7.1	7.4
6H	6.7	7.2	7.0	7.5	7.9	6.1	6.6	6.5	7.0	7.3
8H	6.6	7.1	7.0	7.5	7.8	6.0	6.5	6.4	6.9	7.3
12H	6.6	7.0	7.0	7.4	7.8	6.0	6.4	6.4	6.8	7.2
8H 4H	6.6	7.1	7.0	7.4	7.8	6.1	6.6	6.5	6.9	7.3
6H	6.6	7.0	7.0	7.4	7.8	6.0	6.4	6.4	6.8	7.2
8H	6.5	6.9	7.0	7.3	7.7	5.9	6.3	6.4	6.7	7.1
12H	6.5	6.8	7.0	7.2	7.7	5.9	6.2	6.3	6.6	7.1
12H 4H	6.5	7.0	6.9	7.3	7.7	6.0	6.5	6.4	6.8	7.2
6H	6.5	6.9	7.0	7.3	7.7	5.9	6.3	6.4	6.7	7.2
8H	6.5	6.8	6.9	7.2	7.7	5.9	6.2	6.3	6.6	7.1
Variations with the observer position at spacings:										
S = 1.0H	+ 2.5 / - 4.4					+ 2.6 / - 5.9				
1.5H	+ 4.4 / - 3.7					+ 4.5 / - 4.6				
2.0H	+ 3.5 / - 2.0					+ 3.9 / - 2.7				

CIE Pub.117, 622.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.6)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	77	86	80	77	86	80	76	73
0.80	94	88	85	94	88	85	93	88	84	80
1.00	99	93	90	98	93	89	96	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	104	100	97	102	99	96	91
2.00	108	104	101	107	103	100	104	101	99	93
2.50	110	106	103	109	105	102	105	103	100	95
3.00	112	108	106	110	107	104	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	107	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

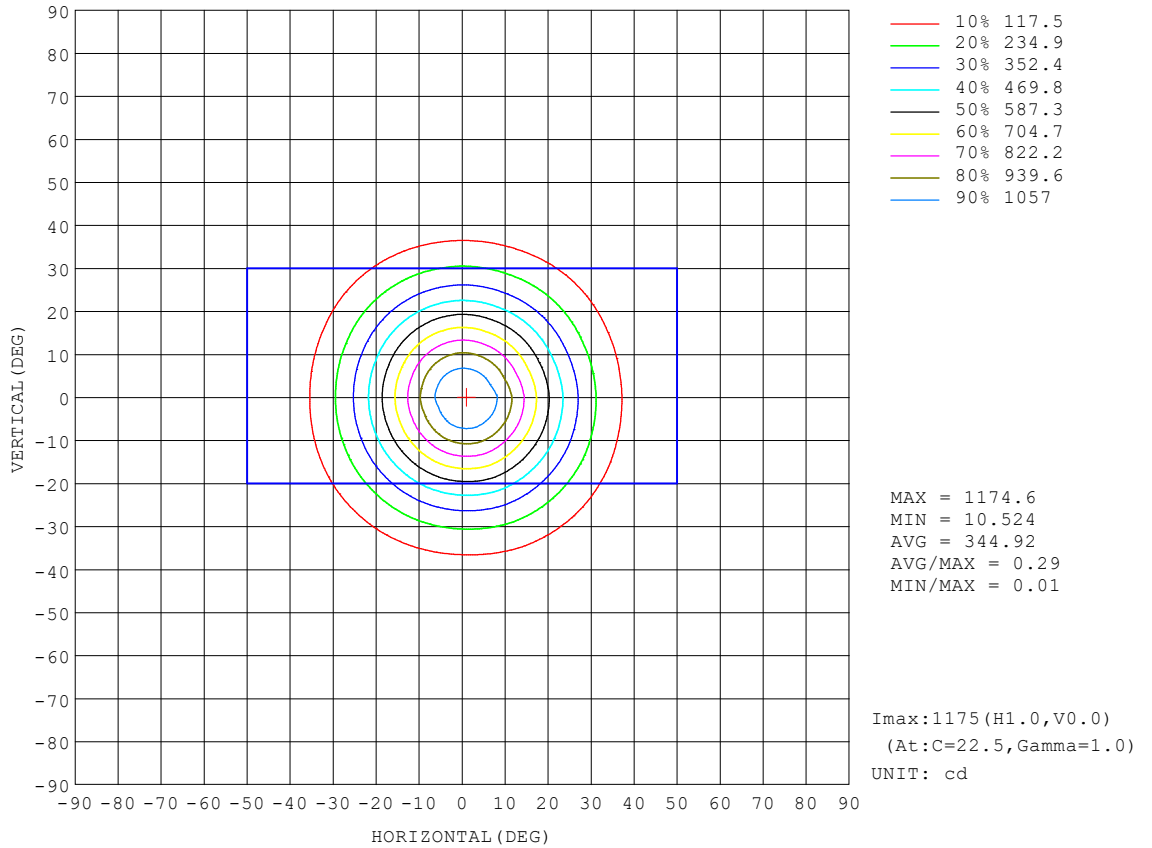


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

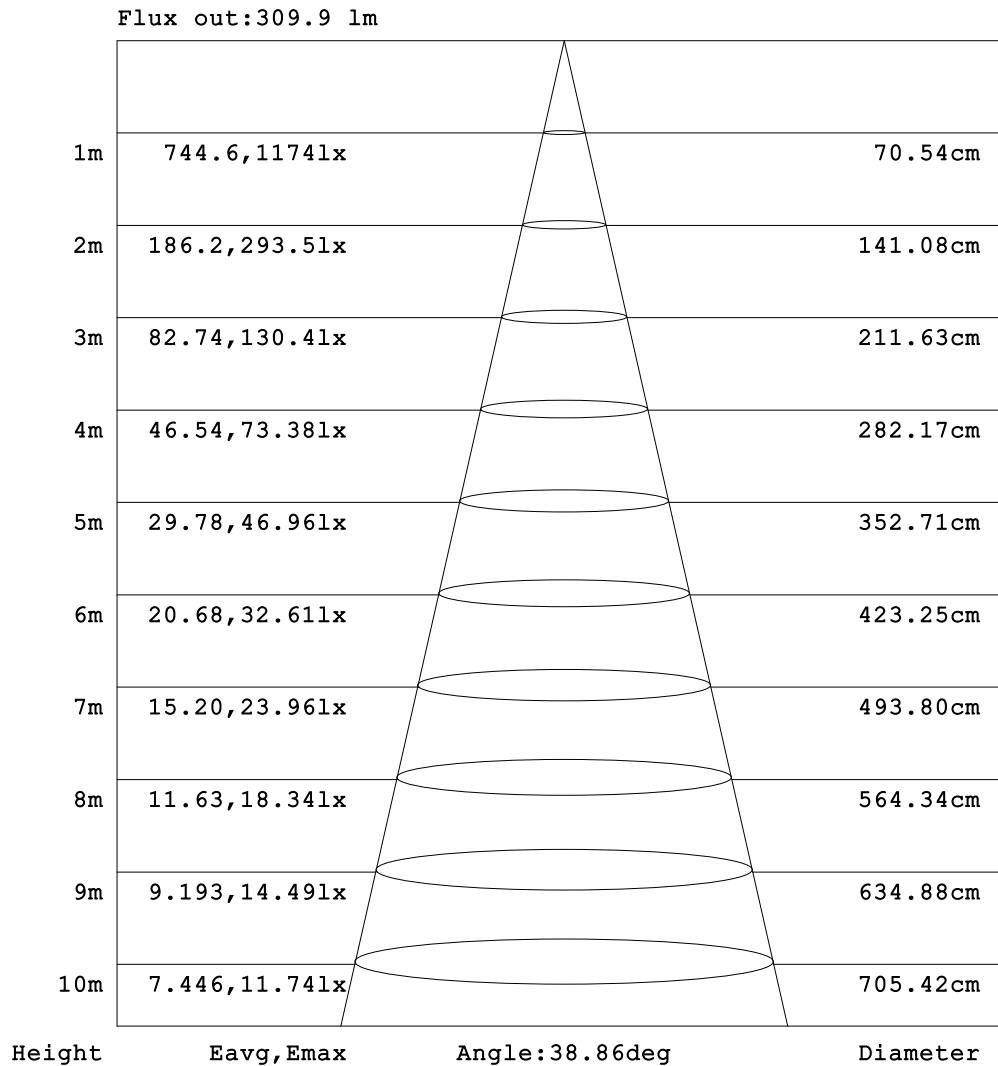


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

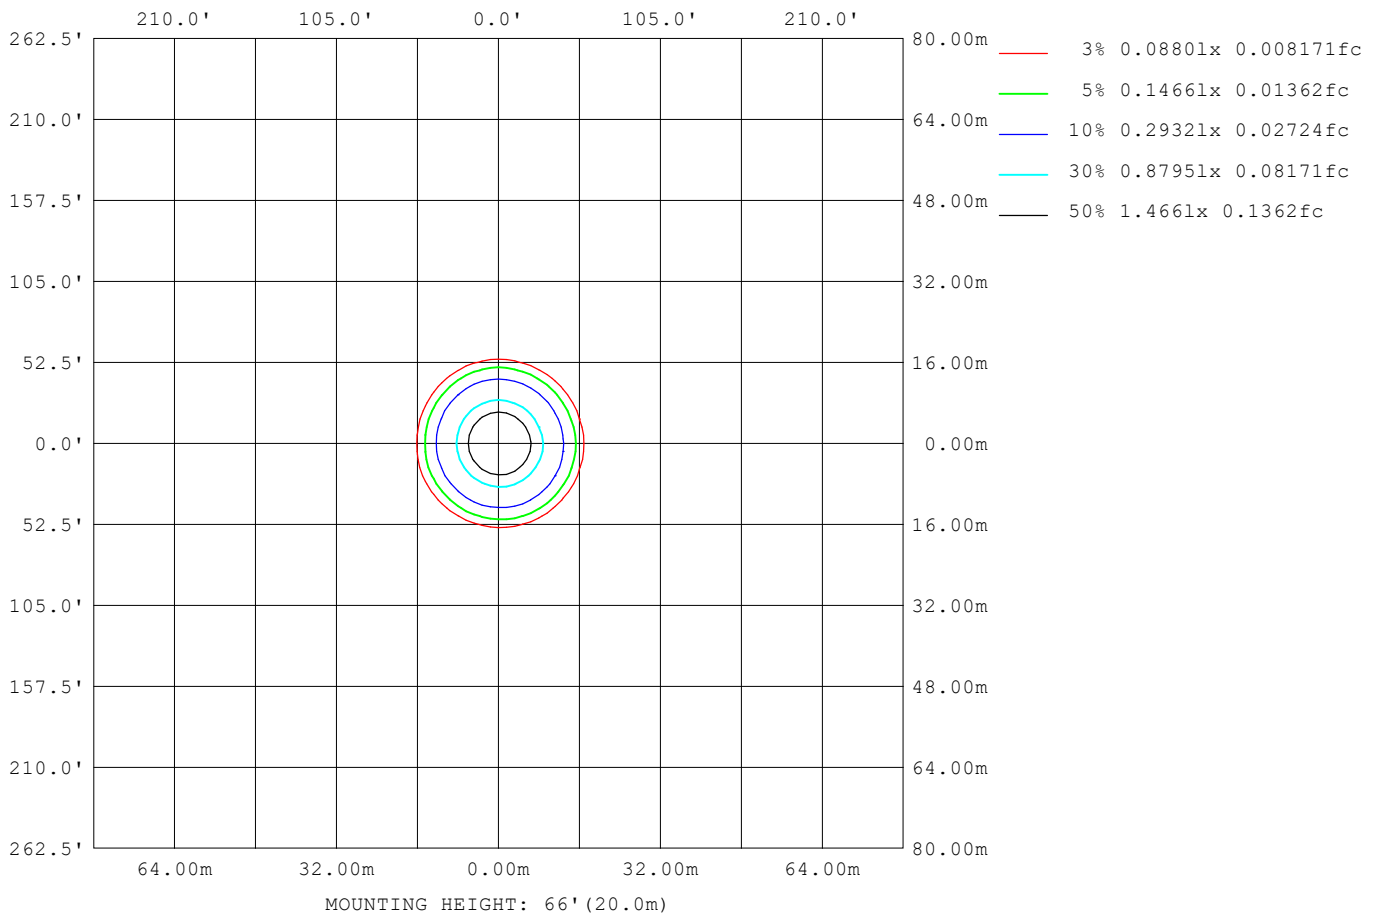

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	127
L_0~180 (75) av	75
L_0~180 (85) av	28
L_90~270 (65) av	100
L_90~270 (75) av	49
L_90~270 (85) av	6
L_45 (65) av	116
L_45 (75) av	59
L_45 (85) av	3

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

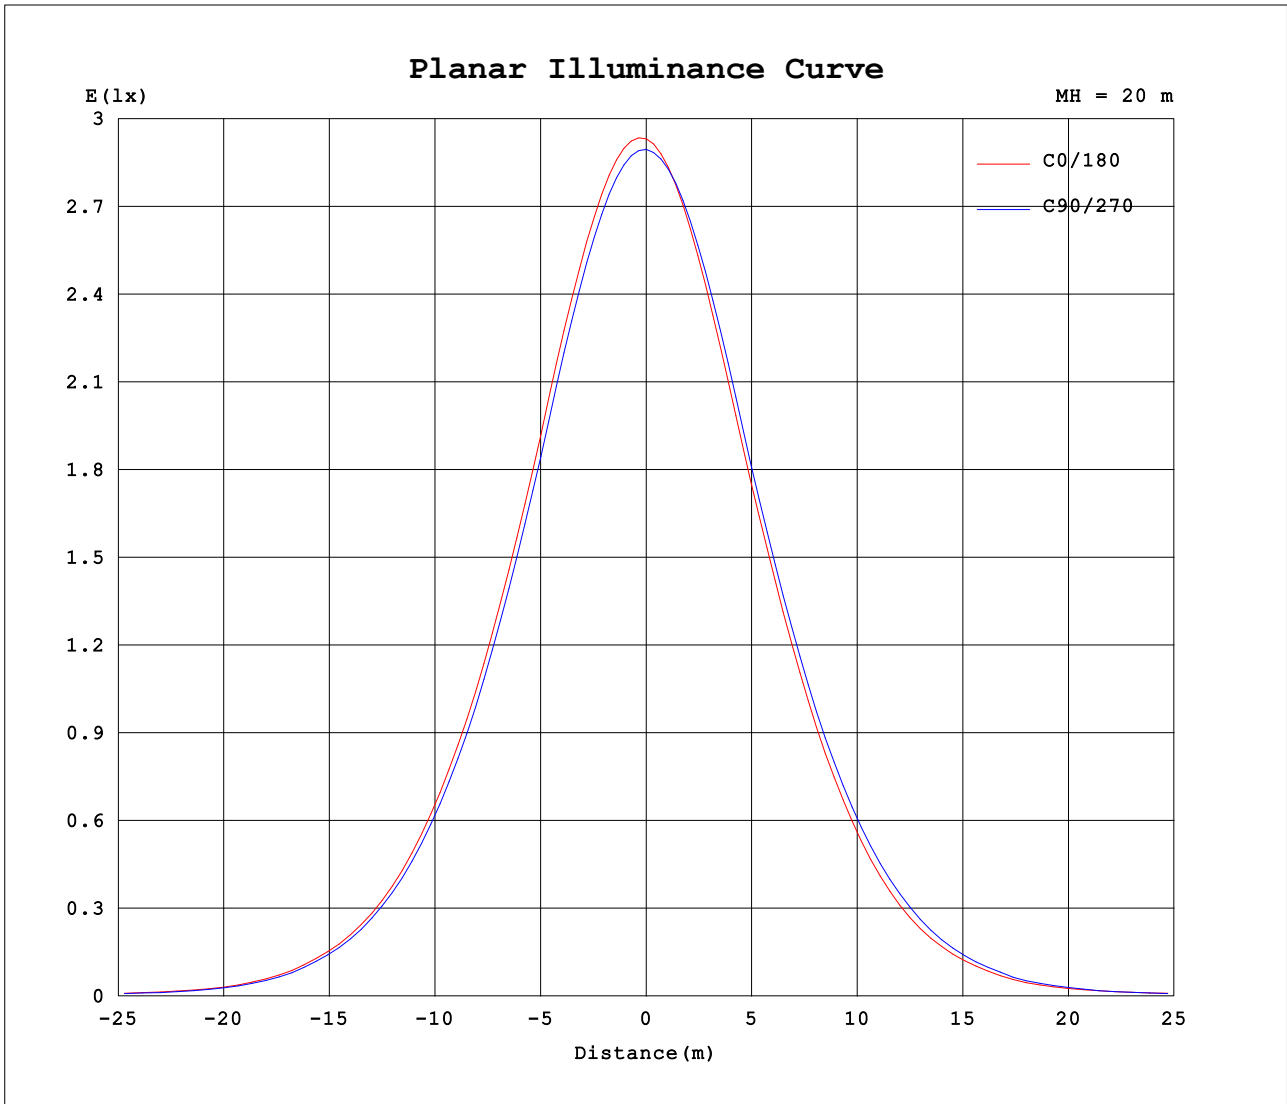

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-07-09

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.96V I:0.1032A P:8.4193W PF:0.9213 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TG-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1161	1161	1161	1161	1161	1161	1161	1161	1161	1161	1161	1161	1161	1161	1161	1161			
5	1124	1125	1121	1118	1112	1105	1095	1090	1083	1084	1091	1097	1103	1107	1112	1117			
10	988	990	986	982	969	956	939	930	919	922	935	944	955	959	969	975			
15	790	793	788	785	770	754	738	730	721	722	736	746	755	757	768	777			
20	592	593	588	587	572	557	543	535	528	530	542	553	562	562	571	578			
25	413	413	409	408	395	382	369	363	357	360	371	381	388	387	395	400			
30	263	265	263	262	251	241	229	224	219	222	233	241	247	245	249	252			
35	151	154	153	152	143	137	129	127	122	124	131	138	141	140	143	146			
40	77.7	77.9	76.8	76.6	71.5	68.7	66.2	65.6	62.1	62.3	67.2	70.8	73.7	72.2	74.8	75.9			
45	35.2	34.9	35.6	36.1	33.3	31.8	31.2	30.9	30.2	30.3	32.7	34.1	34.2	33.0	34.4	35.0			
50	18.7	18.9	18.8	18.9	16.9	16.7	17.5	17.3	17.2	17.3	17.7	18.2	17.0	17.0	18.3	18.1			
55	11.7	11.9	11.4	10.3	9.67	9.90	10.9	11.4	11.4	11.5	11.5	10.6	10.2	10.5	11.3	11.4			
60	8.53	8.57	8.02	6.39	6.24	6.54	7.72	8.49	8.40	8.43	8.25	7.02	6.91	6.94	8.14	8.44			
65	5.98	5.95	5.40	4.67	4.46	4.83	5.27	5.99	5.93	5.89	5.63	5.16	4.90	5.10	5.55	6.02			
70	4.26	4.24	3.36	2.15	2.15	2.22	3.10	4.15	4.20	4.14	3.52	2.42	2.43	2.48	3.54	4.16			
75	2.12	1.86	1.60	1.37	1.26	1.36	1.62	1.95	2.22	2.01	1.83	1.60	1.53	1.59	1.77	1.93			
80	1.39	1.10	0.70	0.44	0.33	0.41	0.66	1.07	1.37	1.15	0.87	0.65	0.59	0.65	0.84	1.12			
85	0.28	0.31	0.03	0.05	0.08	0.05	0.03	0.26	0.27	0.29	0.03	0.03	0.03	0.03	0.04	0.30			
90	0.01	0.01	0.00	0.00	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-07-09

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: