
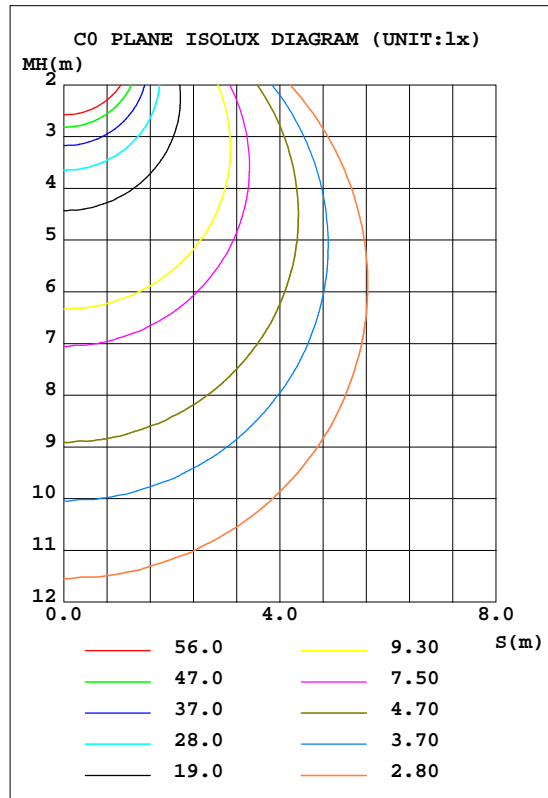


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODELASD-JBR-6D15AC(2700K)		Imax(cd)	373.9	S/MH(C0/180)	1.26
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1100	h UP,DN(C0-180)	0.4,49.7
NOMINAL FLUX(lm)	1100	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.4,49.5
LAMPS INSIDE	1	h up(%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.2	CIBSE SHR MAX	1.35

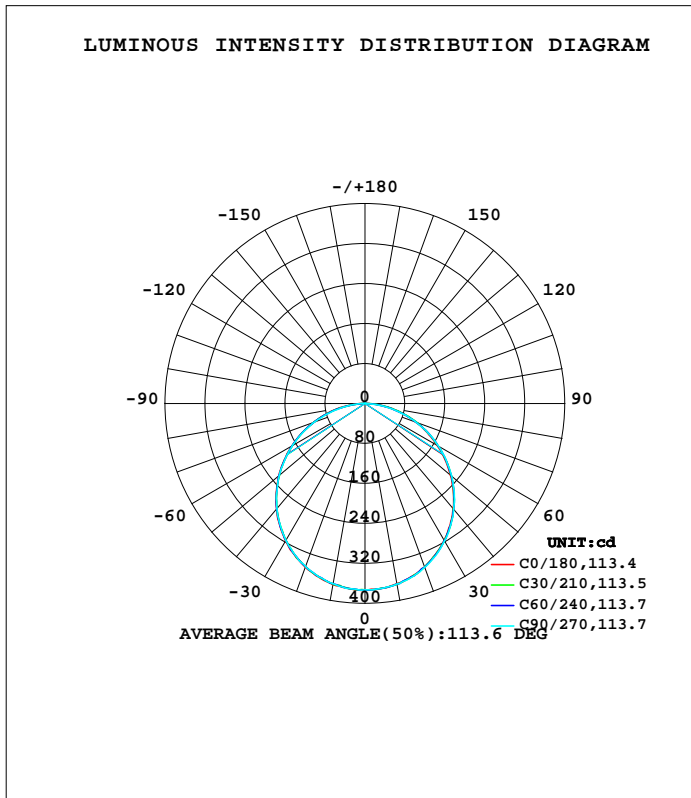

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1860]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	366.4	367.2	366.8	367.0	367.9	366.6	366.3	366.4	0- 10	35.31	35.31	3.23,3.23
20	348.1	348.7	349.1	348.3	349.0	347.5	347.7	347.2	10- 20	101.3	136.6	12.5,12.5
30	317.3	317.3	318.0	317.9	317.9	316.4	316.4	317.0	20- 30	154.0	290.6	26.5,26.5
40	274.6	275.8	276.7	276.0	275.2	275.0	274.5	275.0	30- 40	186.1	476.8	43.5,43.5
50	223.8	225.9	226.7	225.1	225.3	224.3	224.3	224.1	40- 50	193.6	670.4	61.2,61.2
60	166.9	169.1	169.8	167.7	168.1	167.8	167.2	167.0	50- 60	175.9	846.3	77.3,77.3
70	107.4	109.2	108.0	107.7	108.5	108.4	105.9	106.5	60- 70	136.7	982.9	89.8,89.8
80	49.98	48.82	45.86	47.03	50.85	47.47	43.79	46.04	70- 80	81.62	1065	97.2,97.2
90	1.503	1.032	0.9745	1.014	1.048	1.172	1.055	1.146	80- 90	21.24	1086	99.2,99.2
100	1.234	1.177	1.157	1.141	1.146	1.263	1.161	1.263	90-100	1.272	1087	99.3,99.3
110	1.304	1.214	1.304	1.168	1.289	1.287	1.212	1.291	100-110	1.296	1088	99.4,99.4
120	1.494	1.325	1.516	1.255	1.487	1.379	1.297	1.394	110-120	1.302	1090	99.5,99.5
130	1.596	1.453	1.648	1.354	1.641	1.519	1.487	1.493	120-130	1.290	1091	99.7,99.7
140	1.750	1.552	1.766	1.475	1.726	1.633	1.623	1.616	130-140	1.209	1092	99.8,99.8
150	1.801	1.662	1.927	1.621	1.809	1.768	1.685	1.720	140-150	1.046	1093	99.9,99.9
160	1.867	1.790	1.956	1.702	1.934	1.927	1.809	1.845	150-160	0.8237	1094	99.9,99.9
170	2.080	1.984	2.168	1.877	2.097	2.008	1.877	1.889	160-170	0.5434	1095	100,100
180	2.124	2.105	2.095	1.870	1.933	2.083	2.176	2.002	170-180	0.1916	1095	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-8

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1860]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

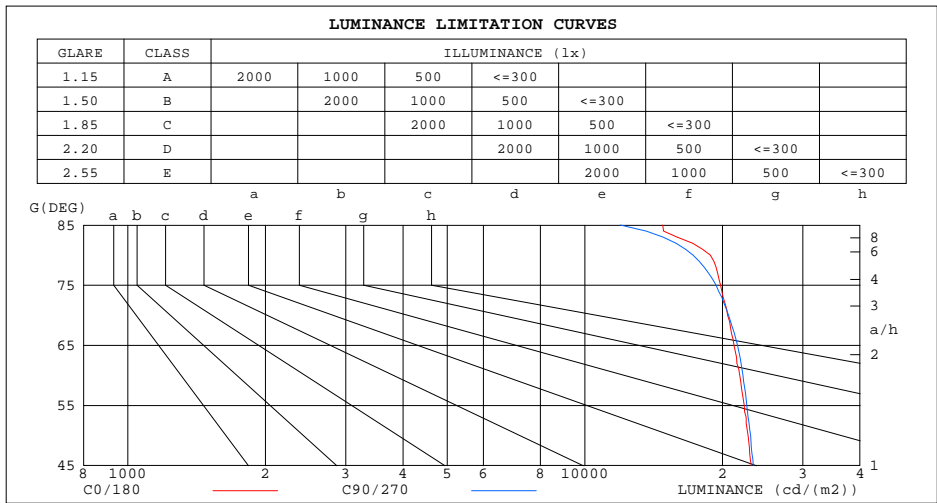

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	14813	11966
80	18808	17255
75	19805	19379
70	20519	20633
65	21195	21590
60	21815	22190
55	22322	22625
50	22751	23044
45	23127	23379


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1860]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.94	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.68
3.0	.79	.71	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.68	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.32
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.37	.30	.26	.36	.30	.25	.36	.30	.25	.24

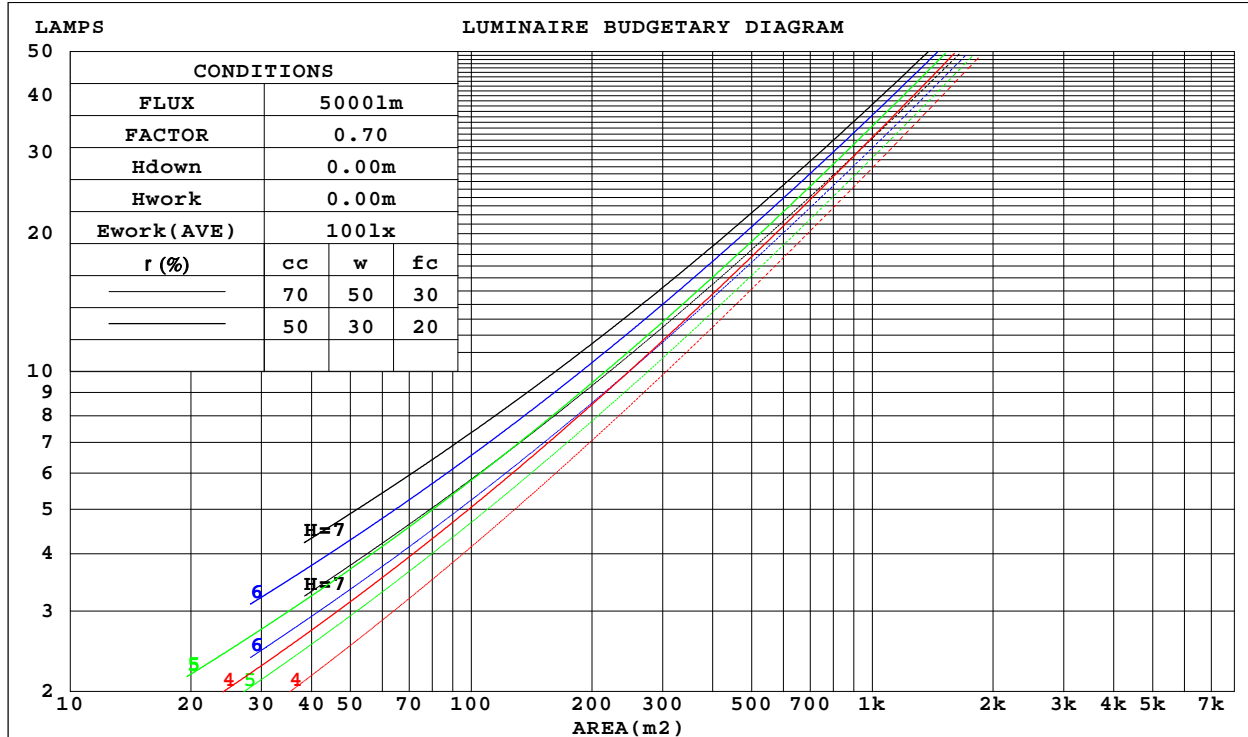

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1860]
 Remarks:

WEC AND CCEC

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.314	.178	.056	.306	.175	.055	.292	.168	.054	.280	.161	.052	.268	.155	.050	
2.0	.295	.161	.050	.288	.159	.049	.276	.153	.048	.265	.149	.046	.254	.144	.045	
3.0	.272	.145	.043	.266	.143	.043	.256	.139	.042	.246	.135	.041	.236	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.203	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.147	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.187	.162	.140	.160	.139	.121	.109	.096	.084	.063	.055	.049	.020	.018	.016	
2.0	.179	.138	.104	.153	.119	.090	.105	.082	.063	.061	.048	.037	.019	.015	.012	
3.0	.171	.121	.080	.147	.104	.070	.101	.072	.049	.058	.042	.029	.019	.014	.009	
4.0	.164	.107	.064	.140	.093	.056	.097	.065	.039	.056	.038	.023	.018	.012	.008	
5.0	.156	.097	.053	.134	.084	.046	.092	.059	.033	.054	.034	.019	.017	.011	.006	
6.0	.149	.089	.045	.128	.077	.040	.088	.054	.028	.051	.032	.017	.017	.010	.005	
7.0	.142	.082	.040	.122	.071	.034	.085	.050	.024	.049	.029	.015	.016	.010	.005	
8.0	.136	.076	.035	.117	.066	.031	.081	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.130	.071	.032	.112	.062	.028	.077	.043	.020	.045	.026	.012	.015	.008	.004	
10.0	.124	.067	.029	.107	.058	.025	.074	.041	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1860]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: φ0.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.9	24.6	23.3	24.9	25.2	23.0	24.6	23.3	24.9	25.3
3H	24.9	26.3	25.2	26.7	27.1	24.8	26.3	25.2	26.7	27.0
4H	25.6	27.0	26.0	27.4	27.8	25.6	27.0	26.0	27.3	27.7
6H	26.2	27.5	26.6	27.9	28.3	26.1	27.4	26.5	27.8	28.2
8H	26.4	27.6	26.8	28.0	28.5	26.2	27.5	26.7	27.9	28.3
12H	26.5	27.7	26.9	28.1	28.5	26.3	27.5	26.8	27.9	28.3
4H 2H	23.6	25.0	24.0	25.4	25.8	23.6	25.0	24.0	25.4	25.8
3H	25.8	26.9	26.2	27.3	27.8	25.7	26.9	26.1	27.3	27.7
4H	26.7	27.7	27.1	28.1	28.6	26.6	27.6	27.0	28.0	28.5
6H	27.4	28.3	27.9	28.8	29.2	27.2	28.1	27.7	28.6	29.1
8H	27.6	28.5	28.1	29.0	29.4	27.4	28.3	27.9	28.7	29.2
12H	27.8	28.6	28.3	29.1	29.6	27.5	28.3	28.0	28.8	29.3
8H 4H	27.0	27.9	27.5	28.3	28.8	26.9	27.8	27.4	28.2	28.7
6H	27.9	28.6	28.4	29.1	29.6	27.7	28.4	28.2	28.9	29.4
8H	28.2	28.9	28.7	29.4	29.9	27.9	28.6	28.5	29.1	29.6
12H	28.5	29.0	29.0	29.5	30.1	28.1	28.7	28.6	29.2	29.8
12H 4H	27.0	27.8	27.5	28.3	28.8	26.9	27.7	27.4	28.2	28.7
6H	28.0	28.6	28.5	29.1	29.6	27.7	28.4	28.3	28.9	29.4
8H	28.3	28.9	28.9	29.4	30.0	28.1	28.6	28.6	29.1	29.7
CIE190: 2010										

CIE190: 2010
Area: 0.0153 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-8

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1860]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	65	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	99	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1860]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

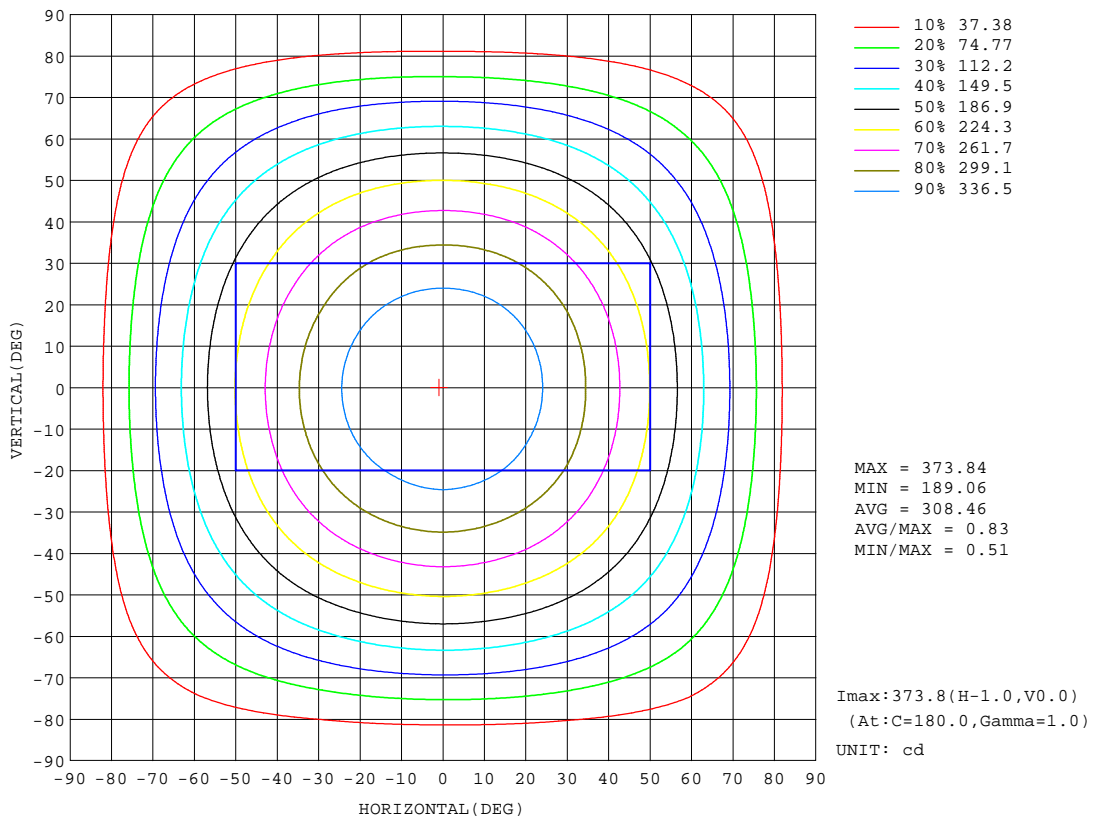


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1860]
 Remarks:

AAI Figure

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.14	Shielding Angle:

Flux out:796.8 lm

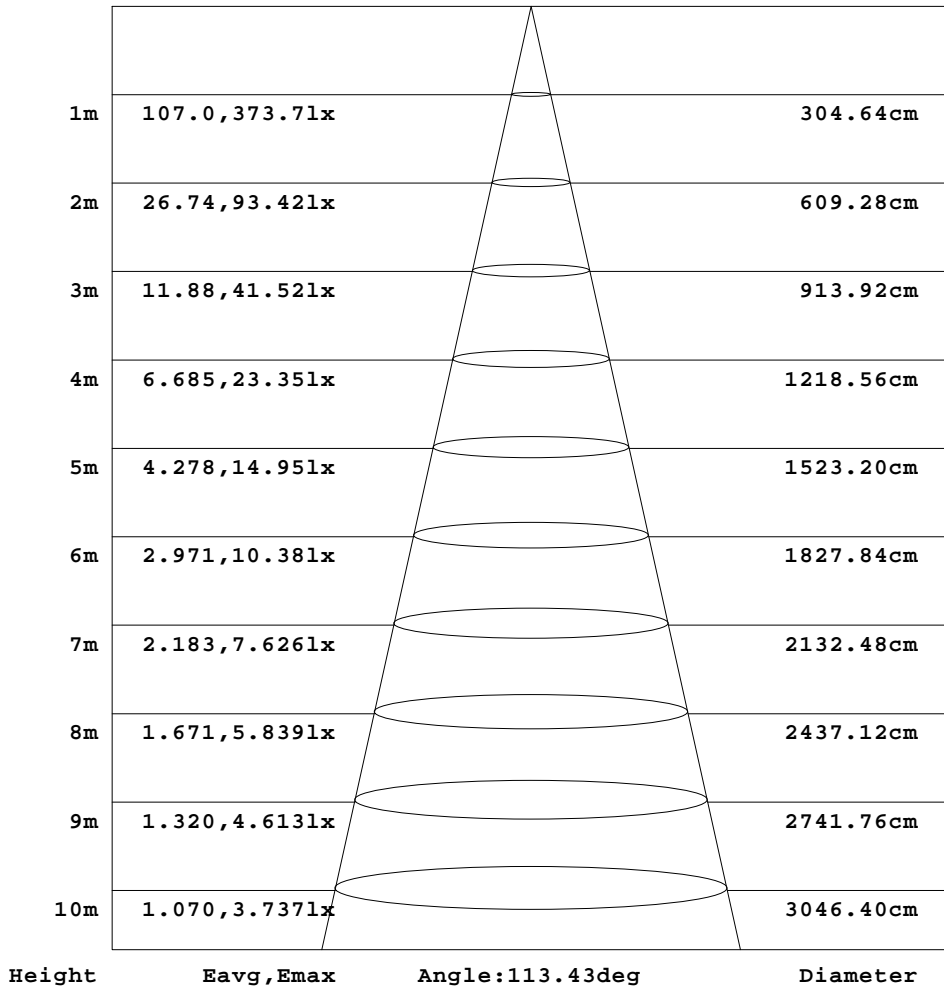


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1860]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

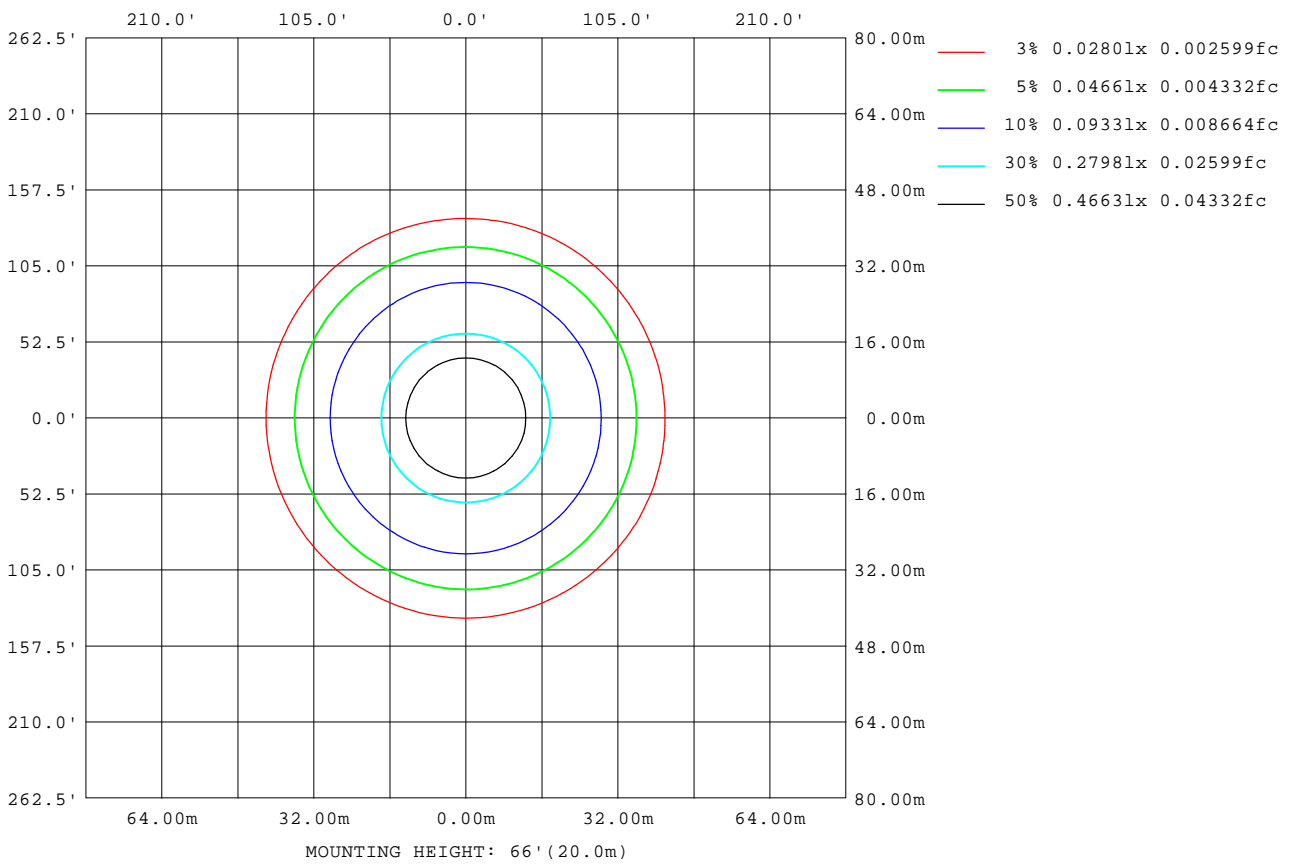

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1860]
 Remarks:

LED Avg.L Report

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	21311
L_0~180(75)av	19921
L_0~180(85)av	14381
L_90~270(65)av	21430
L_90~270(75)av	19106
L_90~270(85)av	11073
L_45(65)av	21359
L_45(75)av	19519
L_45(85)av	13606

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1860]
 Remarks:

Planar Illuminance Curve

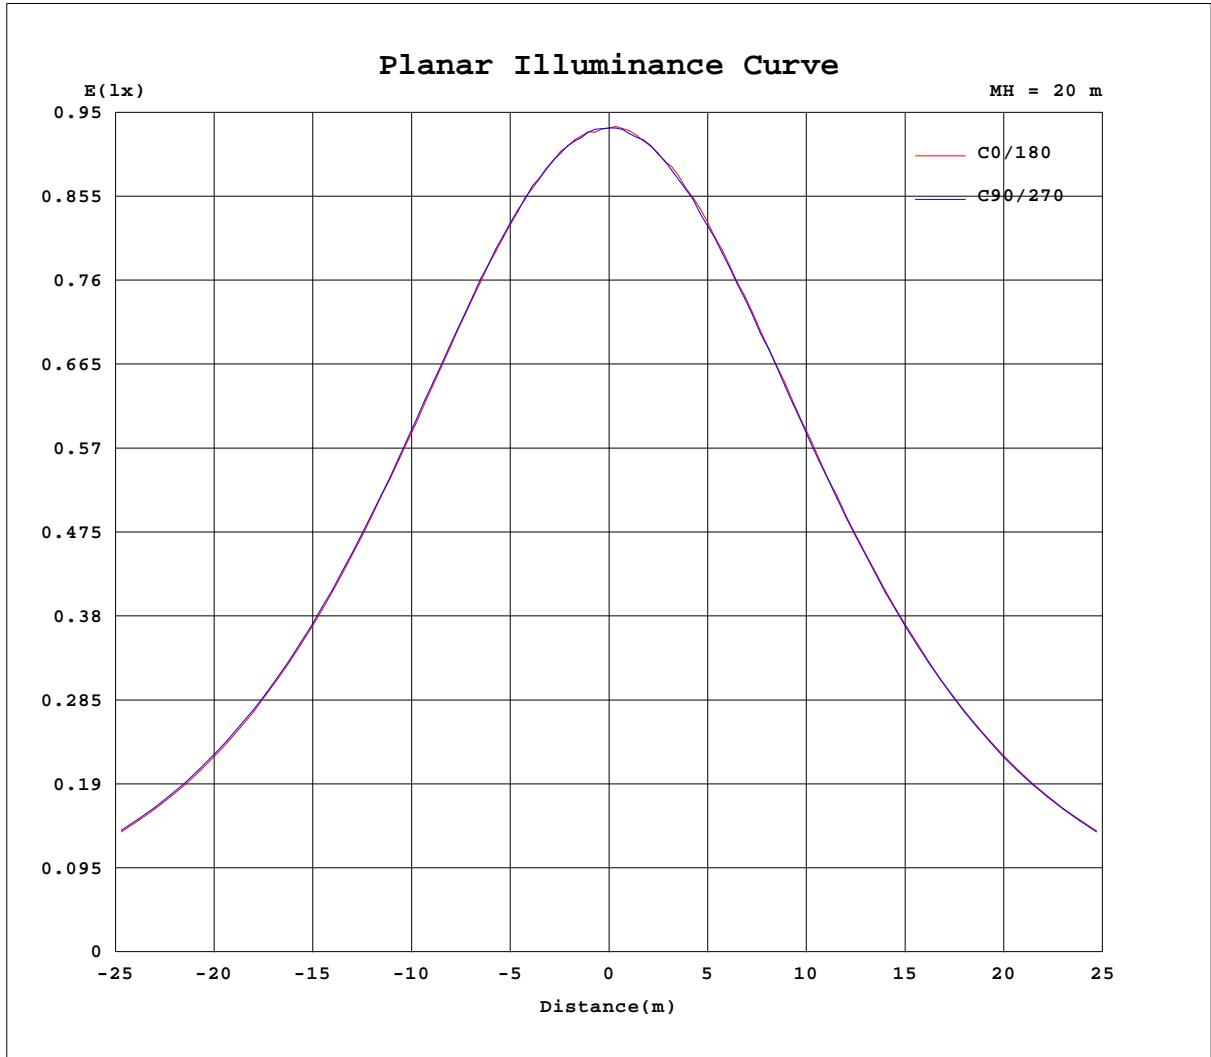

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1860]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.21V I:0.1229A P:14.570W PF:0.9862 Freq:59.98Hz Lamp Flux:1100x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	373	373	373	373	373	373	373	373	373	373	373	373						
5	372	371	372	371	370	372	371	372	372	372	371	371						
10	366	367	367	367	367	367	368	367	366	366	366	367						
15	359	359	359	360	359	360	359	359	358	359	358	359						
20	348	348	349	349	348	349	349	347	347	348	346	348						
25	334	334	334	336	334	335	334	333	333	333	333	334						
30	317	317	317	318	318	318	318	316	317	316	317	317						
35	297	299	298	299	298	298	298	297	297	296	297	298						
40	275	276	276	277	276	276	275	275	275	274	275	275						
45	250	252	252	253	252	251	251	250	251	249	250	250						
50	224	226	226	227	225	225	225	224	225	224	224	224						
55	196	198	198	199	197	198	197	196	197	196	196	196						
60	167	169	169	170	167	168	168	168	168	167	167	167						
65	137	139	139	140	138	138	139	138	139	137	137	137						
70	107	110	109	108	107	108	109	109	108	106	106	107						
75	78.4	79.7	77.8	76.8	76.0	77.7	79.3	78.5	77.2	74.5	75.1	76.3						
80	50.0	50.4	47.2	45.9	45.6	48.4	50.8	48.8	46.1	43.8	45.1	47.0						
85	19.8	22.0	17.4	16.0	16.6	21.1	18.6	17.1	16.6	13.6	16.2	17.0						
90	1.50	1.01	1.05	0.97	0.88	1.15	1.05	1.21	1.14	1.05	1.19	1.11						
95	1.14	1.12	1.25	1.11	1.03	1.22	1.12	1.27	1.21	1.05	1.29	1.18						
100	1.23	1.13	1.23	1.16	1.04	1.24	1.15	1.30	1.23	1.16	1.27	1.25						
105	1.24	1.15	1.22	1.21	1.05	1.25	1.19	1.28	1.24	1.29	1.41	1.26						
110	1.30	1.21	1.22	1.30	1.05	1.28	1.29	1.29	1.29	1.21	1.30	1.28						
115	1.44	1.27	1.22	1.42	1.06	1.32	1.40	1.30	1.37	1.22	1.41	1.31						
120	1.49	1.36	1.29	1.52	1.12	1.39	1.49	1.32	1.44	1.30	1.43	1.36						
125	1.57	1.44	1.35	1.58	1.17	1.44	1.61	1.40	1.48	1.41	1.43	1.42						
130	1.60	1.48	1.42	1.65	1.21	1.50	1.64	1.49	1.54	1.49	1.46	1.53						
135	1.70	1.52	1.46	1.69	1.30	1.54	1.70	1.54	1.60	1.57	1.54	1.60						
140	1.75	1.58	1.52	1.77	1.36	1.59	1.73	1.58	1.69	1.62	1.58	1.66						
145	1.76	1.65	1.56	1.81	1.40	1.66	1.76	1.60	1.74	1.65	1.61	1.75						
150	1.80	1.69	1.63	1.93	1.54	1.71	1.81	1.65	1.88	1.68	1.65	1.80						
155	1.84	1.74	1.70	1.94	1.54	1.76	1.87	1.84	1.87	1.67	1.67	1.88						
160	1.87	1.82	1.76	1.96	1.59	1.81	1.93	1.87	1.98	1.81	1.76	1.94						
165	2.01	1.98	1.84	2.12	1.70	1.93	2.12	1.90	2.03	1.85	1.83	1.90						
170	2.08	2.05	1.91	2.17	1.75	2.00	2.10	1.96	2.05	1.88	1.87	1.90						
175	2.13	2.14	2.02	2.06	1.78	2.07	2.07	2.00	2.11	1.96	1.96	1.97						
180	2.12	2.09	2.12	2.10	1.81	1.93	1.93	2.02	2.15	2.18	2.00	2.00						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1860]
 Remarks: