
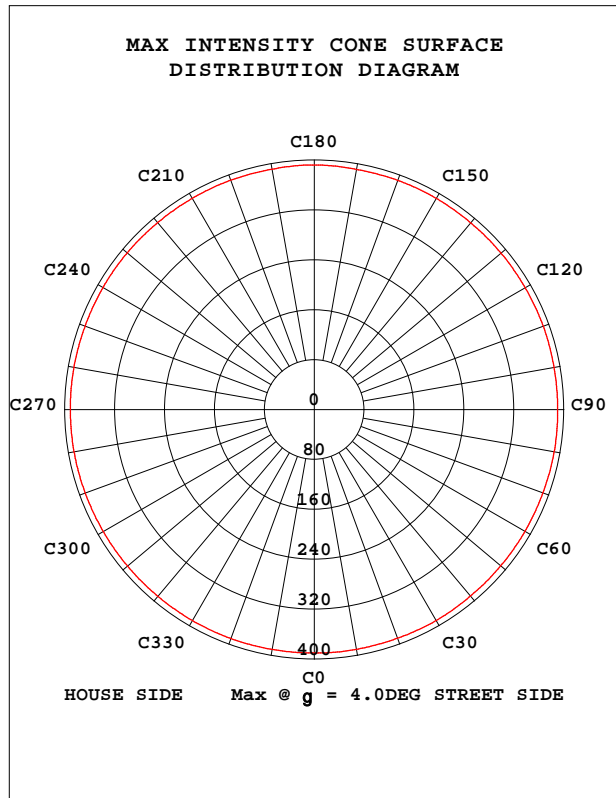


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:120.22V I:0.0894A P:9.6000W PF:0.8203 Freq:59.98Hz Lamp Flux:722.567x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 75.27 lm/W			
ANDERKS-4D10AC-WH (5000K)		Imax(cd/klm)	392.3	h street_up(%)	0.5
NOMINAL POWER(W)	10	LOR(%)	100.0	h street_down(%)	48.6
RATED VOLTAGE(V)	120	TOTAL FLUX(lm/klm)	1000	h house_up(%)	0.4
NOMINAL FLUX(lm)	722.567	MAXIMUM @(C,g)	180,4.0	h house_down(%)	50.5
LAMPS INSIDE	1	h up(%)	0.9	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	120	h down(%)	99.1	SLI	14.256

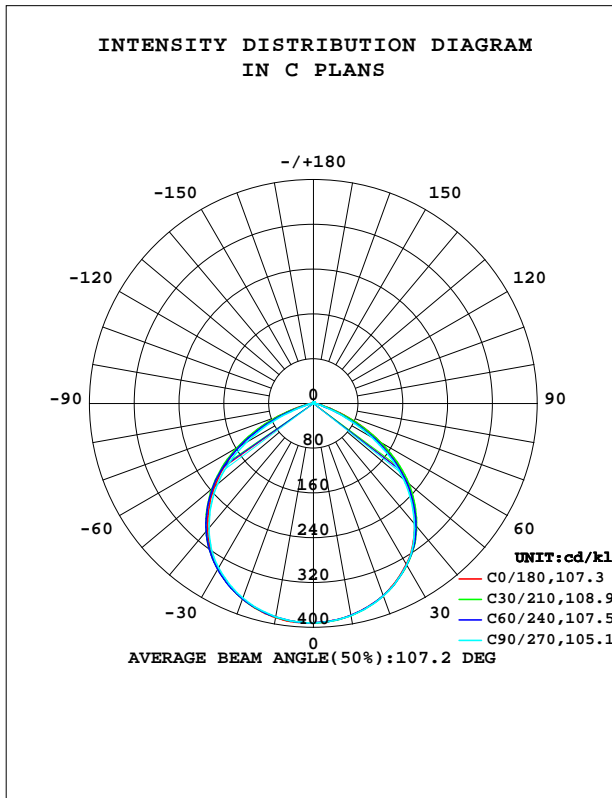


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-19

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0375]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:120.22V I:0.0894A P:9.6000W PF:0.8203 Freq:59.98Hz Lamp Flux:722.567x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

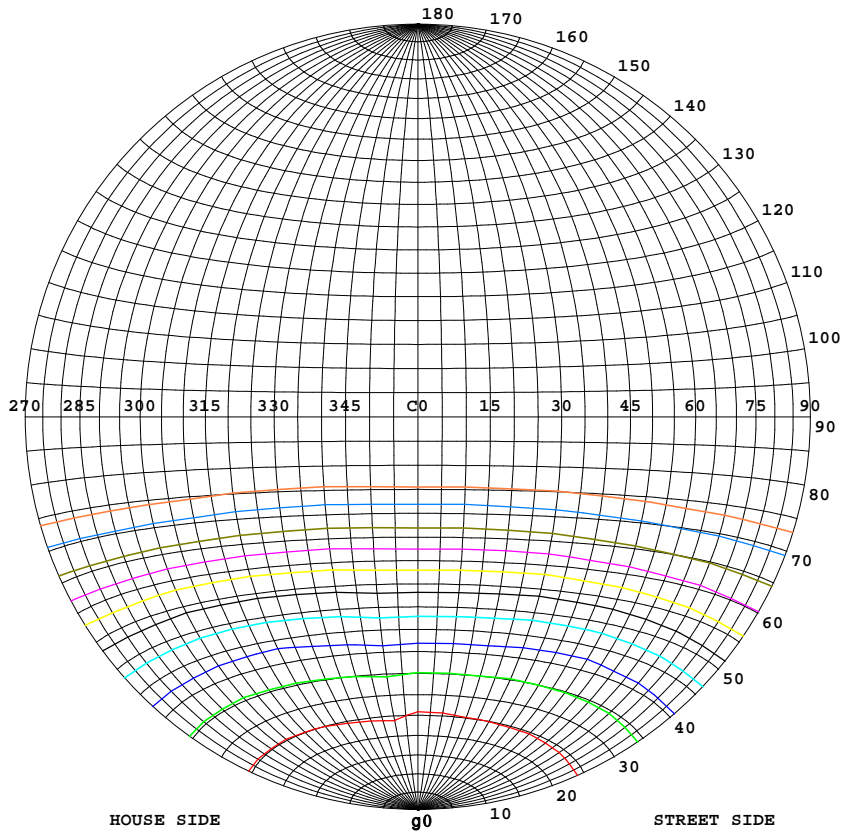

Classification:



IES:Type V - Very Short
 CIE:Narrow - Short
 IES:Cut-off
 CIE:Full cut-off
 Max.At80:13.69cd/klm
 Max.At90:0.4783cd/klm
 Max.80-90:13.69cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd/klm
Imax=100%	392
90%	353
80%	314
70%	275
60%	235
50%	196
40%	157
30%	118
20%	78
10%	39
5%	20

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-19

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0375]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

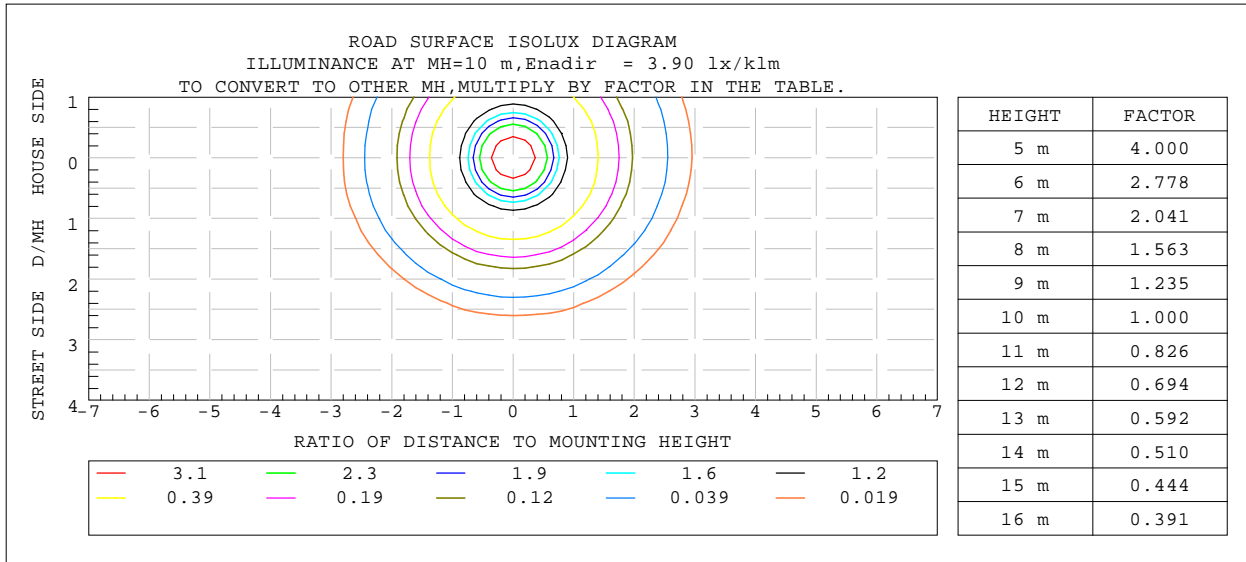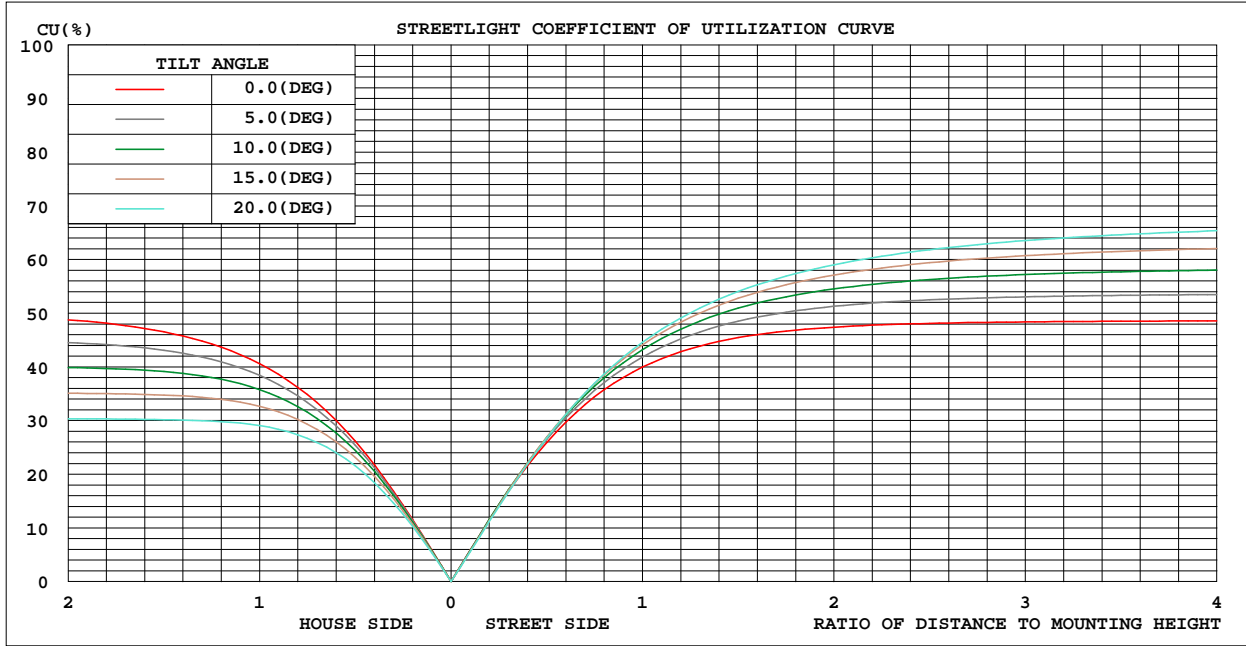

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-19

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.000m [K=1.0375]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:120.22V I:0.0894A P:9.6000W PF:0.8203 Freq:59.98Hz Lamp Flux:722.567x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	384.4	384.3	384.7	385.8	388.4	387.3	387.0	385.8	0- 10	37.12	37.12	3.71,3.71
20	364.9	365.2	365.9	368.5	371.3	371.2	369.5	368.2	10- 20	106.9	144.0	14.4,14.4
30	331.8	333.5	333.2	338.3	341.3	342.4	338.8	338.0	20- 30	163.3	307.3	30.7,30.7
40	281.4	287.8	280.8	293.8	294.1	300.1	290.4	293.4	30- 40	197.6	504.9	50.5,50.5
50	215.8	220.0	209.6	227.8	230.6	237.5	223.6	227.8	40- 50	199.8	704.7	70.5,70.5
60	136.7	132.8	120.4	141.3	152.4	155.5	137.8	142.8	50- 60	164.5	869.2	86.9,86.9
70	51.66	42.97	34.64	48.55	66.31	61.27	43.61	48.80	60- 70	93.10	962.3	96.2,96.2
80	11.15	7.784	7.111	8.971	13.69	10.85	8.489	8.646	70- 80	25.23	987.5	98.8,98.8
90	0.2842	0.2378	0.1954	0.2194	0.4783	0.2075	0.1351	0.1621	80- 90	3.789	991.3	99.1,99.1
100	0.6327	0.5656	0.4986	0.5057	0.4423	0.4085	0.3902	0.4486	90-100	0.3552	991.7	99.2,99.2
110	1.074	0.9940	0.9227	0.9104	0.8380	0.7867	0.7672	0.8497	100-110	0.7208	992.4	99.2,99.2
120	1.536	1.439	1.381	1.355	1.273	1.218	1.211	1.285	110-120	1.100	993.5	99.3,99.3
130	1.945	1.848	1.831	1.750	1.708	1.617	1.656	1.703	120-130	1.385	994.9	99.5,99.5
140	2.262	2.176	2.168	2.101	2.051	1.978	2.006	2.027	130-140	1.489	996.4	99.6,99.6
150	2.486	2.440	2.451	2.391	2.328	2.286	2.316	2.327	140-150	1.401	997.8	99.8,99.8
160	2.730	2.708	2.720	2.657	2.625	2.598	2.639	2.650	150-160	1.162	998.9	99.9,99.9
170	2.954	2.949	2.922	2.913	2.882	2.872	2.868	2.893	160-170	0.7895	999.7	100,100
180	3.034	3.056	3.023	3.062	3.080	3.059	3.036	3.058	170-180	0.2827	1000	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-19

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0375]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.22V I:0.0894A P:9.6000W PF:0.8203 Freq:59.98Hz Lamp Flux:722.567x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

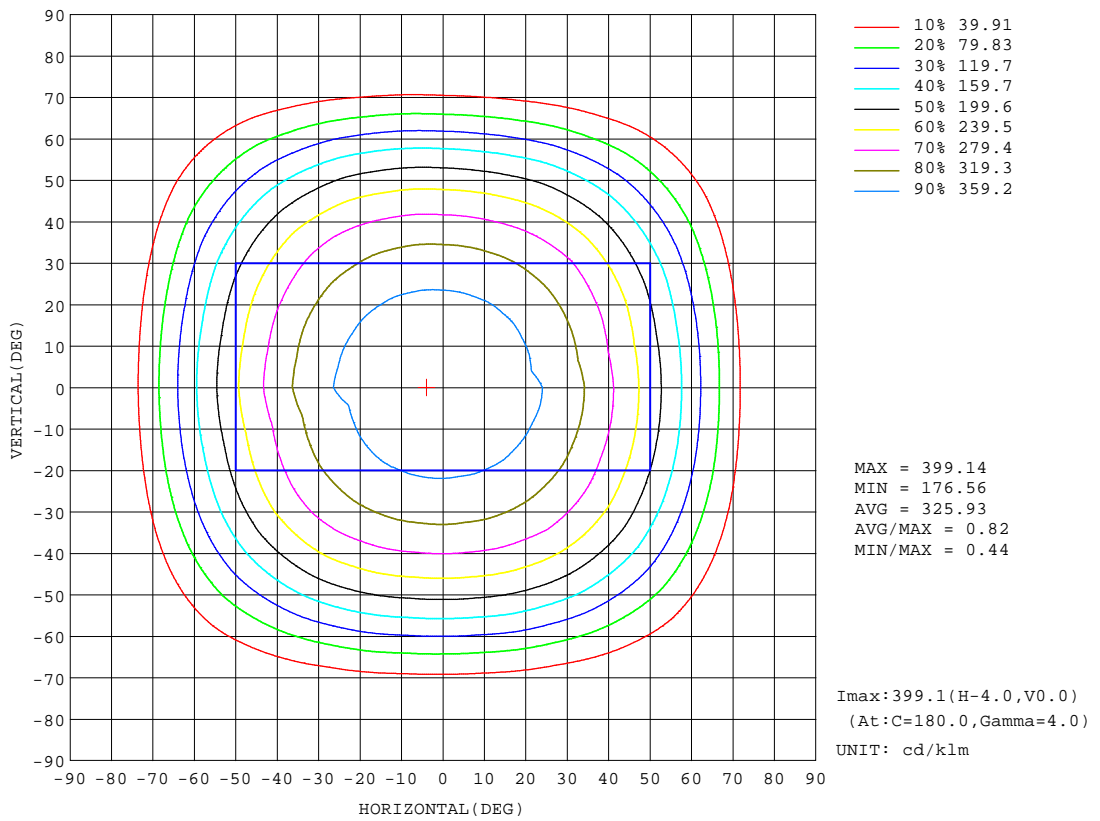

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-19

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0375]
 Remarks:

Planar Illuminance Curve

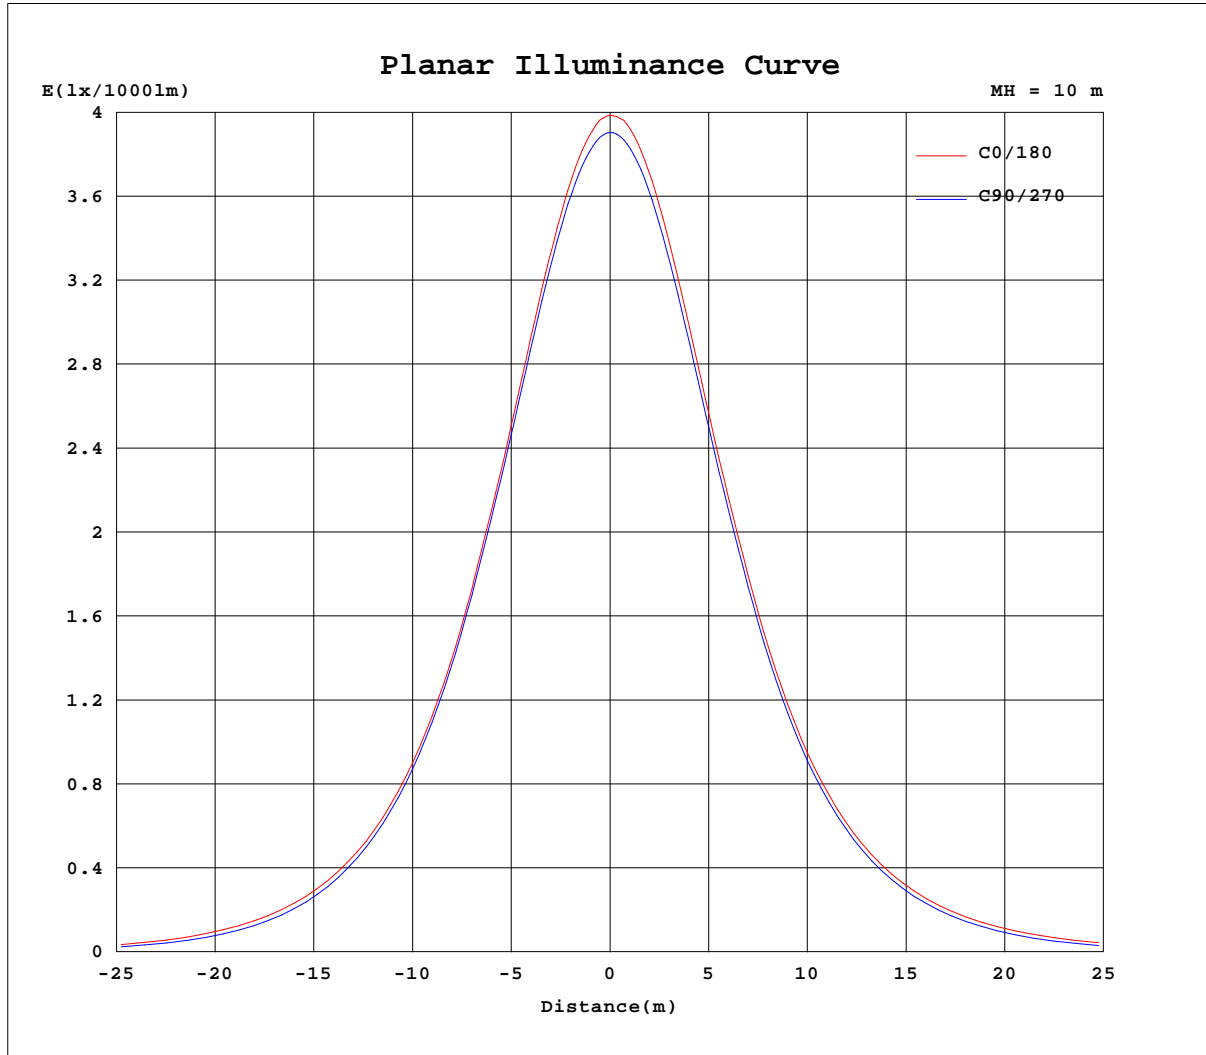


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-03-19

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.000m [K=1.0375]
Remarks:

LCS REPORT

Test:U:120.22V I:0.0894A P:9.6000W PF:0.8203 Freq:59.98Hz Lamp Flux:722.567x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

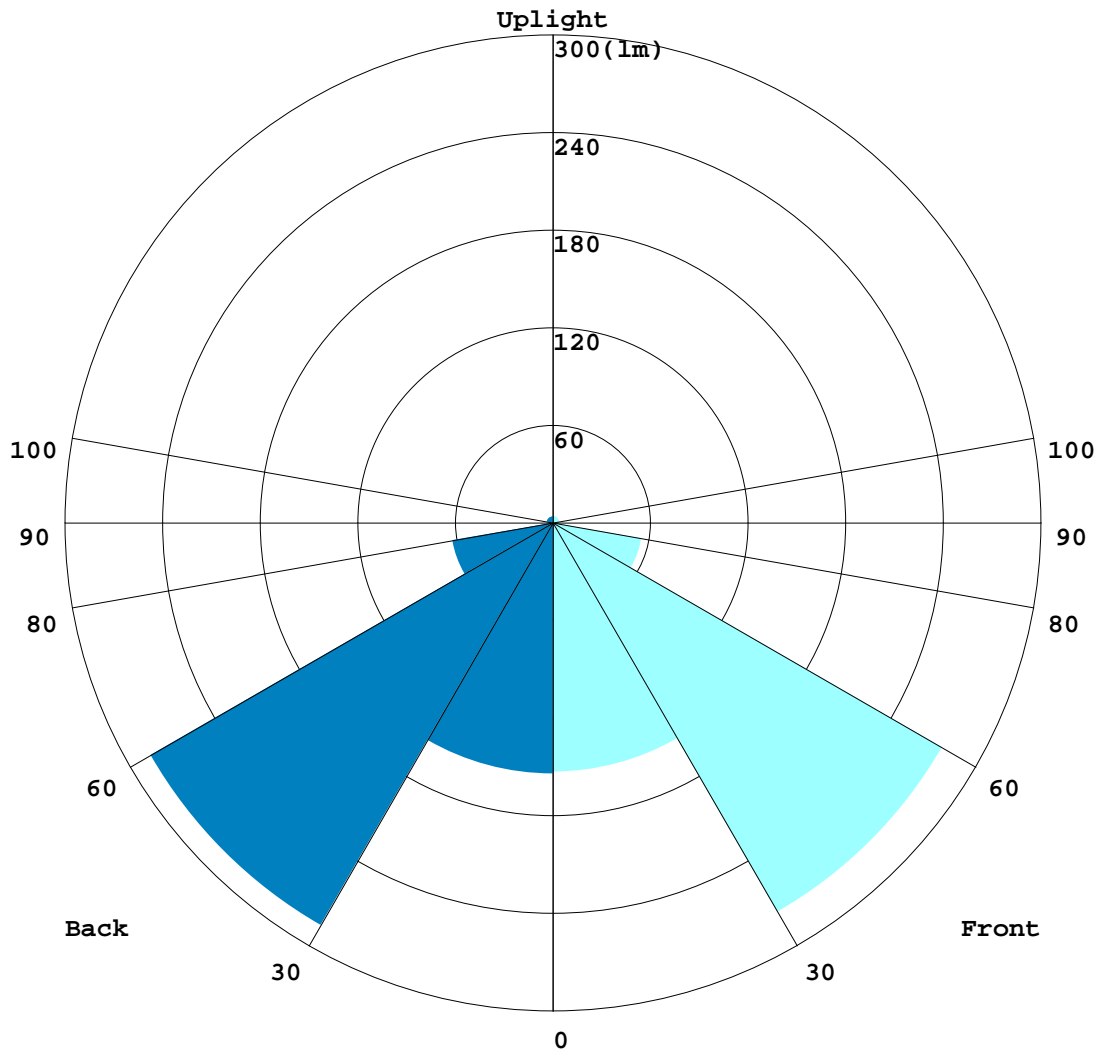

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-19

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0375]
 Remarks:

BUG REPORT

Test:U:120.22V I:0.0894A P:9.6000W PF:0.8203 Freq:59.98Hz Lamp Flux:722.567x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	153.01	15.3
FM - Front-Medium(30-60)	276.23	27.6
FH - Front-High(60-80)	55.51	5.6
FVH - Front-Very High(80-90)	1.7035	0.2
Total Forward Light	490.98	49.1

BL - Back-Low(0-30)	154.29	15.4
BM - Back-Medium(30-60)	285.66	28.6
BH - Back-High(60-80)	62.825	6.3
BVH - Back-Very High(80-90)	2.0857	0.2
Total Back Light	509.02	50.9

UL - Uplight-Low(90-100)	0.35517	0.0
UH - Uplight-High(100-180)	8.3302	0.8
Total Up Light	8.6854	0.9

BUG(Back,Up,Glare) Rating	B1-U1-G0
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	504.86	4.1617	509.02
Street Side	486.46	4.5237	490.98


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-03-19

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.000m [K=1.0375]
Remarks:

ROAD ISOCANDELA REPORT

Test:U:120.22V I:0.0894A P:9.6000W PF:0.8203 Freq:59.98Hz Lamp Flux:722.567x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

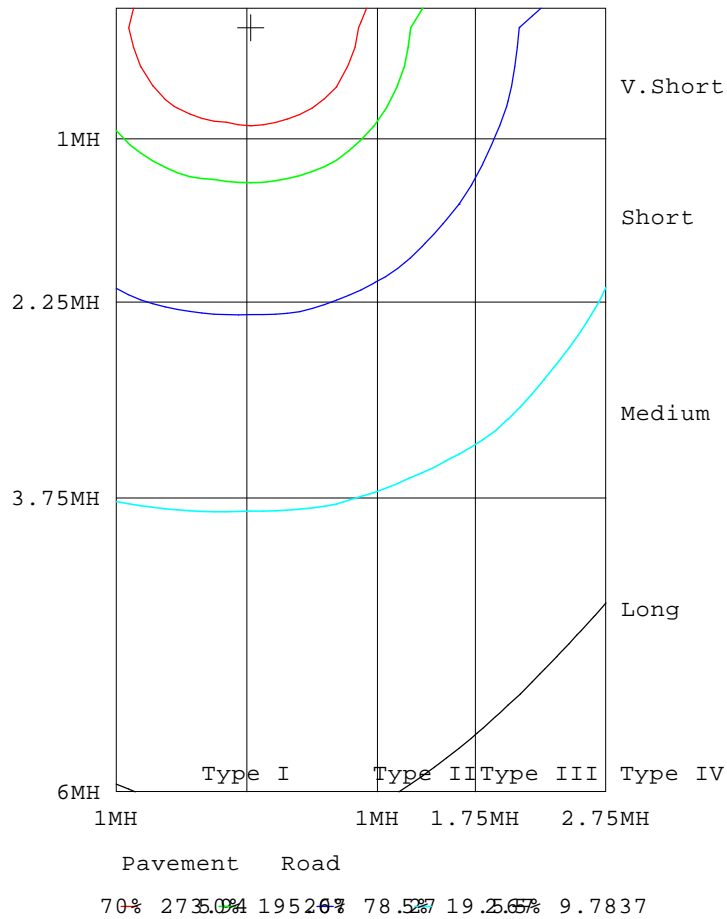

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-03-19

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0375]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.22V I:0.0894A P:9.6000W PF:0.8203 Freq:59.98Hz Lamp Flux:722.567x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd/klm

C(DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	392	392	392	392	392	392	392	392	392	392	392	392	392	392	392	392	392	392	392
5	389	390	389	390	389	389	389	389	390	390	390	390	390	390	390	391	391	391	392
10	384	385	385	385	384	384	384	385	385	385	385	386	386	386	386	387	387	386	388
15	376	377	376	377	376	376	376	377	377	377	377	378	378	378	379	379	380	380	381
20	365	365	365	366	365	365	365	365	366	366	366	367	367	368	369	369	369	370	371
25	350	350	350	351	351	351	351	351	351	351	351	353	353	355	355	356	356	356	358
30	332	332	332	333	333	333	333	333	333	333	334	335	336	338	338	339	339	339	341
35	309	310	311	313	313	313	312	312	310	310	311	314	316	318	318	320	320	319	321
40	281	282	284	287	288	288	285	283	281	281	282	285	288	293	295	296	294	293	294
45	251	252	253	256	257	257	253	251	248	248	249	253	257	262	265	267	265	264	264
50	216	217	219	222	221	219	217	213	210	210	211	216	221	226	229	233	232	230	231
55	178	179	181	183	179	178	174	171	167	167	168	174	179	185	189	194	194	193	193
60	137	138	139	138	134	131	127	125	121	120	122	128	132	139	144	150	152	153	152
65	93.2	94.6	93.7	92.1	87.0	83.4	78.6	76.6	73.7	73.6	74.8	80.0	83.7	90.2	95.6	103	107	109	109
70	51.7	52.5	50.4	48.9	44.5	41.5	37.7	36.5	34.7	34.6	35.4	38.8	41.3	46.2	50.9	57.4	61.5	65.1	66.3
75	21.0	21.2	20.5	19.9	18.0	16.6	15.2	15.0	14.7	14.8	15.0	15.8	16.4	18.4	21.0	24.4	26.7	28.9	30.3
80	11.2	11.0	9.84	8.82	7.95	7.62	7.10	7.03	6.96	7.11	7.18	7.65	7.95	8.68	9.26	10.3	11.5	12.9	13.7
85	4.34	4.00	2.85	2.15	1.66	1.21	1.15	1.14	1.13	1.23	1.25	1.33	1.44	1.95	2.45	3.21	3.97	5.36	6.35
90	0.28	0.24	0.25	0.24	0.25	0.23	0.23	0.21	0.20	0.20	0.19	0.20	0.20	0.21	0.23	0.24	0.25	0.28	0.48
95	0.43	0.40	0.41	0.39	0.39	0.38	0.36	0.35	0.35	0.33	0.34	0.33	0.33	0.33	0.34	0.34	0.33	0.33	0.27
100	0.63	0.60	0.59	0.57	0.57	0.56	0.55	0.52	0.52	0.50	0.50	0.49	0.51	0.50	0.51	0.51	0.51	0.50	0.44
105	0.86	0.81	0.80	0.79	0.78	0.76	0.75	0.73	0.73	0.70	0.69	0.69	0.69	0.69	0.71	0.70	0.71	0.69	0.64
110	1.07	1.03	1.03	1.01	1.01	0.98	0.96	0.93	0.94	0.92	0.91	0.90	0.91	0.90	0.92	0.90	0.92	0.90	0.84
115	1.31	1.26	1.26	1.24	1.24	1.21	1.19	1.17	1.16	1.15	1.14	1.13	1.13	1.13	1.13	1.12	1.13	1.13	1.05
120	1.54	1.50	1.49	1.47	1.46	1.42	1.42	1.40	1.41	1.38	1.37	1.36	1.36	1.35	1.36	1.34	1.34	1.36	1.27
125	1.75	1.73	1.70	1.68	1.67	1.64	1.64	1.63	1.65	1.62	1.59	1.59	1.58	1.57	1.56	1.56	1.57	1.57	1.49
130	1.94	1.93	1.89	1.87	1.87	1.83	1.83	1.81	1.84	1.83	1.81	1.80	1.77	1.75	1.75	1.75	1.77	1.77	1.71
135	2.12	2.10	2.07	2.05	2.04	2.00	1.99	2.00	2.01	2.01	1.99	1.96	1.94	1.93	1.94	1.93	1.94	1.96	1.89
140	2.26	2.24	2.21	2.20	2.19	2.16	2.15	2.15	2.17	2.17	2.15	2.12	2.10	2.09	2.11	2.10	2.11	2.12	2.05
145	2.39	2.38	2.35	2.34	2.30	2.30	2.30	2.30	2.32	2.31	2.29	2.27	2.26	2.25	2.25	2.25	2.26	2.26	2.20
150	2.49	2.49	2.45	2.46	2.44	2.44	2.44	2.45	2.46	2.45	2.45	2.41	2.40	2.39	2.39	2.39	2.39	2.40	2.33
155	2.60	2.61	2.60	2.59	2.56	2.57	2.58	2.60	2.59	2.59	2.58	2.56	2.56	2.52	2.54	2.53	2.55	2.54	2.48
160	2.73	2.74	2.73	2.72	2.71	2.71	2.73	2.74	2.73	2.72	2.71	2.70	2.69	2.65	2.66	2.67	2.68	2.69	2.63
165	2.88	2.88	2.85	2.86	2.84	2.84	2.85	2.86	2.85	2.83	2.82	2.82	2.79	2.79	2.80	2.80	2.80	2.81	2.78
170	2.95	2.94	2.93	2.94	2.94	2.96	2.94	2.94	2.93	2.92	2.90	2.90	2.91	2.91	2.91	2.91	2.92	2.91	2.88
175	3.03	3.02	3.01	3.01	3.00	3.02	3.02	3.02	3.01	2.99	3.00	2.99	2.98	2.98	3.00	3.01	3.02	3.00	2.98
180	3.03	3.04	3.03	3.04	3.05	3.06	3.05	3.03	3.04	3.02	3.04	3.03	3.03	3.06	3.06	3.05	3.04	3.03	3.08

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-19

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0375]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.22V I:0.0894A P:9.6000W PF:0.8203 Freq:59.98Hz Lamp Flux:722.567x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--2

UNIT: cd/klm

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	392	392	392	392	392	392	392	392	392	392	392	392	392	392	392	392	392		
5	391	391	391	391	391	391	391	391	391	391	391	390	390	390	390	390	390		
10	387	388	388	387	387	387	387	388	387	387	387	386	386	386	386	386	385		
15	380	381	381	381	381	381	380	381	380	380	380	379	379	379	378	378	377		
20	370	371	371	372	371	371	371	371	369	370	369	369	368	368	368	367	366		
25	357	358	358	359	358	358	357	357	356	356	356	356	355	355	354	353	351		
30	340	341	342	343	342	342	341	340	339	339	338	339	338	338	336	336	334		
35	320	322	323	323	323	323	321	320	318	318	318	318	317	317	316	315	312		
40	293	296	298	301	300	298	295	293	290	290	290	292	293	294	291	289	285		
45	263	267	270	272	272	269	265	262	259	259	259	262	263	264	261	259	254		
50	230	235	237	239	236	235	230	227	224	223	224	227	227	228	228	225	220		
55	193	198	200	200	197	196	191	188	183	182	183	187	187	189	188	187	182		
60	153	157	158	157	154	151	146	142	138	136	137	140	142	144	144	145	141		
65	110	114	112	111	106	102	96.9	93.4	89.1	87.5	88.3	91.0	92.6	96.3	97.3	98.8	96.9		
70	66.7	68.5	66.5	64.1	58.4	54.4	49.5	47.1	43.6	42.6	42.7	45.0	46.8	50.8	52.8	54.8	53.8		
75	30.3	31.2	29.5	27.6	23.7	21.0	18.8	18.0	17.0	16.9	16.9	17.3	17.8	20.2	21.4	22.7	22.0		
80	13.6	13.5	12.1	11.3	10.4	9.92	9.27	9.08	8.49	8.33	8.15	8.34	8.43	8.86	9.15	10.02	10.8		
85	6.15	5.36	4.31	3.75	3.01	2.75	2.22	2.00	1.62	1.54	1.43	1.47	1.51	2.08	2.31	2.87	3.72		
90	0.43	0.38	0.23	0.21	0.20	0.18	0.16	0.15	0.14	0.13	0.14	0.14	0.16	0.16	0.21	0.22	0.24		
95	0.28	0.27	0.27	0.25	0.26	0.24	0.26	0.24	0.24	0.24	0.25	0.27	0.30	0.29	0.33	0.35	0.37		
100	0.44	0.43	0.42	0.40	0.42	0.40	0.39	0.38	0.39	0.39	0.41	0.43	0.44	0.45	0.50	0.53	0.57		
105	0.63	0.61	0.62	0.60	0.60	0.58	0.57	0.57	0.58	0.57	0.60	0.61	0.63	0.65	0.71	0.74	0.77		
110	0.83	0.82	0.81	0.78	0.79	0.77	0.77	0.77	0.77	0.78	0.79	0.82	0.84	0.86	0.91	0.95	0.98		
115	1.06	1.03	1.02	1.00	1.01	0.99	0.98	0.98	0.99	0.98	1.01	1.04	1.06	1.07	1.13	1.16	1.21		
120	1.26	1.24	1.23	1.22	1.22	1.21	1.21	1.21	1.21	1.22	1.23	1.26	1.28	1.29	1.35	1.38	1.42		
125	1.48	1.46	1.45	1.42	1.43	1.42	1.41	1.42	1.43	1.43	1.47	1.46	1.49	1.51	1.55	1.61	1.63		
130	1.69	1.66	1.64	1.62	1.61	1.61	1.61	1.63	1.66	1.66	1.68	1.68	1.69	1.71	1.75	1.80	1.82		
135	1.87	1.84	1.83	1.80	1.82	1.81	1.81	1.82	1.84	1.85	1.85	1.86	1.87	1.89	1.92	1.95	2.00		
140	2.03	2.00	1.98	1.98	1.98	1.97	1.98	1.99	2.01	2.01	2.04	2.03	2.02	2.03	2.09	2.11	2.15		
145	2.17	2.16	2.15	2.14	2.14	2.12	2.15	2.17	2.18	2.20	2.19	2.18	2.18	2.19	2.21	2.25	2.27		
150	2.32	2.30	2.29	2.28	2.29	2.29	2.28	2.29	2.32	2.31	2.31	2.31	2.33	2.33	2.34	2.35	2.36		
155	2.47	2.46	2.45	2.44	2.45	2.43	2.45	2.47	2.47	2.49	2.49	2.48	2.49	2.48	2.50	2.50	2.51		
160	2.61	2.61	2.61	2.60	2.60	2.60	2.61	2.63	2.64	2.65	2.65	2.66	2.66	2.64	2.65	2.67	2.67		
165	2.76	2.75	2.76	2.75	2.73	2.74	2.75	2.77	2.77	2.78	2.81	2.80	2.79	2.78	2.79	2.80	2.82		
170	2.88	2.88	2.88	2.88	2.87	2.85	2.86	2.86	2.87	2.88	2.91	2.91	2.89	2.89	2.90	2.90	2.91		
175	2.97	2.97	2.98	2.98	2.97	2.97	2.96	2.96	2.97	2.97	2.97	2.99	3.02	3.00	3.00	2.99	2.99		
180	3.04	3.05	3.04	3.06	3.06	3.04	3.04	3.03	3.04	3.04	3.03	3.03	3.05	3.07	3.04	3.04	3.03		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-03-19

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0375]
 Remarks: