



# ROUND OUTDOOR WALL CYLINDER

► **DESIGN** - ROUND OUTDOOR WALL CYLINDER has a modern design with effective up/down illumination. This E26 base fixture is made from die-cast aluminum and a tempered glass cover. It is a durable lighting fixture that is highly resistant to rust, making it perfect for a variety of applications. The high quality reflector creates a 50° beam angle.

► **PHOTOCELL** - The built-in Dusk to Dawn Photocell will automatically turn the fixture on/off depending on the time of day.

► **BULBS** - The fixture includes a standard E26 medium base which is compatible with a variety of incandescent, CFL or LED bulbs less than 60W.

► **APPLICATION** - The fixture is rated for Wet Locations, making it perfect for indoor and outdoor projects such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

► **ADVANTAGES** - ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!

Catalog number	
Notes	
Type	



Finish:	White	Bronze
	Steel	Black

Model	Number of lights	Bulb type	Finish	Dimensions (LxWxH)	Option
ASD-OCL-11-2660-WH	1 light	E26 60W max	White	4-3/8" x 6-7/16" x 7-7/8"	-
ASD-OCL-11-2660-WH-2PACK	1 light	E26 60W max	White	4-3/8" x 6-7/16" x 7-7/8"	-
ASD-OCL-11-2660-SS	1 light	E26 60W max	Stainless steel	4-3/8" x 6-7/16" x 7-7/8"	-
ASD-OCL-11-2660-BZ	1 light	E26 60W max	Oil rubbed bronze	4-3/8" x 6-7/16" x 7-7/8"	-
ASD-OCL-11-2660-BK	1 light	E26 60W max	Black	4-3/8" x 6-7/16" x 7-7/8"	-
ASD-OCL-11-2660-BK-2PACK	1 light	E26 60W max	Black	4-3/8" x 6-7/16" x 7-7/8"	-
ASD-OCL-21-2660-WH	2 light	E26 60W max	White	4-3/8" x 6-7/16" x 11-13/16"	-
ASD-OCL-21-2660-WH-2PACK	2 light	E26 60W max	White	4-3/8" x 6-7/16" x 11-13/16"	-
ASD-OCL-21-2660-SS	2 light	E26 60W max	Stainless steel	4-3/8" x 6-7/16" x 11-13/16"	-
ASD-OCL-21-2660-BZ	2 light	E26 60W max	Oil rubbed bronze	4-3/8" x 6-7/16" x 11-13/16"	-
ASD-OCL-21-2660-BK	2 light	E26 60W max	Black	4-3/8" x 6-7/16" x 11-13/16"	-
ASD-OCL-21-2660-BK-2PACK	2 light	E26 60W max	Black	4-3/8" x 6-7/16" x 11-13/16"	-
<b>OCL-PC WITH PHOTOCELL</b>					
ASD-OCL-11-2660-PC-BK	1 light	E26 60W max	Black	4-3/8" x 6-7/16" x 7-7/8"	Photocell
ASD-OCL-11-2660-PC-BK-2PACK	1 light	E26 60W max	Black	4-3/8" x 6-7/16" x 7-7/8"	Photocell
ASD-OCL-21-2660-PC-BK	2 light	E26 40W max	Black	4-3/8" x 6-7/16" x 11-13/16"	Photocell
ASD-OCL-21-2660-PC-BK-2PACK	2 light	E26 40W max	Black	4-3/8" x 6-7/16" x 11-13/16"	Photocell

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

**ASD LIGHTING CORP**

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)






# ROUND OUTDOOR WALL CYLINDER

## PRODUCT SPECIFICATIONS:

Construction & Materials	
Housing	Aluminum
Lens	Glass
Finish	White, Stainless steel, Oil rubbed bronze, Black
Weight	ASD-OCL-11-2660-WH 1.9 lbs (0.9 kg)
	ASD-OCL-11-2660-WH-2PACK 4 lbs (1.8 kg)
	ASD-OCL-11-2660-SS 1.9 lbs (0.9 kg)
	ASD-OCL-11-2660-BZ 1.9 lbs (0.9 kg)
	ASD-OCL-11-2660-BK 1.9 lbs (0.9 kg)
	ASD-OCL-11-2660-BK-2PACK 4 lbs (1.8 kg)
	ASD-OCL-21-2660-WH 2.5 lbs (1.1 kg)
	ASD-OCL-21-2660-WH-2PACK 5.3 lbs (2.4 kg)
	ASD-OCL-21-2660-SS 2.5 lbs (1.1 kg)
	ASD-OCL-21-2660-BZ 2.5 lbs (1.1 kg)
	ASD-OCL-21-2660-BK 2.5 lbs (1.1 kg)
	ASD-OCL-21-2660-BK-2PACK 5.1 lbs (2.3 kg)
	ASD-OCL-11-2660-PC-BK 1.9 lbs (0.9 kg)
	ASD-OCL-11-2660-PC-BK-2PACK 4 lbs (1.8 kg)
	ASD-OCL-21-2660-PC-BK 2.5 lbs (1.1 kg)
	ASD-OCL-21-2660-PC-BK-2PACK 5.1 lbs (2.3 kg)
Environmental system	
Work environment	Suitable for Wet Locations
Operating temperature	-40°F to 113°F (-40°C to 45°C) for PC models: -4°F to 113°F (-20°C to 45°C)
Electrical system	
Input voltage	120 V
Light source type	Incandescent/LED/CFL bulb
Bulb base type	E26 medium
Maximum bulb wattage	60W for 21-PC models: 40W
Maximum wattage	ASD-OCL-11-2660-WH 60W
	ASD-OCL-11-2660-WH-2PACK 60W
	ASD-OCL-11-2660-SS 60W
	ASD-OCL-11-2660-BZ 60W
	ASD-OCL-11-2660-BK 60W
	ASD-OCL-11-2660-BK-2PACK 60W
	ASD-OCL-21-2660-WH 120W
	ASD-OCL-21-2660-WH-2PACK 120W
	ASD-OCL-21-2660-SS 120W
	ASD-OCL-21-2660-BZ 120W
	ASD-OCL-21-2660-BK 120W
	ASD-OCL-21-2660-BK-2PACK 120W
	ASD-OCL-11-2660-PC-BK 60W
	ASD-OCL-11-2660-PC-BK-2PACK 80W
	ASD-OCL-21-2660-PC-BK 80W
	ASD-OCL-21-2660-PC-BK-2PACK 80W
Surge protection DM/CM	1.25 kV / 1.25 kV
Regular and voluntary certifications	
5-year limited warranty	
cETLus certified 4001256	

## PACKAGE CONTENTS:

Description	Q-ty
Round Outdoor Wall Cylinder	1 (2 for 2 pack)
Mounting plate (A)	1
Mounting screw (B)	2
Outlet box screw (C)	2
Wire nut (D)	3
Decorative nut (E)	2
Waterproof gasket (F)	2
Photocell cap (G) only for PC models	1
Box	1



## BUILT-IN PHOTOCCELL INFORMATION

The dusk-to-dawn sensor automatically turns the fixture off during daylight hours.

Specifications	Model: MD-EP-120R
Input power	120 Vac, 60Hz
Light level to turn ON	30 ~ 150 lux (2.8 ~ 14 fc)
Light level to turn OFF	200 ~ 800 lux (18.6 ~ 74.4 fc)
Operating temperature	-4°F to 113°F (-20°C to 45°C)

## INSTALLATION GUIDE

### IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

### ⚠ WARNING

**RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions.** Keep or give to the owner for future reference.

**Risk of cuts:** Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


**Risk of electric shock:** This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Risk of Fire:** Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

### INSTALLATION STEPS:

- Remove the glass cover and install the bulbs (A19/60W max). In models with photocell option remove the photocell cap to make the dusk-to-dawn sensor operate.
- Screw the two mounting screws onto the mounting plate. Attach the mounting plate to the outlet box using the screws. Make sure the threads of the mounting screws are facing outside when the mounting plate is attached to the outlet box.
- Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Place the fixture base on the wall by aligning the protruding mounting screws through the holes on the wall plate. Put the waterproof gasket on each mounting screw. Tighten the fixture to the wall using two decorative nuts. For outdoor locations please use silicone (not included) shown in the picture below.

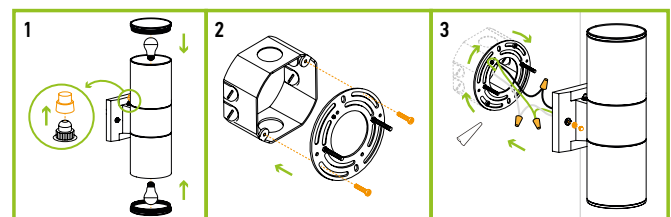

\* The fixture must be mounted vertically with the photocell sensor facing up.

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

ASD LIGHTING CORP

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)





# ROUND OUTDOOR WALL CYLINDER

## ORDERING INFORMATION

Model	UPC	Pcs. per carton	Carton size	Carton weight	GTIN 14
ASD-OCL-1I-2660-WH	810050730617	6	16.7" x 15.4" x 9.7"	16.7 lbs	30810050730618
ASD-OCL-1I-2660-WH-2PACK	810128111638	3	24.4" x 11.4" x 9.8"	16.1 lbs	10810128111635
ASD-OCL-1I-2660-SS	810050730624	6	16.7" x 15.4" x 9.7"	16.7 lbs	30810050730625
ASD-OCL-1I-2660-BZ	810050730600	6	16.7" x 15.4" x 9.7"	16.7 lbs	30810050730601
ASD-OCL-1I-2660-BK	810050730594	6	16.7" x 15.4" x 9.7"	16.7 lbs	30810050730595
ASD-OCL-1I-2660-BK-2PACK	810128112260	3	24.4" x 11.4" x 9.8"	16.1 lbs	10810128112267
ASD-OCL-2I-2660-WH	810050730655	6	16.7" x 15.4" x 13.6"	19.7 lbs	30810050730656
ASD-OCL-2I-2660-WH-2PACK	810128114622	3	24.4" x 11.4" x 13.8"	19.7 lbs	10810128114629
ASD-OCL-2I-2660-SS	810050730662	6	16.7" x 15.4" x 13.6"	19.7 lbs	30810050730663
ASD-OCL-2I-2660-BZ	810050730648	6	16.7" x 15.4" x 13.6"	19.7 lbs	30810050730649
ASD-OCL-2I-2660-BK	810050730631	6	16.7" x 15.4" x 13.6"	19.7 lbs	30810050730632
ASD-OCL-2I-2660-BK-2PACK	810128113861	3	24.4" x 11.4" x 13.8"	19.7 lbs	10810128113868
<b>OCL-PC WITH PHOTOCELL</b>					
ASD-OCL-1I-2660-PC-BK	810050736831	6	16.7" x 15.4" x 9.7"	16.7 lbs	30810050736832
ASD-OCL-1I-2660-PC-BK-2PACK	810128111645	3	24.4" x 11.4" x 9.8"	16.1 lbs	10810128111642
ASD-OCL-2I-2660-PC-BK	810050736848	6	16.7" x 15.4" x 13.6"	19.7 lbs	30810050736849
ASD-OCL-2I-2660-PC-BK-2PACK	810128113878	3	24.4" x 11.4" x 13.8"	19.7 lbs	10810128113875

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

**ASD LIGHTING CORP**

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)

