
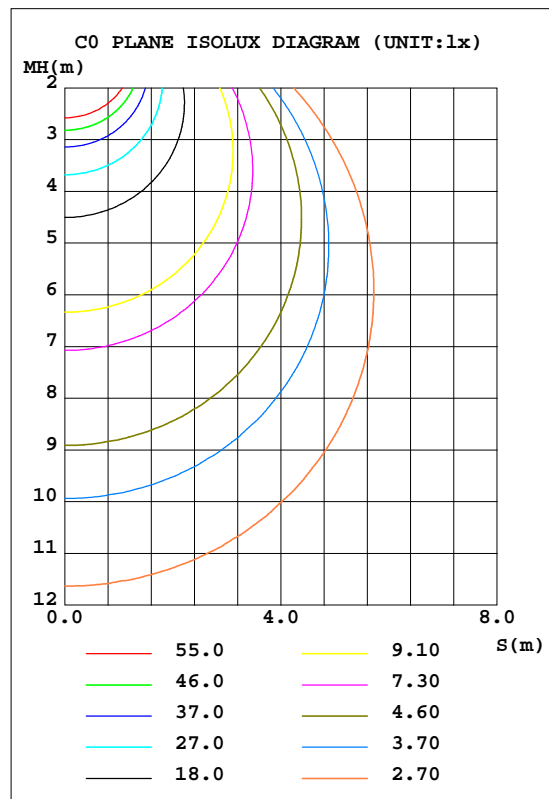


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 71,05 lm/W			
MODELASD	JBS-6D15AC(2700K)	I _{max} (cd)	367.4	S/MH(C0/180)	1.26
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1050	h UP, DN(C0-180)	0.2,49.6
NOMINAL FLUX(lm)	1050	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.0
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

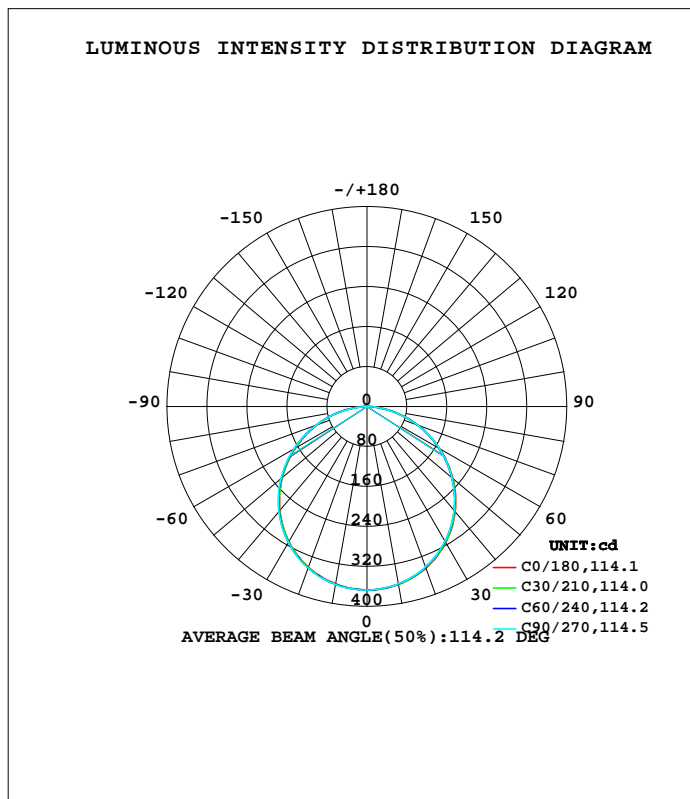

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1163]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	361.9	361.2	360.4	360.2	360.6	361.2	361.7	362.4	0- 10	34.76	34.76	3.22,3.22
20	344.9	343.2	341.9	341.4	342.1	343.4	344.0	345.0	10- 20	99.86	134.6	12.5,12.5
30	315.4	312.9	311.8	311.1	312.5	313.8	314.7	316.1	20- 30	152.0	286.6	26.6,26.6
40	274.5	272.4	271.5	270.1	271.2	272.8	274.6	275.7	30- 40	184.2	470.8	43.7,43.7
50	224.6	222.7	222.2	220.5	221.3	223.0	225.1	226.0	40- 50	192.0	662.8	61.5,61.5
60	167.8	166.3	166.4	164.3	164.7	166.7	168.9	169.2	50- 60	174.8	837.6	77.7,77.7
70	107.4	106.6	105.8	104.9	105.4	106.7	107.5	108.7	60- 70	135.5	973.0	90.2,90.2
80	46.72	46.42	43.37	45.11	45.83	46.02	44.62	47.03	70- 80	80.48	1054	97.7,97.7
90	0.1214	0.0816	0.0580	0.0905	0.1240	0.1634	0.1485	0.2315	80- 90	20.08	1074	99.6,99.6
100	0.2278	0.2086	0.2324	0.2415	0.3263	0.3032	0.3033	0.2905	90-100	0.2108	1074	99.6,99.6
110	0.4627	0.4465	0.4645	0.4452	0.6132	0.5476	0.5028	0.5292	100-110	0.3955	1074	99.6,99.6
120	0.8340	0.6944	0.6839	0.6808	0.8806	0.7823	0.7416	0.7583	110-120	0.6183	1075	99.7,99.7
130	1.277	0.9159	0.8837	0.8737	1.122	0.9781	0.9737	1.046	120-130	0.7864	1076	99.8,99.8
140	0.9862	0.9589	0.9935	0.9874	1.188	1.126	1.270	1.104	130-140	0.7989	1076	99.8,99.8
150	1.095	1.131	1.180	1.159	1.304	1.242	1.464	1.226	140-150	0.7137	1077	99.9,99.9
160	1.265	1.281	1.329	1.320	1.409	1.372	1.361	1.339	150-160	0.5951	1078	99.9,99.9
170	1.415	1.434	1.464	1.445	1.519	1.540	1.864	1.629	160-170	0.4031	1078	100,100
180	1.539	1.555	1.554	1.546	1.558	1.558	1.535	1.552	170-180	0.1469	1078	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1163]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

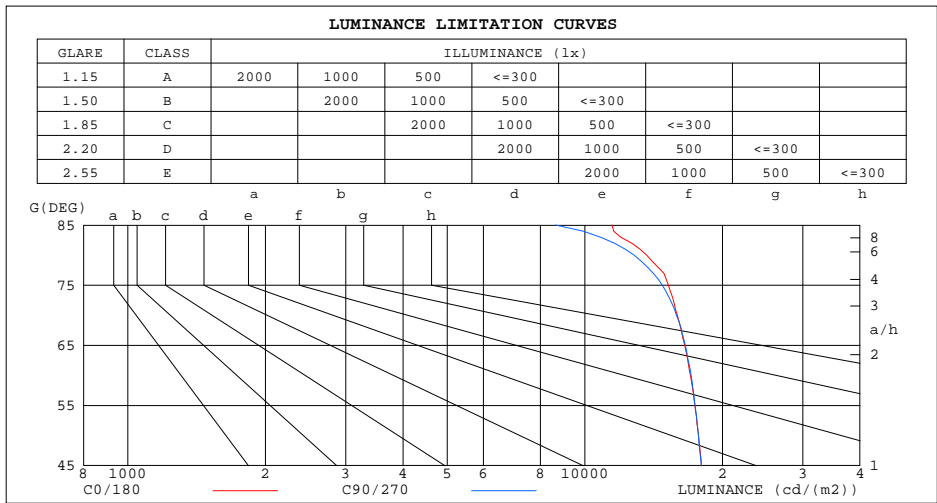

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11476	8641
80	13656	12814
75	15227	14769
70	15940	15876
65	16555	16605
60	17031	17077
55	17420	17424
50	17734	17735
45	18004	17984


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1163]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

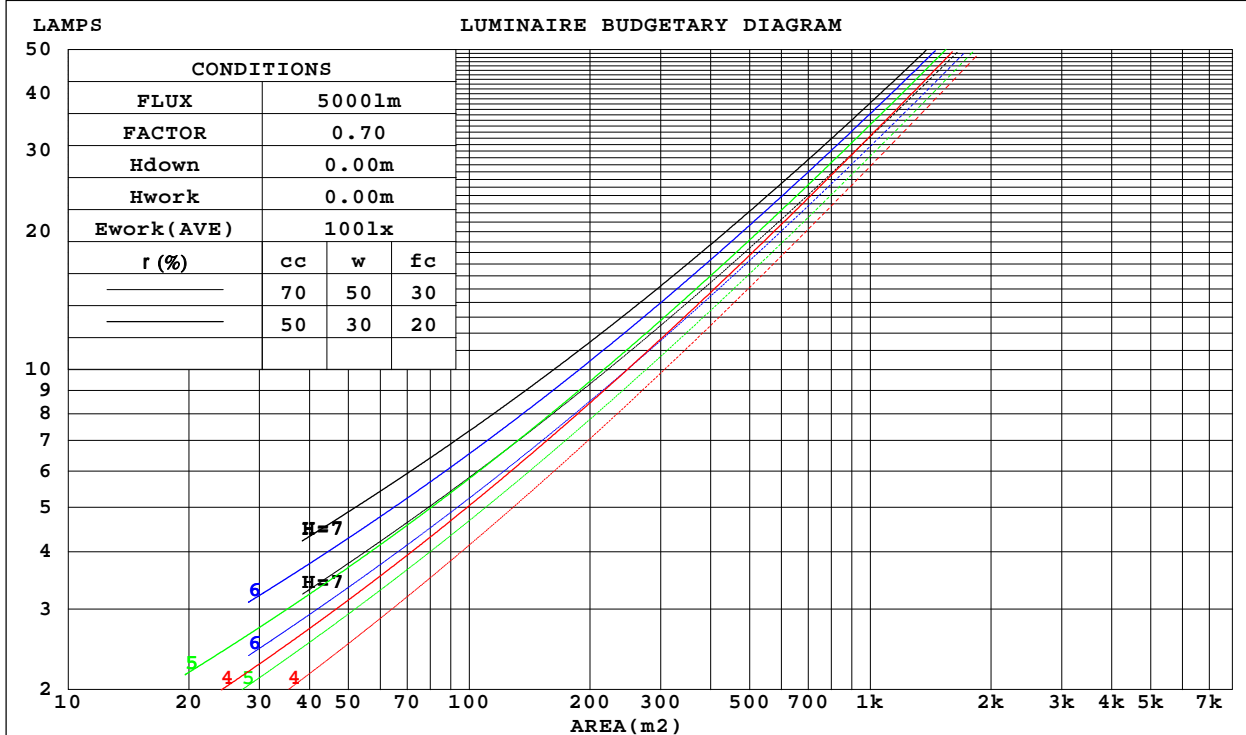

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1163]
 Remarks:

WEC AND CCEC

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.306	.174	.055	.292	.168	.054	.280	.161	.052	.268	.156	.050	
2.0	.294	.161	.050	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.237	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.167	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.102	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.053	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.126	.074	.037	.087	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.036	.120	.068	.032	.083	.048	.023	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.127	.068	.029	.109	.059	.025	.076	.042	.018	.044	.025	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1163]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.14*0.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.1	23.7	22.4	24.0	24.4	22.1	23.7	22.4	24.0	24.4
3H	24.0	25.5	24.4	25.8	26.2	24.0	25.4	24.3	25.8	26.1
4H	24.7	26.1	25.1	26.5	26.9	24.7	26.1	25.1	26.4	26.8
6H	25.3	26.6	25.7	27.0	27.4	25.2	26.5	25.6	26.8	27.2
8H	25.5	26.7	25.9	27.1	27.5	25.3	26.5	25.7	26.9	27.3
12H	25.6	26.8	26.0	27.1	27.6	25.4	26.6	25.8	26.9	27.4
4H 2H	22.7	24.1	23.1	24.5	24.9	22.7	24.1	23.1	24.5	24.9
3H	24.9	26.0	25.3	26.4	26.9	24.8	26.0	25.2	26.4	26.8
4H	25.7	26.8	26.2	27.2	27.7	25.7	26.7	26.1	27.1	27.6
6H	26.4	27.4	26.9	27.8	28.3	26.3	27.2	26.7	27.7	28.1
8H	26.7	27.5	27.1	28.0	28.5	26.5	27.3	26.9	27.8	28.3
12H	26.8	27.6	27.3	28.1	28.6	26.6	27.3	27.0	27.8	28.3
8H 4H	26.1	26.9	26.5	27.4	27.9	26.0	26.9	26.5	27.3	27.8
6H	26.9	27.6	27.4	28.1	28.6	26.7	27.4	27.2	27.9	28.4
8H	27.2	27.9	27.7	28.4	28.9	27.0	27.6	27.5	28.1	28.6
12H	27.5	28.0	28.0	28.5	29.1	27.1	27.7	27.6	28.2	28.8
12H 4H	26.1	26.9	26.6	27.4	27.9	26.0	26.8	26.5	27.3	27.8
6H	27.0	27.6	27.5	28.1	28.7	26.8	27.5	27.3	27.9	28.5
8H	27.3	27.9	27.9	28.4	29.0	27.1	27.7	27.6	28.1	28.7
CIE190: 2010										

CIE190: 2010
 Area: 0.0196 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1163]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	70	86	77	70	83	75	69	61
2.00	95	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	104	99	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1163]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

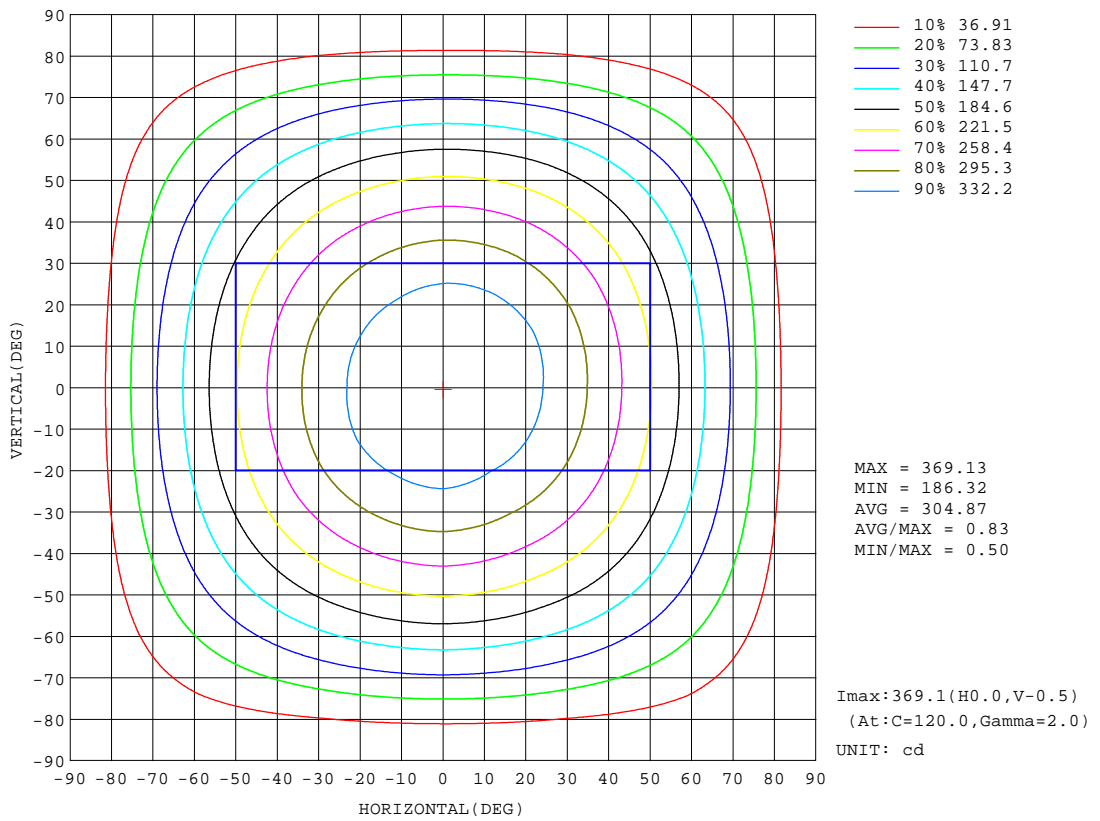


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1163]
 Remarks:

AAI Figure

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

Flux out:805.1 lm

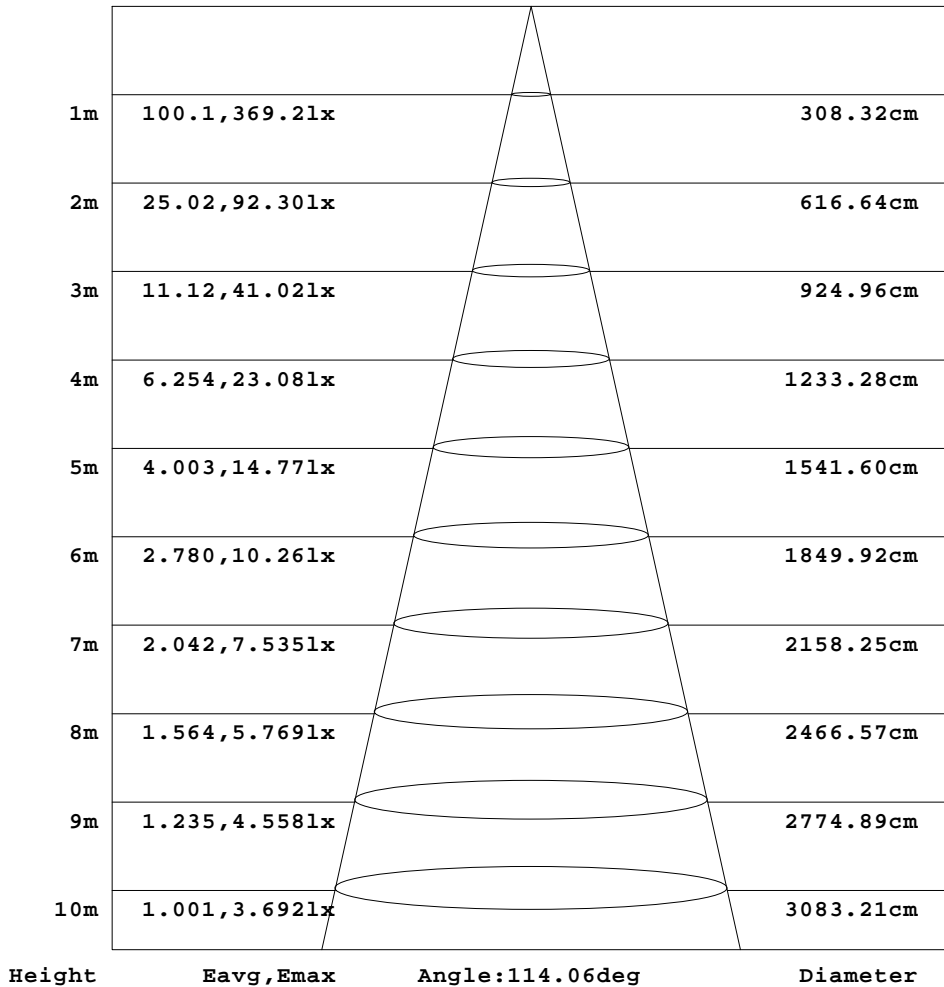


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1163]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

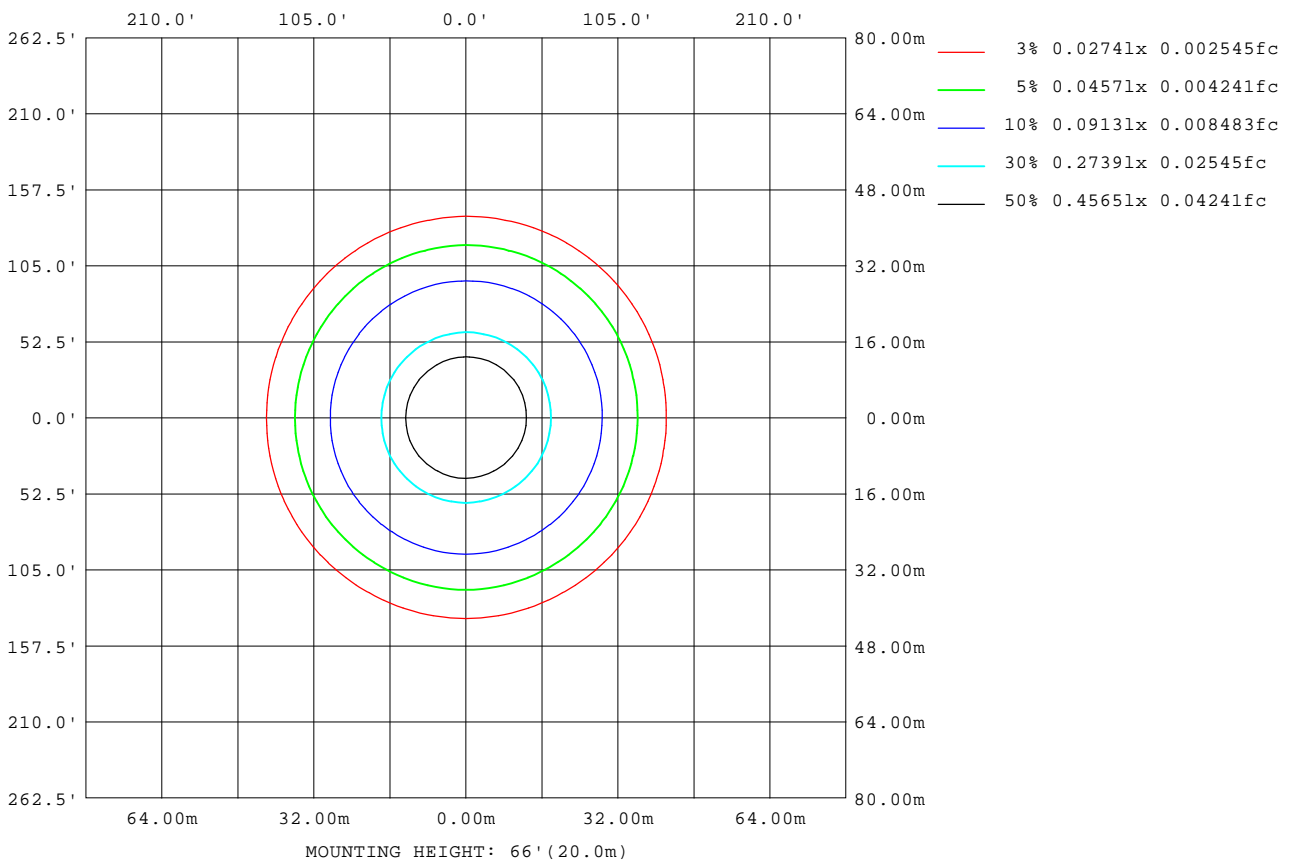

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1163]
 Remarks:

LED Avg.L Report

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	16478
L_0~180(75)av	15156
L_0~180(85)av	11043
L_90~270(65)av	16621
L_90~270(75)av	14833
L_90~270(85)av	8769
L_45(65)av	16536
L_45(75)av	15069
L_45(85)av	9826

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1163]
Remarks:

Planar Illuminance Curve

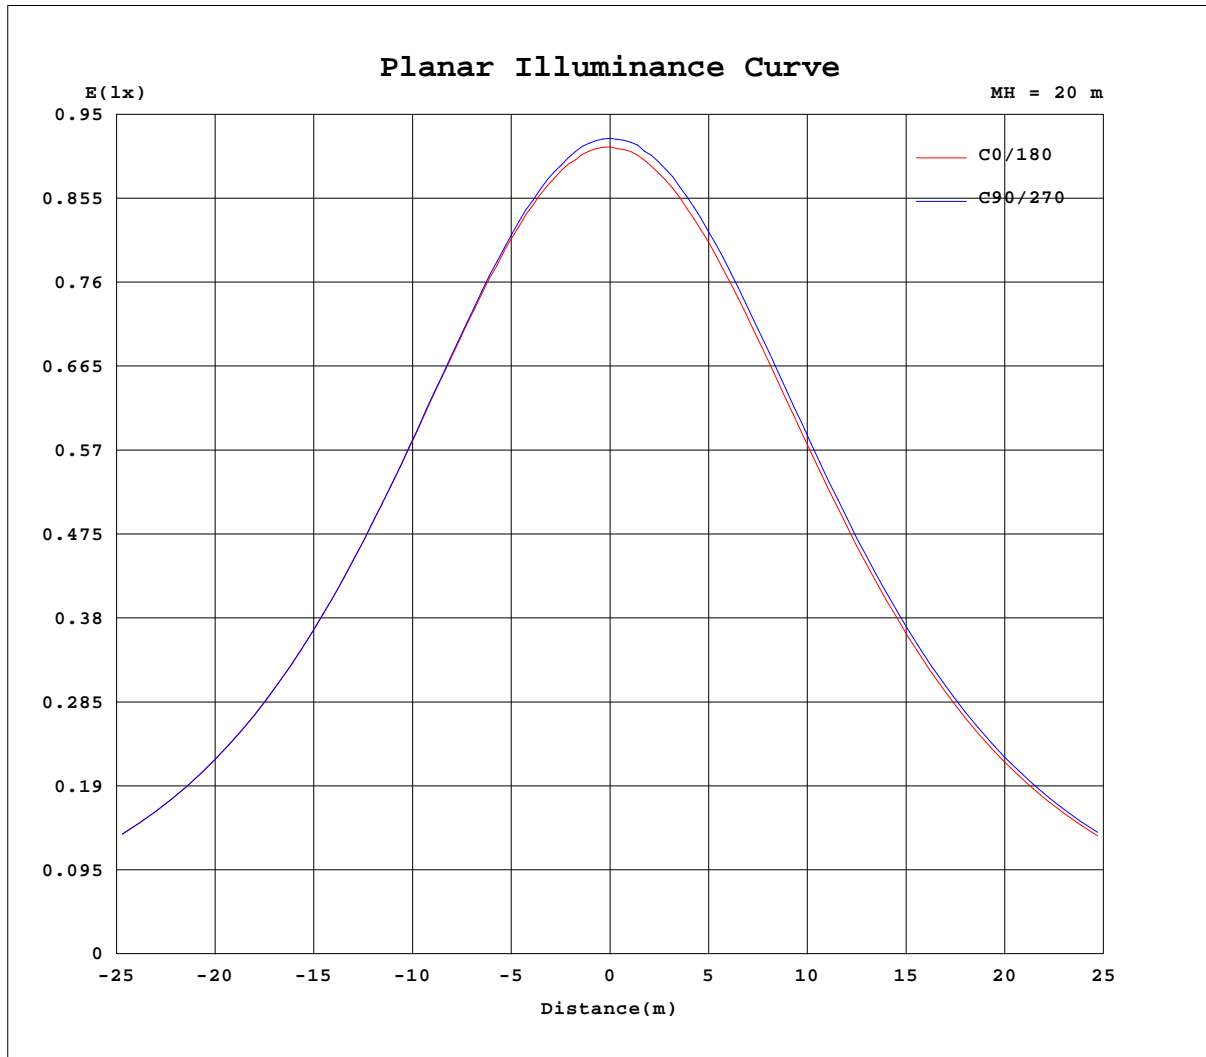

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1163]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.18V I:0.1230A P:14.780W PF:0.9837 Freq:59.98Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	367	367	367	367	367	367	367	367	367	367	367	367						
5	366	366	366	365	365	365	365	365	366	366	366	366						
10	362	361	361	360	360	360	361	361	361	362	363	362						
15	355	354	353	353	352	353	353	353	354	355	355	355						
20	345	344	343	342	341	342	342	343	344	344	345	345						
25	331	330	329	329	328	328	329	329	330	331	332	332						
30	315	314	312	312	311	311	312	313	315	315	317	316						
35	296	295	293	293	292	292	293	293	296	296	297	297						
40	275	273	271	271	270	270	271	272	274	275	276	276						
45	251	250	248	248	246	247	247	247	250	250	252	251						
50	225	224	222	222	221	220	221	222	224	225	226	226						
55	197	196	195	195	193	193	193	194	197	198	199	198						
60	168	167	166	166	165	164	165	165	168	169	170	169						
65	138	137	136	137	135	135	135	136	138	139	140	139						
70	107	107	106	106	105	105	105	106	108	107	109	109						
75	77.7	77.6	75.1	74.5	74.0	75.7	76.1	76.2	76.6	76.0	77.6	78.4						
80	46.7	48.6	44.2	43.4	43.2	47.0	45.8	46.3	45.7	44.6	46.5	47.5						
85	19.7	19.8	15.5	14.7	14.7	18.7	18.0	15.4	16.4	15.3	17.0	16.9						
90	0.12	0.08	0.08	0.06	0.08	0.10	0.12	0.19	0.14	0.15	0.14	0.33						
95	0.08	0.13	0.07	0.13	0.27	0.15	0.21	0.21	0.33	0.22	0.32	0.23						
100	0.23	0.24	0.18	0.23	0.22	0.26	0.33	0.29	0.32	0.30	0.31	0.27						
105	0.31	0.36	0.28	0.34	0.30	0.36	0.47	0.40	0.44	0.37	0.44	0.38						
110	0.46	0.48	0.41	0.46	0.42	0.47	0.61	0.52	0.57	0.50	0.57	0.49						
115	0.63	0.63	0.53	0.57	0.53	0.61	0.76	0.65	0.68	0.65	0.69	0.63						
120	0.83	0.75	0.64	0.68	0.65	0.72	0.88	0.78	0.78	0.74	0.78	0.74						
125	1.08	0.89	0.74	0.78	0.73	0.82	1.01	0.89	0.89	0.84	0.90	1.06						
130	1.28	1.01	0.82	0.88	0.83	0.91	1.12	0.97	0.99	0.97	1.05	1.04						
135	1.17	0.91	0.87	0.93	0.87	0.96	1.16	1.04	1.08	1.17	1.26	1.03						
140	0.99	0.99	0.93	0.99	0.95	1.03	1.19	1.11	1.14	1.27	1.13	1.08						
145	1.13	1.06	1.03	1.15	1.05	1.10	1.23	1.17	1.19	1.34	1.20	1.15						
150	1.10	1.15	1.11	1.18	1.14	1.18	1.30	1.22	1.26	1.46	1.26	1.19						
155	1.15	1.23	1.28	1.24	1.24	1.35	1.34	1.28	1.33	1.60	1.32	1.25						
160	1.26	1.30	1.26	1.33	1.29	1.35	1.41	1.36	1.38	1.36	1.37	1.30						
165	1.33	1.35	1.38	1.40	1.36	1.39	1.49	1.51	1.45	1.72	1.46	1.64						
170	1.41	1.44	1.43	1.46	1.42	1.47	1.52	1.52	1.56	1.86	1.80	1.46						
175	1.49	1.50	1.52	1.53	1.50	1.53	1.55	1.57	1.54	1.60	1.54	1.50						
180	1.54	1.56	1.54	1.55	1.56	1.54	1.56	1.57	1.54	1.54	1.56	1.54						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1163]
 Remarks: