
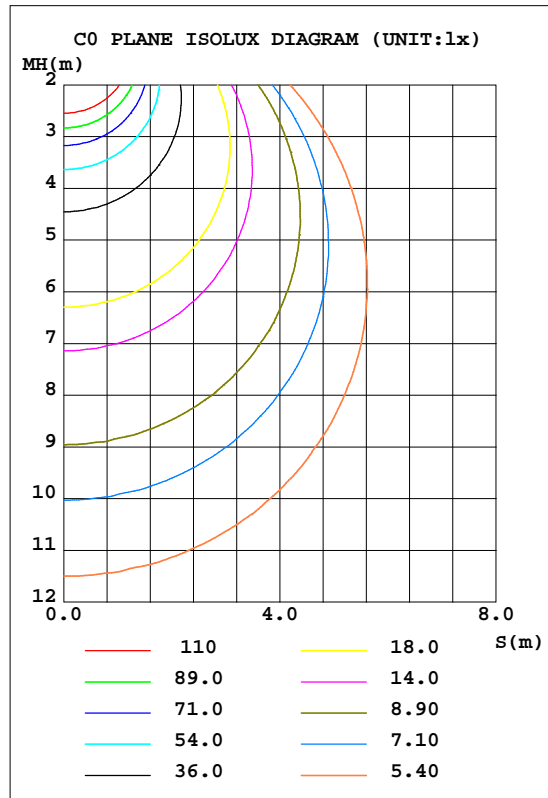


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MABELJBR-12D24AC-WH(5000K)		Imax(cd)	714.9	S/MH(C0/180)	1.26
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2077.1	h UP, DN(C0-180)	0.2,49.5
NOMINAL FLUX(lm)	2077.08	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

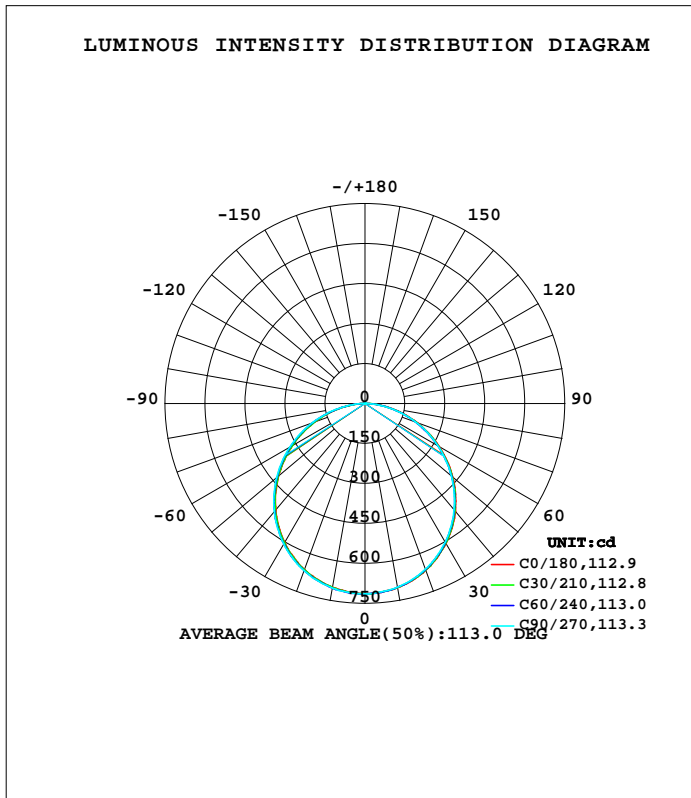

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	701.8	700.7	699.9	700.5	699.8	702.7	703.2	704.8	0- 10	67.56	67.56	3.25,3.25
20	666.4	664.5	662.0	660.7	662.9	665.5	667.4	669.1	10- 20	193.7	261.3	12.6,12.6
30	608.1	604.4	601.4	600.9	601.7	606.3	608.4	611.0	20- 30	294.1	555.3	26.7,26.7
40	528.5	523.9	520.4	519.0	520.9	525.5	529.6	532.0	30- 40	355.0	910.3	43.8,43.8
50	430.7	426.4	424.0	421.1	423.1	427.7	433.2	435.4	40- 50	368.7	1279	61.6,61.6
60	320.4	316.9	315.0	312.3	313.8	318.0	324.6	327.2	50- 60	334.4	1613	77.7,77.7
70	205.8	201.5	200.9	198.2	197.8	202.1	208.8	212.8	60- 70	258.7	1872	90.1,90.1
80	93.80	89.42	85.98	85.95	85.91	85.99	92.34	94.82	70- 80	154.0	2026	97.5,97.5
90	2.166	0.6034	0.2832	0.3466	0.3180	0.3420	0.2932	0.9904	80- 90	41.90	2068	99.6,99.6
100	0.5406	0.5585	0.6110	0.5938	0.6903	0.6626	0.9938	0.7151	90-100	0.5371	2069	99.6,99.6
110	0.9475	0.9705	1.048	1.018	1.097	1.035	1.007	0.9988	100-110	0.8633	2069	99.6,99.6
120	1.350	1.368	1.455	1.421	1.504	1.445	1.400	1.414	110-120	1.206	2071	99.7,99.7
130	1.677	1.700	1.793	1.749	1.802	1.770	1.742	1.734	120-130	1.423	2072	99.8,99.8
140	1.965	1.973	2.051	2.035	2.075	2.040	2.016	2.000	130-140	1.454	2074	99.8,99.8
150	2.243	2.259	2.319	2.308	2.313	2.311	2.264	2.263	140-150	1.349	2075	99.9,99.9
160	2.491	2.534	2.562	2.589	2.616	2.599	2.552	2.554	150-160	1.117	2076	99.9,99.9
170	2.779	2.805	2.815	2.842	2.849	2.909	2.889	2.837	160-170	0.7650	2077	100,100
180	2.998	3.008	2.984	2.976	3.013	3.023	2.994	2.969	170-180	0.2780	2077	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

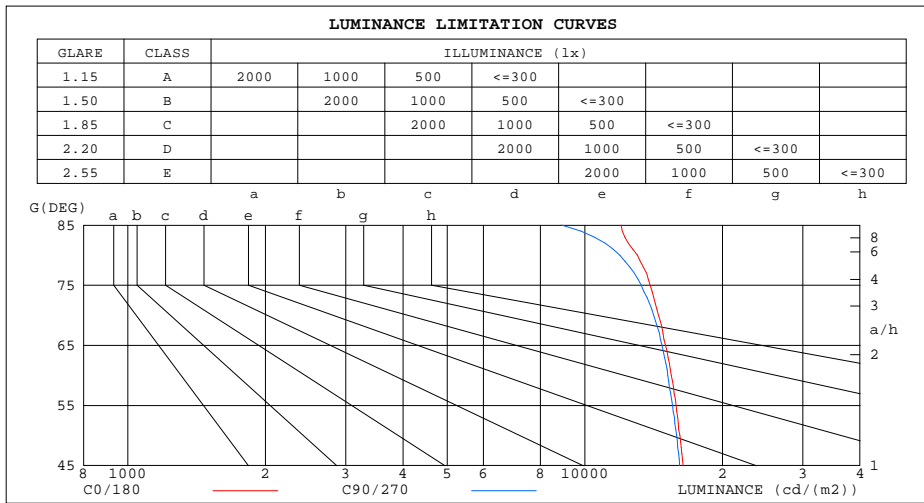

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11999	8893
80	13022	11934
75	13906	13281
70	14506	14156
65	15027	14749
60	15450	15184
55	15844	15565
50	16154	15898
45	16405	16135


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

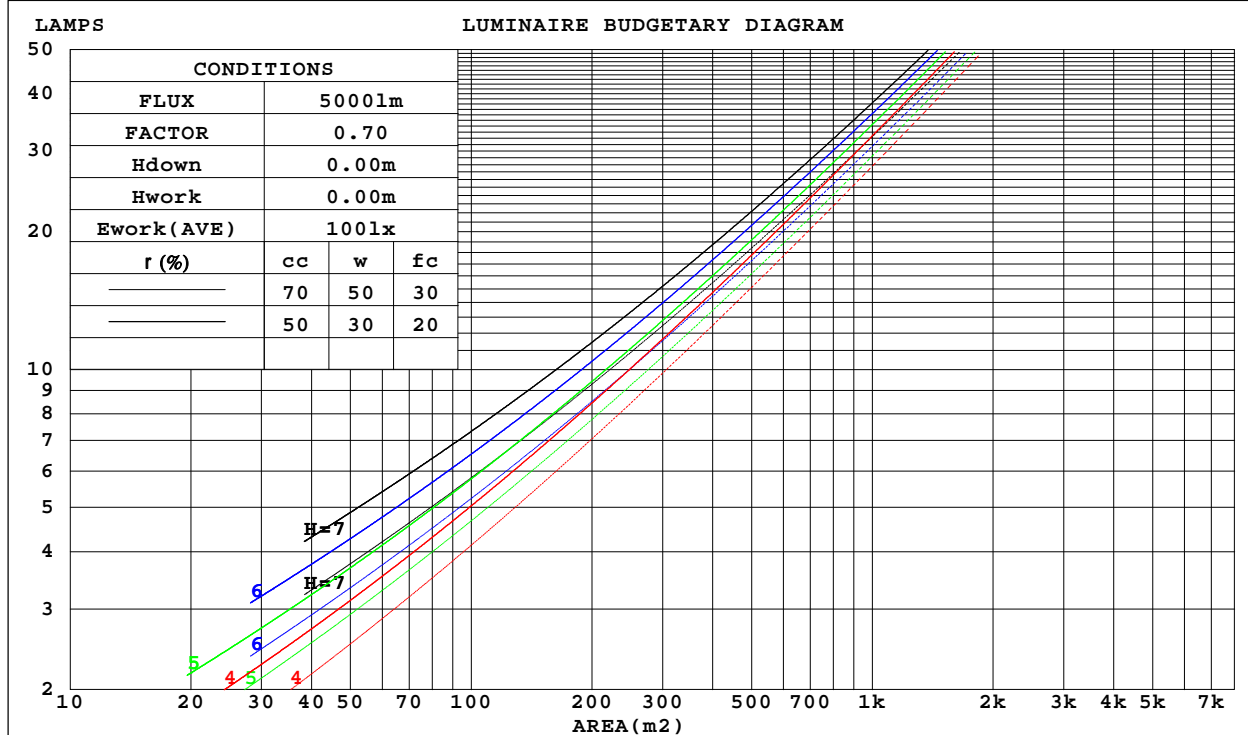

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

WEC AND CCEC

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.46	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.314	.178	.057	.307	.175	.056	.293	.168	.054	.281	.162	.052	.269	.156	.050	
2.0	.295	.161	.050	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.166	.085	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.102	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.125	.074	.037	.087	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.037	.120	.068	.032	.083	.048	.023	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.127	.068	.029	.109	.059	.025	.076	.042	.018	.044	.025	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: φ0.46			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	23.4	22.1	23.7	24.0	21.6	23.2	22.0	23.6	23.9
3H	23.6	25.1	24.0	25.4	25.8	23.5	25.0	23.9	25.3	25.7
4H	24.4	25.8	24.8	26.1	26.5	24.2	25.6	24.6	25.9	26.3
6H	24.9	26.2	25.4	26.6	27.0	24.7	26.0	25.1	26.4	26.8
8H	25.1	26.4	25.6	26.8	27.2	24.9	26.1	25.3	26.5	26.9
12H	25.3	26.5	25.7	26.9	27.3	25.0	26.2	25.4	26.5	27.0
4H 2H	22.4	23.8	22.8	24.1	24.5	22.2	23.6	22.6	24.0	24.4
3H	24.5	25.7	24.9	26.1	26.5	24.3	25.5	24.7	25.9	26.3
4H	25.4	26.4	25.8	26.9	27.3	25.2	26.2	25.6	26.7	27.1
6H	26.1	27.0	26.5	27.5	27.9	25.8	26.8	26.3	27.2	27.7
8H	26.3	27.2	26.8	27.7	28.1	26.0	26.9	26.5	27.4	27.8
12H	26.5	27.3	27.0	27.8	28.3	26.2	27.0	26.7	27.4	27.9
8H 4H	25.7	26.6	26.2	27.0	27.5	25.5	26.4	26.0	26.8	27.3
6H	26.5	27.3	27.0	27.8	28.3	26.3	27.0	26.8	27.5	28.0
8H	26.9	27.5	27.4	28.0	28.5	26.6	27.2	27.1	27.7	28.2
12H	27.2	27.7	27.7	28.2	28.8	26.8	27.3	27.3	27.8	28.4
12H 4H	25.7	26.5	26.2	27.0	27.5	25.6	26.3	26.0	26.8	27.3
6H	26.6	27.3	27.1	27.7	28.3	26.4	27.0	26.9	27.5	28.0
8H	27.0	27.6	27.5	28.1	28.7	26.7	27.3	27.2	27.8	28.3
CIE190: 2010										

CIE190: 2010
Area: 0.0415 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=0.9767]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

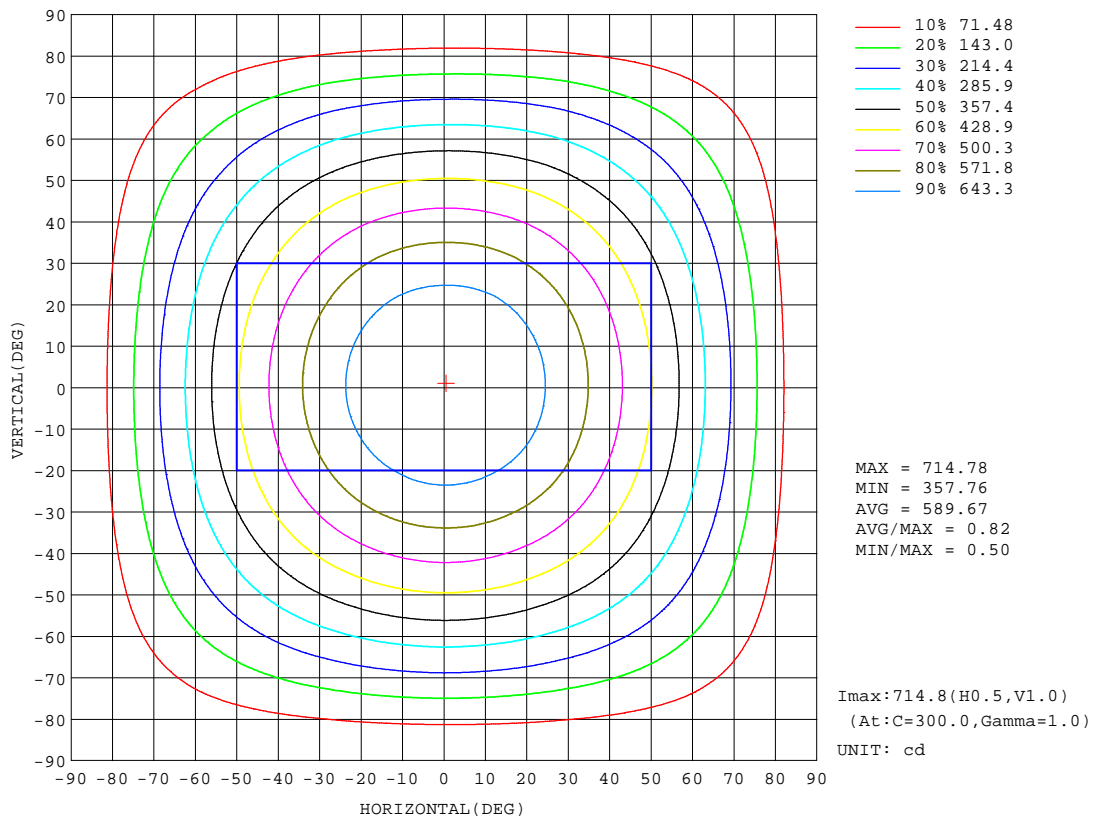


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

AAI Figure

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:

Flux out:1519 lm

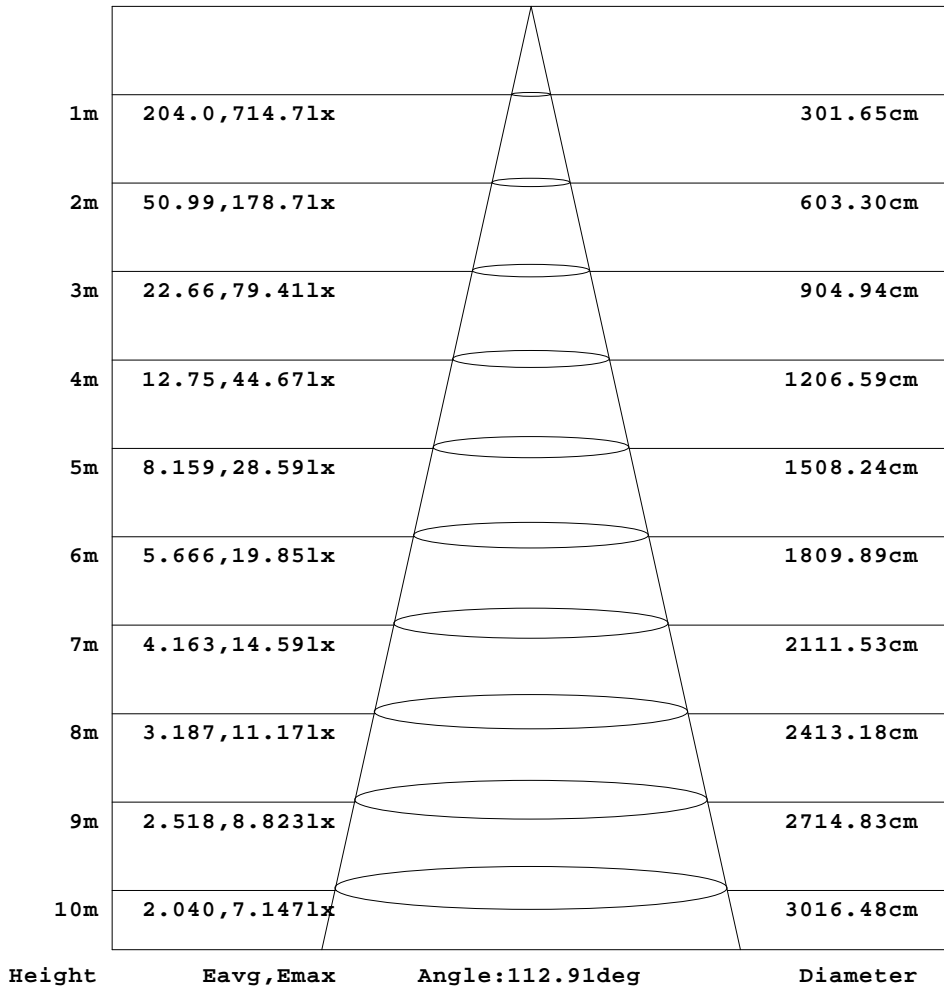


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

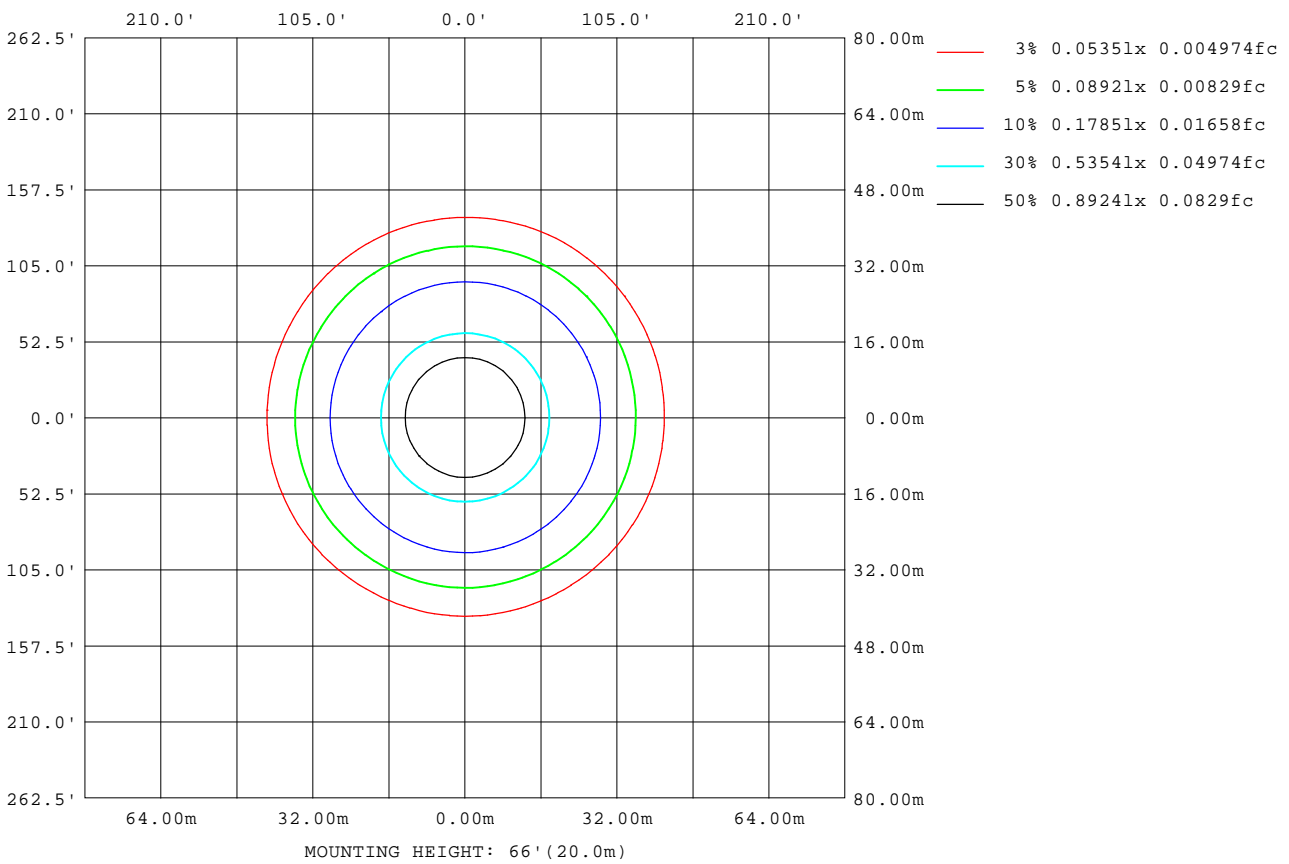

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

LED Avg.L Report

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.46	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	14806
L_0~180(75)av	13536
L_0~180(85)av	10875
L_90~270(65)av	15003
L_90~270(75)av	13623
L_90~270(85)av	9659
L_45(65)av	14906
L_45(75)av	13596
L_45(85)av	9847

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks:

Planar Illuminance Curve

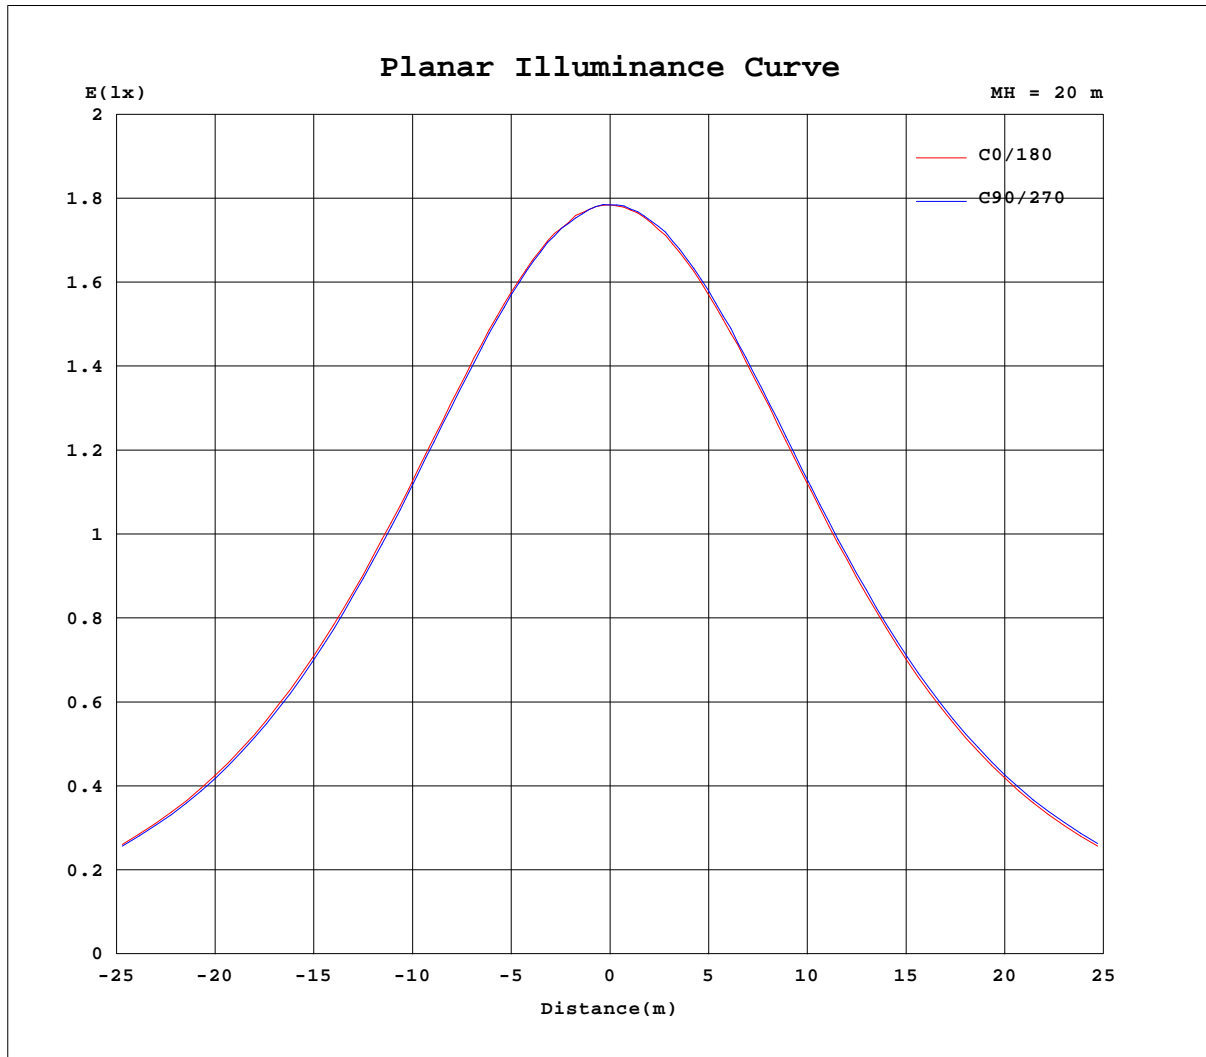

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.20V I:0.2067A P:24.494W PF:0.9861 Freq:59.98Hz Lamp Flux:2077.08x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.46	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	714	714	714	714	714	714	714	714	714	714	714	714						
5	712	710	711	709	710	710	710	711	712	711	712	713						
10	702	701	700	700	700	701	700	701	704	703	704	705						
15	687	686	685	684	683	685	684	686	688	688	689	689						
20	666	666	663	662	660	662	663	664	667	667	669	669						
25	640	638	636	635	633	635	635	637	641	641	644	642						
30	608	606	603	601	599	602	602	604	609	608	611	611						
35	570	568	565	563	561	561	565	565	571	572	574	574						
40	528	526	522	520	518	520	521	523	528	530	532	532						
45	481	479	476	473	471	473	474	475	481	483	487	485						
50	431	428	425	424	421	421	423	425	430	433	436	435						
55	377	374	371	370	367	368	369	371	377	380	384	382						
60	320	318	315	315	312	313	314	314	321	325	328	326						
65	263	261	258	259	255	256	256	256	265	268	272	269						
70	206	203	200	201	197	199	198	198	206	209	214	212						
75	149	146	143	143	141	142	141	140	148	150	155	152						
80	93.8	91.6	87.2	86.0	84.7	87.2	85.9	82.8	89.2	92.3	95.1	94.5						
85	43.4	41.3	34.6	32.2	31.3	35.4	35.3	30.7	34.3	37.7	39.0	39.7						
90	2.17	0.90	0.30	0.28	0.37	0.33	0.32	0.37	0.32	0.29	0.30	1.68						
95	0.35	0.39	0.36	0.43	0.38	0.43	0.49	0.48	0.56	0.44	0.52	0.55						
100	0.54	0.56	0.56	0.61	0.57	0.62	0.69	0.62	0.71	0.99	0.83	0.60						
105	0.73	0.75	0.77	0.83	0.79	0.82	0.89	0.80	0.86	0.81	0.84	0.78						
110	0.95	0.97	0.97	1.05	1.01	1.02	1.10	0.99	1.08	1.01	1.04	0.96						
115	1.16	1.17	1.18	1.26	1.21	1.26	1.30	1.23	1.28	1.22	1.23	1.18						
120	1.35	1.36	1.37	1.46	1.39	1.45	1.50	1.40	1.49	1.40	1.45	1.38						
125	1.50	1.55	1.53	1.64	1.58	1.62	1.66	1.60	1.66	1.60	1.63	1.55						
130	1.68	1.69	1.71	1.79	1.73	1.77	1.80	1.75	1.79	1.74	1.77	1.70						
135	1.81	1.83	1.80	1.94	1.87	1.93	1.94	1.89	1.94	1.89	1.91	1.83						
140	1.97	1.99	1.95	2.05	2.00	2.07	2.07	2.02	2.06	2.02	2.05	1.95						
145	2.09	2.13	2.13	2.19	2.15	2.21	2.20	2.15	2.20	2.14	2.18	2.10						
150	2.24	2.28	2.24	2.32	2.28	2.34	2.31	2.29	2.34	2.26	2.31	2.21						
155	2.40	2.41	2.36	2.44	2.42	2.48	2.47	2.43	2.45	2.43	2.42	2.37						
160	2.49	2.54	2.53	2.56	2.57	2.61	2.62	2.58	2.61	2.55	2.57	2.54						
165	2.67	2.64	2.71	2.70	2.71	2.72	2.76	2.76	2.78	2.73	2.73	2.69						
170	2.78	2.76	2.85	2.82	2.85	2.83	2.85	2.90	2.92	2.89	2.86	2.81						
175	2.90	2.91	2.97	2.93	2.98	2.94	2.98	2.99	2.99	2.95	2.96	2.97						
180	3.00	3.00	3.02	2.98	2.99	2.96	3.01	3.03	3.02	2.99	2.98	2.95						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks: