
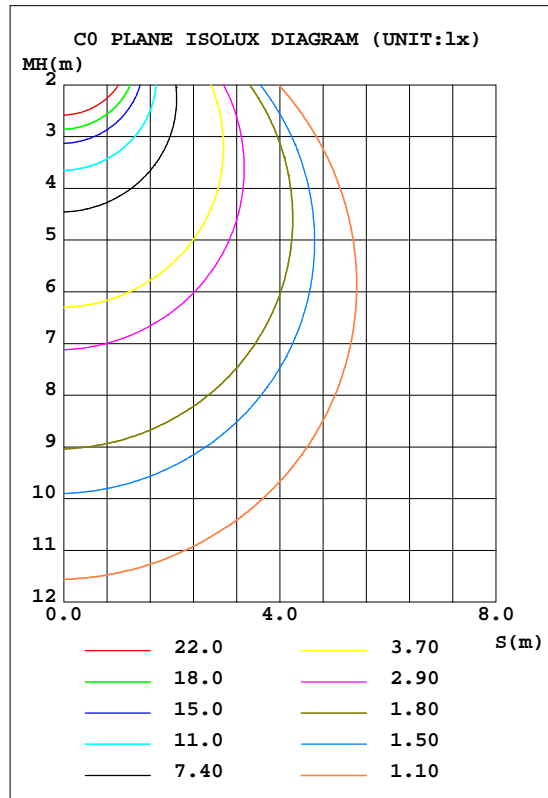


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 68.69 lm/W			
MODEL	ASD-JBR-3D6AC(2700K)	I <sub>max</sub> (cd)	147.6	S/MH(C0/180)	1.32
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	420.36	h UP, DN(C0-180)	0.2,47.7
NOMINAL FLUX(lm)	420.357	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,52.0
LAMPS INSIDE	1	h up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.7	CIBSE SHR MAX	1.35

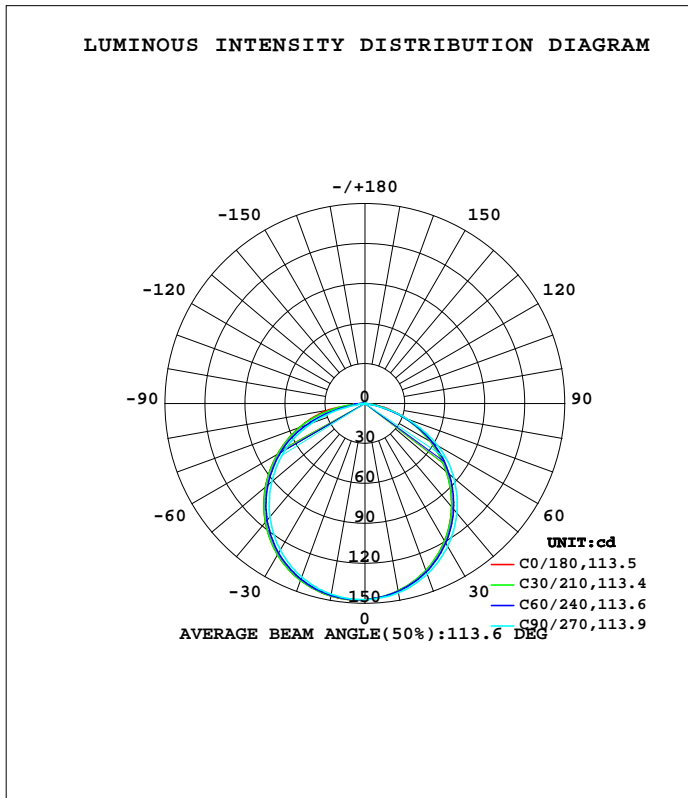

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1628]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	142.8	142.9	144.2	145.6	146.7	146.5	145.3	144.0	0- 10	13.93	13.93	3.31,3.31
20	133.5	133.9	136.4	139.2	141.3	140.9	138.5	135.8	10- 20	39.99	53.92	12.8,12.8
30	119.4	120.3	123.9	128.0	131.2	130.4	127.0	122.9	20- 30	60.83	114.8	27.3,27.3
40	101.2	102.4	107.3	112.5	116.4	115.2	110.9	105.7	30- 40	73.60	188.4	44.8,44.8
50	79.82	81.26	87.13	93.23	97.52	96.21	91.22	85.14	40- 50	76.61	265.0	63,63
60	56.47	57.48	62.84	70.30	75.74	74.23	68.91	62.35	50- 60	69.54	334.5	79.6,79.6
70	32.66	31.37	33.43	42.74	52.15	48.97	41.21	38.07	60- 70	52.81	387.3	92.1,92.1
80	10.61	6.447	4.462	11.81	27.38	18.40	8.503	10.34	70- 80	27.59	414.9	98.7,98.7
90	0	0.0178	0	1.100	0.1612	1.146	0.0032	0.0283	80- 90	3.999	418.9	99.7,99.7
100	0.0141	0.0528	0.0425	0.1641	0.0563	0.0247	0.0070	0.0387	90-100	0.1491	419.0	99.7,99.7
110	0.1196	0.1583	0.1619	0.1443	0.1129	0.0916	0.0563	0.1337	100-110	0.0896	419.1	99.7,99.7
120	0.1971	0.2534	0.2463	0.1969	0.2184	0.1795	0.1687	0.2497	110-120	0.1683	419.3	99.7,99.7
130	0.2550	0.3069	0.3119	0.2631	0.3029	0.2635	0.2462	0.3176	120-130	0.2255	419.5	99.8,99.8
140	0.3232	0.3639	0.3589	0.3236	0.3594	0.3179	0.3236	0.3565	130-140	0.2426	419.8	99.9,99.9
150	0.3521	0.3910	0.4152	0.3750	0.4114	0.3708	0.3700	0.3972	140-150	0.2286	420.0	99.9,99.9
160	0.3804	0.4188	0.4573	0.4221	0.4650	0.4188	0.4009	0.4221	150-160	0.1859	420.2	100,100
170	0.4225	0.4709	0.4819	0.4602	0.4732	0.4636	0.4573	0.4709	160-170	0.1255	420.3	100,100
180	0.5001	0.4892	0.4854	0.4784	0.4790	0.4856	0.4784	0.4784	170-180	0.0451	420.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1628]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

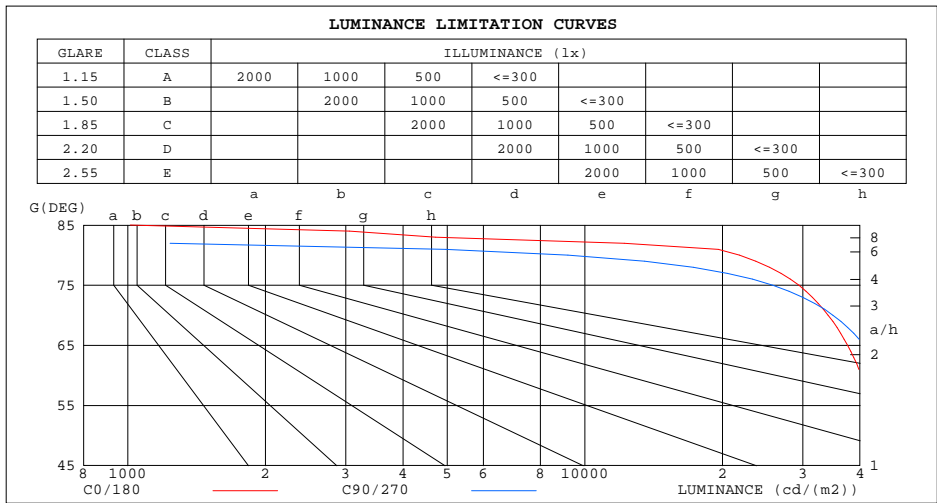

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1013	2083
80	21800	9180
75	29412	25773
70	34073	34923
65	37616	40815
60	40302	44901
55	42492	47340
50	44311	48428
45	45861	49307


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1628]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.79	.89	.83	.78	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.47	.58	.51	.46	.56	.50	.46	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.51	.45	.40	.38
7.0	.51	.43	.36	.51	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

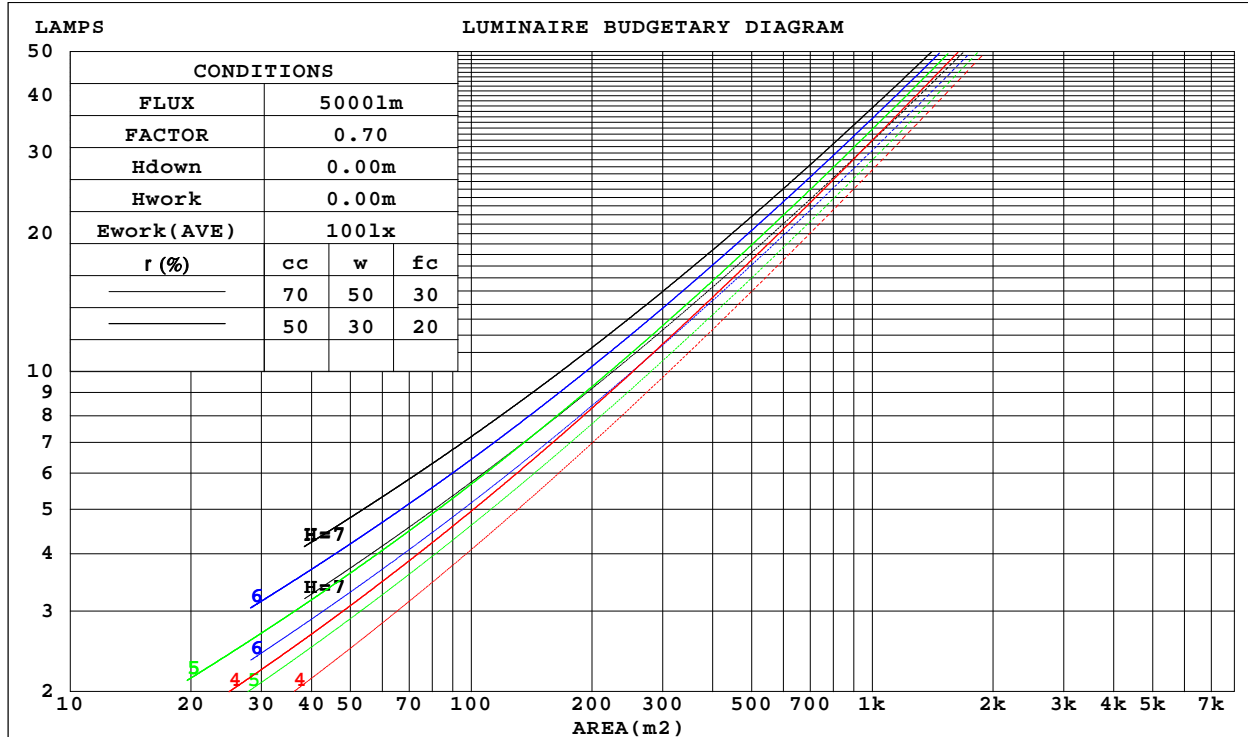

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1628]  
 Remarks:

WEC AND CCEC

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.299	.170	.054	.292	.166	.053	.278	.160	.051	.266	.153	.049	.255	.148	.048	
2.0	.286	.157	.048	.280	.154	.047	.268	.149	.046	.257	.144	.045	.247	.140	.044	
3.0	.267	.142	.042	.261	.140	.042	.251	.136	.041	.241	.132	.040	.232	.128	.040	
4.0	.247	.128	.038	.242	.127	.037	.233	.123	.037	.224	.120	.036	.216	.117	.036	
5.0	.229	.117	.034	.224	.115	.034	.216	.113	.033	.208	.110	.033	.201	.108	.032	
6.0	.213	.107	.031	.209	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027	
8.0	.185	.090	.025	.182	.090	.025	.176	.088	.025	.171	.086	.025	.165	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.151	.075	.021	.147	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.182	.159	.138	.156	.136	.119	.107	.094	.082	.061	.054	.048	.020	.017	.015	
2.0	.174	.135	.101	.149	.116	.088	.102	.080	.061	.059	.047	.036	.019	.015	.012	
3.0	.167	.117	.077	.143	.101	.067	.098	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.159	.104	.061	.136	.090	.053	.094	.062	.038	.054	.037	.022	.017	.012	.007	
5.0	.152	.093	.050	.130	.081	.044	.090	.056	.031	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.042	.124	.074	.037	.086	.051	.026	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.036	.119	.068	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.131	.072	.032	.113	.063	.027	.078	.044	.019	.046	.026	.012	.015	.009	.004	
9.0	.125	.067	.028	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.055	.022	.072	.038	.016	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1628]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: ASD LIGHTNG CORP			SUR.: φ0.06			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.3	25.1	26.6	27.0	25.8	27.4	26.1	27.7	28.0
3H	26.3	27.7	26.6	28.1	28.4	27.2	28.7	27.6	29.0	29.4
4H	26.8	28.2	27.2	28.5	28.9	27.6	29.0	28.0	29.3	29.7
6H	27.1	28.4	27.5	28.7	29.1	27.7	28.9	28.1	29.3	29.7
8H	27.1	28.3	27.5	28.7	29.1	27.6	28.8	28.1	29.2	29.6
12H	27.1	28.2	27.5	28.6	29.1	27.6	28.8	28.0	29.2	29.6
4H 2H	25.3	26.7	25.7	27.0	27.4	26.5	27.9	26.9	28.2	28.6
3H	27.0	28.2	27.4	28.6	29.0	28.1	29.3	28.6	29.7	30.1
4H	27.6	28.7	28.1	29.1	29.5	28.6	29.6	29.0	30.0	30.5
6H	28.0	28.9	28.5	29.4	29.8	28.7	29.6	29.2	30.1	30.5
8H	28.0	28.9	28.5	29.3	29.8	28.7	29.5	29.1	30.0	30.4
12H	28.0	28.8	28.5	29.2	29.7	28.7	29.4	29.1	29.9	30.4
8H 4H	27.8	28.6	28.3	29.1	29.6	28.9	29.8	29.4	30.2	30.7
6H	28.2	28.9	28.7	29.4	29.9	29.1	29.8	29.6	30.3	30.7
8H	28.2	28.9	28.7	29.4	29.9	29.0	29.6	29.5	30.2	30.7
12H	28.2	28.8	28.7	29.3	29.8	29.0	29.6	29.5	30.0	30.6
12H 4H	27.8	28.5	28.3	29.0	29.5	29.0	29.7	29.4	30.2	30.7
6H	28.2	28.8	28.7	29.3	29.8	29.1	29.7	29.6	30.2	30.7
8H	28.2	28.8	28.7	29.3	29.8	29.1	29.6	29.6	30.1	30.7
CIE190: 2010										

CIE190: 2010  
Area: 0.0028 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.1628]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.06$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	88	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	107	101	97	104	99	95	100	96	92	84
5.00	109	104	100	107	102	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.1628]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

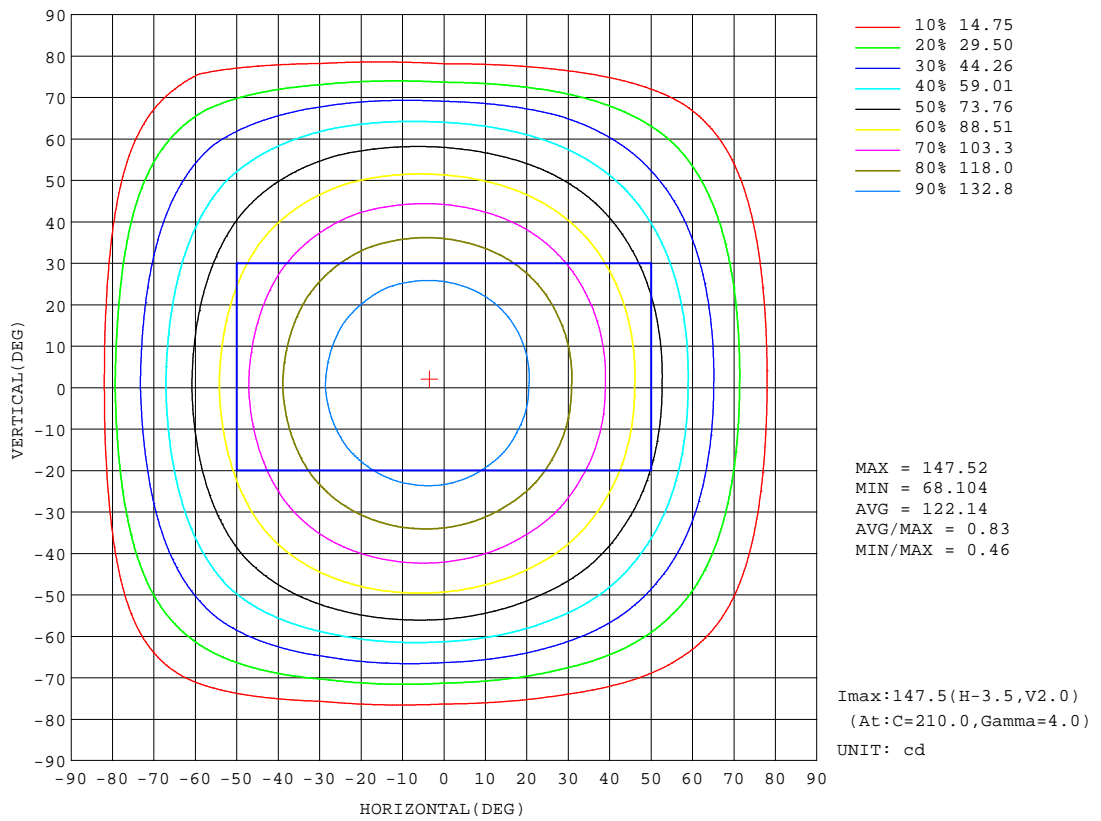

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1628]  
 Remarks:



AAI Figure

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

Flux out:315.0 lm

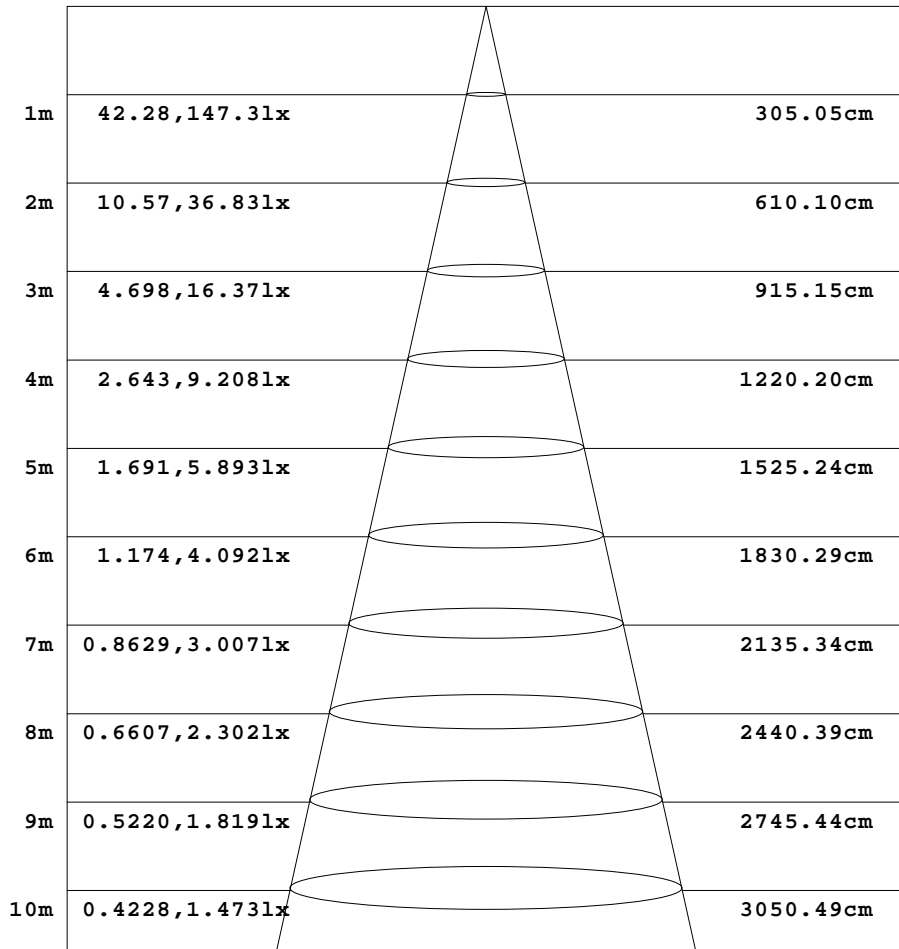

Height                      Eavg, Emax                      Angle:113.50deg                      Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1628]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

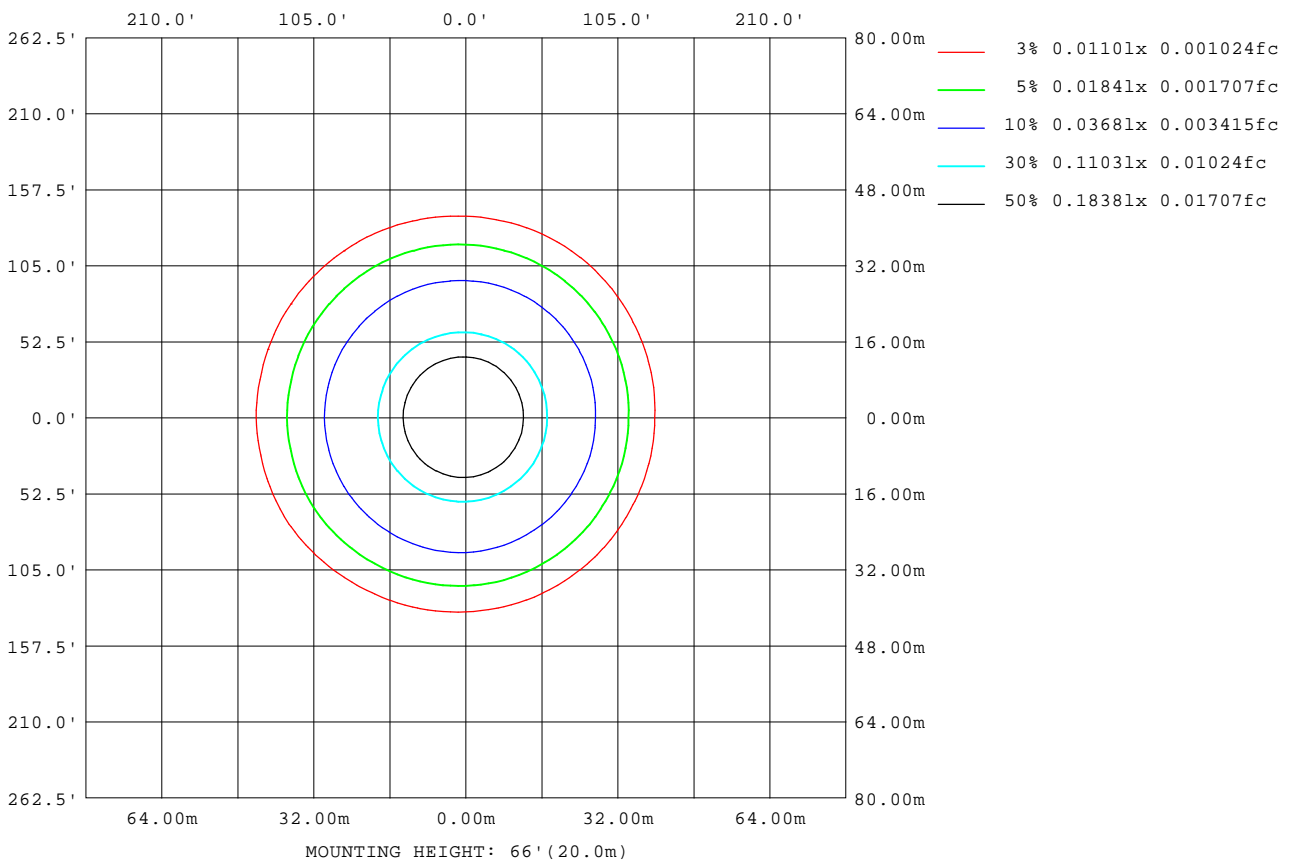

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.1628]  
 Remarks:

## LED Avg.L Report

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	45892
L_0~180(75)av	42476
L_0~180(85)av	18862
L_90~270(65)av	44108
L_90~270(75)av	30096
L_90~270(85)av	9252
L_45(65)av	45399
L_45(75)av	36090
L_45(85)av	5616

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.1628]  
Remarks:

Planar Illuminance Curve

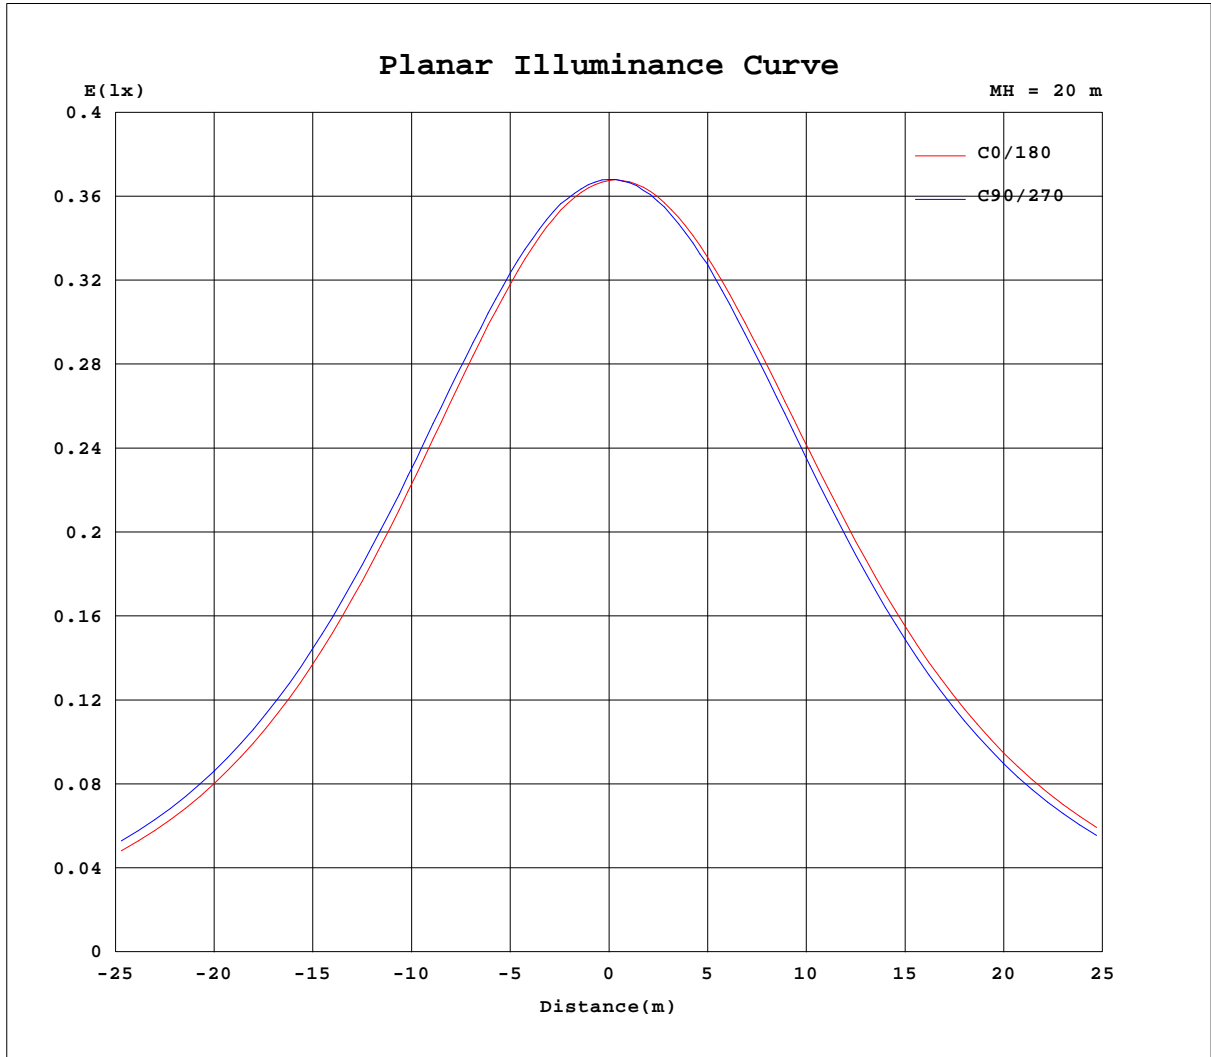

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.1628]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.23V I:0.0540A P:6.1200W PF:0.9419 Freq:60.00Hz Lamp Flux:420.357x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.06	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	147	147	147	147	147	147	147	147	147	147	147	147						
5	146	146	146	146	147	147	148	148	147	147	146	146						
10	143	143	143	144	145	146	147	147	146	145	144	144						
15	139	139	139	141	142	144	145	145	144	143	141	140						
20	133	133	134	136	138	140	141	141	140	139	137	135						
25	127	127	128	131	133	135	137	137	136	133	131	129						
30	119	120	121	124	127	129	131	131	130	127	124	121						
35	111	111	113	116	119	122	124	124	122	119	116	113						
40	101	101	103	107	111	114	116	116	114	111	108	104						
45	90.9	91.1	93.3	97.6	101	105	107	107	105	101	97.7	93.7						
50	79.8	80.0	82.5	87.1	91.3	95.2	97.5	97.3	95.1	91.2	87.4	82.9						
55	68.3	68.4	70.9	76.0	80.3	84.5	87.0	86.6	84.3	80.4	76.3	71.7						
60	56.5	56.3	58.7	62.8	67.3	73.3	75.7	75.4	73.1	68.9	64.8	59.9						
65	44.6	43.8	45.6	48.3	53.4	61.1	64.1	63.6	60.8	56.1	53.0	48.1						
70	32.7	31.3	31.5	33.4	38.4	47.1	52.2	51.6	46.3	41.2	39.9	36.2						
75	21.3	19.0	17.8	18.7	22.9	32.0	40.2	38.2	30.5	24.9	24.7	24.4						
80	10.6	8.09	4.81	4.46	7.20	16.4	27.4	23.0	13.8	8.50	9.45	11.2						
85	0.25	0.08	0.10	0.51	0.45	0.45	8.96	7.49	2.68	4.01	0.52	0.87						
90	0.00	0.01	0.02	0.00	0.00	2.20	0.16	2.27	0.02	0.00	0.00	0.06						
95	0.00	0.05	0.00	0.39	1.19	0.01	0.01	0.00	0.03	0.01	0.02	0.00						
100	0.01	0.10	0.01	0.04	0.24	0.08	0.06	0.00	0.05	0.01	0.06	0.01						
105	0.06	0.14	0.04	0.11	0.16	0.08	0.08	0.01	0.08	0.02	0.11	0.06						
110	0.12	0.20	0.11	0.16	0.16	0.13	0.11	0.07	0.11	0.06	0.16	0.11						
115	0.15	0.24	0.15	0.21	0.17	0.15	0.17	0.12	0.16	0.13	0.23	0.15						
120	0.20	0.29	0.22	0.25	0.19	0.20	0.22	0.15	0.20	0.17	0.27	0.23						
125	0.24	0.32	0.24	0.28	0.23	0.23	0.25	0.22	0.25	0.22	0.31	0.27						
130	0.26	0.34	0.27	0.31	0.26	0.27	0.30	0.24	0.29	0.25	0.34	0.29						
135	0.30	0.37	0.30	0.34	0.30	0.30	0.32	0.27	0.32	0.29	0.36	0.32						
140	0.32	0.40	0.33	0.36	0.33	0.32	0.36	0.28	0.35	0.32	0.38	0.33						
145	0.33	0.40	0.35	0.39	0.36	0.35	0.39	0.31	0.37	0.36	0.41	0.35						
150	0.35	0.42	0.36	0.42	0.36	0.39	0.41	0.34	0.40	0.37	0.42	0.37						
155	0.36	0.43	0.38	0.44	0.38	0.41	0.44	0.35	0.44	0.38	0.43	0.38						
160	0.38	0.44	0.39	0.46	0.41	0.43	0.46	0.39	0.44	0.40	0.46	0.39						
165	0.40	0.46	0.42	0.48	0.43	0.46	0.47	0.42	0.46	0.43	0.48	0.42						
170	0.42	0.49	0.46	0.48	0.45	0.47	0.47	0.45	0.47	0.46	0.48	0.46						
175	0.46	0.50	0.47	0.48	0.46	0.48	0.48	0.49	0.48	0.46	0.49	0.46						
180	0.50	0.50	0.48	0.49	0.47	0.49	0.48	0.49	0.49	0.48	0.49	0.47						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1628]  
 Remarks: