
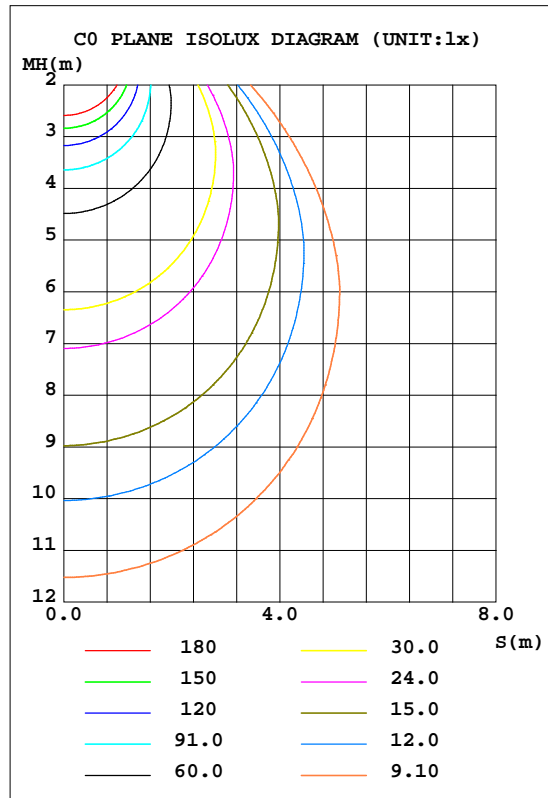


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 86.53 lm/W			
MODEL	DA30AC(30W 3000K)	I _{max} (cd)	1209	S/MH(C0/180)	1.18
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	2552.7	h UP, DN(C0-180)	0.2,48.8
NOMINAL FLUX(lm)	2552.73	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.8
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

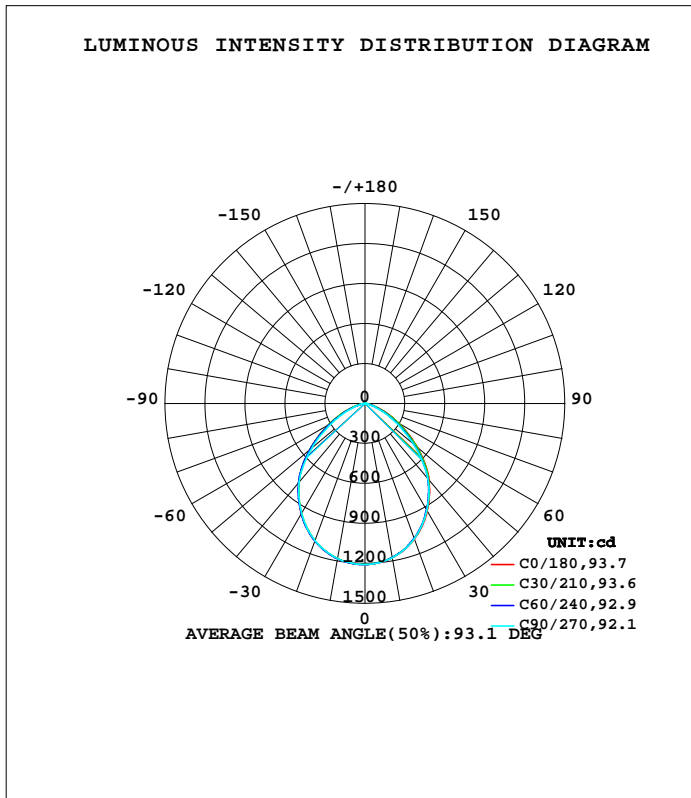

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2241]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1176	1174	1175	1179	1183	1182	1182	1180	0- 10	113.9	113.9	4.46,4.46
20	1083	1079	1080	1088	1097	1097	1096	1093	10- 20	321.5	435.5	17.1,17.1
30	934.3	925.8	927.7	940.7	954.6	955.1	953.0	947.9	20- 30	470.1	905.6	35.5,35.5
40	748.9	736.5	734.8	754.6	772.7	775.0	769.9	762.7	30- 40	532.8	1438	56.3,56.3
50	514.2	496.8	478.2	512.5	540.9	543.1	523.1	525.7	40- 50	493.6	1932	75.7,75.7
60	288.2	267.4	241.4	274.5	309.3	304.8	276.9	288.3	50- 60	353.4	2285	89.5,89.5
70	120.9	102.7	82.49	102.0	127.2	119.9	101.1	114.3	60- 70	187.2	2473	96.9,96.9
80	25.70	21.45	18.19	20.74	24.07	22.79	21.84	24.71	70- 80	60.14	2533	99.2,99.2
90	0.2529	0.0322	0.0321	0.0721	0.0643	0.0719	0.0730	0.0700	80- 90	9.091	2542	99.6,99.6
100	0.3348	0.2394	0.3356	0.3354	0.4474	0.2912	0.1835	0.2876	90-100	0.1592	2542	99.6,99.6
110	0.9090	0.7858	0.8944	0.8943	1.038	0.7940	0.6940	0.8107	100-110	0.5839	2543	99.6,99.6
120	1.619	1.476	1.645	1.601	1.773	1.444	1.404	1.493	110-120	1.167	2544	99.7,99.7
130	2.346	2.210	2.419	2.336	2.563	2.126	2.186	2.172	120-130	1.701	2546	99.7,99.7
140	2.936	2.817	3.058	2.963	3.185	2.733	2.793	2.775	130-140	1.996	2547	99.8,99.8
150	3.519	3.371	3.552	3.442	3.592	3.259	3.328	3.310	140-150	1.972	2549	99.9,99.9
160	3.958	3.922	3.960	3.853	4.135	3.826	3.815	3.805	150-160	1.683	2551	99.9,99.9
170	4.277	4.303	4.255	4.213	4.479	4.333	4.239	4.241	160-170	1.154	2552	100,100
180	4.613	4.628	4.486	4.720	4.414	4.763	4.646	4.632	170-180	0.4221	2553	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2241]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

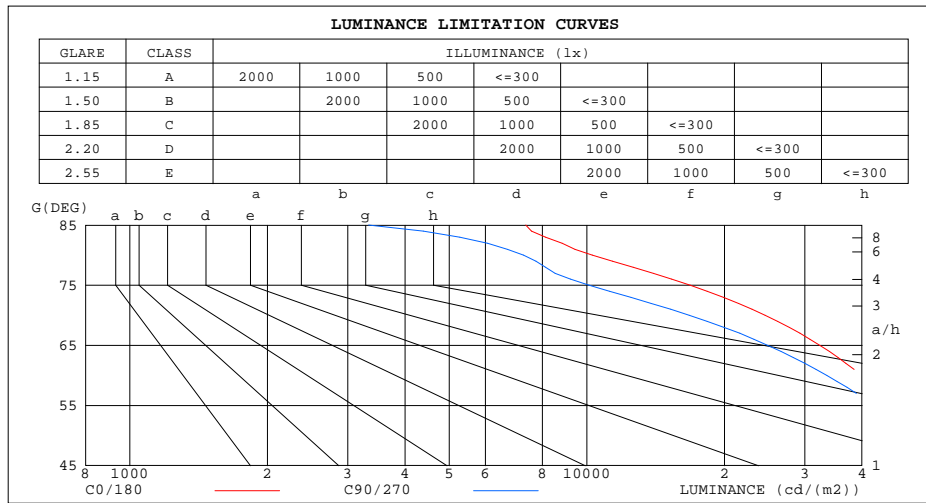


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2241]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	1.00	1.05	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.90	.88
2.0	.95	.89	.85	.93	.88	.84	.90	.85	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.85	.78	.72	.83	.77	.72	.81	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.69	.63	.75	.68	.62	.73	.66	.61	.70	.65	.60	.68	.64	.60	.58
5.0	.69	.61	.55	.68	.60	.55	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.54	.49	.62	.54	.48	.60	.53	.48	.58	.52	.48	.57	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.43	.52	.47	.42	.40
8.0	.52	.45	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

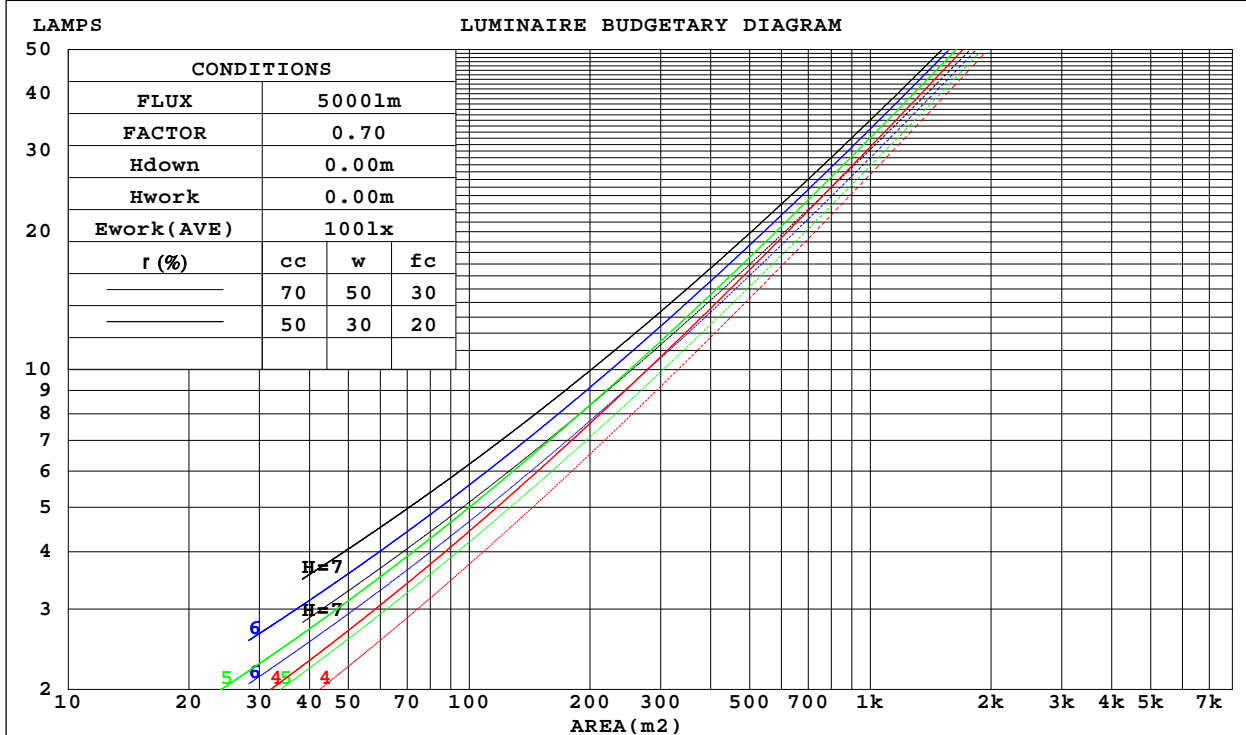

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2241]
 Remarks:

WEC AND CCEC

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.252	.143	.045	.245	.140	.044	.232	.133	.042	.220	.127	.041	.208	.121	.039	
2.0	.245	.134	.041	.239	.132	.041	.228	.127	.039	.217	.122	.038	.207	.117	.037	
3.0	.233	.124	.037	.228	.122	.037	.217	.118	.036	.208	.114	.035	.199	.110	.034	
4.0	.219	.114	.034	.215	.112	.033	.206	.109	.033	.197	.106	.032	.190	.103	.031	
5.0	.206	.105	.030	.202	.104	.030	.194	.101	.030	.186	.098	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	.170	.089	.027	
7.0	.182	.090	.026	.179	.089	.025	.172	.087	.025	.166	.085	.025	.161	.084	.025	
8.0	.172	.084	.024	.169	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.074	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.060	.055	.049	.019	.018	.016	
2.0	.169	.135	.107	.145	.117	.092	.099	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.119	.073	.040	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.132	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.126	.072	.034	.109	.062	.030	.075	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2241]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.7	26.2	25.1	26.5	26.8	23.9	25.3	24.3	25.7	26.0
3H	25.6	26.9	26.0	27.2	27.6	24.5	25.8	24.8	26.1	26.5
4H	25.8	27.0	26.2	27.3	27.7	24.5	25.7	24.9	26.1	26.5
6H	25.8	26.9	26.2	27.3	27.7	24.5	25.6	24.9	26.0	26.4
8H	25.8	26.9	26.2	27.3	27.7	24.5	25.6	24.9	26.0	26.4
12H	25.8	26.8	26.2	27.2	27.6	24.5	25.5	24.9	25.9	26.3
4H 2H	25.0	26.2	25.4	26.5	26.9	24.3	25.5	24.7	25.8	26.2
3H	26.0	27.0	26.4	27.4	27.8	24.9	25.9	25.3	26.3	26.7
4H	26.2	27.1	26.6	27.5	28.0	25.0	25.9	25.5	26.3	26.8
6H	26.3	27.1	26.8	27.5	28.0	25.0	25.8	25.5	26.3	26.7
8H	26.3	27.0	26.8	27.5	27.9	25.0	25.7	25.5	26.2	26.7
12H	26.3	26.9	26.8	27.4	27.9	25.0	25.6	25.5	26.1	26.6
8H 4H	26.2	26.9	26.7	27.4	27.8	25.0	25.8	25.5	26.2	26.7
6H	26.3	26.9	26.8	27.4	27.9	25.1	25.7	25.6	26.2	26.7
8H	26.3	26.8	26.8	27.3	27.8	25.1	25.6	25.6	26.1	26.6
12H	26.3	26.8	26.8	27.3	27.8	25.1	25.5	25.6	26.0	26.6
12H 4H	26.2	26.8	26.6	27.3	27.8	25.0	25.7	25.5	26.1	26.6
6H	26.2	26.8	26.8	27.3	27.8	25.1	25.6	25.6	26.1	26.6
8H	26.3	26.7	26.8	27.2	27.8	25.1	25.5	25.6	26.0	26.6
CIE190: 2010										

CIE190: 2010
 Area: 0.0144 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2241]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	53	47	41
0.80	74	64	58	73	64	57	72	63	57	51
1.00	83	73	67	81	72	66	79	73	66	60
1.25	89	80	74	88	80	74	85	78	73	67
1.50	94	86	80	92	85	79	89	83	78	72
2.00	100	93	88	98	92	87	95	89	85	78
2.50	103	97	92	101	95	91	97	93	89	81
3.00	106	100	96	104	99	95	100	96	92	85
4.00	109	104	101	107	103	99	103	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2241]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

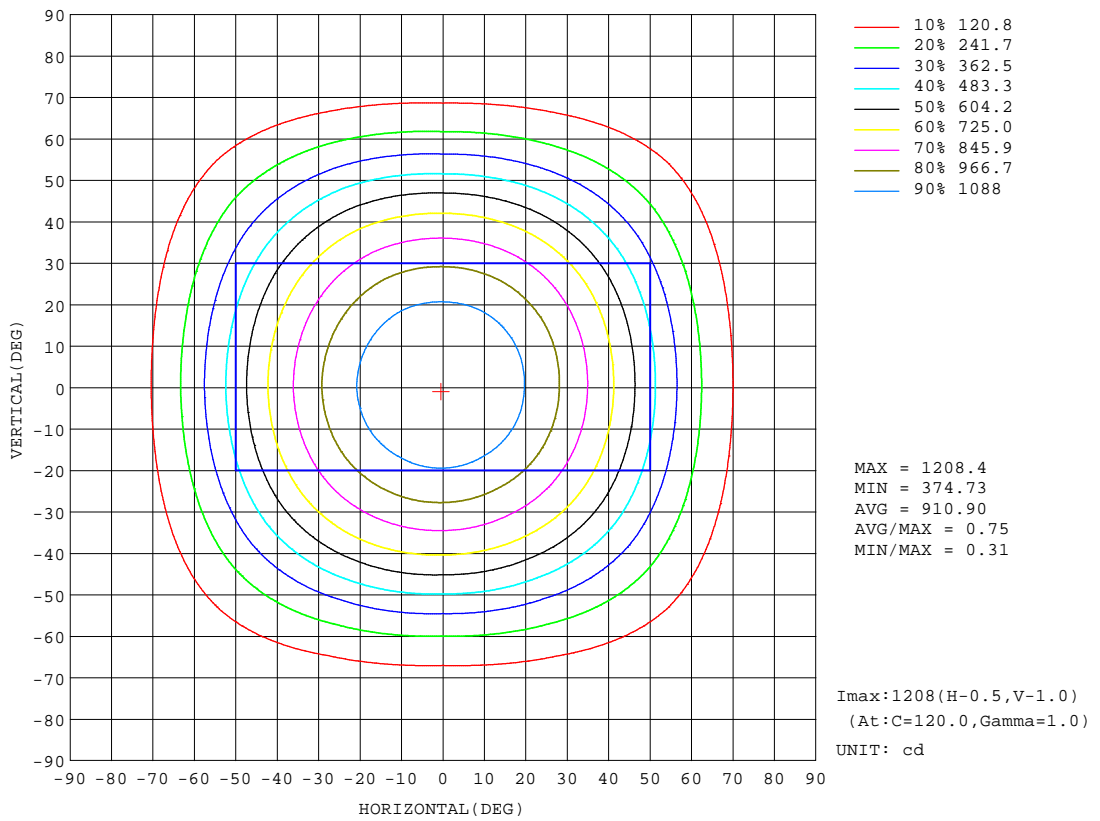


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2241]
 Remarks:

AAI Figure

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:1795 lm

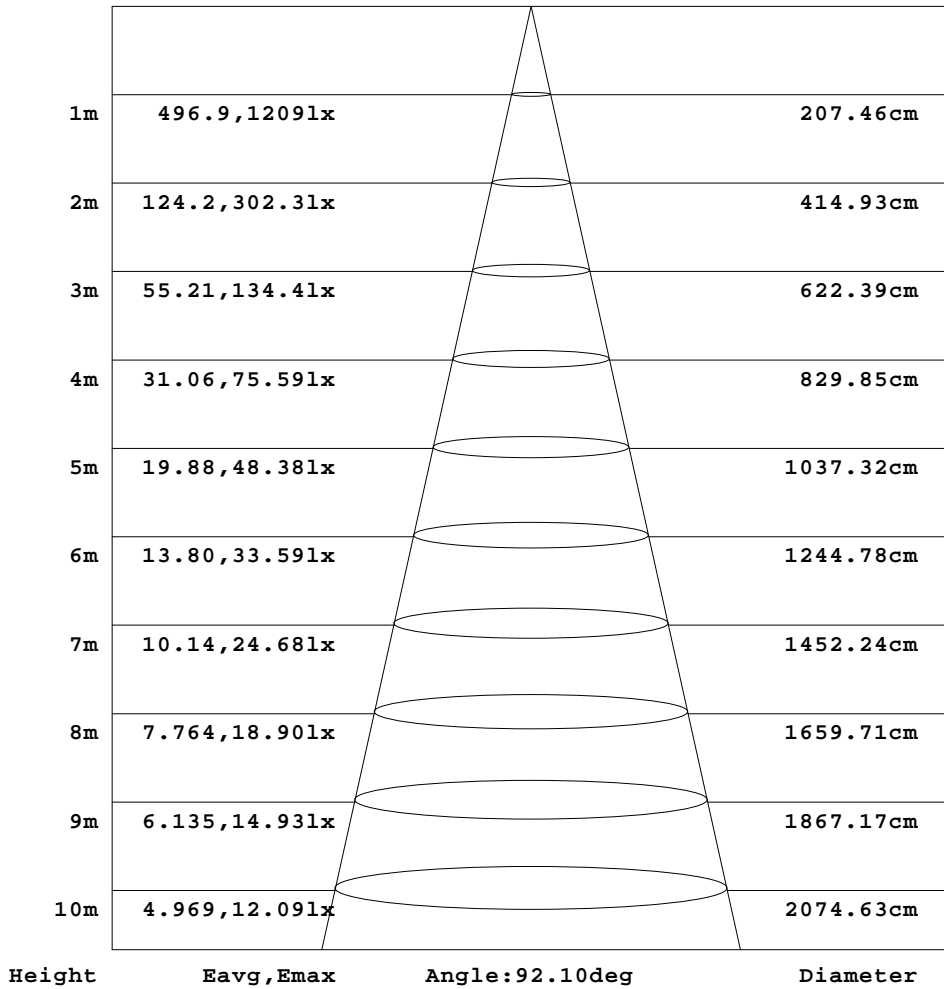


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2241]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

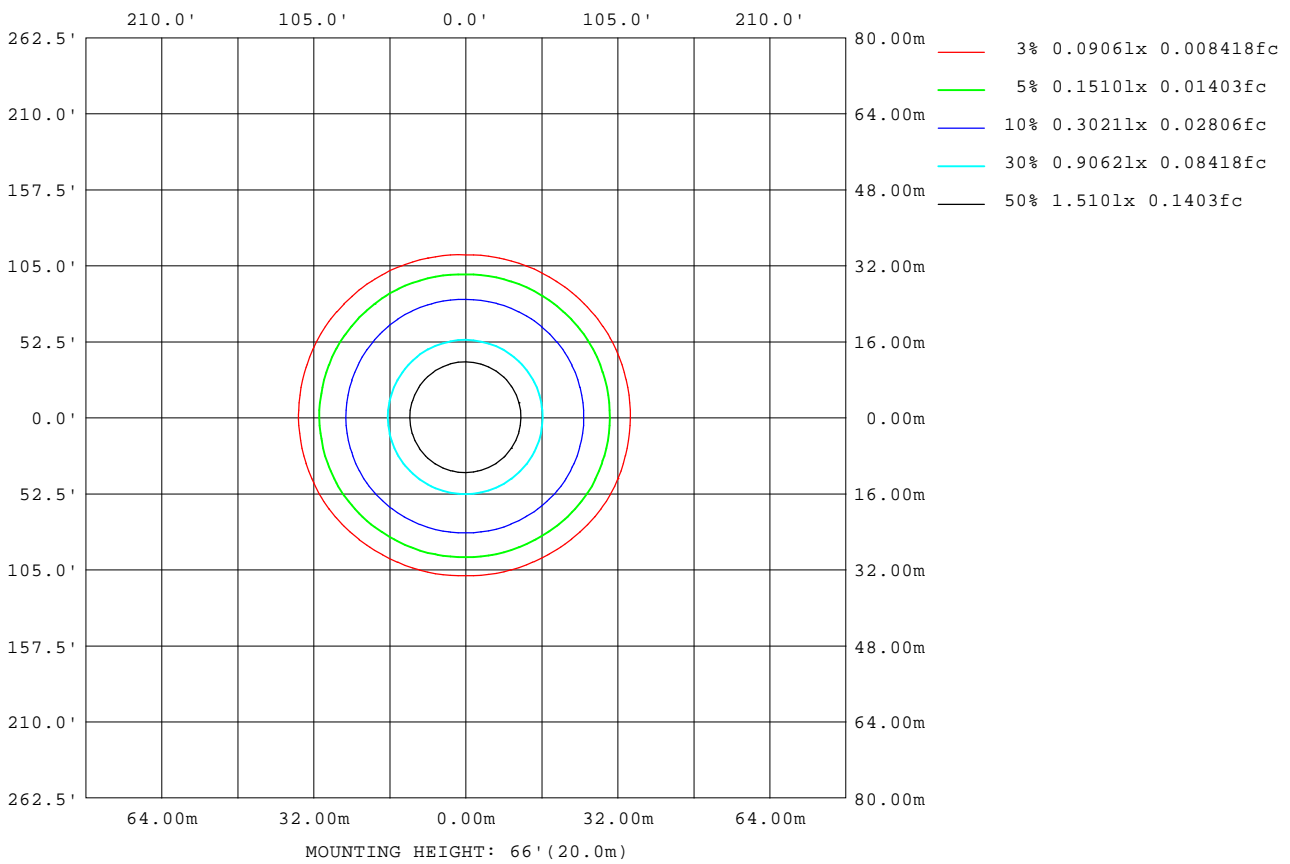

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2241]
 Remarks:

LED Avg.L Report

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	33472
L_0~180(75)av	16802
L_0~180(85)av	6837
L_90~270(65)av	27170
L_90~270(75)av	11337
L_90~270(85)av	4406
L_45(65)av	30947
L_45(75)av	14156
L_45(85)av	5590

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2241]
Remarks:

Planar Illuminance Curve

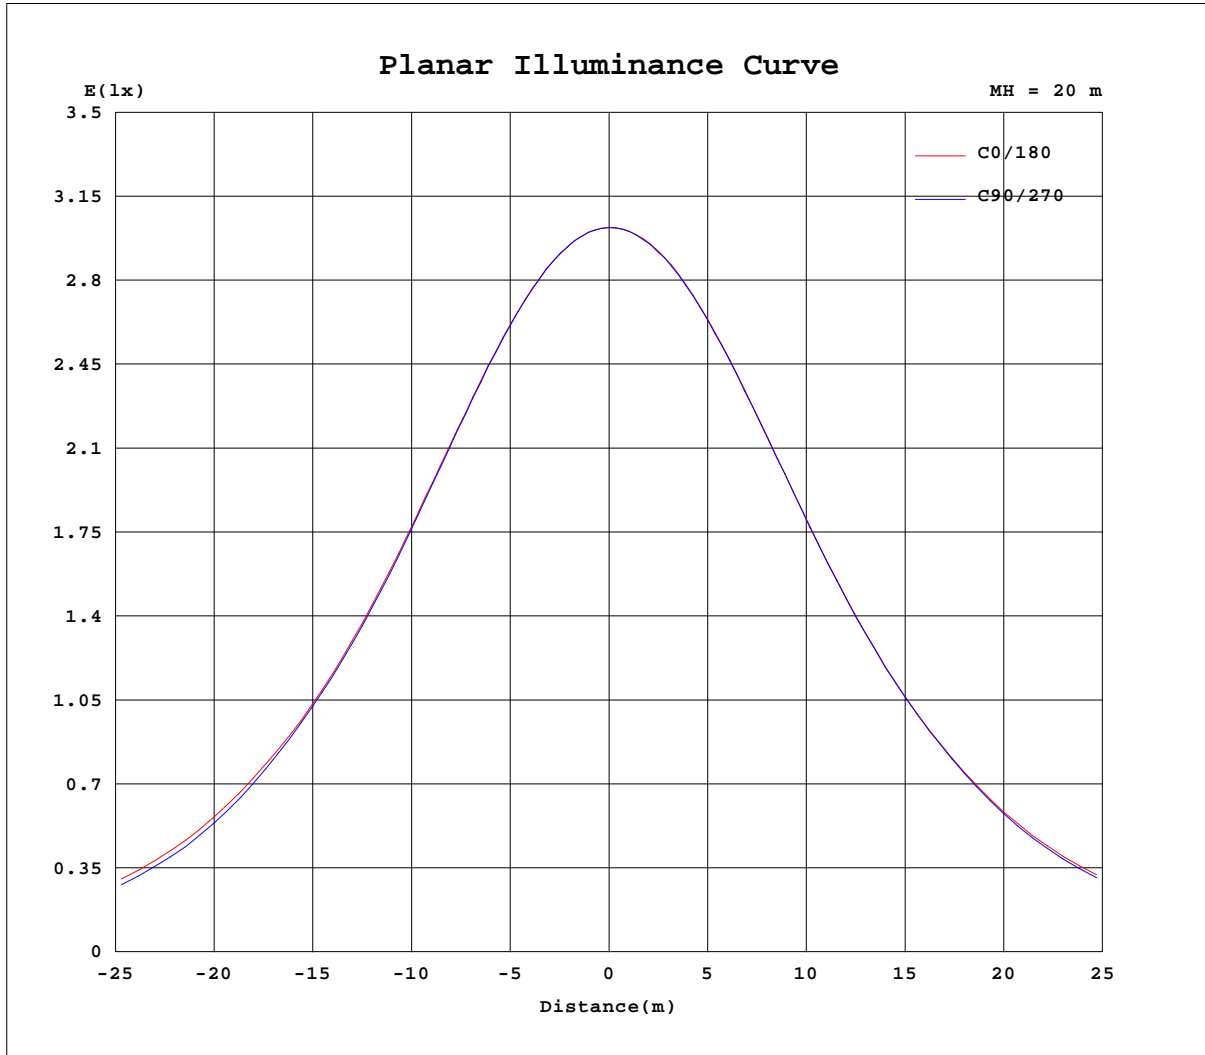

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2241]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.10V I:0.2490A P:29.500W PF:0.9885 Freq:60.00Hz Lamp Flux:2552.73x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1208	1208	1208	1208	1208	1208	1208	1208	1208	1208	1208	1208						
5	1200	1197	1198	1200	1200	1202	1203	1202	1203	1201	1202	1202						
10	1176	1174	1173	1175	1176	1181	1183	1181	1183	1182	1180	1179						
15	1138	1133	1134	1136	1139	1144	1148	1146	1148	1145	1147	1141						
20	1083	1079	1078	1080	1083	1093	1097	1096	1098	1096	1096	1091						
25	1017	1010	1008	1011	1017	1026	1032	1031	1035	1030	1030	1024						
30	934	928	924	928	935	947	955	953	957	953	950	945						
35	844	837	832	837	845	857	866	866	872	864	862	853						
40	749	741	732	735	747	763	773	773	777	770	766	759						
45	637	630	613	609	627	650	660	665	667	652	651	648						
50	514	508	485	478	498	527	541	545	541	523	526	525						
55	395	389	362	351	370	405	422	424	417	394	400	404						
60	288	282	253	241	257	292	309	312	298	277	284	293						
65	197	190	163	151	164	194	210	212	196	179	185	199						
70	121	114	91.5	82.5	90.2	114	127	128	112	101	107	121						
75	62.7	57.0	42.2	37.7	40.6	54.5	62.5	62.3	51.5	46.8	51.1	62.5						
80	25.7	23.2	19.6	18.2	18.9	22.5	24.1	22.9	22.7	21.8	23.5	26.0						
85	9.22	8.52	5.21	4.18	4.52	7.36	7.94	6.28	7.25	6.88	8.23	8.79						
90	0.25	0.03	0.03	0.03	0.05	0.10	0.06	0.12	0.02	0.07	0.03	0.11						
95	0.14	0.10	0.04	0.15	0.11	0.18	0.23	0.12	0.13	0.02	0.12	0.10						
100	0.33	0.26	0.22	0.34	0.29	0.38	0.45	0.29	0.29	0.18	0.29	0.29						
105	0.59	0.50	0.47	0.58	0.53	0.65	0.70	0.53	0.50	0.41	0.52	0.53						
110	0.91	0.80	0.77	0.89	0.84	0.95	1.04	0.80	0.79	0.69	0.80	0.82						
115	1.25	1.11	1.12	1.24	1.18	1.29	1.40	1.11	1.09	1.02	1.13	1.15						
120	1.62	1.47	1.48	1.64	1.56	1.64	1.77	1.42	1.47	1.40	1.49	1.49						
125	1.98	1.83	1.89	2.03	1.94	1.99	2.16	1.72	1.82	1.79	1.83	1.87						
130	2.35	2.18	2.24	2.42	2.32	2.35	2.56	2.08	2.17	2.19	2.16	2.18						
135	2.69	2.49	2.57	2.73	2.66	2.71	2.88	2.40	2.50	2.50	2.50	2.50						
140	2.94	2.80	2.83	3.06	2.97	2.96	3.18	2.69	2.78	2.79	2.77	2.78						
145	3.22	3.09	3.11	3.35	3.24	3.18	3.39	3.01	3.04	3.10	3.07	3.06						
150	3.52	3.41	3.34	3.55	3.46	3.43	3.59	3.27	3.25	3.33	3.33	3.29						
155	3.79	3.72	3.60	3.76	3.65	3.70	3.90	3.57	3.55	3.58	3.57	3.55						
160	3.96	3.99	3.85	3.96	3.80	3.91	4.13	3.81	3.84	3.82	3.82	3.79						
165	4.11	4.15	4.10	4.12	3.98	4.11	4.40	4.06	4.05	4.09	4.11	3.95						
170	4.28	4.29	4.32	4.25	4.10	4.32	4.48	4.39	4.28	4.24	4.31	4.17						
175	4.49	4.50	4.53	4.43	4.41	4.50	4.53	4.53	4.51	4.49	4.56	4.48						
180	4.61	4.69	4.57	4.49	4.76	4.68	4.41	4.74	4.79	4.65	4.68	4.59						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2241]
 Remarks: