
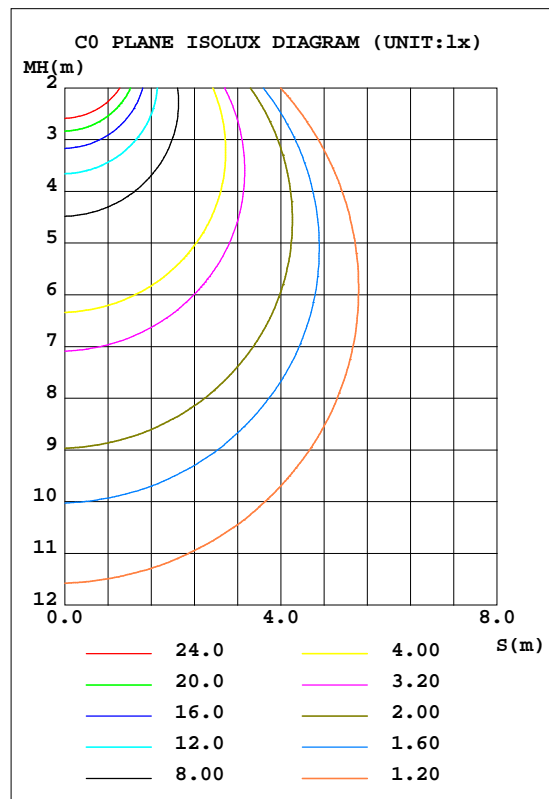


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.45 lm/W			
MODEL	ASD-JBR-3D6AC(3500K)	I <sub>max</sub> (cd)	161.5	S/MH(C0/180)	1.32
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	460.16	h UP, DN(C0-180)	0.2,47.9
NOMINAL FLUX(lm)	460.164	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,51.8
LAMPS INSIDE	1	h up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.7	CIBSE SHR MAX	1.35

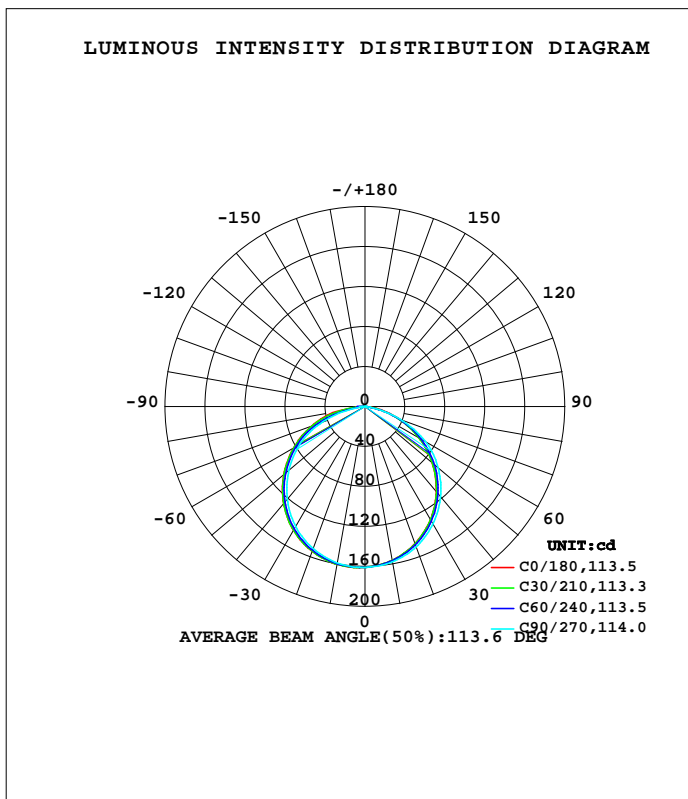

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2209]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	156.4	156.5	157.9	159.2	160.4	160.1	159.0	157.4	0- 10	15.24	15.24	3.31,3.31
20	146.1	146.7	149.6	152.2	154.3	153.7	151.3	148.7	10- 20	43.75	58.99	12.8,12.8
30	131.0	131.9	135.9	139.9	143.2	142.2	138.8	134.5	20- 30	66.53	125.5	27.3,27.3
40	111.1	112.6	117.8	123.0	126.7	125.6	121.1	115.7	30- 40	80.53	206.1	44.8,44.8
50	87.91	89.53	95.76	101.7	106.2	104.6	99.52	93.32	40- 50	83.80	289.9	63,63
60	62.32	63.50	69.56	76.96	82.29	80.51	75.06	68.34	50- 60	76.10	366.0	79.5,79.5
70	36.25	35.01	37.39	47.16	56.46	52.93	44.87	41.82	60- 70	57.89	423.8	92.1,92.1
80	12.08	7.620	5.427	13.41	29.66	19.74	9.227	11.51	70- 80	30.37	454.2	98.7,98.7
90	0.0003	0.0158	0	1.150	0.2318	1.228	0.0035	0.0313	80- 90	4.374	458.6	99.7,99.7
100	0	0.0311	0.0700	0.1541	0.0699	0.0350	0.0078	0.0466	90-100	0.1478	458.7	99.7,99.7
110	0.1086	0.1241	0.1864	0.1668	0.1322	0.1164	0.0854	0.1513	100-110	0.0978	458.8	99.7,99.7
120	0.2096	0.2211	0.2950	0.2188	0.2564	0.2134	0.2094	0.2585	110-120	0.1865	459.0	99.7,99.7
130	0.2949	0.2911	0.3748	0.2839	0.3417	0.2819	0.2871	0.3296	120-130	0.2423	459.3	99.8,99.8
140	0.3374	0.3492	0.3869	0.3606	0.4349	0.3530	0.3620	0.3666	130-140	0.2598	459.5	99.9,99.9
150	0.3889	0.3996	0.4271	0.4401	0.4660	0.4191	0.4174	0.4691	140-150	0.2480	459.8	99.9,99.9
160	0.4347	0.4539	0.4968	0.4730	0.5449	0.4640	0.4502	0.4990	150-160	0.2096	460.0	100,100
170	0.4747	0.5139	0.5554	0.5117	0.5578	0.5243	0.5018	0.5350	160-170	0.1410	460.1	100,100
180	0.5746	0.5470	0.5977	0.5467	0.5668	0.5936	0.5201	0.5389	170-180	0.0509	460.2	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.2209]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

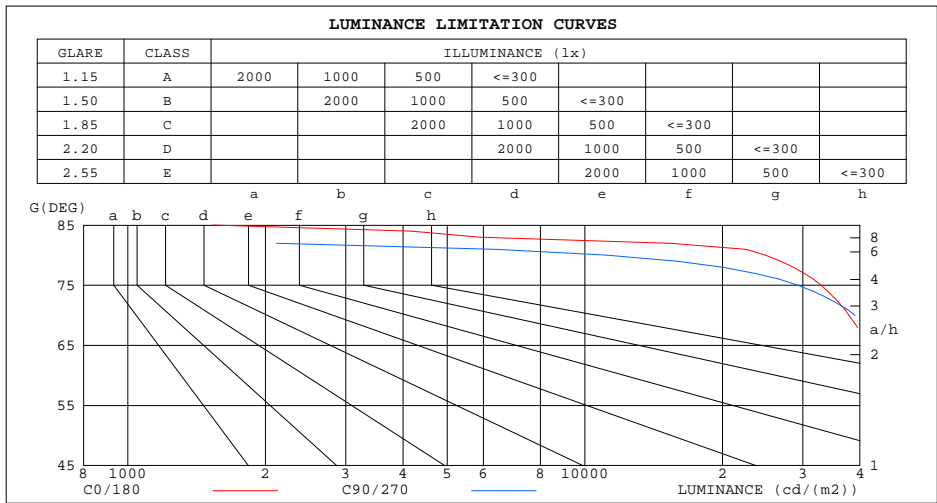

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1537	1666
80	24832	11156
75	32877	29229
70	37832	39022
65	41576	45411
60	44483	49665
55	46851	52101
50	48808	53185
45	50405	54176


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2209]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.79	.89	.83	.78	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.47	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.51	.45	.40	.38
7.0	.51	.43	.36	.51	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

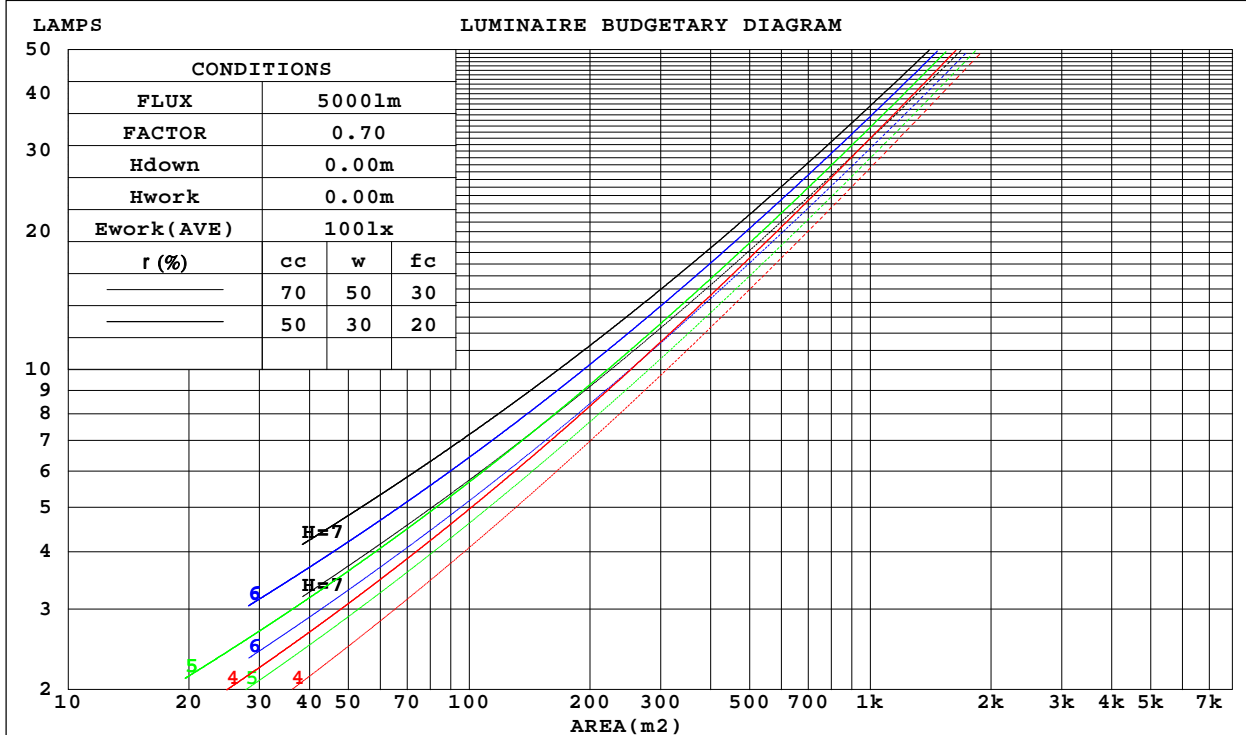

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2209]  
 Remarks:

WEC AND CCEC

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.299	.170	.054	.292	.167	.053	.279	.160	.051	.266	.154	.049	.255	.148	.048	
2.0	.286	.157	.048	.280	.154	.047	.268	.149	.046	.257	.144	.045	.247	.140	.044	
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.241	.132	.040	.232	.128	.040	
4.0	.247	.128	.038	.242	.127	.037	.233	.123	.037	.224	.120	.036	.216	.117	.036	
5.0	.229	.117	.034	.225	.115	.034	.216	.113	.033	.209	.110	.033	.201	.108	.032	
6.0	.213	.107	.031	.209	.105	.030	.201	.103	.030	.194	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.176	.091	.027	
8.0	.185	.090	.025	.182	.090	.025	.176	.088	.025	.171	.086	.025	.165	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.165	.082	.023	.160	.080	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.151	.075	.021	.147	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.182	.159	.138	.156	.136	.119	.107	.094	.082	.061	.054	.048	.020	.017	.015	
2.0	.174	.135	.101	.149	.116	.088	.102	.080	.061	.059	.047	.036	.019	.015	.012	
3.0	.167	.117	.077	.143	.101	.067	.098	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.159	.104	.061	.136	.090	.053	.094	.062	.038	.054	.037	.022	.017	.012	.007	
5.0	.152	.093	.050	.130	.081	.044	.090	.056	.031	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.042	.124	.073	.037	.086	.051	.026	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.036	.119	.068	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.131	.072	.031	.113	.063	.027	.078	.044	.019	.046	.026	.012	.015	.009	.004	
9.0	.125	.067	.028	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.055	.022	.072	.038	.016	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2209]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: φ0.06			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.7	25.4	27.0	27.3	26.1	27.7	26.5	28.1	28.4
3H	26.7	28.1	27.0	28.5	28.8	27.6	29.1	28.0	29.4	29.8
4H	27.2	28.6	27.6	28.9	29.3	28.0	29.4	28.4	29.7	30.1
6H	27.5	28.8	27.9	29.1	29.5	28.1	29.3	28.5	29.7	30.1
8H	27.5	28.7	28.0	29.1	29.6	28.0	29.3	28.5	29.7	30.1
12H	27.5	28.7	27.9	29.1	29.5	28.0	29.2	28.4	29.6	30.0
4H 2H	25.7	27.0	26.1	27.4	27.8	26.8	28.2	27.3	28.6	29.0
3H	27.4	28.6	27.8	29.0	29.4	28.5	29.7	28.9	30.1	30.5
4H	28.0	29.1	28.5	29.5	29.9	29.0	30.0	29.4	30.5	30.9
6H	28.4	29.3	28.9	29.8	30.2	29.1	30.0	29.6	30.5	30.9
8H	28.5	29.3	28.9	29.8	30.2	29.1	29.9	29.6	30.4	30.9
12H	28.4	29.2	28.9	29.7	30.2	29.1	29.8	29.6	30.3	30.8
8H 4H	28.2	29.1	28.7	29.5	30.0	29.3	30.2	29.8	30.6	31.1
6H	28.6	29.3	29.1	29.8	30.3	29.5	30.2	30.0	30.7	31.2
8H	28.7	29.3	29.2	29.8	30.3	29.4	30.1	30.0	30.6	31.1
12H	28.7	29.2	29.2	29.7	30.3	29.4	30.0	29.9	30.5	31.0
12H 4H	28.2	29.0	28.7	29.4	29.9	29.4	30.1	29.9	30.6	31.1
6H	28.6	29.3	29.1	29.7	30.3	29.5	30.2	30.1	30.6	31.2
8H	28.7	29.2	29.2	29.7	30.3	29.5	30.1	30.0	30.6	31.1
CIE190: 2010										

CIE190: 2010  
Area: 0.0028 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.2209]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.06$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	79	72	87	78	71	84	76	70	63
2.00	95	87	81	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	75
3.00	103	96	90	100	94	89	96	91	87	79
4.00	107	101	97	104	99	95	100	96	92	84
5.00	109	104	100	107	102	99	102	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity: 65.0%  
Test Distance: 8.600m [K=1.2209]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

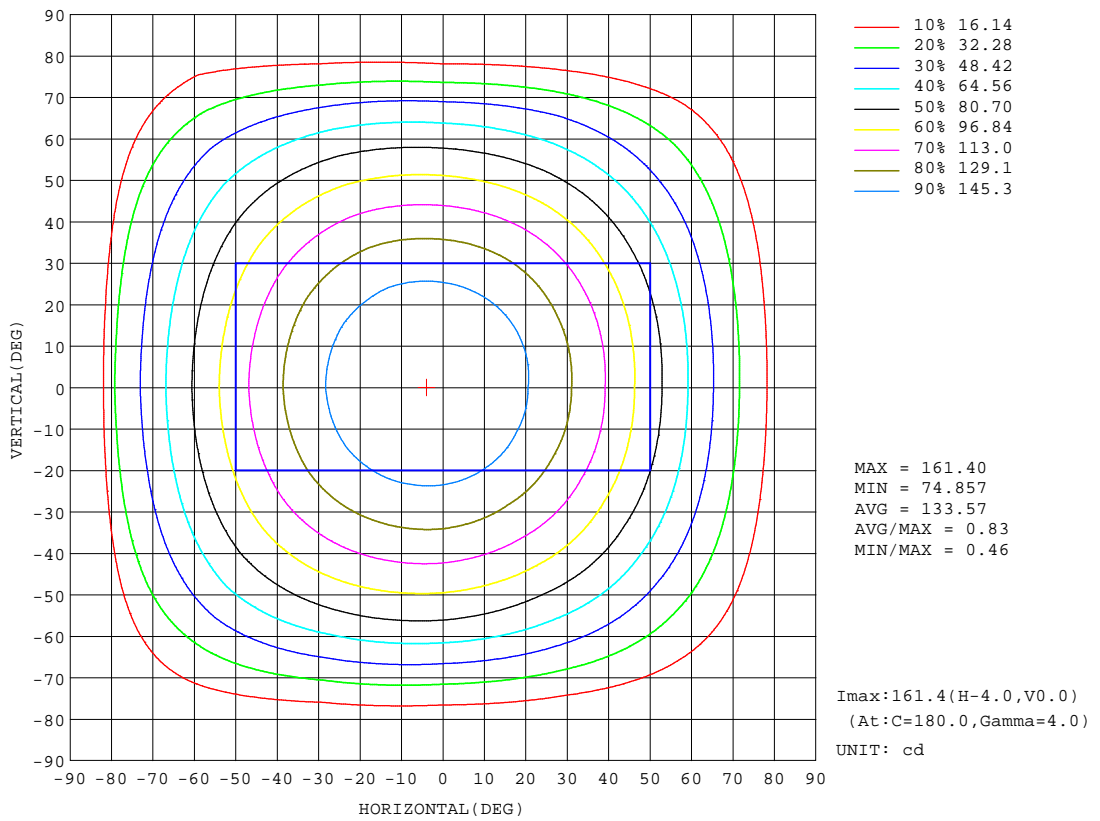

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2209]  
 Remarks:



AAI Figure

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

Flux out:344.6 lm

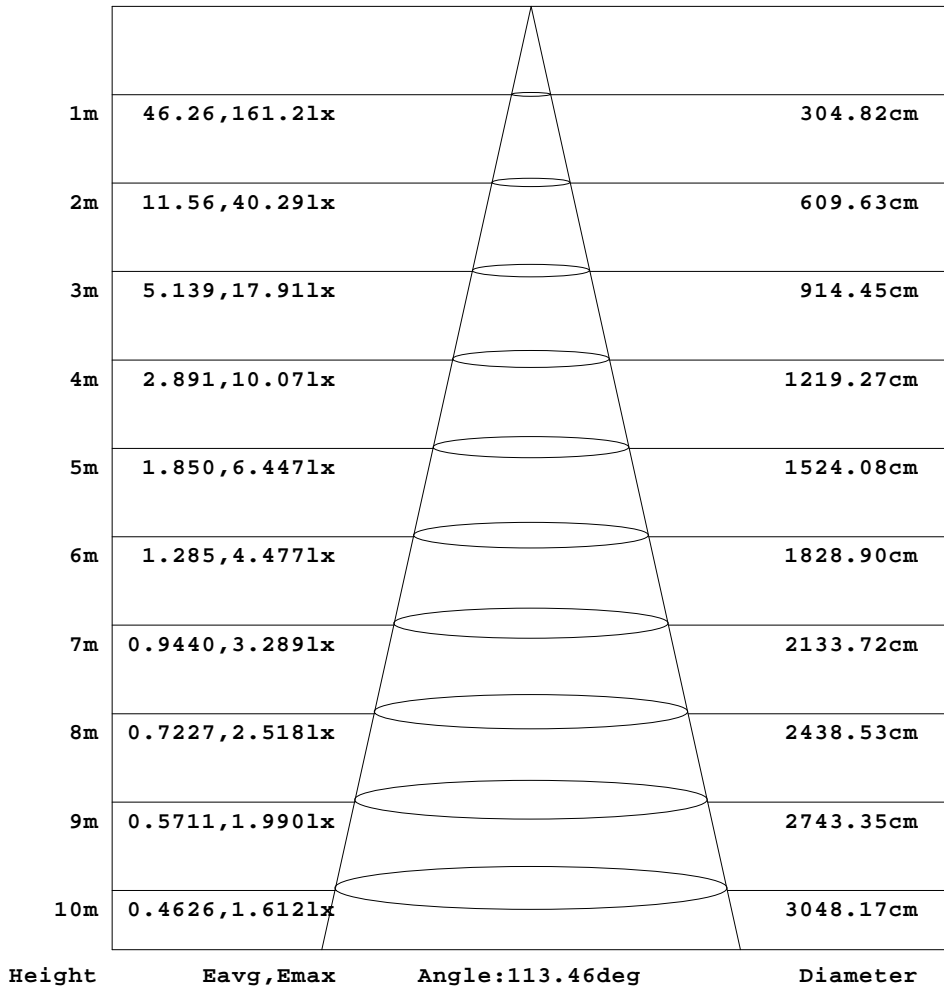


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2209]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

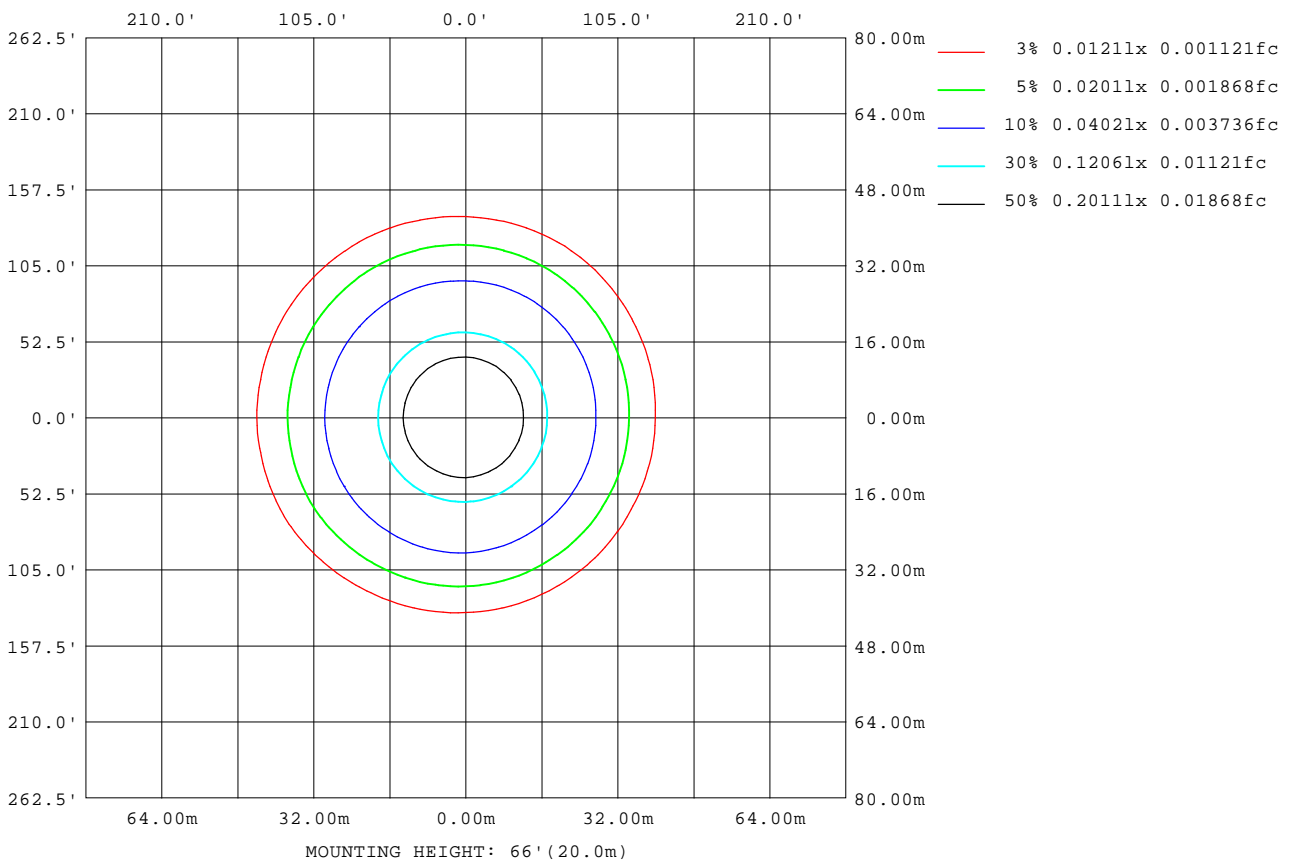

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.2209]  
 Remarks:

## LED Avg.L Report

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	50205
L_0~180(75)av	46414
L_0~180(85)av	19539
L_90~270(65)av	48472
L_90~270(75)av	33366
L_90~270(85)av	9241
L_45(65)av	49745
L_45(75)av	39778
L_45(85)av	6073

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.2209]  
Remarks:

Planar Illuminance Curve

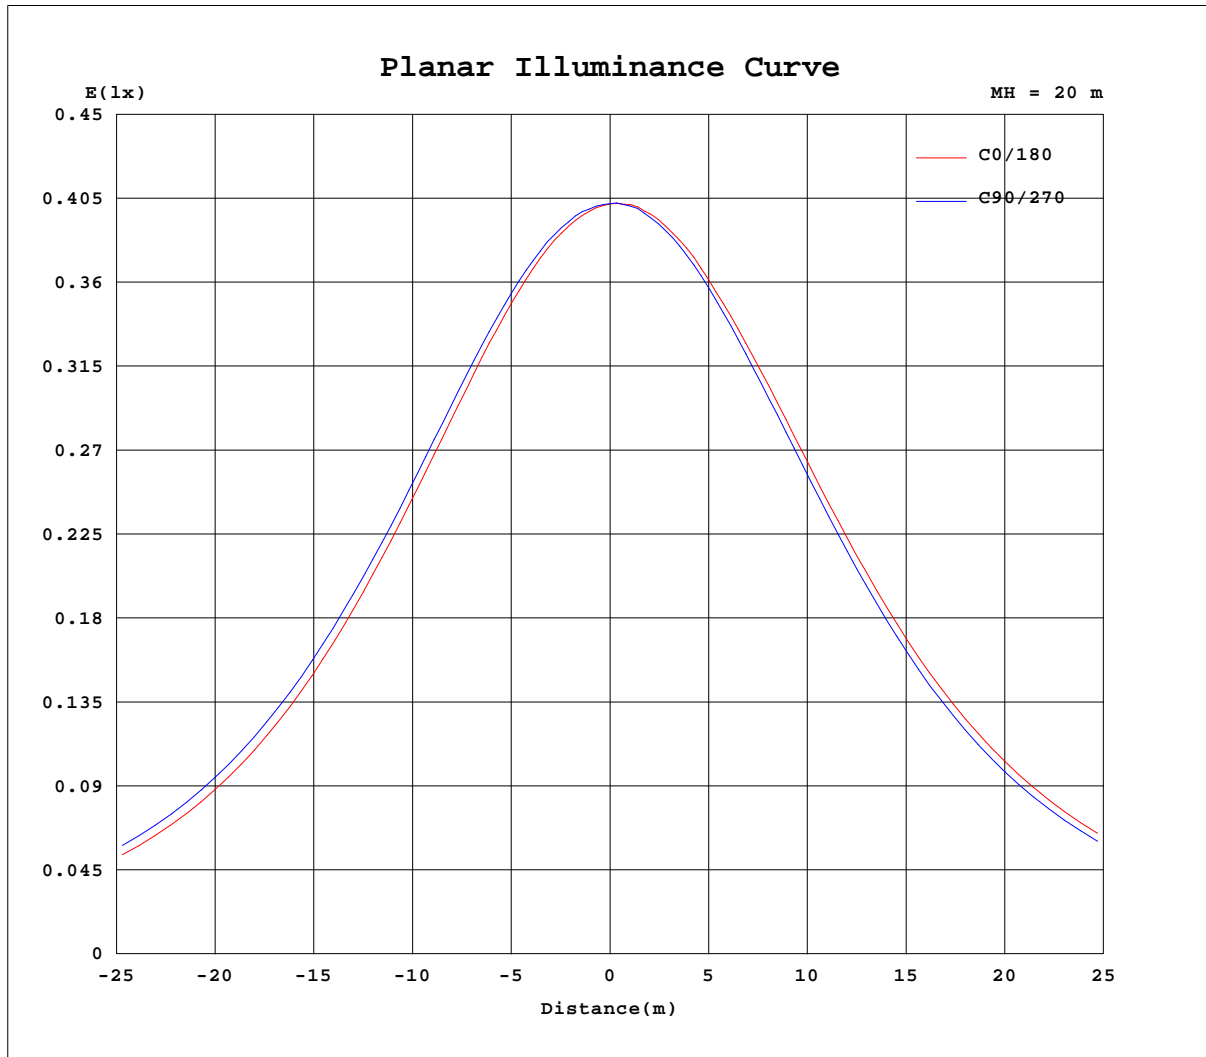

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.2209]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.22V I:0.0505A P:5.7200W PF:0.9416 Freq:60.00Hz Lamp Flux:460.164x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.06	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	161	161	161	161	161	161	161	161	161	161	161	161						
5	159	159	159	160	160	161	161	161	161	161	160	159						
10	156	156	157	158	159	160	160	160	160	159	158	157						
15	152	152	153	154	156	157	158	158	157	156	154	153						
20	146	146	147	150	151	153	154	154	153	151	150	148						
25	139	139	141	143	146	148	149	149	148	146	143	141						
30	131	131	133	136	139	141	143	143	141	139	136	133						
35	122	122	124	127	130	134	136	135	134	131	128	124						
40	111	112	114	118	121	125	127	127	125	121	118	114						
45	99.9	100	103	107	111	115	117	117	115	111	107	103						
50	87.9	88.2	90.9	95.8	99.8	104	106	106	104	99.5	95.6	91.0						
55	75.3	75.5	78.0	83.7	87.9	92.1	94.5	94.1	91.8	87.6	83.5	78.6						
60	62.3	62.2	64.8	69.6	74.1	79.8	82.3	81.7	79.3	75.1	70.9	65.8						
65	49.2	48.6	50.6	53.8	58.9	66.8	69.6	68.9	65.9	61.0	58.0	52.9						
70	36.3	34.8	35.2	37.4	42.6	51.7	56.5	55.8	50.1	44.9	43.7	39.9						
75	23.8	21.4	20.2	21.2	25.7	35.4	43.4	41.1	32.9	27.2	27.1	26.9						
80	12.1	9.46	5.78	5.43	8.48	18.3	29.7	24.6	14.9	9.23	10.5	12.5						
85	0.38	0.15	0.12	0.41	0.26	0.93	9.16	7.98	2.59	4.10	0.55	1.08						
90	0.00	0.00	0.03	0.00	0.00	2.30	0.23	2.44	0.02	0.00	0.00	0.06						
95	0.00	0.03	0.00	0.39	1.15	0.01	0.02	0.00	0.08	0.01	0.04	0.00						
100	0.00	0.06	0.00	0.07	0.20	0.11	0.07	0.00	0.07	0.01	0.09	0.01						
105	0.05	0.12	0.03	0.15	0.17	0.11	0.09	0.03	0.10	0.04	0.12	0.05						
110	0.11	0.17	0.08	0.19	0.17	0.16	0.13	0.09	0.15	0.09	0.19	0.12						
115	0.17	0.23	0.12	0.24	0.18	0.21	0.20	0.15	0.19	0.14	0.26	0.19						
120	0.21	0.26	0.18	0.30	0.20	0.24	0.26	0.19	0.24	0.21	0.29	0.22						
125	0.25	0.30	0.22	0.33	0.25	0.26	0.30	0.21	0.28	0.26	0.33	0.24						
130	0.29	0.33	0.25	0.37	0.27	0.30	0.34	0.25	0.32	0.29	0.37	0.29						
135	0.32	0.37	0.27	0.38	0.30	0.36	0.40	0.28	0.34	0.33	0.39	0.31						
140	0.34	0.40	0.30	0.39	0.33	0.39	0.43	0.31	0.40	0.36	0.40	0.33						
145	0.38	0.42	0.33	0.39	0.37	0.45	0.44	0.34	0.44	0.39	0.42	0.39						
150	0.39	0.43	0.36	0.43	0.41	0.47	0.47	0.36	0.47	0.42	0.51	0.43						
155	0.41	0.47	0.40	0.47	0.43	0.48	0.52	0.39	0.49	0.44	0.53	0.45						
160	0.43	0.49	0.42	0.50	0.44	0.51	0.54	0.42	0.51	0.45	0.54	0.45						
165	0.45	0.52	0.45	0.54	0.45	0.53	0.55	0.47	0.54	0.49	0.55	0.48						
170	0.47	0.54	0.49	0.56	0.49	0.53	0.56	0.50	0.55	0.50	0.56	0.51						
175	0.50	0.56	0.51	0.59	0.53	0.54	0.56	0.52	0.56	0.51	0.56	0.51						
180	0.57	0.58	0.51	0.60	0.57	0.53	0.57	0.60	0.59	0.52	0.57	0.51						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.2209]  
 Remarks: