
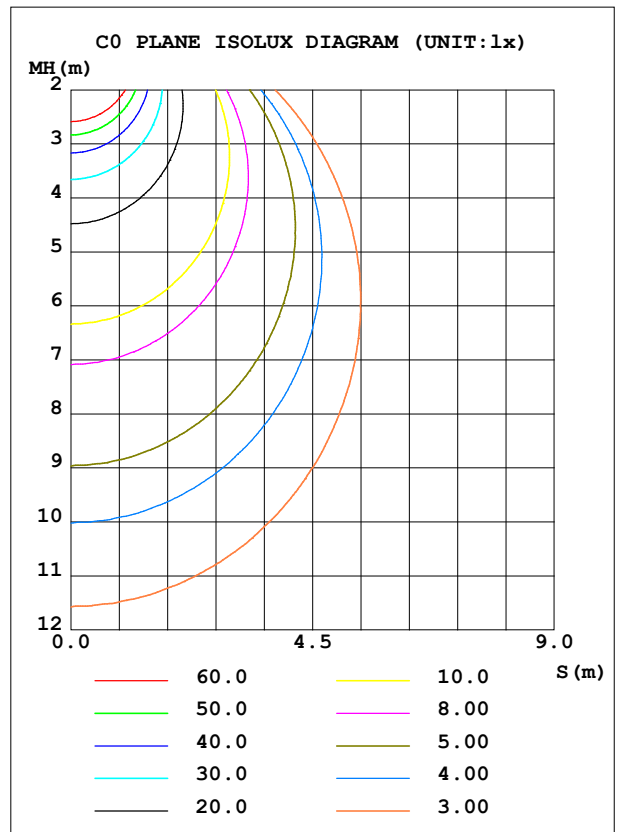


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 85.15 lm/W
MODEL	SD-LRKS-6D12AC-XX(3500K)	I _{max} (cd)	402.7	S/MH (C0/180)		1.22
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)		1.21
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	986.89	<input type="checkbox"/> UP, DN (C0-180)		0.2,50.2
NOMINAL FLUX (lm)	986.89	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)		0.2,49.4
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.4	CIBSE SHR NOM		1.25
TEST VOLTAGE (V)	120.0	<input type="checkbox"/> down (%)	99.6	CIBSE SHR MAX		1.35

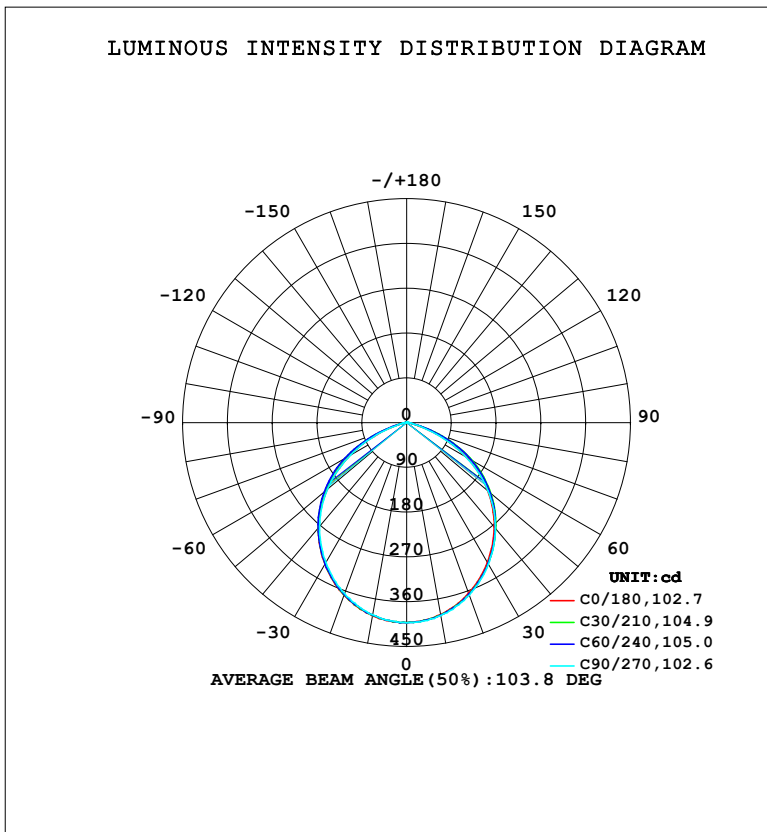

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


☐	C0	C45	C90	C135	C180	C225	C270	C315	☐	☐ zone	☐ total	%lum,lamp
10	391.8	392.7	394.2	394.3	394.3	393.8	392.0	392.5	0- 10	37.94	37.94	3.84,3.84
20	364.5	366.6	368.8	369.3	369.1	368.3	365.1	366.6	10- 20	107.8	145.7	14.8,14.8
30	324.3	327.4	329.0	329.9	328.4	328.1	324.3	326.3	20- 30	160.7	306.4	31,31
40	273.7	278.0	277.6	279.2	276.4	276.5	272.7	276.4	30- 40	189.6	496.0	50.3,50.3
50	212.4	220.2	213.8	218.2	208.3	215.0	207.7	217.8	40- 50	190.7	686.6	69.6,69.6
60	138.3	151.5	137.0	146.3	130.9	142.9	130.5	148.8	50- 60	160.9	847.6	85.9,85.9
70	55.60	68.50	54.93	62.65	48.71	59.23	49.22	65.87	60- 70	100.4	947.9	96.1,96.1
80	10.11	10.88	10.21	10.00	8.880	9.513	9.078	10.40	70- 80	29.89	977.8	99.1,99.1
90	0.1653	0.0648	0.0221	0.0505	0.0387	0.0226	0.0000	0.0149	80- 90	4.747	982.6	99.6,99.6
100	0.1102	0.2040	0.2040	0.1874	0.2154	0.1378	0.0935	0.1212	90-100	0.0866	982.7	99.6,99.6
110	0.3196	0.4631	0.4630	0.4462	0.4691	0.3584	0.3193	0.3388	100-110	0.2910	983.0	99.6,99.6
120	0.5623	0.7389	0.7603	0.7024	0.7669	0.6011	0.5946	0.5841	110-120	0.5248	983.5	99.7,99.7
130	0.8269	1.001	1.041	0.9477	0.9818	0.8492	0.8480	0.8155	120-130	0.7065	984.2	99.7,99.7
140	0.9981	1.194	1.267	1.143	1.092	1.031	1.024	1.017	130-140	0.7804	985.0	99.8,99.8
150	1.169	1.354	1.410	1.287	1.269	1.208	1.184	1.182	140-150	0.7369	985.7	99.9,99.9
160	1.340	1.464	1.499	1.422	1.451	1.409	1.388	1.394	150-160	0.6160	986.3	99.9,99.9
170	1.384	1.586	1.614	1.573	1.589	1.577	1.559	1.554	160-170	0.4203	986.7	100,100
180	1.682	1.632	1.658	1.667	1.704	1.687	1.686	1.689	170-180	0.1540	986.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

☐ Range: 0 - 180DEG
 ☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

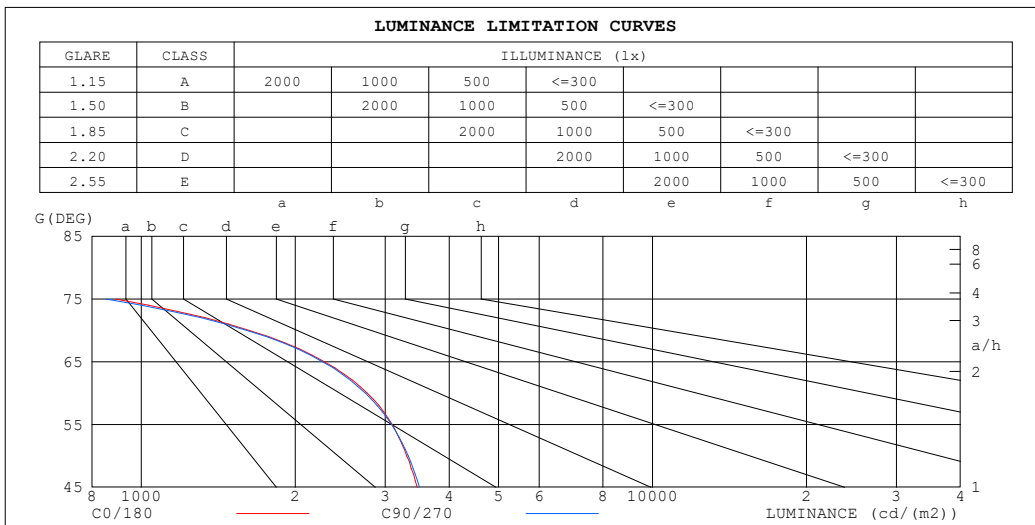

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	521	533
80	582	588
75	890	854
70	1625	1607
65	2279	2261
60	2765	2742
55	3094	3086
50	3302	3328
45	3467	3501


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.87	.82	.92	.86	.81	.88	.83	.79	.85	.81	.77	.82	.79	.76	.74
3.0	.83	.75	.69	.81	.74	.69	.78	.72	.67	.76	.70	.66	.73	.69	.65	.63
4.0	.74	.66	.59	.72	.65	.59	.70	.63	.58	.68	.62	.57	.65	.61	.56	.54
5.0	.66	.58	.51	.65	.57	.51	.63	.56	.51	.61	.55	.50	.59	.54	.49	.47
6.0	.60	.51	.45	.59	.51	.45	.57	.50	.44	.55	.49	.44	.54	.48	.44	.42
7.0	.54	.46	.40	.53	.45	.40	.52	.45	.40	.50	.44	.39	.49	.43	.39	.37
8.0	.50	.41	.36	.49	.41	.36	.48	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.46	.38	.32	.45	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.30
10.0	.42	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27

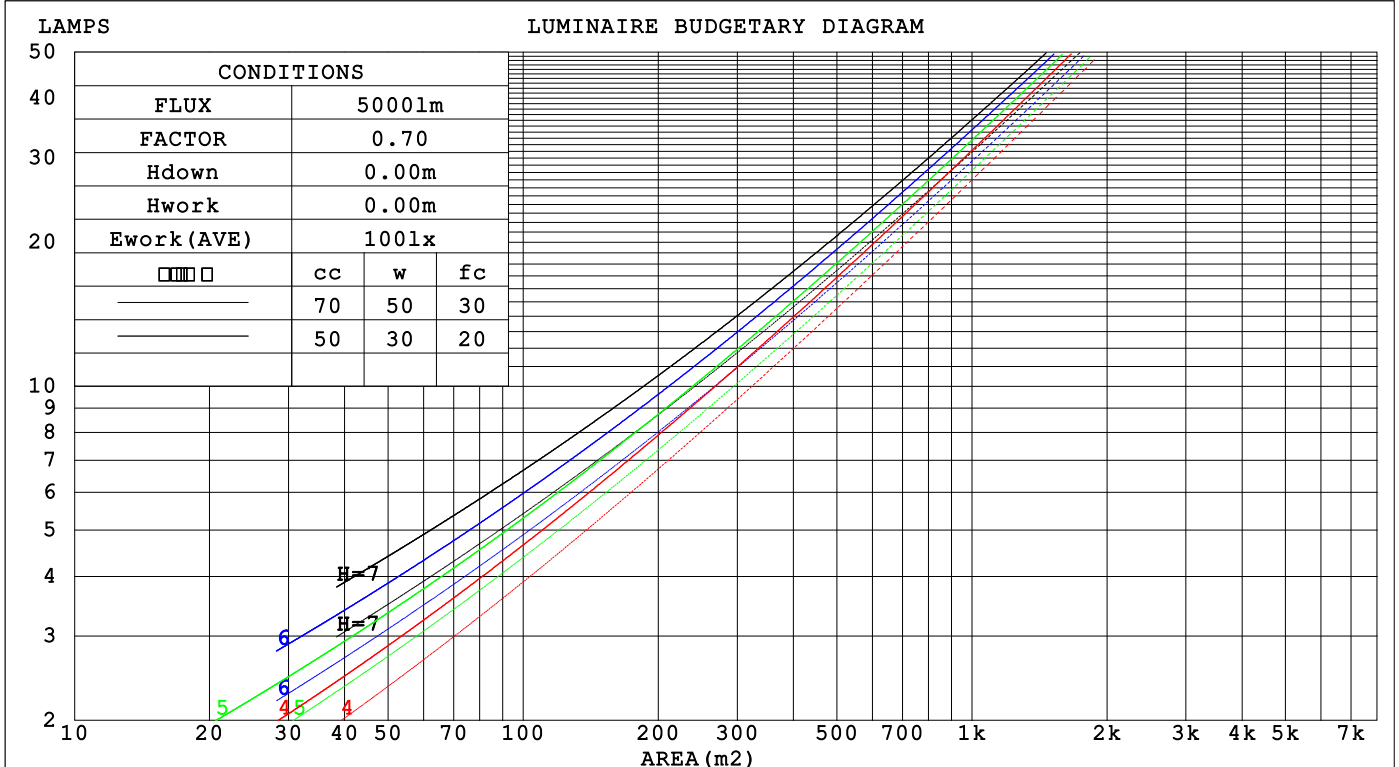

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

WEC AND CCEC

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.269	.153	.048	.262	.149	.047	.248	.142	.045	.236	.136	.044	.225	.130	.042	
2.0	.261	.143	.044	.255	.140	.043	.243	.135	.042	.233	.131	.041	.223	.126	.040	
3.0	.247	.131	.039	.242	.129	.039	.231	.125	.038	.222	.122	.037	.213	.118	.036	
4.0	.232	.120	.035	.227	.119	.035	.218	.115	.034	.209	.112	.034	.201	.109	.033	
5.0	.217	.110	.032	.212	.109	.032	.204	.106	.031	.197	.104	.031	.190	.101	.030	
6.0	.203	.102	.029	.199	.100	.029	.192	.098	.029	.185	.096	.028	.178	.094	.028	
7.0	.190	.094	.027	.186	.093	.026	.180	.091	.026	.174	.089	.026	.168	.087	.026	
8.0	.178	.087	.024	.175	.086	.024	.169	.085	.024	.164	.083	.024	.159	.082	.024	
9.0	.168	.081	.023	.165	.080	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.158	.076	.021	.156	.075	.021	.151	.074	.021	.147	.073	.021	.142	.072	.021	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.181	.160	.141	.155	.137	.121	.106	.094	.084	.061	.055	.049	.020	.018	.016	
2.0	.172	.135	.105	.147	.117	.091	.101	.081	.063	.058	.047	.037	.019	.015	.012	
3.0	.163	.118	.081	.140	.101	.070	.096	.070	.049	.056	.041	.029	.018	.013	.010	
4.0	.156	.104	.064	.134	.090	.056	.092	.063	.039	.053	.037	.023	.017	.012	.008	
5.0	.149	.093	.053	.128	.081	.046	.088	.056	.032	.051	.033	.019	.016	.011	.006	
6.0	.142	.085	.044	.122	.074	.038	.084	.052	.027	.049	.030	.016	.016	.010	.005	
7.0	.135	.078	.038	.117	.068	.033	.081	.047	.023	.047	.028	.014	.015	.009	.005	
8.0	.129	.072	.033	.111	.063	.029	.077	.044	.020	.045	.026	.012	.015	.009	.004	
9.0	.124	.067	.029	.106	.058	.026	.074	.041	.018	.043	.024	.011	.014	.008	.004	
10.0	.118	.063	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: LED DOWNLIGHT		TYPE:					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.: ASD LIGHTING CORP		SUR.: 0.1*0.1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	16.9	18.4	17.2	18.6	18.8	16.9	18.3	17.1	18.5	18.7	
3H	17.7	19.0	18.0	19.2	19.5	17.6	18.9	17.9	19.2	19.4	
4H	17.8	19.0	18.1	19.3	19.5	17.7	18.9	18.0	19.2	19.5	
6H	17.7	18.9	18.1	19.2	19.4	17.7	18.8	18.0	19.1	19.4	
8H	17.7	18.8	18.0	19.1	19.4	17.6	18.7	18.0	19.0	19.3	
12H	17.7	18.7	18.0	19.0	19.3	17.6	18.7	17.9	19.0	19.3	
4H 2H	17.4	18.7	17.7	18.9	19.2	17.4	18.6	17.7	18.9	19.1	
3H	18.3	19.4	18.7	19.7	20.0	18.3	19.3	18.6	19.6	19.9	
4H	18.5	19.4	18.8	19.8	20.1	18.4	19.4	18.8	19.7	20.0	
6H	18.4	19.3	18.8	19.7	20.0	18.4	19.2	18.8	19.6	19.9	
8H	18.4	19.2	18.8	19.6	20.0	18.3	19.1	18.8	19.5	19.9	
12H	18.4	19.1	18.8	19.5	19.9	18.3	19.1	18.8	19.4	19.9	
8H 4H	18.5	19.3	18.9	19.6	20.0	18.4	19.2	18.8	19.6	19.9	
6H	18.5	19.1	18.9	19.5	20.0	18.4	19.1	18.9	19.5	19.9	
8H	18.5	19.1	19.0	19.5	20.0	18.4	19.0	18.9	19.4	19.9	
12H	18.5	19.0	19.0	19.4	19.9	18.4	18.9	18.9	19.4	19.8	
12H 4H	18.4	19.2	18.9	19.5	20.0	18.4	19.1	18.8	19.5	19.9	
6H	18.5	19.0	18.9	19.5	19.9	18.4	19.0	18.8	19.4	19.8	
8H	18.5	19.0	19.0	19.4	19.9	18.4	18.9	18.9	19.3	19.8	
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4					
1.5H	+ 0.4 / - 0.6					+ 0.3 / - 0.6					
2.0H	+ 0.5 / - 0.7					+ 0.5 / - 0.7					

CIE Pub.117, 986.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.0)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	43	60	49	42	58	48	42	36
0.80	71	60	53	70	59	53	68	59	52	46
1.00	79	69	62	78	69	62	76	70	62	55
1.25	87	77	70	85	76	70	82	75	69	62
1.50	91	82	76	90	82	76	87	80	74	67
2.00	98	90	85	96	89	84	93	87	82	75
2.50	101	94	89	99	93	88	96	90	86	78
3.00	104	98	94	102	97	92	98	94	90	82
4.00	108	103	99	106	101	98	102	98	95	86
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

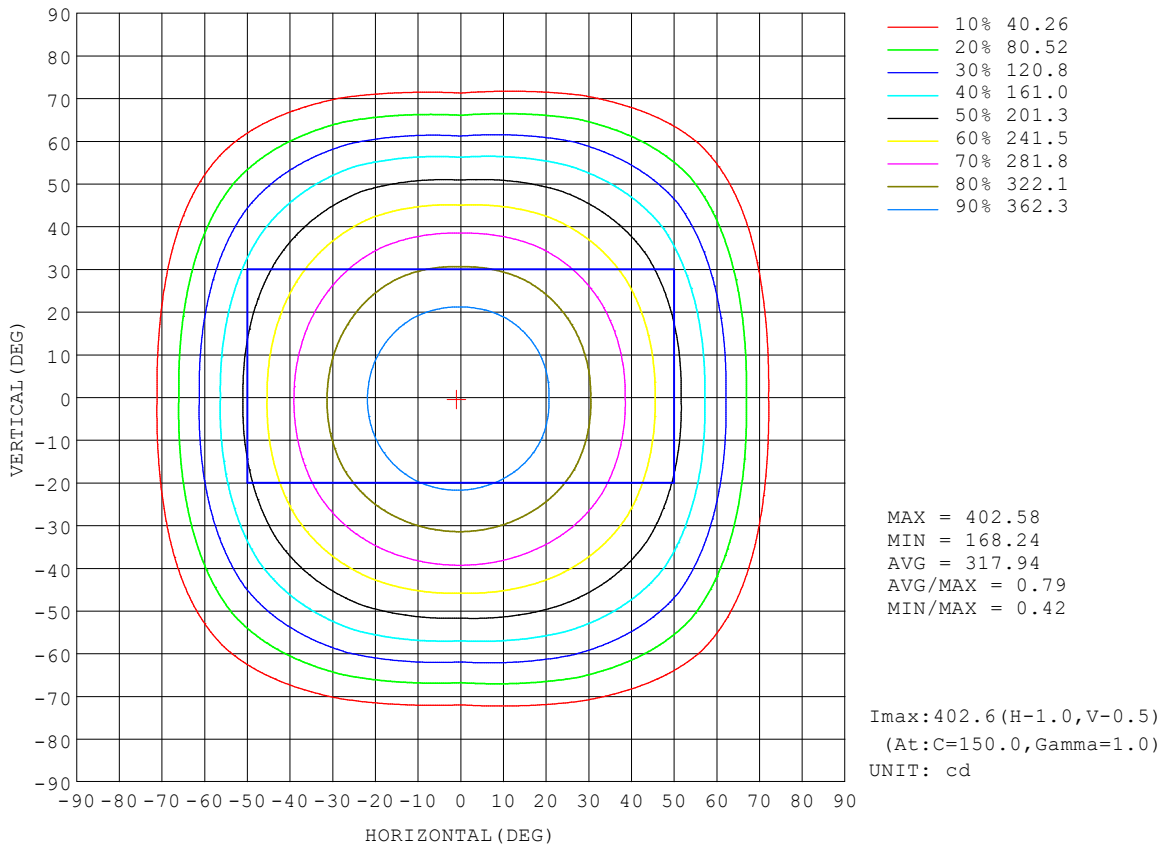


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

AAI Figure

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

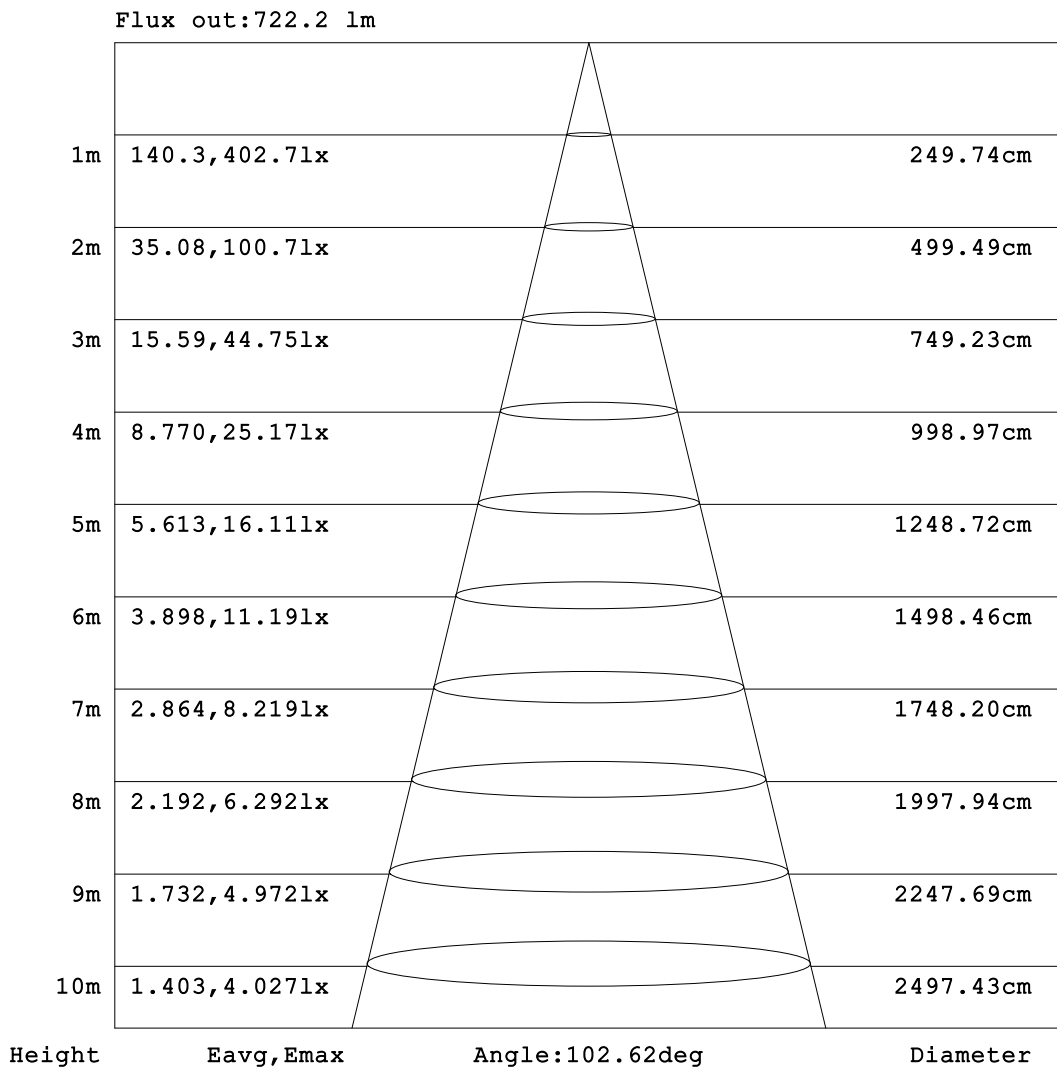


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

ISOLUX DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

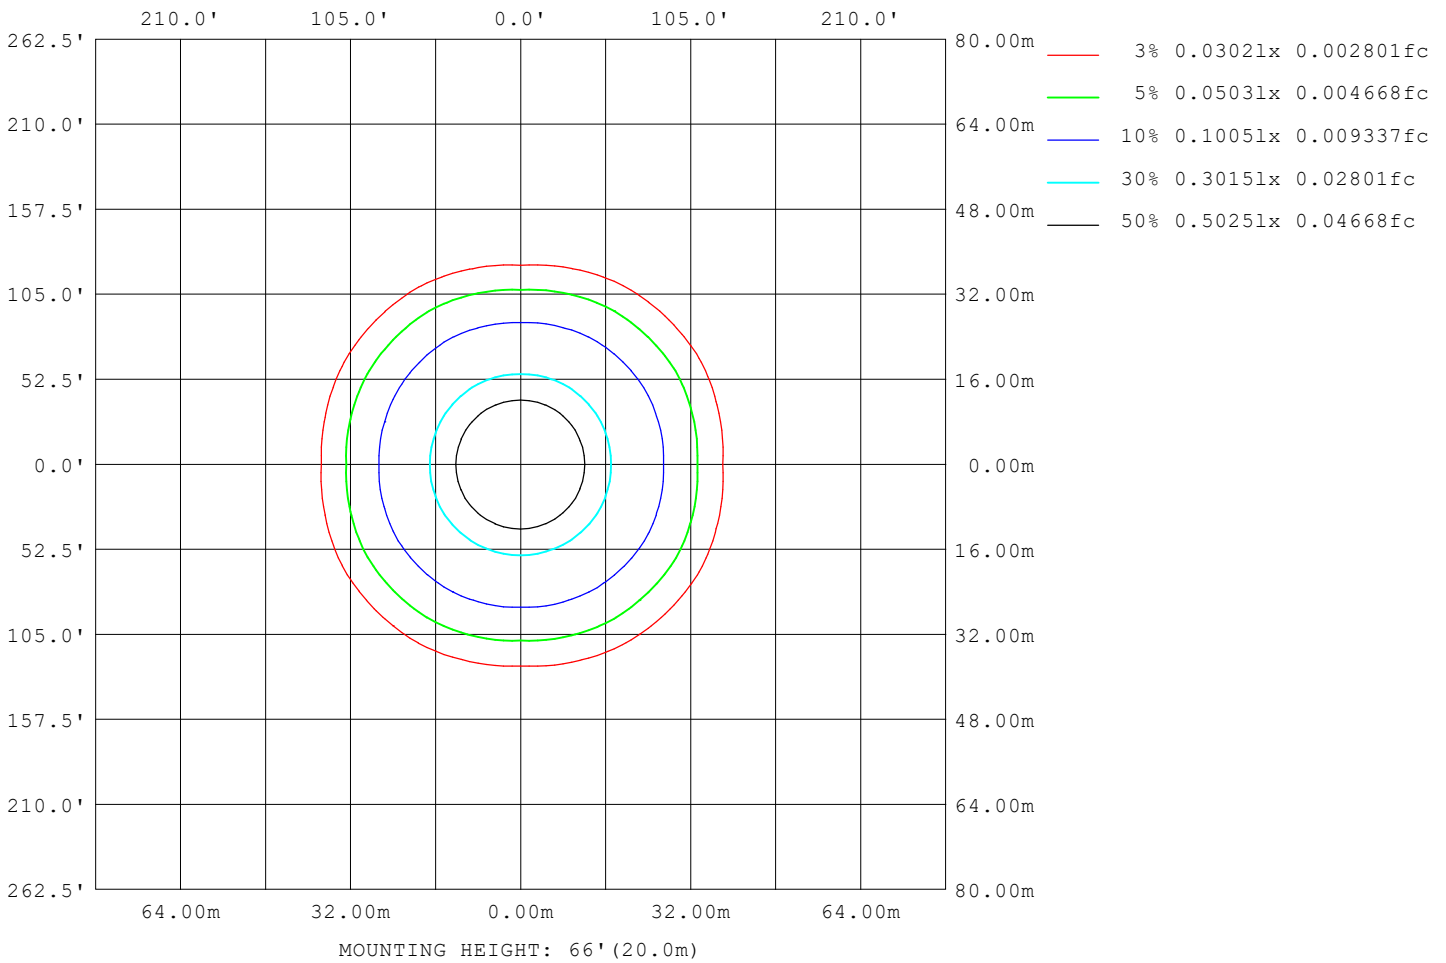

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

LED Avg.L Report

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2199
L_0~180 (75) av	788
L_0~180 (85) av	477
L_90~270 (65) av	2183
L_90~270 (75) av	786
L_90~270 (85) av	486
L_45 (65) av	2558
L_45 (75) av	1074
L_45 (85) av	472

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

Planar Illuminance Curve

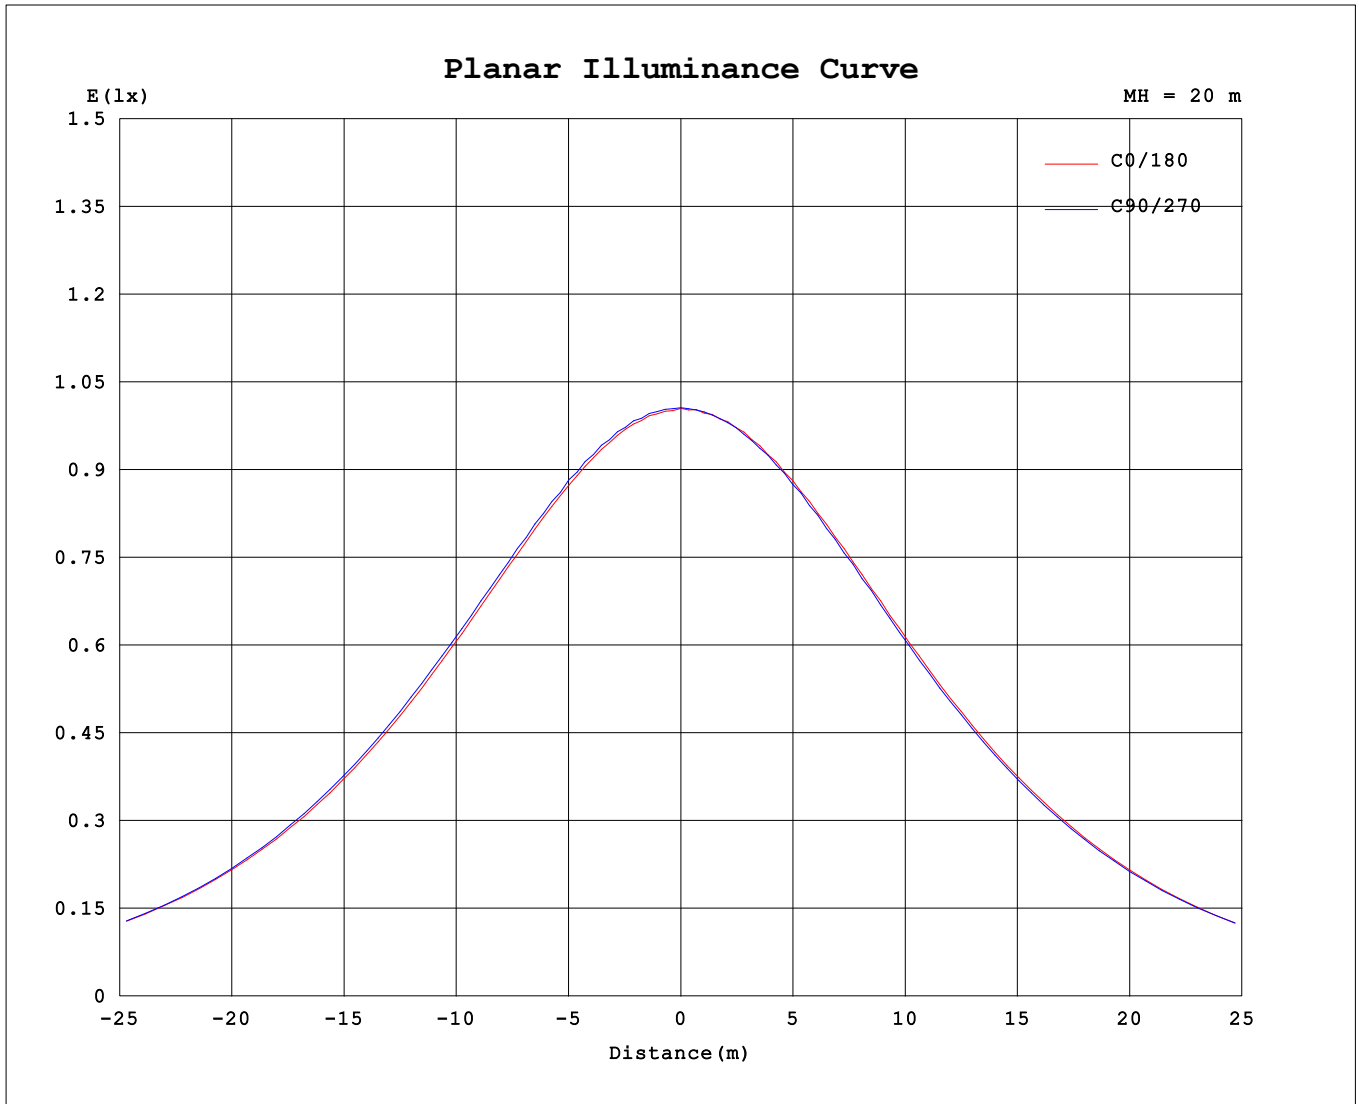

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	402	402	402	402	402	402	402	402	402	402	402	402							
5	398	398	399	400	400	401	399	399	399	399	399	400							
10	392	393	393	394	394	394	394	394	393	392	393	392							
15	380	381	382	382	384	385	383	382	382	382	382	381							
20	364	367	366	369	369	369	369	369	368	365	367	366							
25	346	349	349	350	350	352	350	349	349	347	348	347							
30	324	328	327	329	329	330	328	328	328	324	327	326							
35	301	304	303	305	305	306	304	303	303	300	303	301							
40	274	278	278	278	279	279	276	276	277	273	277	276							
45	245	251	249	247	250	250	244	247	248	241	248	248							
50	212	221	219	214	219	218	208	214	216	208	217	219							
55	178	189	186	177	184	182	171	179	182	170	183	186							
60	138	153	150	137	147	145	131	142	144	131	147	151							
65	96.4	112	110	95.5	106	104	89.5	101	102	89.0	106	110							
70	55.6	69.2	67.8	54.9	63.5	61.8	48.7	58.6	59.9	49.2	64.7	67.1							
75	23.1	31.0	29.6	22.1	26.6	25.0	17.7	22.7	24.3	18.6	27.5	29.1							
80	10.1	11.0	10.8	10.2	10.2	9.78	8.88	9.32	9.71	9.08	10.3	10.5							
85	4.55	4.99	4.80	4.64	4.28	4.06	3.76	2.94	3.93	3.83	4.43	3.52							
90	0.17	0.09	0.04	0.02	0.07	0.03	0.04	0.03	0.02	0.00	0.01	0.02							
95	0.04	0.15	0.04	0.08	0.09	0.09	0.12	0.03	0.07	0.00	0.07	0.01							
100	0.11	0.26	0.14	0.20	0.20	0.18	0.22	0.12	0.16	0.09	0.15	0.09							
105	0.21	0.40	0.26	0.33	0.33	0.31	0.34	0.23	0.27	0.20	0.25	0.18							
110	0.32	0.53	0.40	0.46	0.46	0.43	0.47	0.33	0.39	0.32	0.37	0.30							
115	0.46	0.67	0.52	0.61	0.60	0.55	0.62	0.45	0.51	0.45	0.50	0.43							
120	0.56	0.82	0.66	0.76	0.74	0.66	0.77	0.57	0.63	0.59	0.63	0.54							
125	0.69	0.95	0.79	0.90	0.86	0.78	0.90	0.71	0.77	0.73	0.76	0.67							
130	0.83	1.08	0.92	1.04	0.99	0.90	0.98	0.82	0.88	0.85	0.85	0.78							
135	0.95	1.16	1.04	1.17	1.10	1.02	1.05	0.92	0.97	0.94	0.96	0.88							
140	1.00	1.26	1.12	1.27	1.18	1.10	1.09	1.01	1.05	1.02	1.07	0.96							
145	1.05	1.32	1.22	1.36	1.25	1.19	1.16	1.10	1.15	1.11	1.14	1.06							
150	1.17	1.42	1.29	1.41	1.32	1.26	1.27	1.20	1.22	1.18	1.21	1.16							
155	1.26	1.47	1.33	1.45	1.37	1.35	1.31	1.29	1.31	1.26	1.32	1.26							
160	1.34	1.51	1.42	1.50	1.42	1.43	1.45	1.38	1.43	1.39	1.42	1.37							
165	1.35	1.53	1.49	1.57	1.48	1.48	1.54	1.48	1.51	1.49	1.50	1.44							
170	1.38	1.60	1.58	1.61	1.54	1.60	1.59	1.57	1.58	1.56	1.58	1.53							
175	1.51	1.66	1.65	1.67	1.63	1.68	1.69	1.69	1.66	1.63	1.68	1.64							
180	1.68	1.61	1.65	1.66	1.68	1.66	1.70	1.69	1.68	1.69	1.69	1.69							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks: