
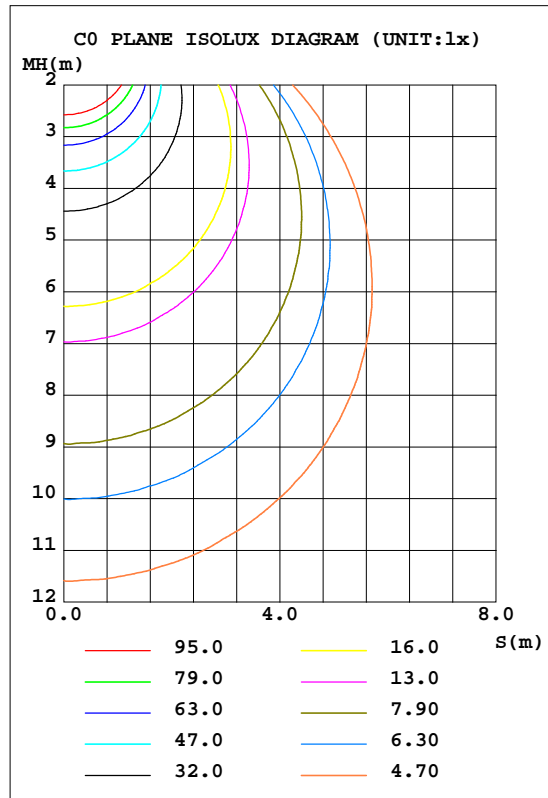


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 75.79 lm/W			
M&B&L&J&B&S-12D24AC-WH(2700K)		I _{max} (cd)	632.2	S/MH(C0/180)	1.25
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1850	h UP, DN(C0-180)	0.2,50.7
NOMINAL FLUX(lm)	1850	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,48.8
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

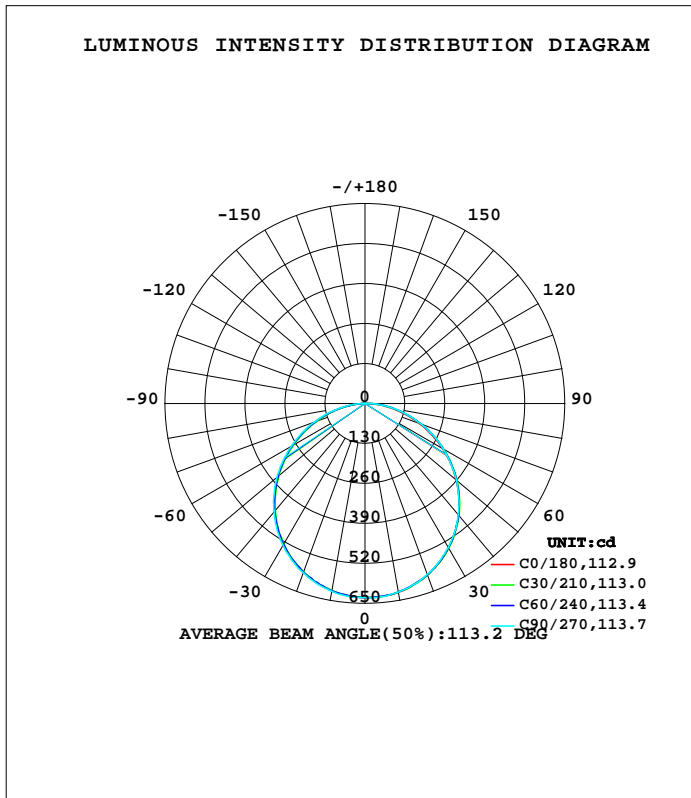

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	623.7	622.5	623.0	620.5	619.2	618.2	619.9	621.8	0- 10	59.78	59.78	3.24,3.24
20	593.5	593.5	592.1	587.7	585.9	583.1	586.4	590.5	10- 20	171.4	231.2	12.5,12.5
30	542.7	543.5	541.6	534.6	530.7	528.4	532.9	538.8	20- 30	260.4	491.7	26.6,26.6
40	474.1	474.4	472.4	463.2	457.9	455.3	459.2	467.8	30- 40	314.7	806.4	43.7,43.7
50	388.6	390.2	388.6	376.7	369.4	367.4	373.6	381.9	40- 50	327.0	1133	61.4,61.4
60	290.7	294.6	293.3	280.6	271.3	269.3	276.1	284.6	50- 60	296.6	1430	77.5,77.5
70	186.2	192.7	192.8	178.9	168.0	167.3	174.1	182.0	60- 70	229.1	1659	89.9,89.9
80	86.19	93.83	93.79	81.47	70.89	70.14	76.03	81.49	70- 80	137.5	1797	97.3,97.3
90	4.503	8.110	6.808	0.7959	0.2338	0.2755	0.2806	0.4297	80- 90	41.67	1838	99.6,99.6
100	0.4767	0.4489	0.4627	0.5089	0.5470	0.6028	0.5714	0.5040	90-100	0.5312	1839	99.6,99.6
110	0.7550	0.8135	0.8206	0.8838	0.9048	0.9946	0.9592	0.9234	100-110	0.7386	1839	99.6,99.6
120	1.053	1.173	1.139	1.219	1.273	1.367	1.362	1.266	110-120	1.058	1841	99.7,99.7
130	1.376	1.464	1.432	1.542	1.576	1.657	1.626	1.584	120-130	1.249	1842	99.8,99.8
140	1.610	1.709	1.686	1.780	1.789	1.880	1.778	1.778	130-140	1.278	1843	99.8,99.8
150	1.844	1.942	1.949	2.001	2.028	2.141	1.909	1.956	140-150	1.174	1844	99.9,99.9
160	2.132	2.180	2.263	2.296	2.351	2.351	2.188	2.237	150-160	0.9768	1845	100,100
170	2.355	2.510	2.501	2.507	2.545	2.639	2.585	2.500	160-170	0.6757	1846	100,100
180	2.624	2.731	2.844	2.577	2.594	2.773	2.680	2.619	170-180	0.2461	1846	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

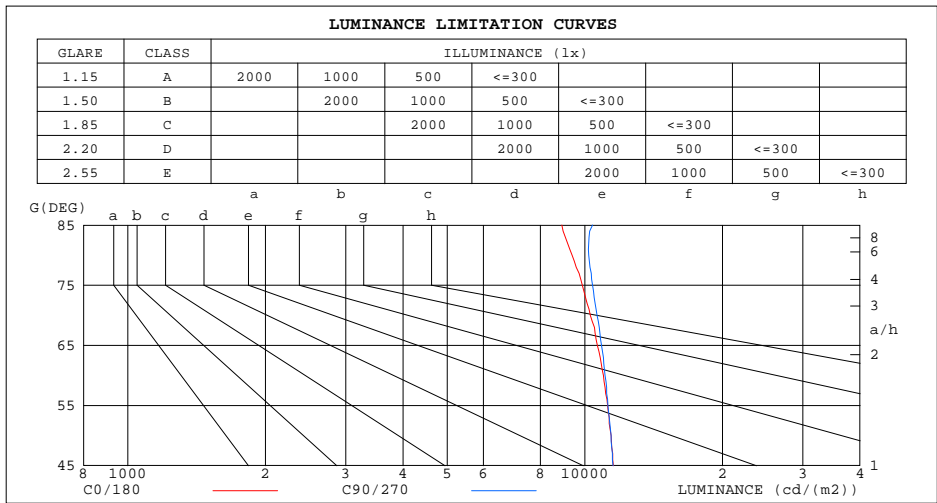

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	8909	10390
80	9375	10196
75	9868	10398
70	10281	10640
65	10660	10871
60	10982	11076
55	11212	11232
50	11420	11413
45	11552	11522


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

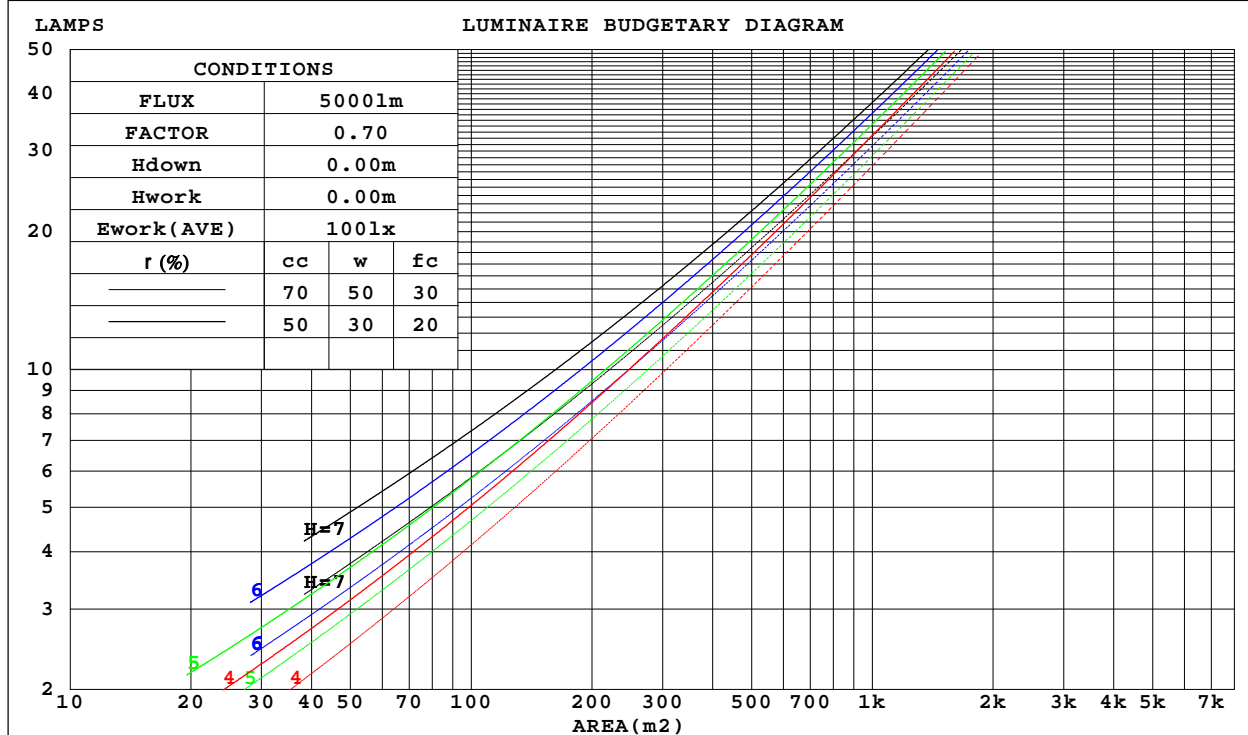

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

WEC AND CCEC

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.316	.180	.057	.309	.176	.056	.296	.170	.054	.283	.163	.052	.272	.157	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.154	.048	.267	.150	.047	.256	.145	.046	
3.0	.273	.145	.044	.267	.143	.043	.257	.139	.042	.247	.135	.042	.238	.132	.041	
4.0	.251	.131	.038	.246	.129	.038	.237	.126	.038	.228	.123	.037	.220	.120	.036	
5.0	.232	.118	.034	.228	.117	.034	.219	.114	.034	.211	.112	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.047	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.101	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.053	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.126	.074	.037	.087	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.036	.120	.068	.032	.083	.048	.023	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.127	.068	.029	.109	.059	.025	.076	.042	.018	.044	.025	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.022	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: ASD LIGHTNG CORP			SUR.: 0.23*0.23			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.7	22.3	21.1	22.7	23.0	20.5	22.2	20.9	22.5	22.8
3H	22.6	24.1	23.0	24.4	24.8	22.5	24.0	22.9	24.3	24.7
4H	23.4	24.8	23.8	25.1	25.5	23.3	24.7	23.7	25.1	25.5
6H	23.9	25.2	24.4	25.6	26.0	24.0	25.3	24.4	25.6	26.0
8H	24.2	25.4	24.6	25.8	26.2	24.2	25.5	24.6	25.9	26.3
12H	24.3	25.5	24.7	25.9	26.3	24.4	25.6	24.8	26.0	26.4
4H 2H	21.4	22.8	21.8	23.1	23.5	21.2	22.6	21.6	22.9	23.3
3H	23.5	24.7	23.9	25.1	25.5	23.4	24.5	23.8	24.9	25.3
4H	24.4	25.5	24.9	25.9	26.4	24.3	25.4	24.7	25.8	26.2
6H	25.2	26.1	25.6	26.5	27.0	25.1	26.0	25.5	26.5	26.9
8H	25.4	26.3	25.9	26.8	27.2	25.4	26.3	25.9	26.7	27.2
12H	25.6	26.4	26.1	26.9	27.4	25.7	26.4	26.1	26.9	27.4
8H 4H	24.8	25.7	25.3	26.1	26.6	24.6	25.5	25.1	25.9	26.4
6H	25.7	26.4	26.2	26.9	27.4	25.5	26.3	26.0	26.8	27.2
8H	26.1	26.7	26.6	27.2	27.7	25.9	26.6	26.4	27.1	27.6
12H	26.4	27.0	26.9	27.5	28.0	26.3	26.9	26.8	27.4	27.9
12H 4H	24.9	25.7	25.4	26.1	26.6	24.6	25.4	25.1	25.9	26.4
6H	25.8	26.5	26.3	26.9	27.5	25.6	26.3	26.1	26.7	27.3
8H	26.2	26.8	26.8	27.3	27.9	26.1	26.6	26.6	27.1	27.7
CIE190: 2010										

CIE190: 2010
Area: 0.0529 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-11

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	77	70	83	75	69	61
2.00	94	86	79	93	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

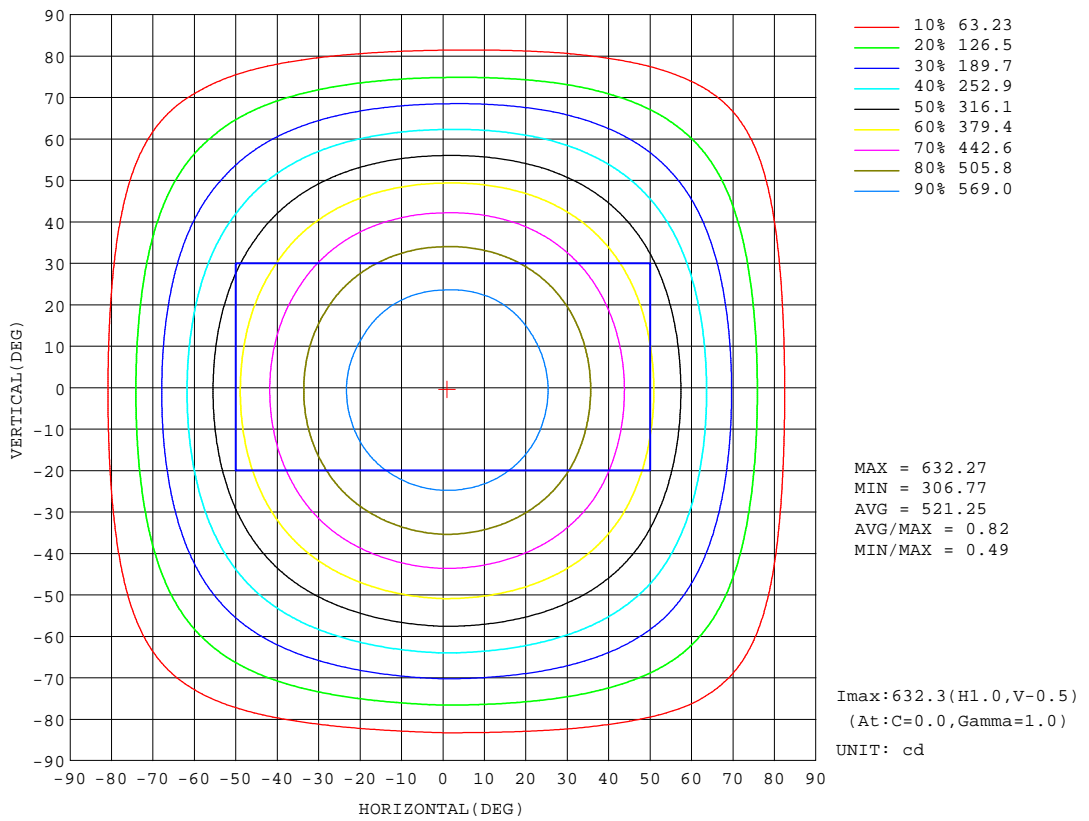


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

AAI Figure

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

Flux out:1347 lm

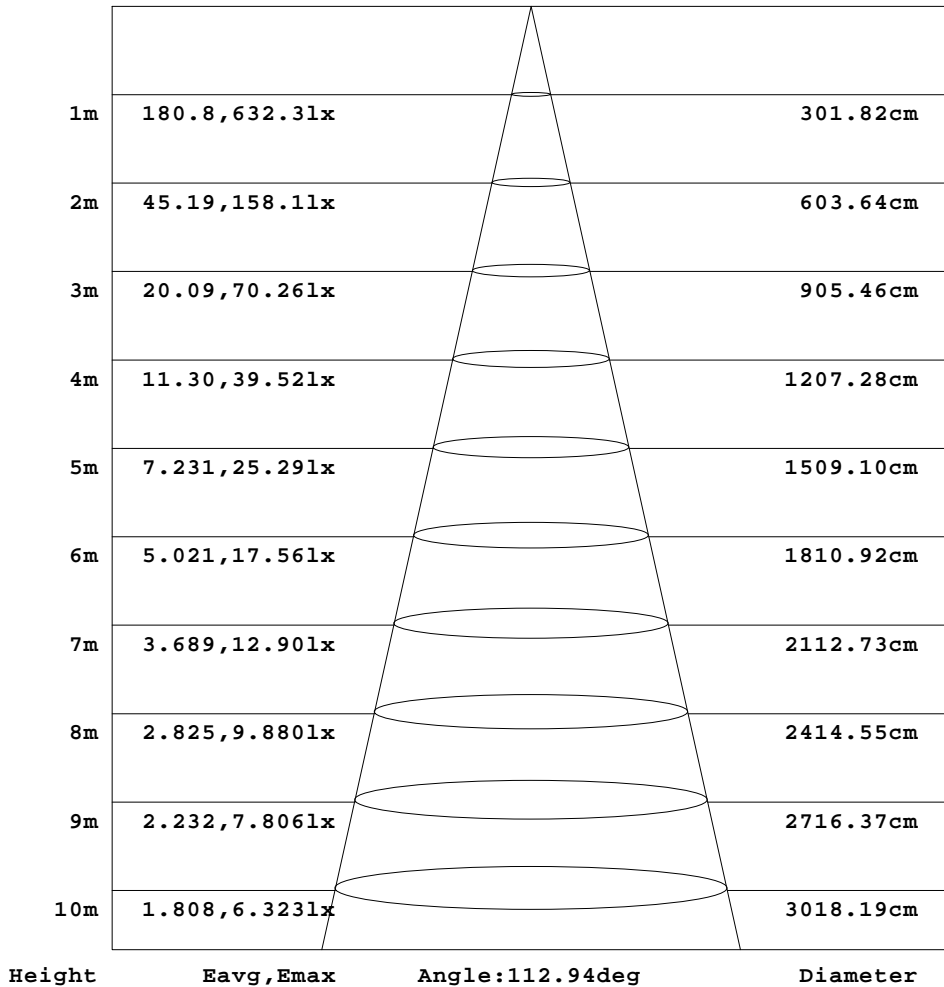


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

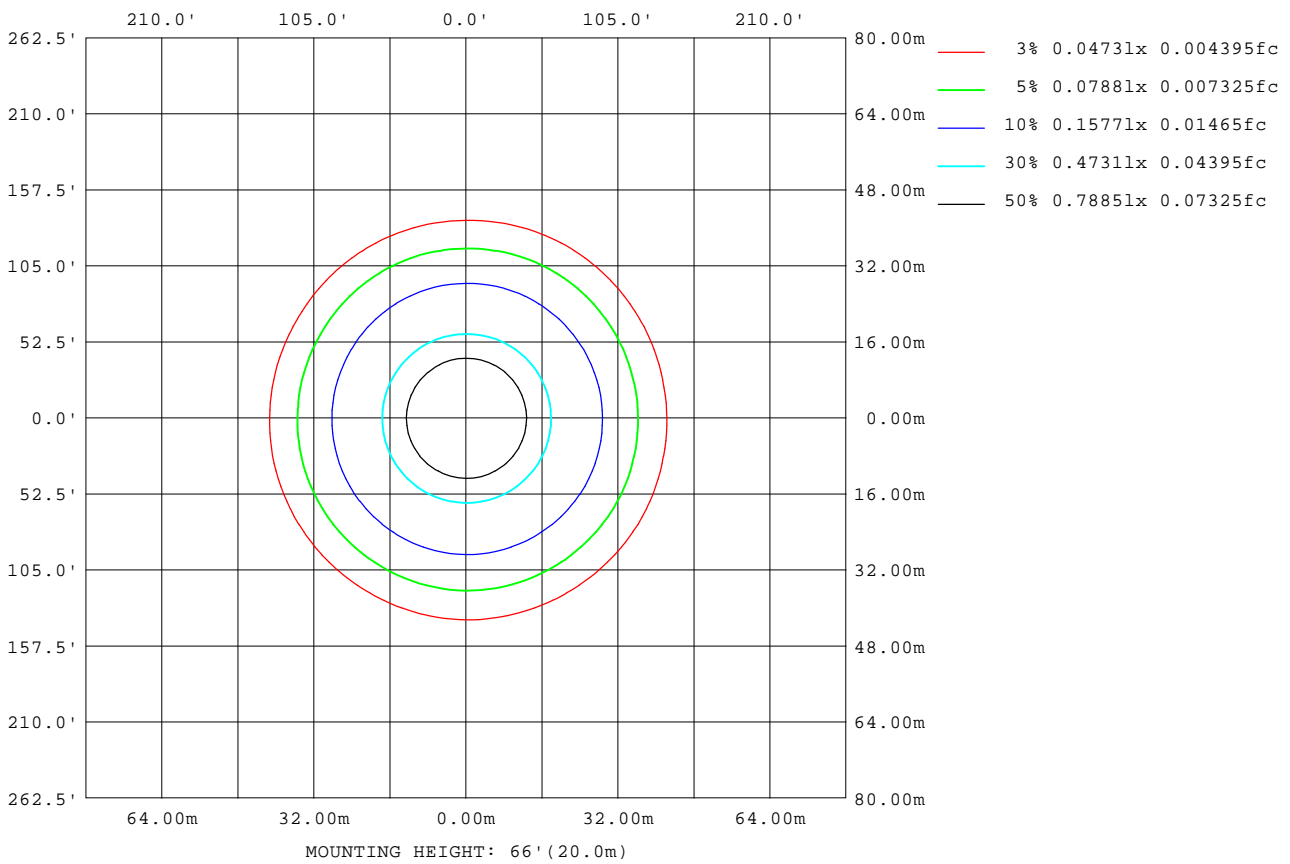

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

LED Avg.L Report

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	10245
L_0~180(75)av	9242
L_0~180(85)av	7467
L_90~270(65)av	10476
L_90~270(75)av	9748
L_90~270(85)av	8562
L_45(65)av	10352
L_45(75)av	9501
L_45(85)av	7955

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-11

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks:

Planar Illuminance Curve

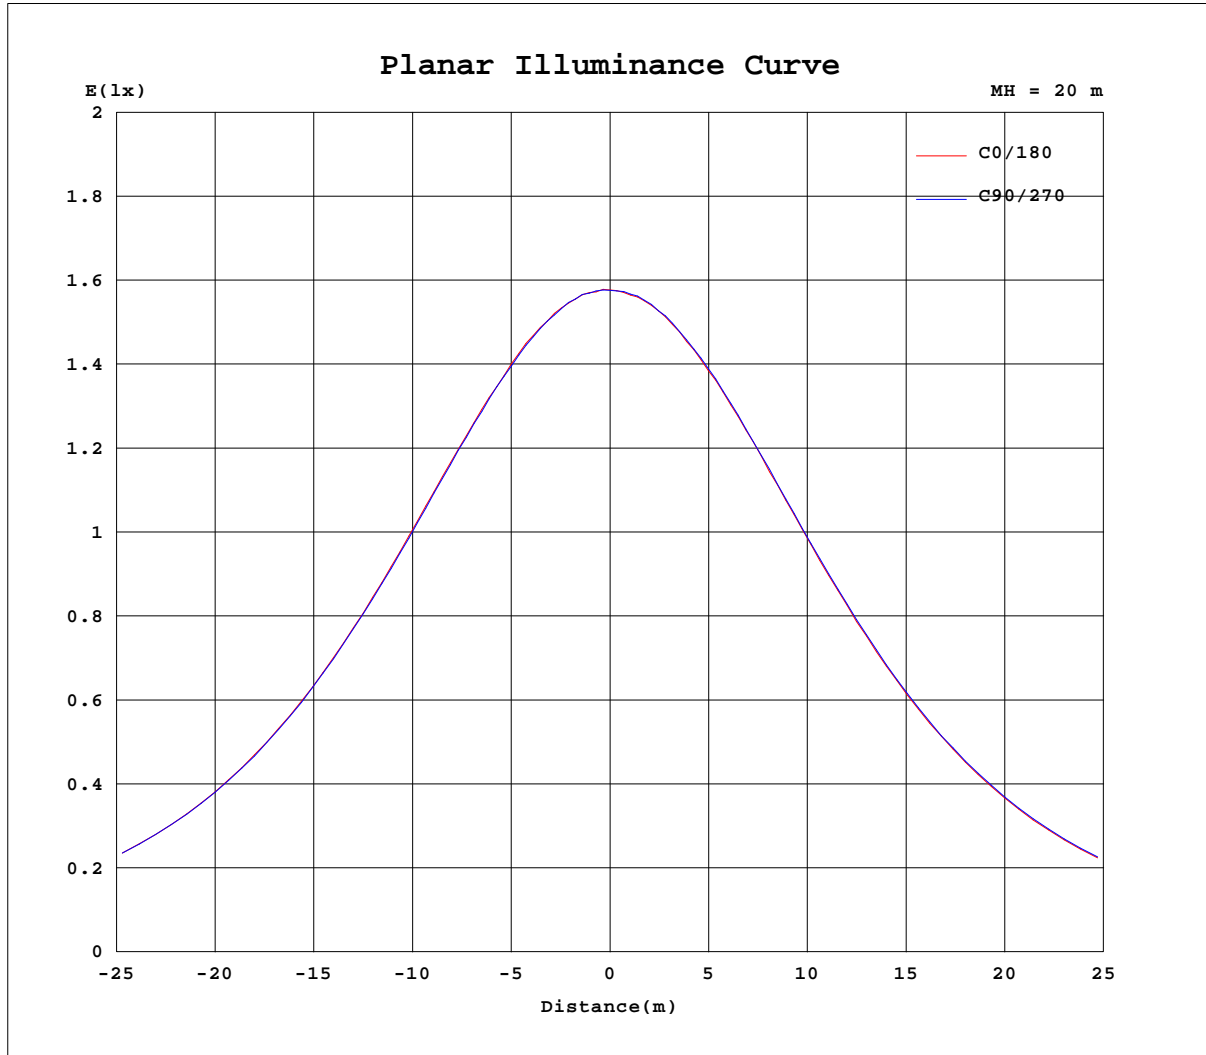

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.18V I:0.2060A P:24.411W PF:0.9859 Freq:59.98Hz Lamp Flux:1850x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	631	631	631	631	631	631	631	631	631	631	631	631						
5	630	630	629	630	629	628	628	627	627	629	629	629						
10	624	623	622	623	621	620	619	618	618	620	622	622						
15	610	611	610	610	607	605	605	603	603	607	608	609						
20	593	594	593	592	589	586	586	582	584	586	590	591						
25	571	572	570	569	565	562	560	558	560	562	567	567						
30	543	545	542	542	537	532	531	528	529	533	538	540						
35	511	511	510	509	503	498	496	494	494	499	504	507						
40	474	475	473	472	466	461	458	454	456	459	466	470						
45	432	435	433	432	424	419	416	412	414	419	425	428						
50	389	391	389	389	380	373	369	366	369	374	380	384						
55	340	344	343	341	333	326	321	318	322	325	333	336						
60	291	295	294	293	284	277	271	267	272	276	283	286						
65	239	244	243	243	234	226	220	216	221	225	232	235						
70	186	193	193	193	183	175	168	165	170	174	181	183						
75	135	142	143	143	134	125	118	115	120	124	130	131						
80	86.2	92.8	94.8	93.8	85.6	77.3	70.9	68.2	72.0	76.0	81.3	81.7						
85	41.1	47.5	48.9	48.0	40.6	33.9	27.7	24.8	27.7	31.0	34.0	36.3						
90	4.50	8.17	8.05	6.81	1.38	0.21	0.23	0.26	0.29	0.28	0.24	0.62						
95	0.33	0.27	0.32	0.31	0.35	0.34	0.37	0.41	0.44	0.39	0.38	0.32						
100	0.48	0.41	0.49	0.46	0.51	0.51	0.55	0.61	0.60	0.57	0.53	0.48						
105	0.62	0.58	0.68	0.64	0.72	0.69	0.72	0.80	0.79	0.75	0.71	0.68						
110	0.76	0.75	0.87	0.82	0.89	0.88	0.90	0.99	1.00	0.96	0.90	0.95						
115	0.91	0.93	1.04	0.99	1.06	1.08	1.10	1.20	1.18	1.16	1.06	1.13						
120	1.05	1.12	1.23	1.14	1.20	1.24	1.27	1.38	1.35	1.36	1.23	1.30						
125	1.19	1.28	1.36	1.29	1.38	1.39	1.44	1.56	1.50	1.52	1.40	1.47						
130	1.38	1.47	1.46	1.43	1.55	1.53	1.58	1.68	1.64	1.63	1.55	1.62						
135	1.50	1.65	1.52	1.55	1.66	1.67	1.69	1.80	1.75	1.73	1.62	1.71						
140	1.61	1.79	1.63	1.69	1.79	1.77	1.79	1.90	1.87	1.78	1.73	1.83						
145	1.73	1.94	1.78	1.82	1.87	1.88	1.91	2.00	1.99	1.82	1.83	1.93						
150	1.84	2.00	1.88	1.95	1.98	2.02	2.03	2.11	2.17	1.91	1.88	2.03						
155	1.99	2.09	2.04	2.11	2.13	2.18	2.19	2.22	2.27	2.03	1.99	2.15						
160	2.13	2.17	2.19	2.26	2.28	2.31	2.35	2.35	2.35	2.19	2.22	2.25						
165	2.27	2.32	2.34	2.42	2.42	2.41	2.48	2.48	2.52	2.38	2.40	2.37						
170	2.36	2.54	2.48	2.50	2.53	2.49	2.54	2.57	2.71	2.59	2.53	2.47						
175	2.44	2.66	2.56	2.64	2.63	2.55	2.58	2.64	2.66	2.67	2.62	2.54						
180	2.62	2.82	2.64	2.84	2.62	2.54	2.59	2.63	2.91	2.68	2.66	2.57						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-11

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks: